# ANALYSIS OF PIZZA SALES







# RETRIEVE THE TOTAL NUMBER ORDER PLACED

```sql
SELECT
    COUNT(order_id) AS total_orders
FROM
    orders;
```


Result Grid

| | total_orders |
|---|---|
| ▶ | 21350 |

# CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES


```sql
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price), 2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

| | total_sales |
|---|---|
| ▶ | 817860.05 |

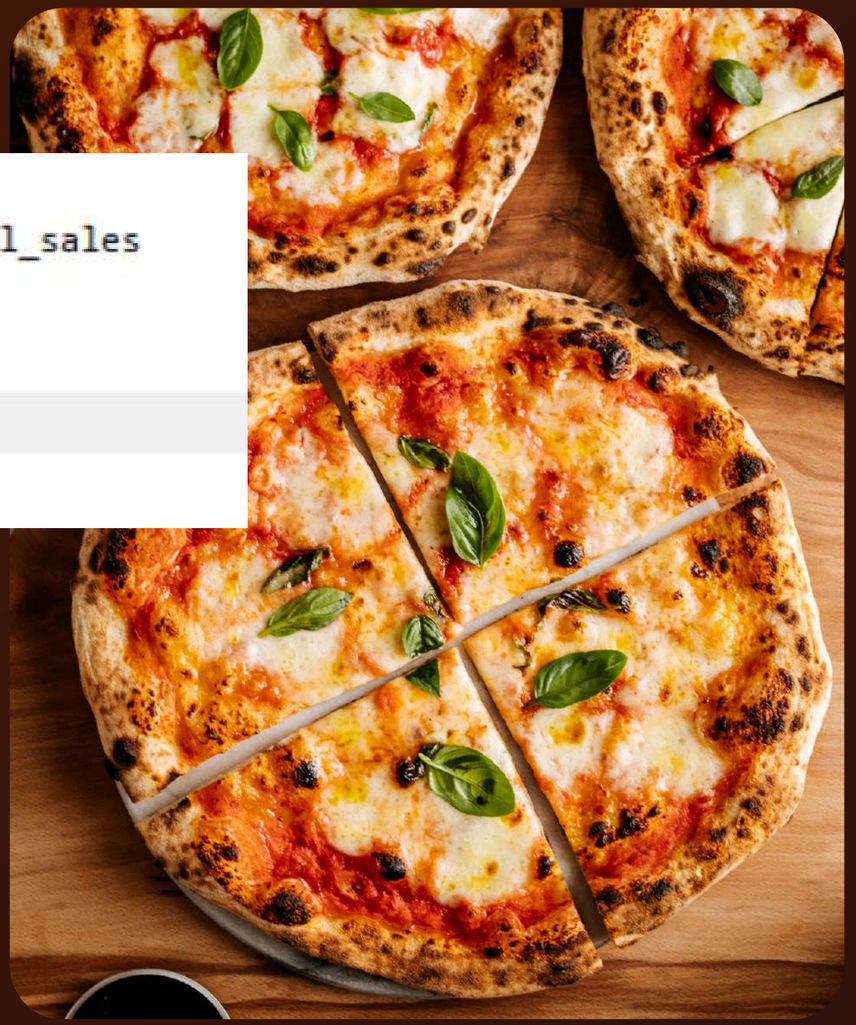

# IDENTIFY THE HIGHEST-PRICED PIZZA.

```sql
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type
ORDER BY pizzas.price DESC
LIMIT 1;
```

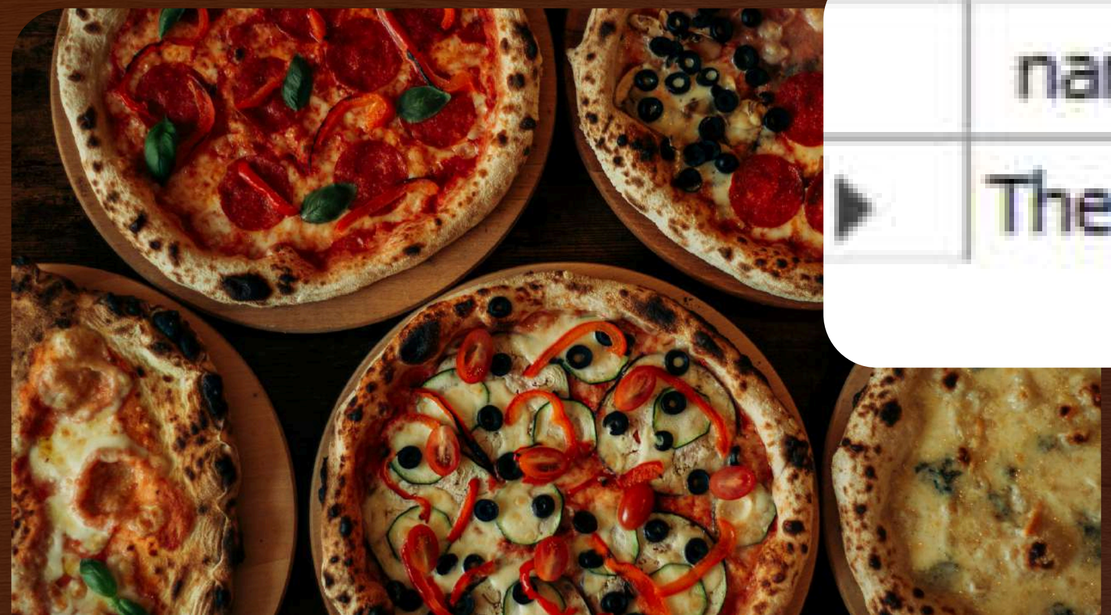

| name | price |
| --- | --- |
| The Greek Pizza | 35.95 |


# IDENTIFY THE MOST COMMON PIZZAS

```sql
use pizzahut;
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
        JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

| size | order_count |
|---|---|
| L | 18526 |
| M | 15385 |
| S | 14137 |
| XL | 544 |
| XXL | 28 |

# LIST THE TOP 5 ORDERSD PIZZAS WITH THEIR QUANTITY

```sql
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

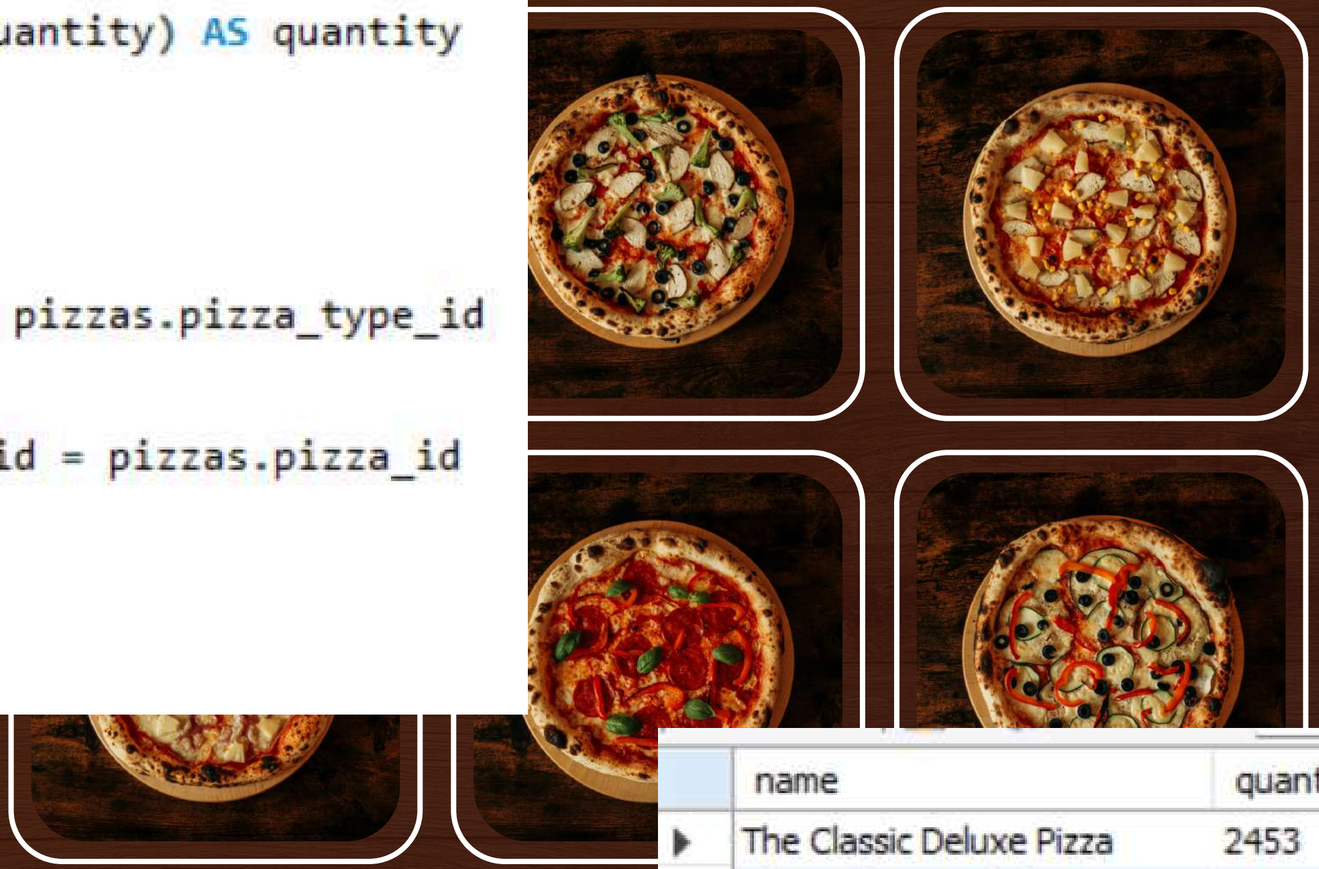

| name | quantity |
|---|---|
| The Classic Deluxe Pizza | 2453 |
| The Barbecue Chicken Pizza | 2432 |
| The Hawaiian Pizza | 2422 |
| The Pepperoni Pizza | 2418 |
| The Thai Chicken Pizza | 2371 |

# FIND THE TOTAL QAUNTITY OF EACH PIZZAS ORDERD-TOTAL QUANTITY OF EACH CATEGORY ORDERED.

```sql
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```



| category | quantity |
|---|---|
| Classic | 14888 |
| Supreme | 11987 |
| Veggie | 11649 |
| Chicken | 11050 |

# DISTRIBUTION OF ORDERS BY HOUR OF THE DAY

```sql
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

| hour | order_count |
|---|---|
| 11 | 1231 |
| 12 | 2520 |
| 13 | 2455 |
| 14 | 1472 |
| 15 | 1468 |

# JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE COUNT OF PIZZA TYPES

```
SELECT
    category, COUNT(name)
FROM
    pizza_types
GROUP BY category;
```



| category | COUNT(name) |
|---|---|
| Chicken | 6 |
| Classic | 8 |
| Supreme | 9 |
| Veggie | 9 |

# GROUP THE ORDERS BY DATE AND CALCULATE AVERAGE
## NUMBER OF PIZZAS ORDERD PAER DAY SELECT

```sql
SELECT
    ROUND(AVG(quantity), 0) AS avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```






| avg_pizza_ordered_per_day |
| --- |
| 138 |

# DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON

```sql
select pizza_types.name,
sum(order_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizzas.pizza_type_id = pizza_types.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.name order by revenue desc limit 3;
```

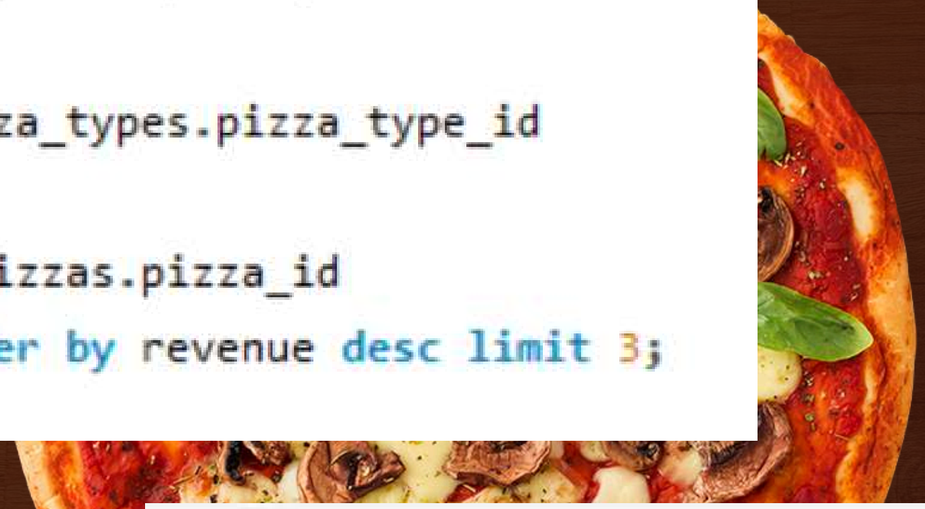

| name | revenue |
|---|---|
| The Thai Chicken Pizza | 43434.25 |
| The Barbecue Chicken Pizza | 42768 |
| The California Chicken Pizza | 41409.5 |

# CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.


```sql
select pizza_types.category,
round(sum(order_details.quantity * pizzas.price) / (SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id) * 100, 2) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category order by revenue desc;
```



| category | revenue |
|---|---|
| Classic | 26.91 |
| Supreme | 25.46 |
| Chicken | 23.96 |
| Veggie | 23.68 |

# ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME


```sql
select order_date,
sum(revenue) over(order by order_date) as cum_revenue
from
(select orders.order_date,
sum(order_details.quantity * pizzas.price) as revenue
from order_details join pizzas
on order_details.pizza_id = pizzas.pizza_id
join orders
on orders.order_id = order_details.order_id
group by orders.order_date) as sales;
```

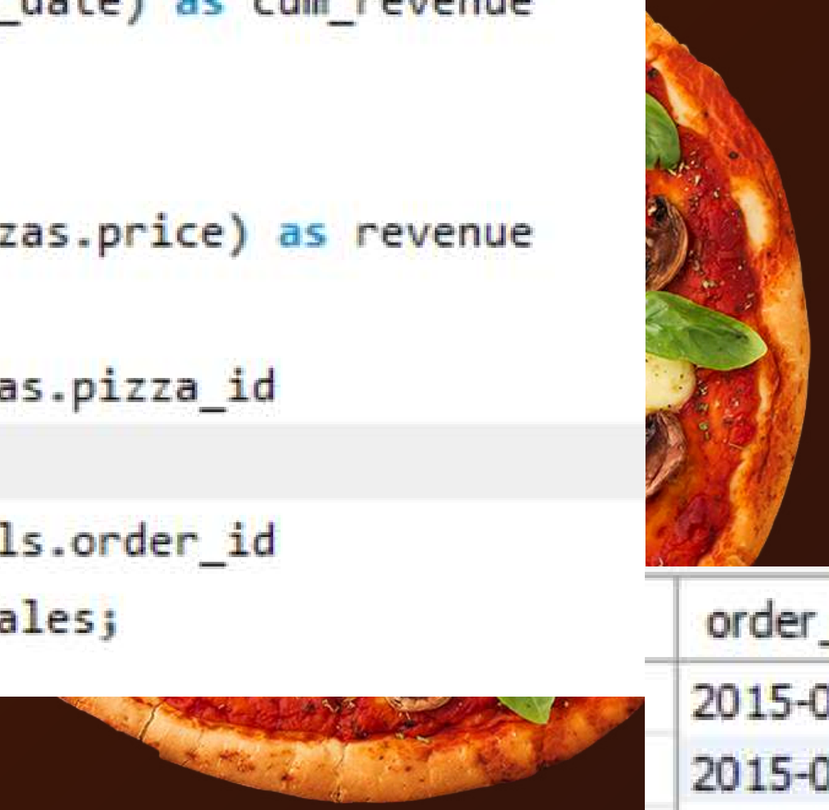

| order_date | cum_revenue |
|---|---|
| 2015-01-01 | 2713.850000000004 |
| 2015-01-02 | 5445.75 |
| 2015-01-03 | 8108.15 |
| 2015-01-04 | 9863.6 |
| 2015-01-05 | 11929.55 |

# DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```sql
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn <= 3;
```

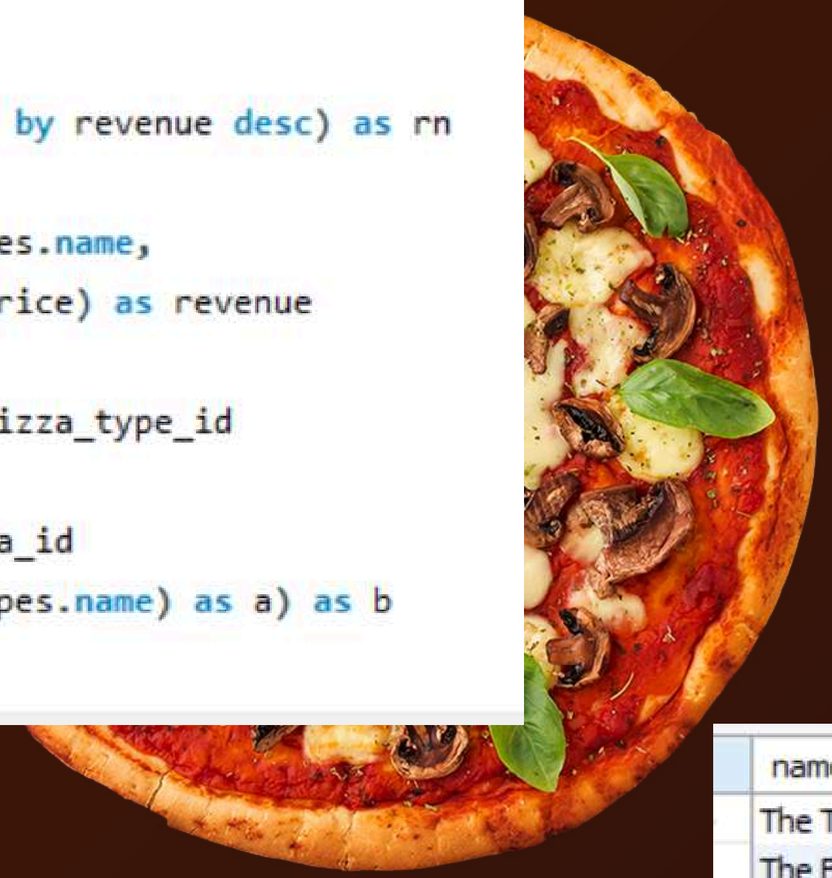

| name | revenue |
|---|---|
| The Thai Chicken Pizza | 43434.25 |
| The Barbecue Chicken Pizza | 42768 |
| The California Chicken Pizza | 41409.5 |
| The Classic Deluxe Pizza | 38180.5 |
| The Hawaiian Pizza | 32273.25 |