

SERVER COMPONENT BOUNDARY

COUNTER CONTEXT PROVIDER (CLIENT COMPONENT)

SERVER COMPONENT BOUNDARY

[Home](#)

Electronics

Clothing

Books

COUNTER CONTEXT [CLIENT COMPONENT]

5 Clicks

Client Context

- This example uses context to share state between Client Components that cross the Server/Client Component boundary.
- Try incrementing the counter and navigating between pages. Note how the counter state is shared across the app even though they are inside different layouts and pages that are Server Components.

Docs →

Code →

Recording network activity...

Perform a request or hit **% R** to record the reload.

[Learn more](#)

Router (Beta)

Menu

acme.com /

SERVER COMPONENT BOUNDARY

COUNTER CONTEXT PROVIDER (CLIENT COMPONENT)

SERVER COMPONENT BOUNDARY

Home Electronics Clothing Books

COUNTER CONTEXT [CLIENT COMPONENT]

5 Clicks

Client Context

- This example uses context to share state between Client Components that cross the Server/Client Component boundary.
- Try incrementing the counter and navigating between pages. Note how the counter state is shared across the app even though they are inside different layouts and pages that are Server Components.

Docs → Code →

Elements Console Sources Network Performance Memory

1

Filter

All

Fetch/XHR

JS

CSS

Img

Media

Font

Doc

WS

Wasm

Manifest

Other

Has blocked cookies


Blocked Requests

3rd-party requests

Recording network activity...

Perform a request or hit % R to record the reload.

[Learn more](#)

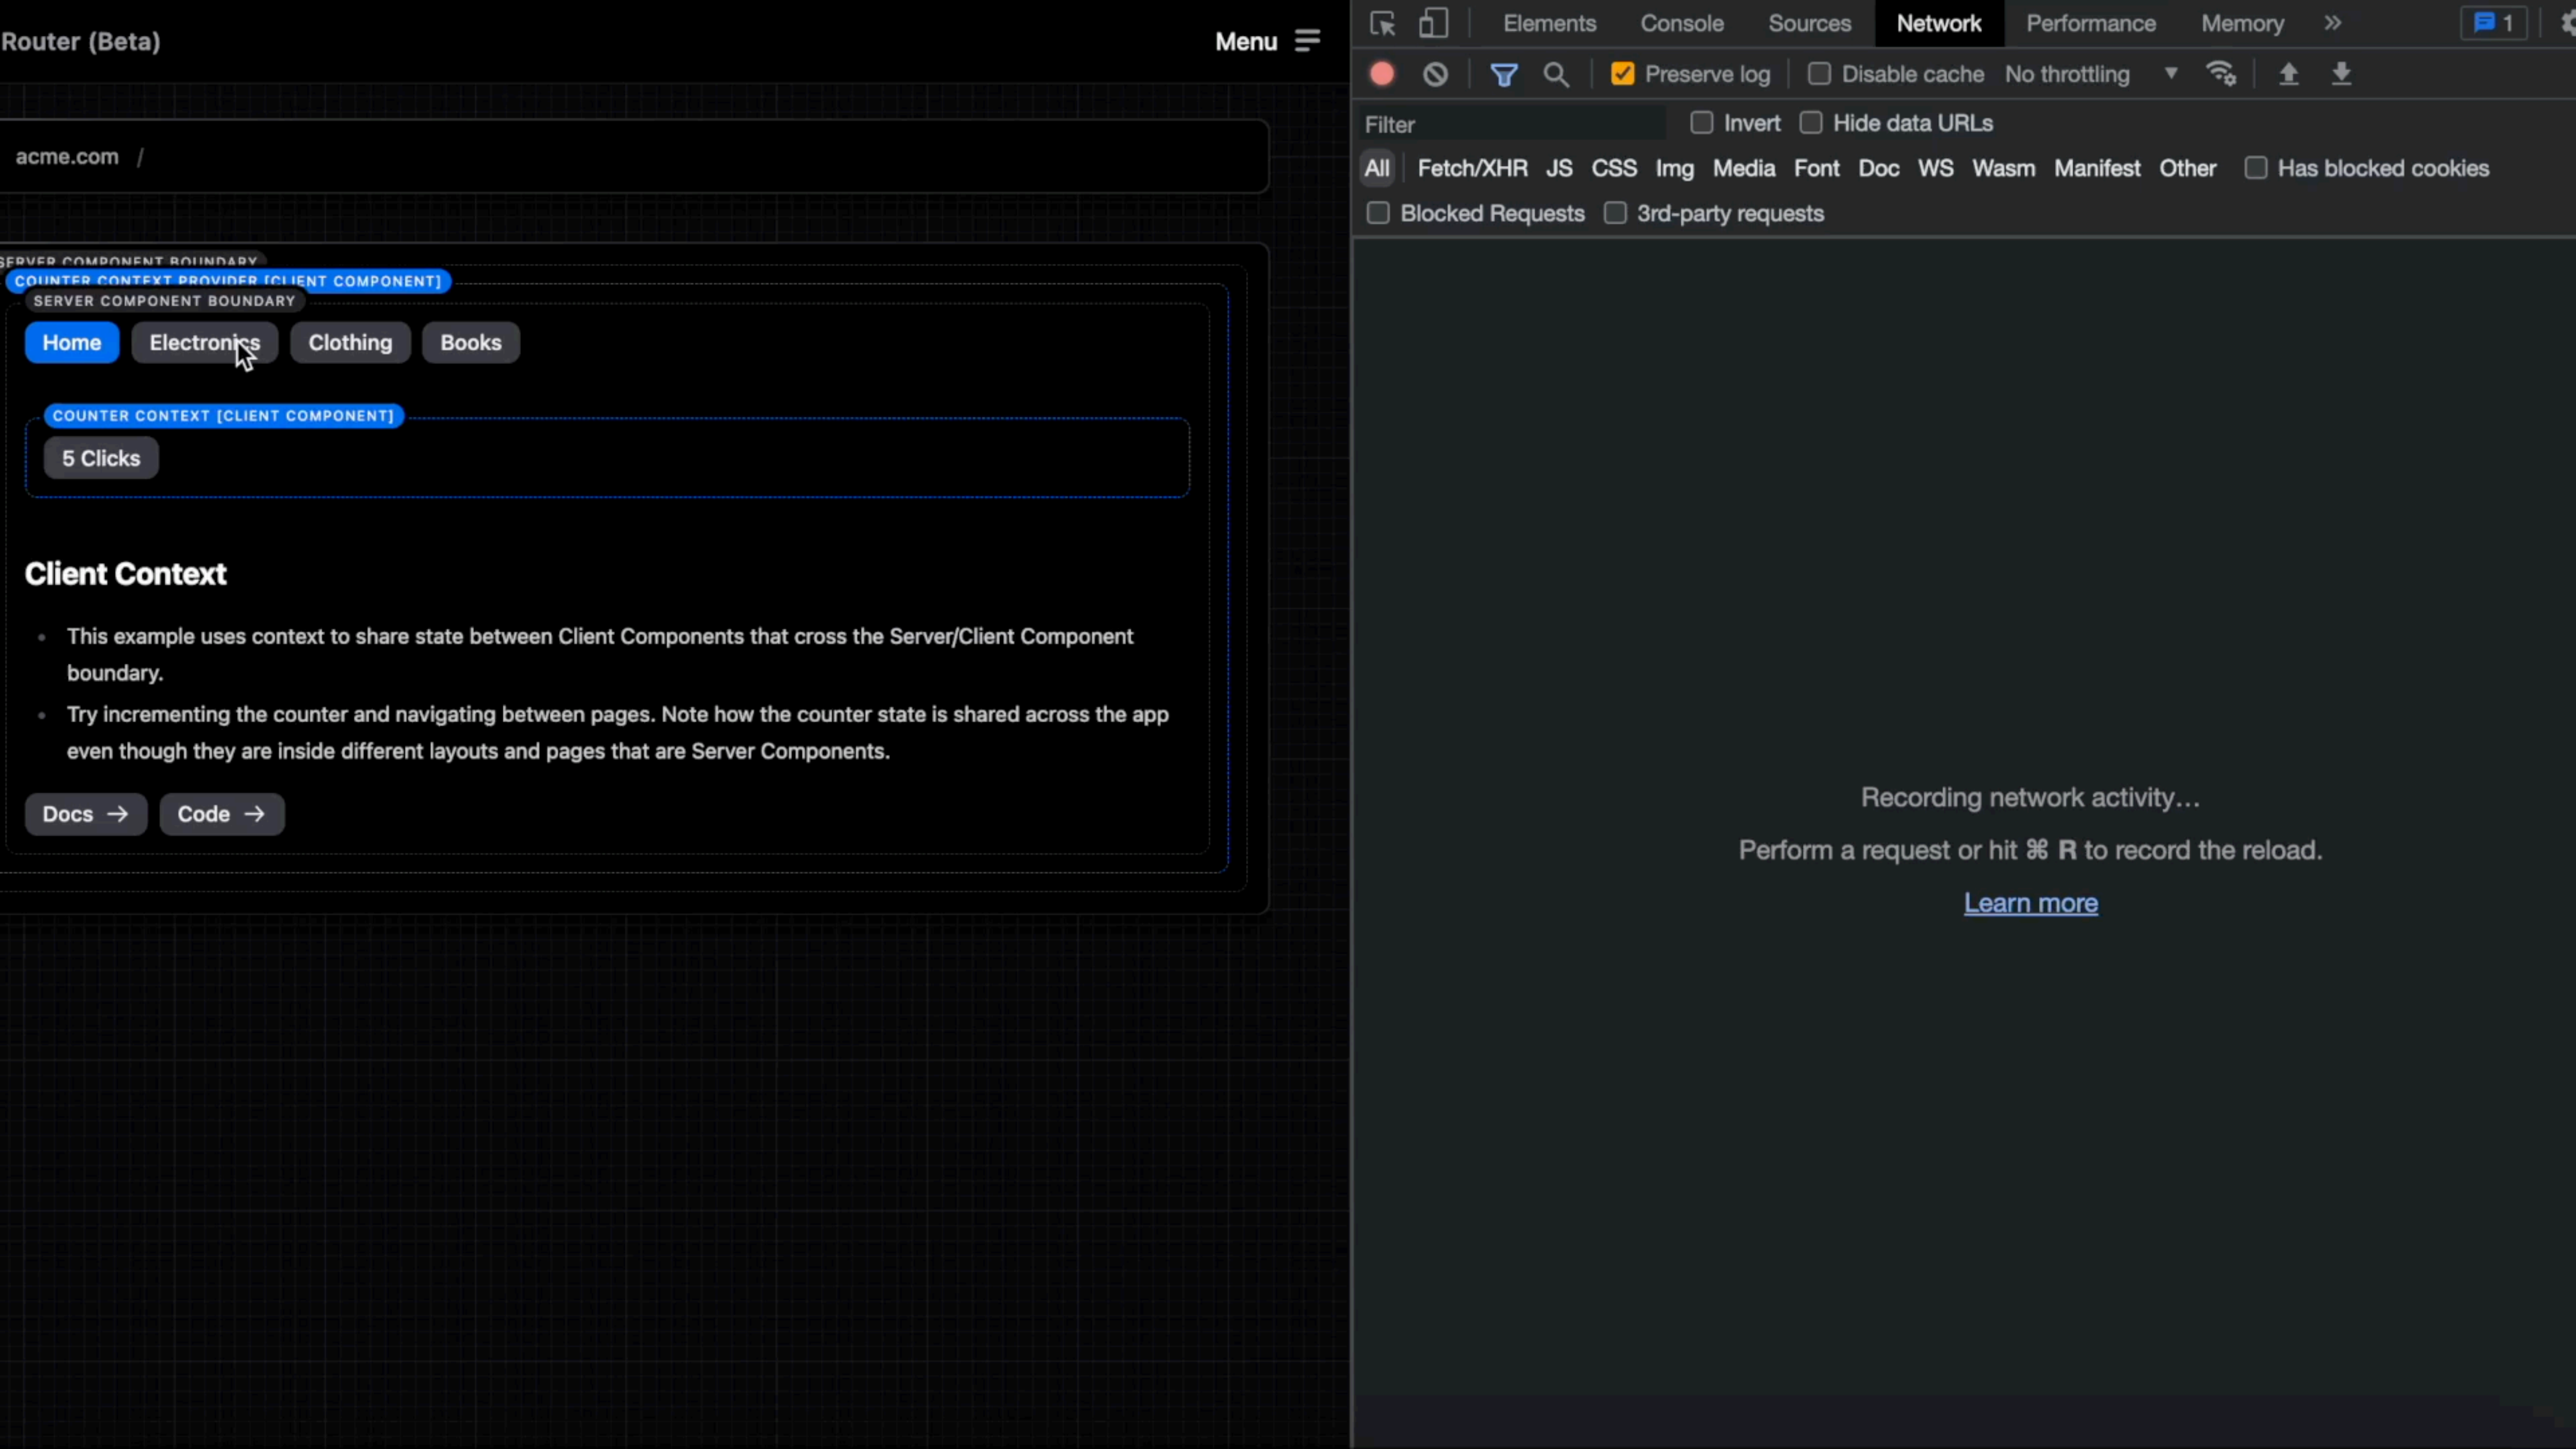

Next.js Route based RSC

Router (Beta)

Menu

acme.com /

SERVER COMPONENT BOUNDARY

COUNTER CONTEXT PROVIDER (CLIENT COMPONENT)

SERVER COMPONENT BOUNDARY

Home Electronics Clothing Books

COUNTER CONTEXT [CLIENT COMPONENT]

5 Clicks

Client Context

- This example uses context to share state between Client Components that cross the Server/Client Component boundary.
- Try incrementing the counter and navigating between pages. Note how the counter state is shared across the app even though they are inside different layouts and pages that are Server Components.

Docs →

Code →

Elements Console Sources Network Performance Memory

Filter

All

Fetch/XHR JS CSS Img Media Font Doc WS Wasm Manifest Other

Has blocked cookies

Blocked Requests

3rd-party requests

Recording network activity...

Perform a request or hit % R to record the reload.

[Learn more](#)

Wakuwork RSC!

Header for Valued Customer



Jacket Color

Pink ▼

Cart



Green Harness

Green Harness

Green Leash

Blue Harness



Pink Collar

Add to cart



Pink Harness

Add to cart



Pink Leash

Add to cart

Network tab showing request details for the URL: `http://localhost:3000/RSC/ProductCarousel/props=%7B%22color%22%3A%22blue%22%7D`

Request Headers:

- Accept: */*
- Accept-Encoding: gzip, deflate, br
- Accept-Language: en-US,en;q=0.9,fa;q=0.8
- Connection: keep-alive
- Cookie: __session=eyJ1c2VySWQiOiJjbGZzNTQ2dmcwMDAwcGRxenl6Z2Q1b2UwIn0%3D.Gl4ak6EvYtZn9IoN9Bf37urGG8MEj5ls42D8QcIbEr0; _session.legacy=ieTpP6Xk0Vge1WU11Vzux
- Host: localhost:3000
- Referer: http://localhost:3000/
- sec-ch-ua: "Google Chrome";v="111", "Not(A:Brand";v="8", "Chromium";v="111"
- sec-ch-ua-mobile: ?0
- sec-ch-ua-platform: "macOS"
- Sec-Fetch-Dest: empty
- Sec-Fetch-Mode: cors

Response Headers:

- Connection: keep-alive
- Content-Type: text/x-component
- Date: Wed, 19 Apr 2023 11:42:41 GMT
- Keep-Alive: timeout=5
- Transfer-Encoding: chunked

General:

- Request Method: GET
- Status Code: 200 OK
- Remote Address: [::1]:3000
- Referrer Policy: strict-origin-when-cross-origin

10 requests | 3.8 kB tran