

# Cucumber Report

Jun 24, 2023, 1:56:17 PM

Start : Jun 24, 1:56:13.283 PM

End : Jun 24, 1:56:16.547 PM

Duration : 3.264 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 2



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>grid_feature</u>	3.264 s	1	0	1	0	3	0	1	2

#	Feature Name	Scenario Name
1	<u>grid_feature</u>	<u>TC01_running_on_chrome</u>

<b><i>TAG</i></b>	<b><i>Scenario</i></b>				<b><i>Feature</i></b>			
<b><i>Name</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@GridTest	1	0	1	0	1	0	1	0
@GridChrome	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>grid_feature</u>	1	0	1	0	3.264 s

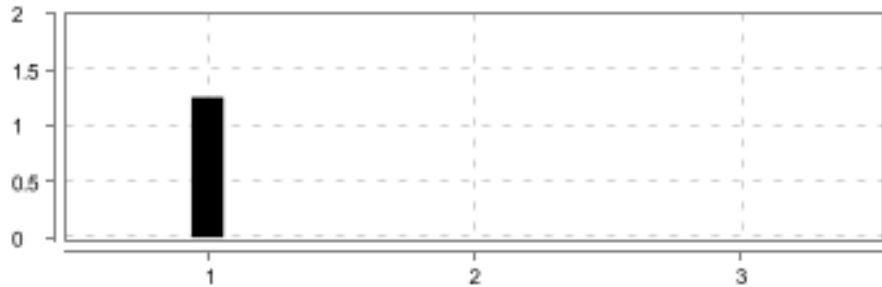



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>grid_feature</u>	<u>TC01_running_on_chrome</u>	3	0	1	2	3.260 s

**grid\_feature**

<b>FAILED</b>	<b>DURATION - 3.264 s</b>	Scenarios		Steps	
/ 1:56:13.283 PM // 1:56:16.547 PM /		Total - 1		Total - 3	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

**TC01\_running\_on\_chrome**

<div>FAILED</div> <div>DURATION - 3.260 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 1:56:13.287 PM // 1:56:16.547 PM /</div>				
<div>grid_feature</div>				
<div>@GridTest @GridChrome</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on the application with chrome</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'DESKTOP-98SEM7J', ip: '192.168.1.36' Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.19' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*], extensions: []}}]} Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*], extensions: []}} at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:549) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:154) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:134) at stepdefinitions.GridStepDefs.user_is_on_the_application_with_chrome(GridStepDefs.java:25) at ?.user is on the application with chrome(file:///C:/Users/ROG/IdeaProjects/mycucumberproject/.src/test/resources/features/Selenium_grid/grid.feature:6)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:0:1:4444 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p>	<b>FAILED</b>	1.256 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:97) at org.openqa.selenium.remote.tracing.TracedHttpClient.execute(TracedHttpClient.java:54) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:115) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.TracedCommandExecutor.execute(TracedCommandExecutor.java:51) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:227) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:154) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:134) at stepdefinitions.GridStepDefs.user_is_on_the_application_with_chrome(GridStepDefs.java:25) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		



#	Step / Hook Details	Status	Duration
	<p> at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at org.junit.runner.JUnitCore.run(JUnitCore.java:137)  at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)  at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)  at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)  at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)  at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235)  at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54)  Caused by: java.net.ConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:1:4444  at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)  at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)  at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)  at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)  at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)  at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)  at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)  at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)  at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)  at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)  at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)  at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)  at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)  at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)  at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) </p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:829) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:0:1:4444 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:777) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:829) * Not displayable characters are replaced by '?'. </pre>		
2	Then verify the title is "Blue Rental Cars   Cheap, Hygienic, VIP Car Hire"	SKIPPED	0.001 s
3	And close the remote driver	SKIPPED	0.001 s
	AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	1.982 s
	screenshots		