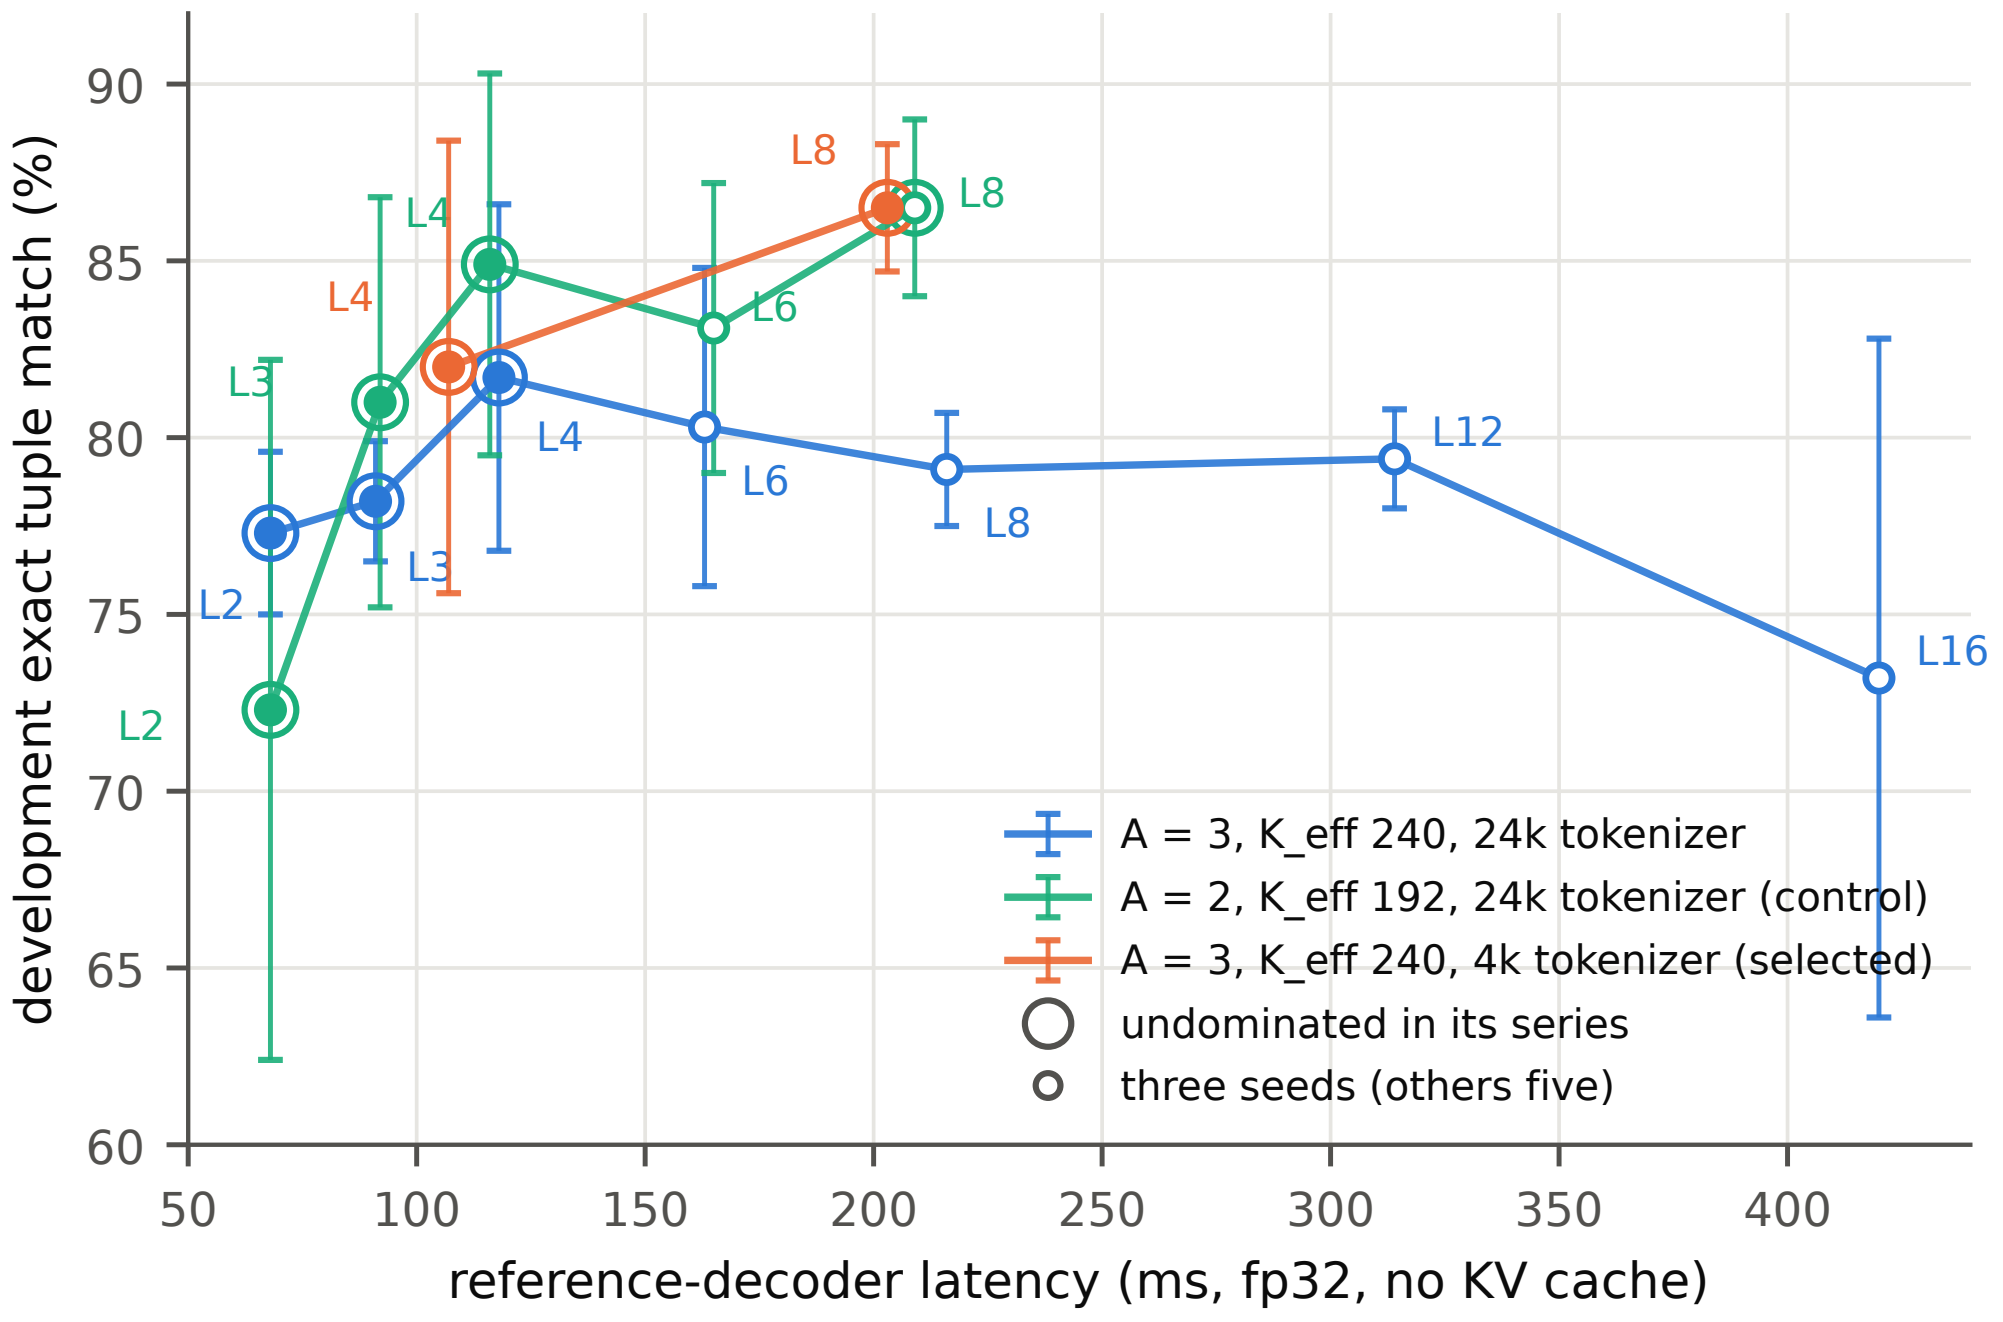
development exact tuple match (%)
reference-decoder latency (ms, fp32, no KV cache)
90
85
80
75
70
65
60
50
100
150
200
250
300
350
400
L2
L3
L4
L6
L8
L12
L16
A = 3, K_eff 240, 24k tokenizer
A = 2, K_eff 192, 24k tokenizer (control)
A = 3, K_eff 240, 4k tokenizer (selected)
undominated in its series
three seeds (others five)