faktor

Complete website / edition 4 / 12 October 2026

Faktor
The full website.

Every current page, complete documentation, identity system and dated prior website content in a paginated edition.

01 / Make the change. Show the evidence.

02 / Define the finish. Then make the change.

03 / Source to workspace

04 / A result belongs to a change

05 / Count the attempts. Keep the basis.

06 / The workflow stays yours.

07 / Useful work starts with a bounded request.

08 / Faktor visual identity

09 / Current edition and complete prior reference

10 / Work, inspect and finish deliberately.

Live website: https://faktor.windyclock5.chatgpt.site
Current source: 16e8bd4cf2832affbb6a2e9e9281beee7527ac4d
Local interactive examples are design simulations. PDFs show static states; live pages retain the controls.

faktor


01 / Native engineering agent

Make the change. Show the evidence.

Faktor plans the task, works in an isolated candidate workspace, and checks what changed before the run can finish.

View the source ↗

See the engineering loop

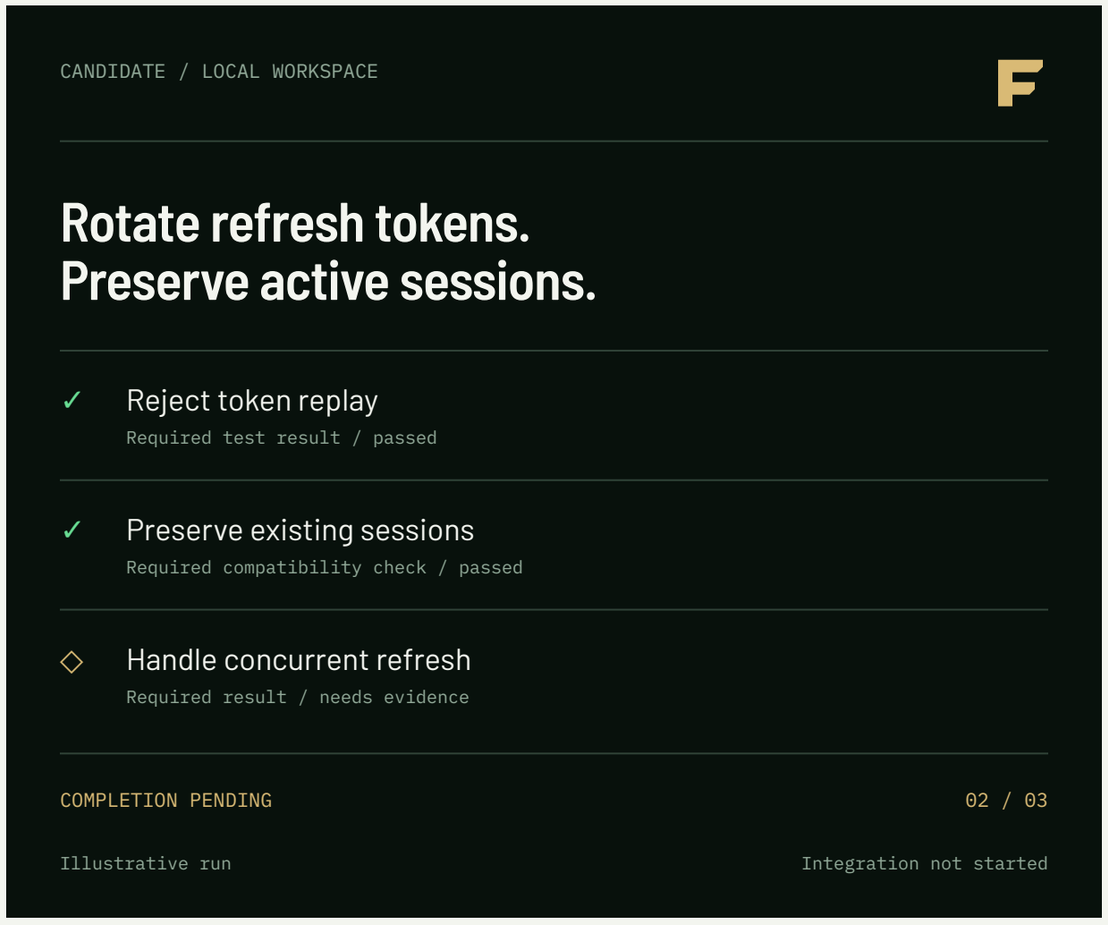

VS CODE / JETBRAINS / CLI · NATIVE RUST RUNTIME

02 / Define what must hold

A task needs more than a prompt.

Keep the goal, acceptance criteria, invariants and proof obligations together. The plan orders the work; the checks evaluate the change.

01 / PLAN

Give the work conditions.

Translate the objective into ordered tasks and observable criteria. Keep the risks and dependencies in view.

02 / CHANGE

Work in a candidate.

Use an isolated workspace with transactions and checkpoints. Separate editing from integration.

03 / CHECK

Keep the basis visible.

Connect required checks and named claims to the candidate they actually evaluated.

Explore the approach →

03 / A result belongs to a claim

See what passed. See what is missing.

Inspect connects criteria, candidate state, check results and review. A missing required result keeps completion pending.

Illustrative run / Rotate refresh tokens without breaking active sessions

Criterion	State	Evidence basis
Replayed refresh tokens fail	√ Passed	Required test result
Existing sessions remain valid	√ Passed	Required compatibility check
Concurrent refresh yields one valid result	◇ Needs evidence	Required result not recorded

2 criteria passed / 1 needs evidence / Candidate not integrated

04 / Done has conditions

Choose where the run stops.

Leave the changes locally, commit, push or open a pull request. Requested finish actions are recorded and checked as part of completion.

01	02	03	04
Local change	Commit	Push	Pull request


Native pull requests use the configured SCM integration. Missing configuration stays visible as a blocker.

Expanded editor flow / design proposal

05 / In your editor

Work stays in front.

Conversation, current run, composer. Open Inspect for the plan and evidence. History keeps durable outcomes within reach.

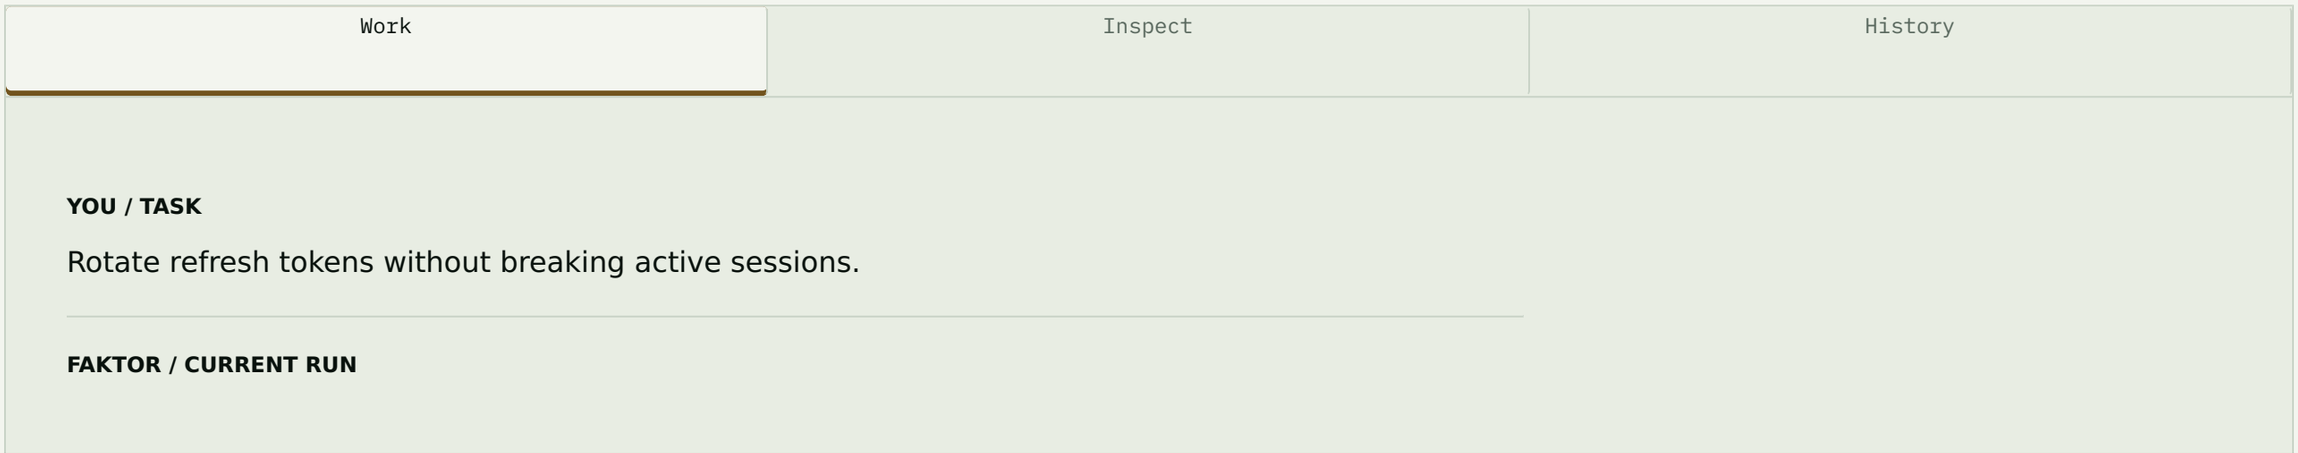

The candidate is ready for review. Two required criteria passed. The concurrent refresh result is still missing.

Add a constraint or inspect the evidence...

Illustrative interface. Tabs switch examples locally.

06 / The run leaves a record

Spend. Rework. Outcome.

Verified cost / VCSC

All eligible attempted spend / verified changes.

First-pass result

Keep initial verification and repair attempts distinct.


Final basis

Record acceptance, integration and the verification basis together.


A full editor experience

One task. Two native hosts.

Explore the complete proposed Faktor experience in VS Code and JetBrains: setup, planning, permissions, evidence, diff review, recovery and history.

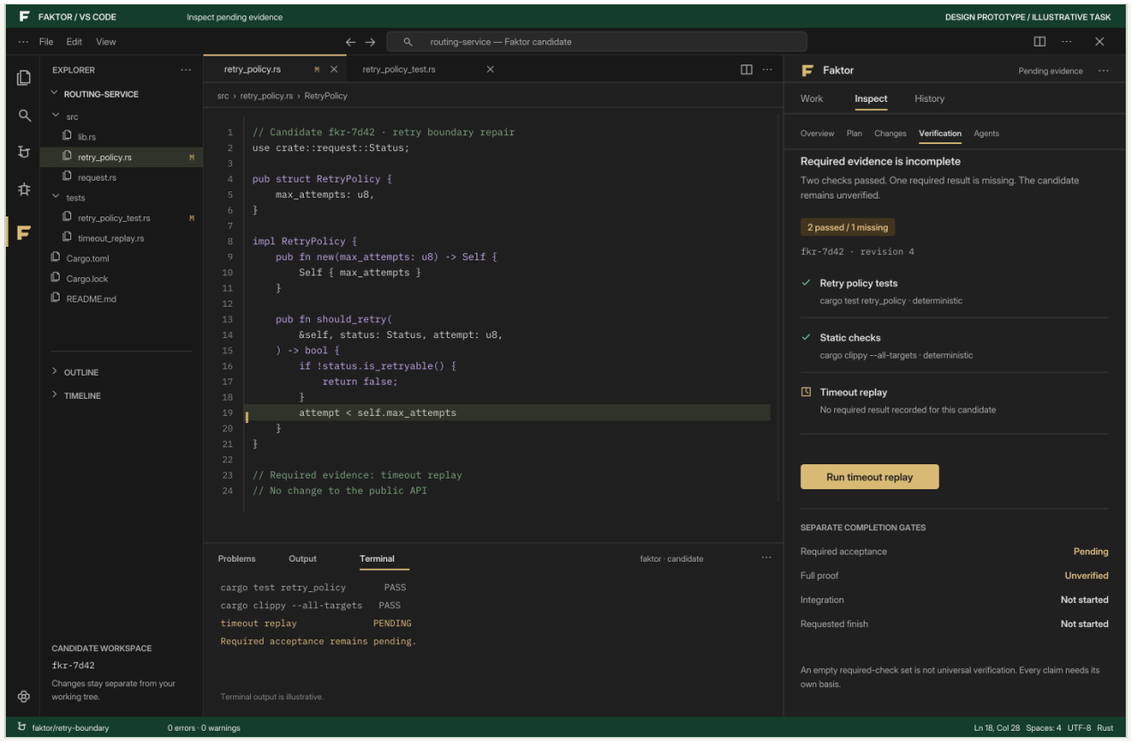

VS CODE / EVIDENCE PENDING / DESIGN PROTOTYPE

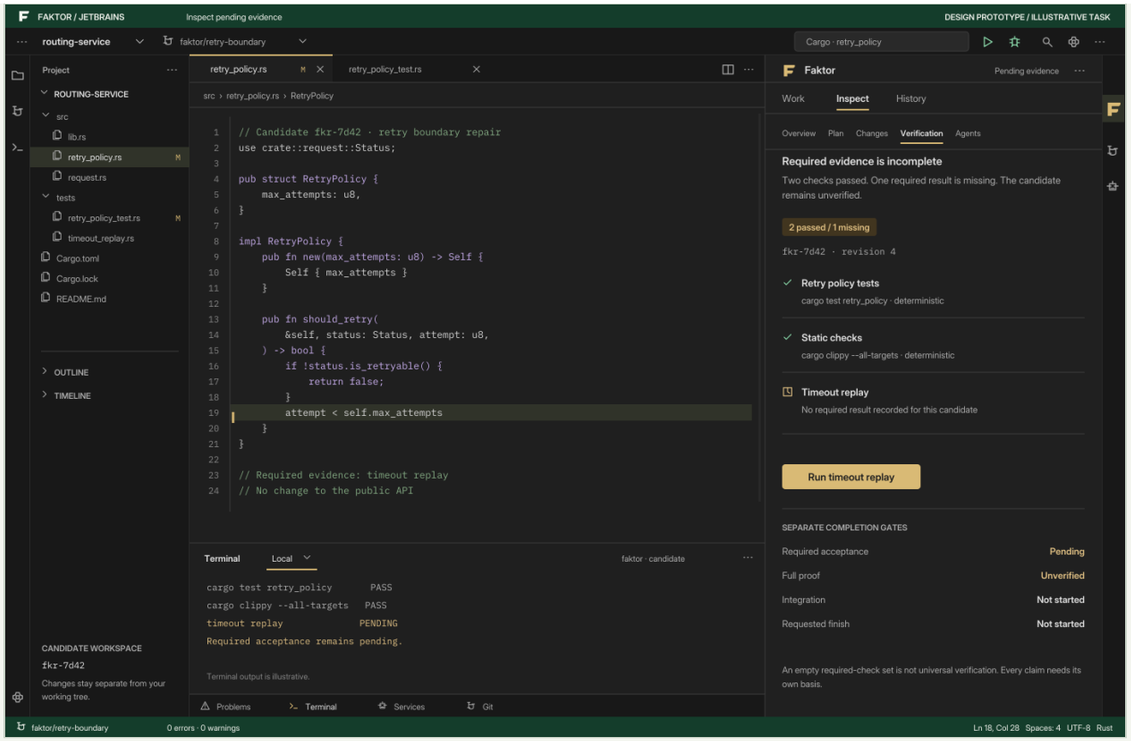

JETBRAINS / EVIDENCE PENDING / DESIGN PROTOTYPE

Explore both editor flows →

Download the UI/UX specification

Concrete engineering work

Choose a task worth reviewing.

01

Preserve behavior during a migration.

Define compatibility criteria and invariants before a session, schema or API change. The evidence remains attached to the candidate that was checked.

02

Repair a failure with a visible basis.

Start with the failed check or counterexample. Keep the repair scoped and inspect the candidate before choosing an integration or finish action.

03

Work with deliberate model choice.

Keep model configuration separate from the engineering contract. Review native, local or hosted steps through their recorded outcomes and spend.

Explore task patterns →

07 / Start in your workspace

Source, setup and the runtime.

Explore the native runtime and its IDE surfaces. Start with the source workspace and its setup guide.

Read setup ↗

SOURCE-WORKSPACE COMMAND

```
cargo run -p faktor-cli -- run --data-dir /tmp/faktor-demo "explain this repo"
```

Copy command

VS Code: Faktor: Open
JetBrains: Faktor tool window

Useful boundaries

Before you begin.

Does Faktor require another Bel Consulting product?

No. Native intelligence and verification form the baseline. Optional providers can enrich neutral interfaces.

Does a passing check mean the whole change is verified?

A result has a scope. Inspect the required criteria, named claims, candidate identity, integration state and final basis together. An empty set of required checks can pass without establishing a verified change.

What stays in the IDE?

The product uses the host's theme and typography. Work, Inspect and History are shared vocabulary across its native surfaces.

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Approach / Engineering loop

Define the finish. Then make the change.

A goal, a candidate and a visible evidence basis. Each part does a different job.

01 / INTENT

Compile the task.

Keep the goal, criteria, invariants, risks and proof obligations together before work starts.

02 / PLAN

Order the work.

A task graph records dependencies and makes the plan inspectable.

03 / CANDIDATE

Separate the edit.

Transactions, checkpoints and isolated candidates bound changes before integration.

The completion chain

A green result has a scope.

Required-check acceptance, claim evidence, integration and requested finish actions stay distinct. A result for an earlier candidate cannot certify a different landed state.

1. **Required acceptance.** Every required result must be present and pass. Missing evidence stays Pending; a failure stays Fail.

2. **Claim evidence.** Name the claim and the candidate snapshot. Unavailable means no verdict; refusal is a separate outcome.

3. **Integration.** Keep verified and landed identities visible. Recheck a state that differs from the verified candidate.

4. **Finish actions.** Local changes, commit, push and native pull request are user choices with durable outcomes.

The outcome ledger counts a verified change when it is accepted and integrated with a deterministic-checks final basis. A passing empty check set does not establish that condition.

One workflow in the host.

Work keeps conversation and the current task in front. Inspect exposes the plan, agents and evidence. History holds outcomes. IDE surfaces inherit their editor’s typography and theme.

Start from the source.

The source workspace includes the native Rust runtime, CLI, VS Code and JetBrains surfaces. Optional providers do not become product dependencies.

Open the repository ↗ | Explore the example

Explore the contract

A complete route through the work.

Evidence and completion ↗

Outcome and cost definitions ↗

Runtime and providers ↗

VS Code and JetBrains design ↗

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

Start with a workspace. Keep the finish explicit.

Runtime setup, editor configuration, task criteria, evidence and recorded outcomes in one practical guide.

ON THIS PAGE

Source quickstart

Editor setup

Task contract

Completion

Recovery

Source quickstart

Build and run from the Faktor source workspace. These commands are source-development entry points; use the repository's current installation notes for packaged releases.

```
cargo build --workspace
```

Copy build command

```
cargo run -p faktor-cli -- doctor
```

Copy doctor command

```
cargo run -p faktor-cli -- run --data-dir /tmp/faktor-demo "explain this repo"
```

Copy run command

Choose the host.

VS Code opens Faktor through its command and webview. JetBrains uses a right-anchored tool window. Keep binary discovery, daemon transport and project binding understandable before the first run.

The expanded design introduces a consistent Work / Inspect / History structure while retaining host-specific behavior. The current VS Code History surface and common finish selector are proposed additions; JetBrains already has the three top-level views.

Open the complete editor design →

Give the task conditions.

Record the goal, acceptance criteria, invariants, risks and requested finish action. An isolated candidate separates editing from integration. Context and permissions stay scoped to the task.

Completion has a chain.

Required acceptance, claim evidence, candidate identity, integration and requested finish actions are distinct. Missing data stays visible. An empty required-check set can pass without establishing a verified change.

Read the evidence contract →

Recover without losing the task.

Preserve the draft, attached context and finish choice when a start fails. Explain daemon, provider, verification and SCM blockers separately. A reconnect must not silently skip malformed durable frames or advance beyond unseen events.

Runtime and provider configuration →

Reviewed source: Faktor README at 16e8bd4cf283. Detailed source and proposed-control mapping are supplied in the UI/UX specification.

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Evidence / Claim, candidate and result

A result belongs to a change.

Review what was requested, which candidate was checked and what can still prevent completion.

The completion chain

Four questions before the finish.

01

Did the required criteria pass?

Pass requires present, passing required results. A missing result is Pending; a failed required check is Fail. An empty set is not a complete proof of the change.

02

What claim did the evidence answer?

Keep the named claim, source and candidate snapshot visible. Unavailable provides no verdict. A refusal is not an observation of correctness.

03

Is this the state that will land?

Expose verified and landed identities. A different landed snapshot needs its own evidence basis; a result for earlier code cannot certify later edits.

04

Did the requested actions succeed?

Local changes, commit, push and native pull request carry distinct requested outcomes. Missing SCM configuration, skipped work and unsuccessful steps stay explicit.

Illustrative refresh-token task

Keep the unresolved result.

Criterion	Required result	Next useful action
Reject replayed refresh tokens	Passed / test result	Inspect the recorded basis.
Preserve active sessions	Passed / compatibility check	Review the candidate identity.
Concurrent refresh yields one valid result	Missing / Pending	Run or acquire the required result.

Illustrative task. No live run or verification request is made by this website.

From a result to an outcome

The final basis stays in the record.

The verified-change definition requires accepted and integrated with a deterministic-checks final basis. Metrics retain this boundary instead of counting every green check as a successful engineering change.

Explore outcome and cost definitions → Inspect the interface design →

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Outcomes / Measured records

Count the attempts. Keep the basis.

Cost and performance mean more when failed and cancelled work remains in the denominator’s context.

Current source definitions

Three different measurements.

Measure	Definition	Reading rule
Verified Cost per Successful Change	All eligible attempted spend divided by verified changes. Failed and cancelled attempted spend remains eligible under the ledger’s rules.	Keep period and cohort together; an absent denominator is not a zero-cost success.
Successful-run cost	Spend associated with successful runs.	A separate measure from VCSC; do not silently substitute it.

Measure	Definition	Reading rule
Recorded final basis	Accepted / integrated / deterministic-checks basis.	Keep the source-defined verified-change boundary explicit.

Local execution cohorts

Keep the comparison like for like.

01

Local-only

Runs whose model steps stayed local.

02

Local-final

Runs with a local final path under the current ledger definition.

03

Local-first with fallback

Runs beginning locally and using a hosted fallback. Keep escalation and spend visible.

> The current recorder does not establish avoided hosted inference, verification process spend or frontier-escalation savings. Those fields are honest zeros at this source baseline, rather than measured savings claims.

What the interface should show

A run record you can inspect.

Field	Presentation
Outcome and final basis	Accepted, integrated and verification basis in separate labeled rows.
Spend	Recorded values where available; “Cost unavailable” when not available.
Rework and first-pass result	Initial verification and repair attempts remain distinct.
Eligible attempted spend	Available in outcome context, not hidden because a run failed.
Cohort and period	Visible alongside aggregate comparisons.

Current source: outcome-ledger.md. The prior edition’s metric wording is retained as dated reference.

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Runtime / Provider configuration

The workflow stays yours. The model is a choice.

Connect the runtime deliberately, then keep model and optional service configuration separate from the engineering contract.

Before the first run

Make readiness legible.

01

Locate the binary.

Show the configured path, discovery result and executable readiness. A bare checksum match means it matches the recorded checksum; it is different from a signed launcher's signature verification.

02

Bind the project and daemon.

Explain project scope, transport and autostart state. A disconnected daemon is a connectivity condition, not a failed verification verdict.

03

Configure the chosen model.

Keep local or hosted provider details in settings. Secrets remain masked, and diagnostic copies redact credentials.

04

Inspect optional adapters.

Optional intelligence and verification providers enrich neutral interfaces. The native baseline does not acquire a sibling-product dependency.

Where the editor puts the detail

Keep Work uncluttered.

Work

Conversation, current run, scoped requests and composer. A short configuration status belongs beside the task; raw URLs, cursors and transport details belong in diagnostics.

Settings and diagnostics

Binary discovery, daemon lifecycle, provider readiness and redacted support details. Name the failed seam and the next safe recovery action.

Explore the configuration and diagnostics states →

---

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Task patterns / Reviewable engineering

Useful work starts with a bounded request.

Choose observable conditions and the stop point before handing the task to an engineering agent.

Migration

Rotate refresh tokens without breaking sessions.

Contract field	Example
Goal	Rotate refresh tokens.
Acceptance	Reject replay; preserve sessions; constrain concurrent refresh behavior.
Invariant	Active sessions continue under the stated compatibility conditions.

Contract field	Example
Candidate	Isolated workspace and snapshot identity.
Finish choice	Leave changes locally for review.

> Illustrative brief from the design study. The website does not run this migration or claim its results.

Failure repair

Start with the counterexample.

01

Attach the failing basis.

Keep the relevant test or observed failure alongside the task.

02

Constrain the repair.

State preserved behavior, affected scope and the requested verification.

03

Review before landing.

Inspect changed files, unrelated changes and the evidence for the candidate being integrated.

Budget-aware work

Keep spend and rework observable.

Recorded spend, attempted outcomes and model cohorts help evaluate an engineering workflow. They do not establish unmeasured token savings or guarantee that a cheaper model produces the same result.

Read the current outcome definitions →

---

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

Faktor / Visual identity

Built for a clear finish.

Clipped terminals. A clear initial. Deliberate evidence.

The fixed logo masters



INK / PAPER Download SVG



OCHRE / INK Download SVG

Fixed outlined artwork. Preserve letter spacing and H/4 clear space. Preferred symbol size: 24 px; tiny icons supplied separately.

Palette / Family foundations, own accent

Ink, Paper and Ochre.

Ink	Forest	Paper	Sage	Ochre	Ochre Deep
#08110C	#143D2B	#F3F5EF	#92AA99	#D9BA75	#72541E

Use the soft accent on Ink; the deeper accent for readable text on Paper. State colors keep their own semantic meaning.

Typography / Its own voice

Make the change. Show the evidence.

Barlow Semi Condensed for headings.

Barlow for the reading surface.

IBM Plex Mono for technical metadata. The logo is fixed outlined artwork; host interfaces retain their own typography.

The identity in use

A complete application system.



Downloads

Everything in its own project.

Logo suite, source analysis, usage rules, design tokens, font licenses, applications and generation briefs.

Visual identity guide	PDF
Complete identity kit	ZIP
Standalone symbol	SVG
Stacked logo	SVG
Application icon	SVG
Design tokens	JSON

Current application package

The websites, in PDF form.

Complete website edition	PDF / ALL PRODUCT PAGES
All editor visual assets	SVG + PNG / BOTH HOSTS / BOTH THEMES

VS Code & JetBrains UI/UX

PDF / FLOWS, STATES AND HANDOFF

Retained prior content

DATED RESEARCH & WEBSITE

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Research / Retained content

Current edition. Complete prior reference.

All earlier identity work and website content remain available, with their original source baselines clearly dated.

Current baseline / 12 October 2026

Faktor at 16e8bd4cf283

Cost definitions now distinguish all eligible attempted spend, successful-run cost and local execution cohorts. VS Code and JetBrains have different implemented surfaces; the complete shared UI is explicitly a design extension.

Current source baseline: 16e8bd4cf2832affbb6a2e9e9281beee7527ac4d
Prior research baseline: c43f97451d68b2d8e4884e39c3b475d2737a8b27

Prior website / 11 October 2026

The earlier edition, retained.

Index / Prior edition ↗

Approach / Prior edition ↗

Brand / Prior edition ↗

The expanded identity guide retains every original page, image, construction rule, source analysis and generation brief. Dated corrections introduce the new edition.

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Faktor / VS Code & JetBrains

Work, inspect and finish deliberately.

A complete editor design: task capture, scoped permissions, candidate review, evidence, recovery and durable outcomes.

Interactive editor design

Switch the host, theme and flow state, or use the controls inside the tool view.

> Local design prototype. No executable starts, repository changes, model requests, permissions or SCM actions occur here. Proposed controls and current-source differences are documented below.

Editor

VS Code

Host theme

Dark

Flow state

Evidence pending

routing-service — Visual Studio Code

DESIGN PROTOTYPE / ILLUSTRATIVE TASK

PROJECT / ROUTING-SERVICE

- routing-service
  - src
    - auth
      - session.rs
      - session_test.rs
  - tests
  - Cargo.toml
  - README.md

session.rs session_test.rs

routing-service › src › auth › session.rs

```rust
use crate::auth::RefreshToken;

pub fn rotate_session(token: RefreshToken) {
    // Candidate change / illustrative code
    validate_session(&token);
    reject_replayed_token(&token);

    // Required concurrent-refresh result is missing
    let next = issue_rotated_token(&token);
    preserve_active_session(&token, &next);
    record_rotation(&next);
}
```

TERMINAL / ILLUSTRATIVE OUTPUT

```
Required test: replay rejection / passed
Compatibility: active sessions / passed
Concurrent refresh result / missing
Completion remains pending.
```

Faktor

Settings

Work | Inspect | History

Plan | Agents | Evidence | Diff

Completion pending

Two required criteria passed. One required result is missing.

✓ Reject token replay

Required test result / passed

✓ Preserve active sessions

Compatibility check / passed

◇ Concurrent refresh yields one valid result

Required result / missing

Candidate	candidate-08 / illustrative
Integration	Not started
Final basis	Not available

Review changed files | Open criteria

Evidence references

Replay test result

Session compatibility result

Concurrent-refresh result not recorded

routing-service / candidate workspace

Evidence pending

Completion remains pending.

Next design state → | Reset specimen | **Complete editor asset kit ↓** | Complete UI/UX PDF ↓

Host-specific design

Familiar in each editor.

Area	VS Code	JetBrains
Placement	Movable view/container and webview. Current source has Chat and Inspect disclosure.	Right-anchored Faktor tool window with Work / Inspect / History.
Shared navigation	A proposed Work / Inspect / History shell, including a visible History addition.	Retains the existing top-level views and makes their content more coherent.
Finish choice	Hierarchical finish levels already exist.	Current independent checkboxes become a proposed common four-level selector.
Diff review	Proposed native side-by-side diff adapter.	Proposed native DiffManager adapter.
Typography and theme	Inherit VS Code font, editor settings, focus and semantic tokens.	Inherit JetBrains UI font, editor settings and native theme.
Native confirmation	Keep exact-path service-start confirmation and fail-closed checks.	Keep exact-path service-start confirmation and fail-closed checks.

Thirty-six specified screens

The complete flow, beyond the hero.

01

Capture and preserve the task.

Project readiness, binary discovery, native start consent, typed task criteria, context attachments and captured finish choices.

02

Work with bounded authority.

Named current work, stop conditions and target/reason/scope permission review. No blanket grant is implied.

03

Inspect the evaluated candidate.

Plan, agents, all evidence references, review/verification, changed files and matching verified/landed identities.

04

Recover coherently.

Ambiguous submission, reconnect, malformed durable frame, unavailable proof, missing cost and SCM blockers retain useful state.


05

Record the outcome.


History separates conversation completion, engineering acceptance, integration, requested steps, final basis and recorded cost.

Reproduction in both themes

Native layout specimens.

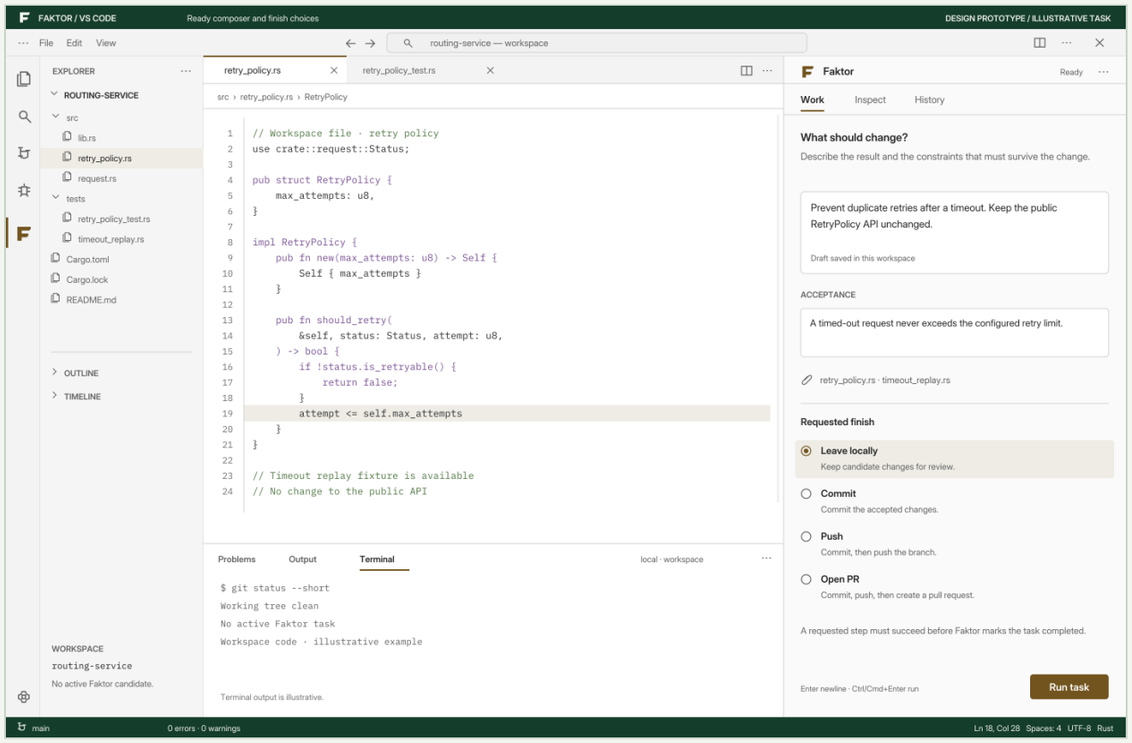

VS CODE / LIGHT / COMPOSER

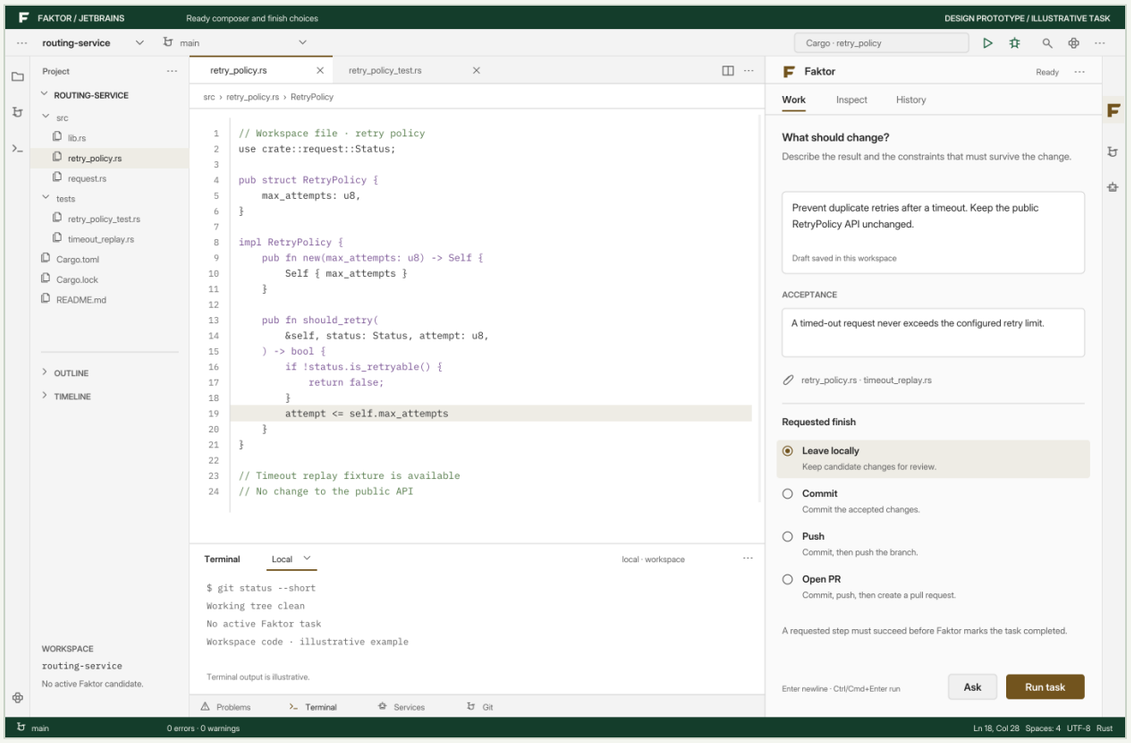

JETBRAINS / LIGHT / COMPOSER

The complete kit contains 56 native SVG and PNG screen assets: 14 core states × 2 hosts × 2 themes. The standalone specification maps 36 screens, 34 states and 16 end-to-end flows to the current source and proposed work.

Keyboard and recovery

Small details that keep the work usable.

Condition	Interaction contract
Keyboard	Roving main tabs, visible focus, Ctrl/Cmd + Enter scoped to the composer, Escape for confirmation recovery.
Narrow pane	Wrap paths and key/value rows, stack composer actions, move only secondary controls to accessible overflow.
Async refresh	Retain item identity and coherent snapshot; do not steal focus or skip an unprocessed durable frame.
Submission	One admitted logical request; keep the captured draft, finish and context when the response is ambiguous.
Unavailable information	Show unavailable proof/cost explicitly. Unavailable cost is not zero.
Diagnostics	Mask credentials; copied support details are redacted.

Implementation handoff

Build the shared contract in native adapters.

The source study distinguishes presentation refinements, UI work using existing backend support, new host integrations and backend extensions. The artifact is a complete design and handoff, not a claim that these extension changes are deployed.

Download the complete specification

Runtime and editor setup

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Identity & downloads

Research & prior edition

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

Prior edition / 11 October 2026 Retained design and pinned research. Current source and expanded experience are in the updated edition. Open current website →

Approach / Engineering loop

Define the finish. Then make the change.

A goal, a candidate and a visible evidence basis. Each part does a different job.

01 / INTENT

Compile the task.

Keep the goal, criteria, invariants, risks and proof obligations together before work starts.

02 / PLAN

Order the work.

A task graph records dependencies and makes the plan inspectable.

03 / CANDIDATE

Separate the edit.

Transactions, checkpoints and isolated candidates bound changes before integration.

A green result has a scope.

Required-check acceptance, claim evidence, integration and requested finish actions stay distinct. A result for an earlier candidate cannot certify a different landed state.

1. **Required acceptance.** Every required result must be present and pass. Missing evidence stays Pending; a failure stays Fail.
2. **Claim evidence.** Name the claim and the candidate snapshot. Unavailable means no verdict; refusal is a separate outcome.
3. **Integration.** Keep verified and landed identities visible. Recheck a state that differs from the verified candidate.
4. **Finish actions.** Local changes, commit, push and native pull request are user choices with durable outcomes.

The outcome ledger counts a verified change when it is accepted and integrated with a deterministic-checks final basis. A passing empty check set does not establish that condition.

One workflow in the host.

Work keeps conversation and the current task in front. Inspect exposes the plan, agents and evidence. History holds outcomes. IDE surfaces inherit their editor’s typography and theme.

Start from the source.

The source workspace includes the native Rust runtime, CLI, VS Code and JetBrains surfaces. Optional providers do not become product dependencies.

Open the repository ↗ **Explore the example**

---

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Logo & design assets

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

Prior edition / 11 October 2026 Retained design and pinned research. Current source and expanded experience are in the updated edition. Open current website →

Faktor / Visual identity

Built for a clear finish.

Clipped terminals. A clear initial. Deliberate evidence.

The fixed logo masters



INK / PAPER

Download SVG



OCHRE / INK

Download SVG

Fixed outlined artwork. Preserve letter spacing and H/4 clear space. Preferred symbol size: 24 px; tiny icons supplied separately.

Palette / Family foundations, own accent

Ink, Paper and Ochre.

Ink	Forest	Paper	Sage	Ochre	Ochre Deep
#08110C	#143D2B	#F3F5EF	#92AA99	#D9BA75	#72541E

Use the soft accent on Ink; the deeper accent for readable text on Paper. State colors keep their own semantic meaning.

Typography / Its own voice

Make the change.
Show the evidence.

Barlow Semi Condensed for headings.

Barlow for the reading surface.

IBM Plex Mono for technical metadata. The logo is fixed outlined artwork; host interfaces retain their own typography.

The identity in use

A complete application system.

FAKTOR / VISUAL IDENTITY

faktor

BEL CONSULTING / INDEPENDENT PRODUCT

Make the change.
Show the evidence.

PALETTE / SHARED FOUNDATIONS, OWN ACCENT

Ink	Forest	Paper	Sage	Ochre	Ochre Deep
#08110C	#143D2B	#F3F5EF	#92AA99	#D9BA75	#72541E

TYPOGRAPHY / OWN VOICE

Barlow Semi Condensed

Character in the lettering.

Readable product language. Exact labels.

IBM PLEX MONO / TECHNICAL METADATA

PRODUCT WEBSITE / NATIVE DESIGN SPECIMEN

faktor

Make the change.
Show the evidence.

View the source

COMPONENT / ILLUSTRATIVE STATE

CANDIDATE / LOCAL WORKSPACE

2 checks passed / 1 pending

Concurrent refresh / needs evidence

COMPLETION PENDING

APP / ICON

FIXED OUTLINED WORDMARK faktor

H/4 clear space. One-color masters. No effects.

Source review / logo suite / applications / own website

NATIVE MASTER / VERSION 3.0

Application concept. Use the native SVG masters for production artwork.

Downloads

Everything in its own project.

Logo suite, source analysis, usage rules, design tokens, font licenses, applications and generation briefs.

Visual identity guide	PDF
Complete design kit	ZIP
Standalone symbol	SVG
Stacked logo	SVG
Application icon	SVG
Design tokens	JSON

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Logo & design assets

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI

faktor

Prior edition / 11 October 2026 Retained design and pinned research. Current source and expanded experience are in the updated edition. Open current website →

01 / Native engineering agent

Make the change. Show the evidence.

Faktor plans the task, works in an isolated candidate workspace, and checks what changed before the run can finish.

View the source ↗

See the engineering loop

CANDIDATE / LOCAL WORKSPACE

Rotate refresh tokens. Preserve active sessions.

✓ Reject token replay
Required test result / passed

✓ Preserve existing sessions
Required compatibility check / passed

◇ Handle concurrent refresh
Required result / needs evidence

COMPLETION PENDING 02 / 03

Illustrative run Integration not started

02 / Define what must hold

A task needs more than a prompt.

Keep the goal, acceptance criteria, invariants and proof obligations together. The plan orders the work; the checks evaluate the change.

01 / PLAN

Give the work conditions.

Translate the objective into ordered tasks and observable criteria. Keep the risks and dependencies in view.

02 / CHANGE

Work in a candidate.

Use an isolated workspace with transactions and checkpoints. Separate editing from integration.

03 / CHECK

Keep the basis visible.

Connect required checks and named claims to the candidate they actually evaluated.

Explore the approach →

03 / A result belongs to a claim

See what passed. See what is missing.

Inspect connects criteria, candidate state, check results and review. A missing required result keeps completion pending.

Illustrative run / Rotate refresh tokens without breaking active sessions

Criterion	State	Evidence basis
Replayed refresh tokens fail	√ Passed	Required test result
Existing sessions remain valid	√ Passed	Required compatibility check
Concurrent refresh yields one valid result	◇ Needs evidence	Required result not recorded

2 criteria passed / 1 needs evidence / Candidate not integrated

04 / Done has conditions

Choose where the run stops.

Leave the changes locally, commit, push or open a pull request. Requested finish actions are recorded and checked as part of completion.

01	02	03	04
Local change	Commit	Push	Pull request

Native pull requests use the configured SCM integration. Missing configuration stays visible as a blocker.

05 / In your editor

Work stays in front.

Conversation, current run, composer. Open Inspect for the plan and evidence. History keeps durable outcomes within reach.

Work | Inspect | History

YOU / TASK

Rotate refresh tokens without breaking active sessions.

FAKTOR / CURRENT RUN

The candidate is ready for review. Two required criteria passed. The concurrent refresh result is still missing.

Add a constraint or inspect the evidence...

Illustrative interface. Tabs switch examples locally.

06 / The run leaves a record

Spend. Rework. Outcome.

Verified cost

Recorded model and verification spend per successful change.

First-pass result

Keep initial verification and repair attempts distinct.

Final basis

Record acceptance, integration and the verification basis together.

07 / Start in your workspace

Source, setup and the runtime.

Explore the native runtime and its IDE surfaces. Start with the source workspace and its setup guide.

Read setup ↗

SOURCE-WORKSPACE COMMAND

```
cargo run -p faktor-cli -- run --data-dir /tmp/faktor-demo "explain this repo"
```

Copy command

VS Code: Faktor: Open
JetBrains: Faktor tool window

Useful boundaries

Before you begin.

Does Faktor require another Bel Consulting product?

No. Native intelligence and verification form the baseline. Optional providers can enrich neutral interfaces.

Does a passing check mean the whole change is verified?

A result has a scope. Inspect the required criteria, named claims, candidate identity, integration state and final basis together. An empty set of required checks can pass without establishing a verified change.

What stays in the IDE?

The product uses the host's theme and typography. Work, Inspect and History are shared vocabulary across its native surfaces.

faktor

An engineering agent for changes you can inspect.

Source & documentation ↗

Logo & design assets

An independent Bel Consulting product.
Also in the family: KiwiCaptcha · Kiwi CI