

Systems Biology Graphical Notation: Entity Relationship Level 1

Draft of April 6, 2009

Disclaimer: This is a working draft of the SBGN Entity Relationship Level 1 specification. It is not a normative document.

To discuss any aspect of SBGN, please send your messages to the mailing list sbgn-discuss@sbgn.org. To get subscribed to the mailing list or to contact us directly, please write to sbgn-team@sbgn.org.



Preface

Acknowledgements

Notes on typographical conventions

The concept represented by a glyph is written using a normal font, while a *glyph* means the SBGN visual representation of the concept. Note on the color code: The glyphs that have been thoroughly discussed, and are considered frozen, are represented in blue. The glyphs that have been thoroughly discussed, but are still posing problems are represented in green. The glyphs that have been proposed but for which in-depth discussion is yet to come are represented in red.

Contents

Preface	ii	2.3.5 Glyph: <i>Unit of information</i>	13
1 What is the Systems Biology Graphical Notation?	1	2.3.6 Glyph: <i>State variable</i>	14
1.1 History of SBGN development	1	2.4 Glyph: <i>Submap</i>	16
1.2 The three languages of SBGN	2	2.5 Relationships	16
1.3 SBGN levels	3	2.5.1 Statements	16
1.4 Developments, discussions, and notifications of updates	4	2.5.2 Glyph: <i>Observable</i>	18
2 Entity Relationship Glyphs	5	2.5.3 influences	18
2.1 Overview	5	3 Grammar of Entity Relationship diagrams	24
2.2 Controlled vocabularies used in SBGN Entity Relationship Level 1	6	3.1 Overview	24
2.2.1 Entity material types	6	3.2 Concepts	24
2.2.2 Entity conceptual types	6	3.3 Syntax	24
2.2.3 Macromolecule covalent modifications	7	3.3.1 Interactor Nodes connectivity definition	25
2.2.4 Miscellaneous terms	7	3.3.2 Syntactic rules	25
2.3 Entity nodes	8	3.4 Semantic description of Entity Relationship diagrams	25
2.3.1 interactors	8	3.4.1 Statements	25
2.3.2 Logical operators	10	3.4.2 Influences	26
2.3.3 Glyph: <i>Perturbing agent</i>	12	3.4.3 Logical Operators	26
2.3.4 Auxiliary units	13	A Reference card	27

Chapter 1

What is the Systems Biology Graphical Notation?

The goal of the **S**ystems **B**iology **G**raphical **N**otation (SBGN) is to standardize the graphical/visual representation of essential biochemical and cellular processes studied in systems biology. SBGN defines a comprehensive set of symbols with precise semantics, together with detailed syntactic rules defining their use. It also describes the manner in which such graphical information should be interpreted.

Standardizing graphical notations for describing biological interactions is an important step towards the efficient and accurate transmission of biological knowledge between different communities. Traditionally, diagrams representing interactions among genes and molecules have been drawn in an informal manner, using simple unconstrained shapes and edges such as arrows. Until the development of SBGN, no standard agreed-upon convention existed defining exactly how to draw such diagrams in a way that helps readers interpret them consistently, correctly, and unambiguously. By standardizing the visual notation, SBGN can serve as a bridge between different communities such as computational and experimental biologists, and even more broadly in education, publishing, and more.

For SBGN to be successful, it must satisfy a majority of technical and practical needs, and must be embraced by the community of researchers in biology. With regards to the technical and practical aspects, a successful visual language must meet at least the following goals:

1. Allow the representation of diverse biological objects and interactions;
2. Be semantically and visually unambiguous;
3. Allow implementation in software that can aid the drawing and verification of diagrams;
4. Have semantics that are sufficiently well defined that software tools can convert graphical models into formal models, suitable for analysis if not for simulation;
5. Be unrestricted in use and distribution, so that the entire community can freely use the notation without encumbrance or fear of intellectual property infractions.

This document defines the *Entity Relationship* visual language of SBGN. As explained more fully in Section 1.2, Entity Relationship diagrams are one of three views of a model offered by SBGN. It is the product of many hours of discussion and development by many individuals and groups. In the following sections, we describe the background, motivations, and context of Entity Relationship diagrams.

1.1 History of SBGN development

Although problems surrounding the representation of biological pathways has been discussed for a long time, see for instance [1], the effort to create a well-defined visual notation was pioneered

by Kurt Kohn with his Molecular Interaction Map (MIM), a notation defining symbols and syntax to describe the interactions of molecules [2]. MIM is essentially a variation of the entity-relationship diagrams [3]. Kohn's work was followed by numerous other attempts to define both alternative notations for diagramming cellular processes (e.g., the work of Pirson and colleagues [4], BioD [5], Patika [6, 7], and others), as well as extensions of Kohn's notation (e.g., the Diagrammatic Cell Language of Maimon and Browning [8]).

Kitano originated the idea of having multiple views of the *same* model. This addresses two problems: no single view can satisfy the needs of all users, and a given view can only represent a subset of the semantics necessary to express biological knowledge. Kitano proposed the development of process diagrams, entity-relationship diagrams, timing charts (to describe temporal changes in a system), and abstract flow charts [9]. The Process Diagram notation was the first to be fully defined using a well-delineated set of symbols and syntax [10]. It led to a desire to establish a unified standard for graphical representation of biochemical entities, and from this arose the current SBGN effort. Separately and roughly concurrently, other groups designed similar notations, for example the Edinburgh Pathway Notation [11] or Patika [6, 7]. All of these efforts began to attract attention as more emphasis in biological research was placed on networks of interactions and not just characterization of individual entities.

In 2005, thanks to funding from the Japanese agency *The New Energy and Industrial Technology Development Organization* (NEDO, <http://www.nedo.go.jp/>), Kitano initiated the Systems Biology Graphical Notation (SBGN) project as a community effort. The first SBGN workshop was held in February 2006 in Tokyo, with over 30 participants from major organizations interested in this effort. From the in-depth discussions held during that meeting emerged a set of decisions that are the basis of the current SBGN specification. These decisions are:

- SBGN should be made up of two different visual grammars, describing Entity Relationship and Process Diagram diagrams (called *State Transition* diagrams at the time). See Section 1.2.
- In order to promote wide acceptance, the initial version(s) of SBGN should stick to at most a few dozens symbols that non-specialists could easily learn.

The second SBGN workshop was held in October, 2006, in Yokohama, Japan. This meeting featured the first technical discussions about which symbols to include in SBGN Level 1, as well as discussions about the syntax, semantics, and layout of graphs. A follow-up technical meeting was held in March, 2007, in Heidelberg, Germany; the participants of that meeting fleshed out most of the design of SBGN. The third SBGN workshop, held in Long Beach in October, 2007, was dedicated to reaching agreement on the final outstanding issues of notation and syntax. The participants of that meeting collectively realized that a third language would be necessary: the Activity Flow diagrams. The specification for the Process Diagram language was finalized and largely completed during a follow-up technical meeting held in Okinawa, Japan, in January, 2008. At this last meeting, attendees also held the first in-depth discussions about the syntax of the Entity Relationship language.

The specification for SBGN Process Diagram Level 1 was publicly released on August 23rd 2008 during the ICSB in Göteborg [12].

SBGN workshops are an opportunity for public discussions about SBGN, allowing interested persons to learn more about SBGN and help identify needs and issues. More meetings are expected to be held in the future, long after this specification document has been issued.

1.2 The three languages of SBGN

Readers may well wonder, why are there *three* languages in SBGN? The reason is that this approach solves a problem that was found insurmountable any other way: attempting to include all relevant facets of a biological system in a single diagram causes the diagram to become hopelessly complicated and incomprehensible to human readers.

The three different notations in SBGN correspond to three different *views* of the same model. These views are representations of different classes of information, as follows:

1. *Process Diagram*: the causal sequences of molecular processes and their results
2. *Entity Relationship*: the interactions between entities irrespective of sequence
3. *Activity Flow*: the flux of information going from one entity to another

In the Process Diagram view, each node in the diagram represents a given *state* of a species, and therefore a given species may appear multiple times in the same diagram if it represents the same entity in different states. Conversely, in the Entity Relationship view, a given species appears only once in a diagram. Process Diagrams are suitable for following the temporal aspects of interactions, and are easy to understand. The drawback of the Process Diagram, however, is that because the same entity appears multiple times in one diagram, it is difficult to understand which interactions actually exist for the entity. Conversely, Entity Relationship diagrams are suitable for understanding relationships involving each molecule, but the temporal course of events is difficult or impossible to follow because Entity Relationship diagrams do not describe the sequence of events.

Process Diagrams can quickly become very complex. Moreover, when diagramming a biochemical network, one often wants to ignore the biochemical basis underlying the action of one entity on the activity of another. A common desire is to represent only the flow of activity between nodes, without representing the transitions in the states of the nodes. This is the motivation for the creation of the Activity Flow view. Activity Flow diagrams permit the use of *modulation*, *stimulation* and *inhibition* and allow them to point to State/Entity nodes rather than process nodes. The Activity Flow view is thus a hybrid between Process Diagram and Entity Relationship diagrams. It is particularly convenient for representing the effect of perturbations, whether genetic or environmental in nature.

A recurring argument in SBGN development is that these three types of diagrams should be merged into one. Unfortunately, each view has such different meanings that merging them would compromise the robustness of the representation and destroy the mathematical integrity of the notation system. While having three different notations makes the overall system more complex, much of the complexity and increase in burden on learning is mitigated by reusing most of the same symbols in all three notations. It is primarily the syntax and semantics that change between the different views, reflecting fundamental differences in the underlying mathematics of what is being described.

1.3 SBGN levels

It was clear at the outset of SBGN development that it would be impossible to design a perfect and complete notation right from the beginning. Apart from the prescience this would require (which, sadly, none of the authors possess), it also would likely require a vast language that most newcomers would shun as being too complex. Thus, the SBGN community followed an idea used in the development of the Systems Biology Markup Language (SBML; [13]): stratify language development into levels.

A *level* of SBGN represents a set of features deemed to fit together cohesively, constituting a usable set of functionality that the user community agrees is sufficient for a reasonable set of tasks and goals. Capabilities and features that cannot be agreed upon and are judged insufficiently critical to require inclusion in a given level, are postponed to a higher level. In this way, SBGN development is envisioned to proceed in stages, with each higher SBGN level adding richness compared to the levels below it.

1.4 Developments, discussions, and notifications of updates

The SBGN website (<http://sbgn.org>) is a portal for all things related to SBGN. It provides a web forum interface to the SBGN discussion list (sbgn-discuss@sbgn.org) and information about how anyone may subscribe to it. The easiest and best way to get involved in SBGN discussions is to join the mailing list and participate.

Face-to-face meetings of the SBGN community are announced on the website as well as the mailing list. Although no set schedule currently exists for workshops and other meetings, we envision holding at least one public workshop per year. As with other similar efforts, the workshops are likely to be held as satellite workshops of larger conferences, enabling attendees to use their international travel time and money more efficiently.

Notifications of updates to the SBGN specification are also broadcast on the mailing list and announced on the SBGN website.

Chapter 2

Entity Relationship Glyphs

This chapter provides a catalog of the graphical symbols available for representing entities in Entity Relationship diagrams. There are different classes of glyphs corresponding to different classes of entities, predicates, controls and operators.

In Chapter 3 beginning on page 24, we describe the rules for combining these glyphs into a legal SBGN Entity Relationship, and in Chapter ?? beginning on page ??, we describe requirements and guidelines for the way that diagrams are visually organized.

2.1 Overview

To set the stage for what follows in this chapter, we first give a brief overview of some of the concepts in the Entity Relationship notation with the help of an example shown in Figure 2.1. This example will be re-used throughout the description of the graphical symbols (glyphs) used by SBGN Entity Relationship Level 1 (with a few additions when the concepts are missing in the example)

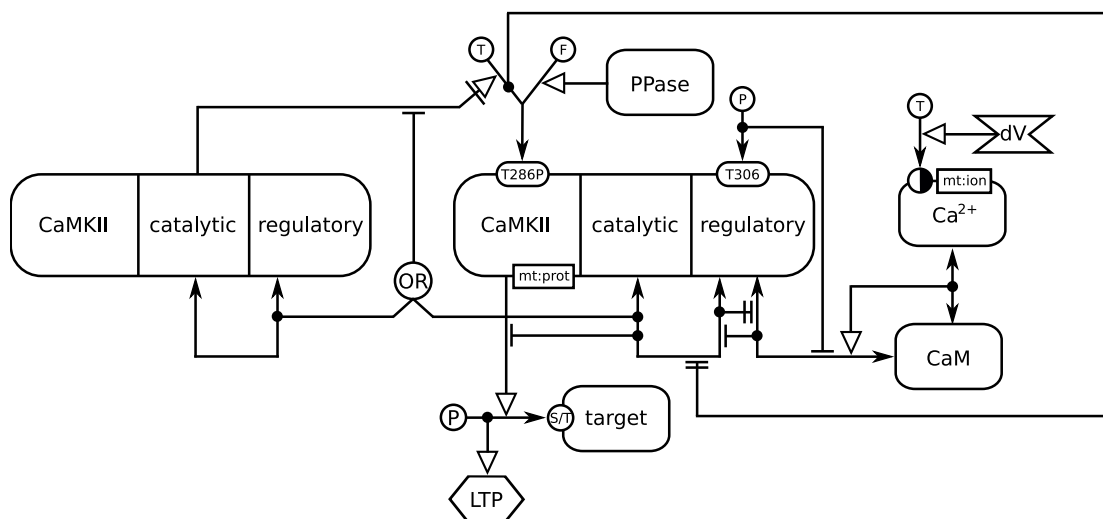


Figure 2.1: This example of a Entity Relationship diagram depicts the effect of a depolarisation (dV) on the intracellular calcium, that binds to Calmodulin (CaM), that itself binds to the calcium/calmoduline kinase II ($CaMKII$). The binding of calmodulin inhibits the interaction between the catalytic and regulatory domains, thus relieving the inhibition on the kinase activity. The phosphorylation of the targets finally leads to the Long Term Potentiation (LTP) of the synapses. In addition, the diagram shows the effect of phosphorylation on threonine 286, that makes the enzyme constitutively active, and on threonine 306, that renders the kinase insensitive to calmodulin.

The essence of the Entity Relationship diagram is to depict the influences of entities upon the

behaviour of others. The entities are things that exist, either on their own or when statements become true. For instance, an entity can exist, different entities can interact, or a value can be assigned to an entity's property. The influences can therefore be understood as logical consequences of this existence. Contrary to the Process Diagram notation, where the different processes affect each other, the relationships are independent. One can imagine that each of the relationships represent a specific conclusion of a scientific experience or article. Their addition on a map represents the knowledge we have of the effects of the entities represented upon each other. The independence of relationships is the key to avoid the combinatorial explosion inherent to Process Diagrams.

Table 2.1 summarizes the different SBGN abstractions described in this chapter.

Component	Role	Examples
Entity node	Something that exists	An entity, the result of an interaction
Statement	Something that can be true or false	An interaction between entities, the assignment of a value to a variable
Influence	The effect of something true on the realisation of a statement or another influence.	A stimulation, an absolute inhibition

Table 2.1: Summary of Entity Relationship components and their roles.

2.2 Controlled vocabularies used in SBGN Entity Relationship Level 1

Some glyphs in SBGN Entity Relationship diagrams can contain particular kinds of textual annotations conveying information relevant to the purpose of the glyph. These annotations are carried by *units of information* (Section 2.3.5) or *state variable values* (Section 2.3.6).

The text that appears as the unit of information decorating an entity must be prefixed with a controlled vocabulary term indicating the type of information being expressed. The prefixes are mandatory. Without the use of controlled vocabulary prefixes, it would be necessary to have different glyphs to indicate different classes of information; this would lead to an explosion in the number of symbols needed.

In the rest of this section, we describe the controlled vocabularies (CVs) used in SBGN Entity Relationship Level 1. In each case, some CV terms are predefined by SBGN, but unless otherwise noted, *they are not the only terms permitted*. Authors may use other CV values not listed here, but in such cases, they should explain the terms' meanings in a figure legend or other text accompanying the diagram.

2.2.1 Entity material types

The material type of an *Entity* indicates its chemical structure. A list of common material types is shown in Figure 2.2 on the next page, but others are possible. The values are to be taken from the Systems Biology Ontology (<http://www.ebi.ac.uk/sbo/>), specifically from the branch having identifier **SBO:0000240** (*material entity*). The labels are defined by SBGN Entity Relationship Level 1.

The material types are in contrast to the *conceptual types* (see below). The distinction is that material types are about physical composition, while conceptual types are about functions. For example, a strand of RNA is a physical artifact, but its use as messenger RNA is a function.

2.2.2 Entity conceptual types

An *entity's conceptual type* indicates its function within the context of a given Entity Relationship. A list of common conceptual types is shown in Figure 2.3 on the following page,

Name	Label	SBO term
Non-macromolecular ion	mt:ion	SBO:0000327
Non-macromolecular radical	mt:rad	SBO:0000328
Ribonucleic acid	mt:rna	SBO:0000250
Deoxribonucleic acid	mt:dna	SBO:0000251
Protein	mt:prot	SBO:0000297
Polysaccharide	mt:psac	SBO:0000249

Figure 2.2: A sample of values from the material types controlled vocabulary (Section 2.2.1).

but others are possible. The values are to be taken from the Systems Biology Ontology (<http://www.ebi.ac.uk/sbo/>), specifically from the branch having identifier **SBO:0000241** (*functional entity*). The labels are defined by SBGN Entity Relationship Level 1.

Name	Label	SBO term
Gene	ct:gene	SBO:0000243
Transcription start site	ct:tss	SBO:0000329
Gene coding region	ct:coding	SBO:0000335
Gene regulatory region	ct:grr	SBO:0000369
Messenger RNA	ct:mRNA	SBO:0000278

Figure 2.3: A sample of values from the conceptual types vocabulary (Section 2.2.2).

2.2.3 Macromolecule covalent modifications

A common reason for the introduction of state variables on an entity is to allow access to the configuration of possible covalent modification sites on that entity. For instance, a macromolecule may have one or more sites where a phosphate group may be attached; this change in the site's configuration (i.e., being either phosphorylated or not) may factor into whether, and how, the entity can participate in different processes. Being able to describe such modifications in a consistent fashion is the motivation for the existence of SBGN's covalent modifications controlled vocabulary.

Figure 2.4 on the next page lists a number of common types of covalent modifications. The most common values are defined by the Systems Biology Ontology in the branch having identifier **SBO:0000210** (*addition* under *events*→*reaction*→*biochemical reaction*→*conversion*→*addition*). The labels shown in Figure 2.4 on the following page are defined by SBGN Entity Relationship Level 1; for all other kinds of modifications not listed here, the author of a Entity Relationship diagram must create a new label (and should also describe the meaning of the label in a legend or text accompanying the diagram).

2.2.4 Miscellaneous terms

SBGN Entity Relationship Level 1 requires several reserved characters. A special unit of information usable on interactions describe the number of identical interactors involved. Note that the value is a unitary number, and not (for example) a range. There is no provision in SBGN Process Diagram Level 1 for specifying a range in this context because it leads to problems of entity identifiability. Other reserved characters are used in state variable assignments to represent truth or falsehood.

Name	Label	SBO term
Acetylation	Ac	SBO:0000215
Glycosylation	G	SBO:0000217
Hydroxylation	OH	SBO:0000233
Methylation	Me	SBO:0000214
Myristoylation	My	SBO:0000219
Palmytoylation	Pa	SBO:0000218
Phosphorylation	P	SBO:0000216
Prenylation	Pr	SBO:0000221
Protonation	H	SBO:0000212
Sulfation	S	SBO:0000220
Ubiquitination	Ub	SBO:0000224

Figure 2.4: A sample of values from the covalent modifications vocabulary (Section 2.2.3).

Name	Label	SBO term
cardinality	N:#	SBO:0000364
true	T	SBO:new
false	F	SBO:new

Table 2.2: Miscellaneous controlled terms. For the cardinality, # stands for the number; for example, “N:5”.

2.3 Entity nodes

In SBGN Entity Relationship Level 1 entity nodes represent element of truth, things that exist. In ontology parlance, they would be “continuants”. Entity nodes are the source of influences. SBGN Entity Relationship Level 1 contains three different types of entity nodes, the interactors, that are entities able to interact, the logical operators and the *perturbing agent*.

2.3.1 interactors

2.3.1.1 Glyph: Entity

SBGN Entity Relationship Level 1 defines only one glyph for all entities, whether physical entity, such as protein, a nucleic acid, metabolite or functional entity such as a gene. Indeed the exact nature of entities does not impact the rules of interactions within a diagram. The nature of a particular entity may then be clarified using its label and decorations, as will become clear below.

SBO Term:

SBO:0000245 ! entity

Container:

An *entity* is represented by a rectangular container with rounded corners, as illustrated in Figure 2.5 on the next page.

Label:

An *entity* is identified by a label placed in an unbordered box containing a string of characters. The characters can be distributed on several lines to improve readability, although this is not mandatory. The label box must be attached to the center of the container if the *entity* does not contain domains. If the *entity* contains *domains*, the label box must be attached to the center of the container representing the whole entity (Section ??). The label may spill outside of the container.

Auxiliary items:

An *entity* might carry state variables that can add information about its state (Section 2.3.6). A state variable is represented by a “stadium”, that is a rectangle capped with two hemi-circles, with the long axis of this stadium placed on the border of the *entity*’s container, as illustrated in Figure 2.5. The label of the state variable (which can precise the type of characteristic represented by the state variable, residue type, residue number etc.) is written within the state variable’s container. Particular *state variables* are the existence (Section 2.3.6) and the location (Section 2.3.6).

An *entity* can carry one or several *units of information* (Section 2.3.5). Particular *units of information* are available for describing the material type (Section 2.2.1) and the conceptual type (Section 2.2.2) of a macromolecule. The center of the bounding box of a *unit of information* is located on the mid-line of the border of the macromolecule.

An *entity* can carry one or several *domains*. *Domains* are represented by labelled subsections of the *entity*. The leftward section represents the whole entity.

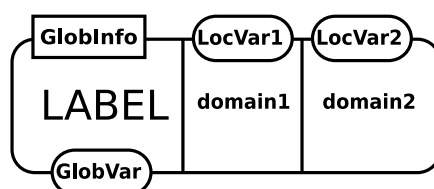


Figure 2.5: The Entity Relationship glyph for entity, showing the location of domains, units of information, global and local state variables.

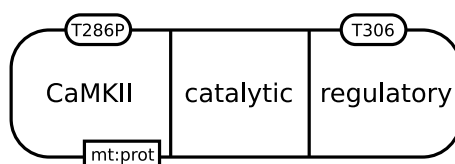


Figure 2.6: Example of an entity named *CaMKII*, that carries a global state variable representing the residu threonine 286, a global unit of information precising its material status (protein), two domains, catalytic and regulatory, the latter carrying a local state variable representing the residu threonine 306.

2.3.1.2 Glyph: Outcome

In Entity Relationship diagram, an *outcome* represents the actualisation of a *statement* (Section 2.5.1) or an *influence* (Section 2.5.3). For instance, if an *interaction* represents a non-covalent binding, the *outcome* represents the complex. If an *interaction* represents a genetic interaction, for instance derived from genetic screenings, the *outcome* represents the result of the presence of the two polymorphisms. If an *assignment* represents the phosphorylation of a protein, the *outcome* represents the phosphorylated form of this protein.

SBO Term:

SBO:0000409 ! interaction outcome

Container:

An *outcome* is represented by a black dot located on the arc of a *statement* (Section 2.5.1)

or an *influence* (Section 2.5.3). The diameter of the dot has to be larger than the thickness of the arc.

Label:

An *outcome* has no identity on its own and does not carry any label.

Auxiliary items:

An *outcome* does not carry any auxiliary items.



Figure 2.7: *The Entity Relationship glyph for outcome.*

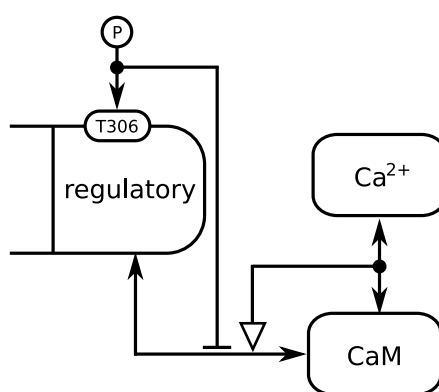


Figure 2.8: *Examples of outcomes. The rightmost represents the fact that calcium effectively interacts with Calmodulin. The leftmost represents the fact that the value phosphorylated is assigned to the variable threonin 306 of CaMKII.*

In SBGN Entity Relationship Level 1, logical operator allow to combine element of truth into another element of truth (if A exists and B exists, then A AND B exists) in order to apply influences.

2.3.2 Logical operators

2.3.2.1 *Glyph: And*

The glyph *and* is used to denote that all the *interactor nodes* linked as input are necessary to produce the output influence.

SBO Term:

SBO:0000173 ! and.

Container:

And is represented by a circle

Label:

And is identified by the label “AND” placed in an unbordered box attached to the center of the container.

Auxiliary items:

And does not carry any auxiliary items.




Figure 2.9: *The Entity Relationship glyph for and. Only two inputs are represented, but more would be allowed.*

2.3.2.2 Glyph: Or

The glyph *or* is used to denote that any of the *interactor nodes* linked as input is sufficient to produce the output influence.

SBO Term:

SBO:0000174 ! or.

Container:

Or is represented by a circle

Label:

Or is identified by the label “OR” placed in an unbordered box attached to the center of the container.

Auxiliary items:

Or does not carry any auxiliary items.




Figure 2.10: *The Entity Relationship glyph for or. Only two inputs are represented, but more would be allowed.*

2.3.2.3 Glyph: Not

The glyph *not* is used to denote that the output influence only happen in the absence of the input *interactor*.

SBO Term:

SBO:0000238 ! not.

Container:

Not is represented by a circle

Label:

Not is identified by the label “NOT” placed in an unbordered box attached to the center of the container.

Auxiliary items:

NOT does not carry any auxiliary items.




Figure 2.11: *The Entity Relationship glyph for not.*

2.3.2.4 Glyph: delay

The glyph *delay* is used to denote that the *interactor* linked as input does not produce the influence immediately.

SBO Term:

SBO:NEW ! delay.

Container:

Delay is represented by a circle

Label:

Delay is identified by the greek letter “ τ ” (“TAU”) placed in an unbordered box attached to the center of the container.

Auxiliary items:

NOT does not carry any auxiliary items.




Figure 2.12: *The Entity Relationship glyph for delay.*

2.3.3 Glyph: Perturbing agent

Biochemical networks can be affected by external influences. Those influences can be well-defined physical perturbations, such as the effect of a light pulse or of a change in temperature; they can also be more complex and not well-defined phenomena, for instance a biological process, an experimental setup, or a mutation. For these situations, SBGN provides the *perturbing agent* glyph. We do not use the word *perturbation* to avoid the misunderstanding with the influence that the *perturbing agent* has on the map.

SBO Term:

SBO:0000405 ! perturbing agent

Container:

A *perturbing agent* is represented by a modified hexagon having two opposite concave faces, as illustrated in Figure 2.13 on the next page.

Label:

A *perturbing agent* is identified by a label placed in an unbordered box containing a string of characters. The characters can be distributed on several lines to improve readability, although this is not mandatory. The label box must be attached to the center of the *perturbing agent* container. The label may spill outside of the container.

Auxiliary items:

A *perturbing agent* does not carry any auxiliary unit. In particular, its existence being not subjected to any modulation by any other *interactor*, it does not require the state variable existence. *Perturbing agent* do not have location either. pH of lysosome and mitochondria are different perturbing agents.



Figure 2.13: *The Entity Relationship glyph for perturbing agent.*




Figure 2.14: *Example of a perturbing agent representing the depolarisation of a membrane, that stimulates (Section 2.5.3.2) the existence (see 2.3.6) of an interactor.*

2.3.4 Auxiliary units

Auxiliary units are decorations used on *entities*.

2.3.5 Glyph: *Unit of information*

When representing biological entities, it is often necessary to convey some abstract information about the entity's function that cannot (or does not need to) be easily related to its structure. The SBGN *unit of information* is a decoration that can be used in this situation to add information to a glyph. Some example uses of a *unit of information* include characterizing a logical part of an entity, the information encoded in the entity, information about the physical environment, or the specific type of biological entity it is decorating.

SBO Term:

Not applicable.

Container:

A unit of information is represented by a rectangle. The long side of the rectangle should be oriented parallel to the border of the *entity* being annotated by the *unit of information*. The center of the bounding box of a *state of information* should be located on the mid-line of the border of the *entity*.

Label:

A *unit of information* is identified by a label placed in an unbordered box containing a string of characters. The characters can be distributed on several lines to improve readability, although this is not mandatory. The label box must be attached to the center of the container. The label may spill outside of the container.

The label defines the information carried by the *unit of information*. For certain predefined types of information having controlled vocabularies associated with them, SBGN defines specific prefixes that must be included in the label to indicate the type of information in question. The controlled vocabularies predefined in SBGN Entity Relationship Level 1 are described in Section 2.2 and summarized in the following list:

- mt** entity material type
- ct** entity conceptual type

Auxiliary items:

A *unit of information* does not carry any auxiliary items.




Figure 2.15: *The Entity Relationship glyph for unit of information.*




Figure 2.16: *Using a unit of information to represent the fact that the entity “CaMKII” is a protein.*

2.3.6 Glyph: *State variable*

Many biological entities such as molecules can exist in different *states*, meaning different physical or informational configurations. These states can arise for a variety of reasons. For example, macromolecules can be subject to post-synthesis modifications, wherein residues of the macromolecules (amino acids, nucleosides, or glucid residues) are modified through covalent linkage to other chemicals. Other examples of states are alternative conformations as in the closed/open/desensitized conformations of a transmembrane channel, and the active/inactive forms of an enzyme.

SBGN provides a means of associating one or more *state variables* with an entity; each such variable can be used to represent a dimension along which the state of the overall entity can vary. When an entity can exist in different states, the state of the whole entity (i.e., the SBGN object) can be described by the current values of all its *state variables*, and the values of the *state variables* of all its possible components, recursively.

In SBGN Entity Relationship Level 1, *state variables* are also used to describe the localisation in compartments (a transport is therefore described as a state variable assignment, see Section 2.5.1.1).

SBO Term:

Not applicable.

Container:

A *state variable* is represented by a “stadium” container, that is two hemicircles of same radius joined by parallel segments, as shown in Figure 2.17 on the following page. The parallel segment axis should be tangent to the border of the glyph of the *EN* being modified by the *state variable*. The center of the bounding box of a *state variable* should be located on the mid-line of the border of the *EN*.

Label:

A *state variable* is identified by a label placed in an unbordered box containing a string of characters. The characters can be distributed on several lines to improve readability, although this is not mandatory. The label box must be attached to the center of the container. The label may spill outside of the container.

Auxiliary items:

A *state variable* does not carry any auxiliary items.

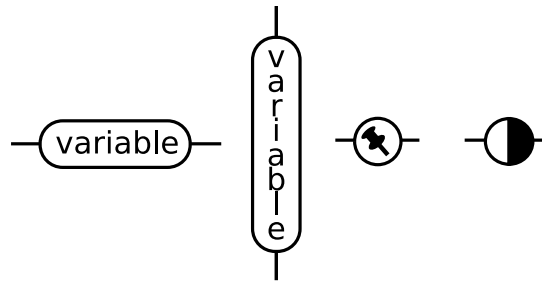


Figure 2.17: The Entity Relationship glyph for state variable. From left to right, horizontal state variable, vertical state variable, Location, existence.

A *state variable* does not necessarily have to be Boolean-valued. For example, an ion channel can possess several conductance states; a receptor can be inactive, active and desensitized; and so on. As another example, a *state variable* “ubiquitin” could also carry numerical values corresponding to the number of ubiquitin molecules present in the tail.

The state variable is assigned state-values (see Section 2.5.1.1). Those values are contained in a glyph similar to the *stateVariable*, although not carried by another *EN*.

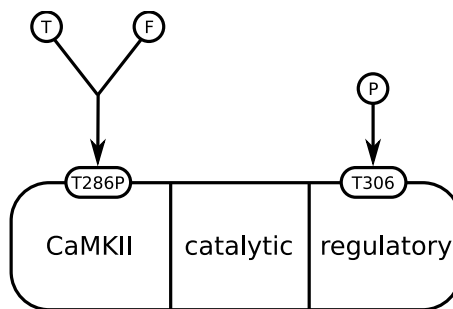


Figure 2.18: Two examples of state variables used to represent phosphorylation of a threonine residue. While only the value “phosphorylated” is assigned to T306, the variable T286P can take the values true or false, which allow for representing dephosphorylation as well as phosphorylation.

Two state variables are predefined. The variable *existence* is used to represent the creation or destruction of entities, as seen on Figure 2.19. *Existence* can take two values, true (T) or false (F). The variable is represented by a circle vertically divided in two. One hemicycle is black, and the other white.




Figure 2.19: Using the state variable existence to represent the appearance of calcium following a depolarisation.

The variable *location* is used to represent the physical location of an entity, as seen on Figure 2.20 on the following page. *Location* can take any value, but there can be only one

location per entity. The variable is represented by a circle containing a slanted pin.




Figure 2.20: Using the state variable location to represent the appearance of calcium in the cytosol following a depolarisation.

2.4 Glyph: Submap

A *submap* is used to encapsulate entities and relationships (including all types of nodes and edges) within one glyph.

TO BE FILLED.

2.5 Relationships

In SBGN Entity Relationship Level 1 relationships are rules that decide of the existence of entity nodes, based on the existence of others. In ontology parlance, they would be “occurents”. SBGN Entity Relationship Level 1 contains two types of relationships, the statements and the influences.

2.5.1 Statements

In SBGN Entity Relationship Level 1, statements can be true or false. Statements are targets of influences. They are not true themselves, but can carry truth element (*outcomes*, see Section 2.3.1.2).

2.5.1.1 Glyph: Assignment

Assignment is used to describe the setting of a state variable to a certain value. The assignment, represented by an harpoon arrow, goes from a variable value, represented by a floating *state variable* to a variable identification, represented by a *state variable* attached to the entity affected by the assignment. The result of an assignment is represented by *outcomes*, that is by filled dots on the arrow. The result of an *assignment* can be represented by any number of *outcomes*.

[NLN]

SBO Term:

non-applicable

Origin:

A state-variable (section Section 2.3.6) on its own, containing a variable value.

Target:


A state-variable (section Section 2.3.6) carried by a interactor (section Section 2.3.1), containing a variable identification.

End point:

The target extremity of an *assignment* carries an harpoon arrowhead.

NLN: The arrowhead of assignment is currently the same than of interactions. It was suggested that we either or both. But no single combination was really esthetically nice.

[NLN]



NLN: Can a perturbing agent be a target?

Figure 2.21: The Entity Relationship glyph for assignment.

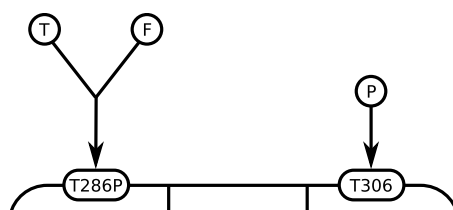


Figure 2.22: Two examples of assignment, representing the phosphorylated state of residues by one value (phosphorylation) or two values (phosphorylated or not phosphorylated).

2.5.1.2 Glyph: Interaction

Interaction represents an interaction between two or more *entities* or *outcomes*, whether a non-covalent physical interaction, or a functional interaction, e.g. genetic interaction. Each arrowhead points to an interactor involved in the interaction. The result of the interaction is represented by *outcomes* (see section 2.3.1.2), that is by filled dots on the line linking the two arrowheads in the case of a binary interaction, on a circle linked to the edges coming from the arrowheads in the case of a n-ary interactions. The result of an interaction can be represented by any number of *outcomes*.

SBO Term:

SBO:0000342 molecular or genetic interaction

Origin:

Any *interactor* (Section 2.3.1).

Target:

Any *interactor* (Section 2.3.1).

End point:

Both origin and target extremities of an *interaction* carry an harpoon arrowhead.

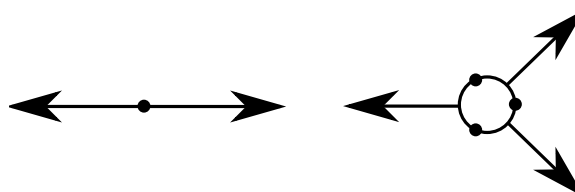


Figure 2.23: The Entity Relationship glyph for interaction. Top, binary interaction; bottom, n-ary interaction.

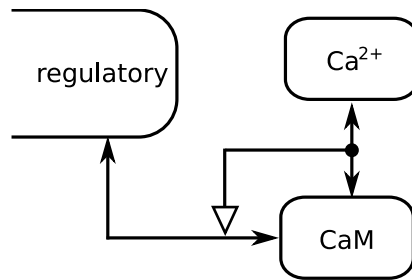


Figure 2.24: Examples of interactions. The interaction between calcium and Calmodulin influences the interaction between Calmodulin and CaMKII.

2.5.2 Glyph: *Observable*

A biochemical network can generate phenotypes or affect biological processes. Such processes can take place at different levels and are independent of the biochemical network itself. To represent these processes in a diagram, SBGN defines the *observable* glyph.

SBO Term:

SBO:0000358 ! phenotype

Container:

An *observable* is represented by an elongated hexagon, as illustrated in Figure 2.25.

Label:

An *observable* is identified by a label placed in an unbordered box containing a string of characters. The characters can be distributed on several lines to improve readability, although this is not mandatory. The label box must be attached to the center of the *observable* container. The label may spill outside of the container.



Figure 2.25: The Entity Relationship glyph for observable.




Figure 2.26: Example of an observable “Long Term Potentiation (LTP)” enhanced when the entity “target” is phosphorylated [by CaMKII].

2.5.3 influences

Influence arcs represent the effect of an entity on another relationship. The symbols attached to their extremities precise their semantics. SBGN Entity Relationship Level 1’s influences can be viewed as logical rules linking interactors and other rules.

2.5.3.1 Glyph: Modulation

A modulation affects the strength, or the probability to exist, of the target relationship. Such a modulation can affect the relationship **positively** or **negatively**, or even both ways depending on the conditions. A *modulation* can also be used when one does not know the precise direction of the effect, for instance if there are conflicting evidence.

SBO Term:

SBO:0000168 ! control.

Origin:

Any *entity node* (Section 2.3).

Target:

Any *relationship* (Section 2.5).

End point:

The target extremity of a *modulation* carries an empty diamond.



Figure 2.27: The Entity Relationship glyph for modulation.




Figure 2.28: Example of a modulation of the observable “Long Term Potentiation (LTP)” by the phosphorylation of an entity “target”. For instance the influence could be positive (stimulation, see Section 2.5.3.2) or negative (inhibition, see Section 2.5.3.3).

2.5.3.2 Glyph: Stimulation

A stimulation affects **positively** the strength, or the probability, of the target relationship. This stimulation can be for instance a catalysis or a positive allosteric regulation.

SBO Term:

SBO:0000170 ! stimulation.

Origin:

Any *entity node* (Section 2.3).

Target:

Any *relationship* (Section 2.5).

End point:

The target extremity of a *stimulation* carries an empty arrowhead.



Figure 2.29: *The Process Diagram glyph for stimulation.*




Figure 2.30: *Example of a stimulation of the observable “Long Term Potentiation (LTP)” by the phosphorylation of an entity “target”.*

2.5.3.3 Glyph: Inhibition

An inhibition **negatively** the strength, or the probability, of the target relationship. This inhibition can be for instance a steric hindrance or a negative allosteric regulation.

SBO Term:

SBO:0000170 ! inhibition.

Origin:

Any *entity node* (Section 2.3).

Target:

Any *relationship* (Section 2.5).

End point:

The target extremity of a *inhibition* carries a bar perpendicular to the arc.



Figure 2.31: *The Process Diagram glyph for inhibition.*

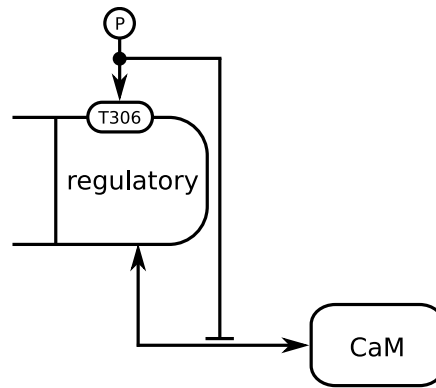


Figure 2.32: In this example, the phosphorylation of the threonine 306 of the regulatory domain of CaMKII inhibits the interaction between Calmodulin and the kinase.

2.5.3.4 Glyph: Necessary stimulation

A necessary stimulation is an influence that has to be present for a relationship to take place (to become true). A relationship modulated by a necessary stimulation can only exist when this stimulation is true, whatever are the other influences this relationship is subjected to.

SBO Term:

SBO:0000171 ! necessary stimulation.

Origin:

Any *entity node* (Section 2.3).

Target:

Any *relationship* (Section 2.5).

End point:

The target extremity of a *necessary stimulation* carries an open arrow (to remind that it is a *stimulation*) coming after a larger vertical bar.



Figure 2.33: The Process Diagram glyph for necessaryStimulation.

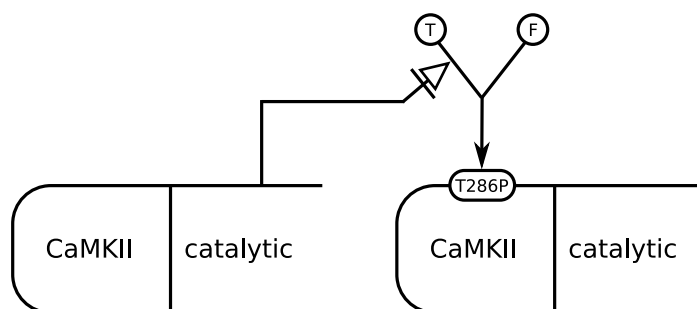


Figure 2.34: This example shows how threonine 286 of CaMKII is only phosphorylated by the kinase itself, but in a trans-fashion, meaning a molecule of CaMKII does not phosphorylate itself, but another molecule of CaMKII.

2.5.3.5 Glyph: Absolute inhibition

An absolute inhibition precludes the existence of another relationship. A relationship modulated by an absolute inhibition can only exist when an absolute inhibition is false, whatever are the other influences this relationship is subjected to.

SBO Term:

SBO:0000171 ! absolute inhibition.

Origin:

Any *entity node* (Section 2.3).

Target:

Any *relationship* (Section 2.5).

End point:

The target extremity of a *absolute inhibition* carries a double bar perpendicular to the arc (to remind that it is an *inhibition*).



Figure 2.35: The Process Diagram glyph for absoluteInhibition.

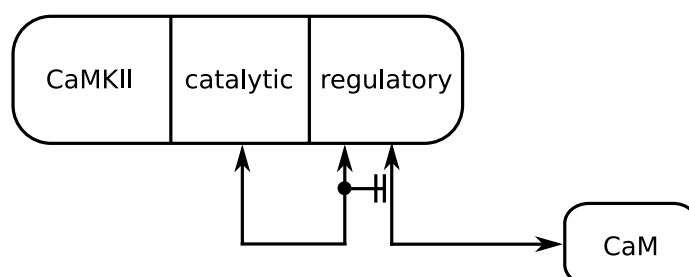


Figure 2.36: This example shows how the interaction between catalytic and regulatory domains of CaMKII precludes the interaction of Calmodulin with CaMKII.

2.5.3.6 Glyph: Logic arc

Logic arc is used to represent the fact that an interactor influences the outcome of a logic operator.

SBO Term:

SBO:0000398 - logical relationship.

Origin:

Any *interactor* (Section 2.3.1) or *logical operator* (Section 2.3.2).

Target:

Any *logical operator* (Section 2.3.2).

End point:

No particular symbol is used to represent a logic arc.




Figure 2.37: *The Entity Relationship glyph for logic arc.*

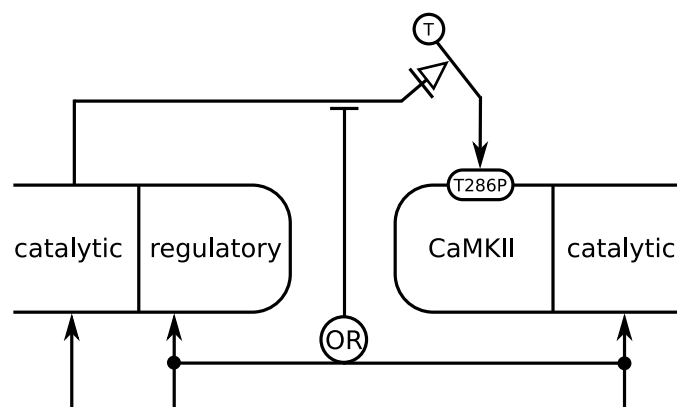


Figure 2.38: *In this example, two logic arcs reflect the fact that the intra-molecular interaction of either the cis- or trans-subunits of CaMKII precludes the phosphorylation of threonine 286 by the trans-subunit.*

Chapter 3

Grammar of Entity Relationship diagrams

3.1 Overview

In this chapter, we describe how the glyphs of SBGN Entity Relationship Level 1 can be combined to make a valid Entity Relationship diagram. To do this, we must at the very least define what glyphs can be connected to each other. This is called syntax. Next, we must define rules over and above connection rules, such as whether duplicate symbols are permitted. In addition, we must define what the notation “means” — how does it represent a body of biological knowledge? This is semantics, and it is essential if a reader is to understand an SBGN diagram without external help, and a writer is to create one that reflects his understanding of a biological system.

In this section we start off by describing the concepts of the Entity Relationship notation. Next a detailed description of the syntax is provided followed by a description of the syntactic rules of the notation.

3.2 Concepts

The SBGN Entity Relationship language is more than a collection of symbols. It is a visual language that uses specific abstractions to describe the biological processes that make up a quantitative model, a signalling pathway or a metabolic network. This abstraction is the semantics of SBGN, and to describe it requires more than a definition of the symbols and syntax of the language. We first need to define the abstractions we are using.

SBGN Entity Relationship diagrams describe biological interactions involving biological entities. An *interactor* (Section 2.3.1), such as a molecule, influences the behaviour of other *interactor* via a relationships.

It may be convenient to think of a SBGN Entity Relationship diagrams as listing independent rules that describe influences between interactors. Diagram can then be analysed with “what if?” queries.

3.3 Syntax

The syntax of SBGN Entity Relationship diagrams can be defined in the form of an incidence matrix. This incidence matrix has symbols as rows and arcs as columns. Each element of the matrix represents the role of a symbol in connection to an arc. Input (I) means that the arc can begin on that symbol. Output (O) indicates that the arc can end on that symbol. Numbers in parenthesis represent the maximum number of arcs of a particular type to have this specific connection role with the node. No numbers means any number is allowed. Empty cells means the arc is not able to connect to the symbol. Note that due to its particular nature, *observable* is listed in the symbols, despite being a statement.

3.3.1 Interactor Nodes connectivity definition

<i>Arc\interactors</i>	<i>assignment</i>	<i>interaction</i>	<i>modulation</i>	<i>stimulation</i>	<i>inhibition</i>	<i>necessary stimulation</i>	<i>absolute inhibition</i>	<i>logic arc</i>
<i>entity</i>		IO	I	I	I	I	I	I
<i>outcome</i>		I(1)O(1)	I(1)	I(1)	I(1)	I(1)	I(1)	I(1)
<i>and</i>			I(1)	I(1)	I(1)	I(1)	I(1)	I(1)O
<i>or</i>			I(1)	I(1)	I(1)	I(1)	I(1)	I(1)O
<i>not</i>			I(1)	I(1)	I(1)	I(1)	I(1)	I(1)O(1)
<i>delay</i>			I(1)	I(1)	I(1)	I(1)	I(1)	I(1)O(1)
<i>perturbing agent</i>			I	I	I	I	I	I
<i>unit of information</i>								
<i>state variable</i>	I(1)O(1)							
<i>domain</i>		IO						
<i>modulation</i>			O	O	O	O	O	O
<i>stimulation</i>			O	O	O	O	O	O
<i>inhibition</i>			O	O	O	O	O	O
<i>necessary stimulation</i>			O	O	O	O	O	O
<i>absolute inhibition</i>			O	O	O	O	O	O
<i>observable</i>			O	O	O	O	O	

3.3.2 Syntactic rules

In addition to the incidence matrix, additional rules refine the syntax of Entity Relationship diagrams.

1. There can be any number of *entities* with the same label (name). All of them represent the same concept, such as a molecular species. Those different *entities* do not have to carry the same *auxiliary units*, whether state variables, units of information or domains.
2. There can be any number of *perturbing agents* with the same label (name). All of them represent the same concept, such as a physical input.
3. There can be any number of *observable* with the same label (name). All of them represent the same concept, producing identical readout.
4. From an *outcome* can only originate one relationship, whether influence or interaction. The relationships being seen as independent rules, separate consequences of an assignment or an interaction have to originate from different outcomes, that is affirmation of truth of this assignement or interaction.
5. An *Influence* from an interactor can target only one interactor or one relationship. Influence arcs cannot be branched.

3.4 Semantic description of Entity Relationship diagrams

3.4.1 Statements

An *interaction* linking the *interactors* *A* and *B* means: “*A* interacts with *B*”. An *outcome* on an *interaction* represents the cases when the statement is true, that is when the interaction

effectively exists. If the interaction is a physical interaction between molecules, the *outcome* represents the complex resulting from the interaction. It is used as follow: “when (or if) A interacts with B then ...”.

An *assignement* linking a state variable value v to a *state-variable* V of an *interactor* I means: “ v is assigned to V of I ” or “ V of I takes the value v ”. An *outcome* on an *assignment* represents the cases when the statement is true, that is when the variable effectively displays the value. It is used as follows: “when (or if) V of I takes the value v then ...” or more succinctly “when (or if) $I\{V \Rightarrow v\}$ then ...”.

3.4.2 Influences

A *modulation* linking an *interactor* I and a relationship R means: “If I exists then R is either reinforced or weakened”.

A *stimulation* linking an *interactor* I and a relationship R means: “If I exists then R is reinforced” or “If I then the probability of R is increased”.

A *necessary stimulation* linking an *interactor* I and a relationship R means: “ R only takes place if I exists”.

An *inhibition* linking an *interactor* I and a relationship R means: “If I exists then R is weakened” or “If I then the probability of R is lowered”.

An *absolute inhibition* linking an *interactor* I and a relationship R means: “If I exists then R never takes place”.

3.4.3 Logical Operators

An *and* linking several *logic arcs* L_i and an influence F means: “if for each i , L_i exists, then F ”.

An *or* linking several *interactors* I_i and an influence F means: “if for any i , I_i exists, then F ”.

A *not* linking an *interactors* I and an influence F means: “if I exists, then F does not”.

A *delay* means: “if the input is true then output but not immediately”.


Appendix A

Reference card

Print this summary of SBGN Entity Relationship symbols for a quick reference.

Entity Nodes

Relationship Nodes

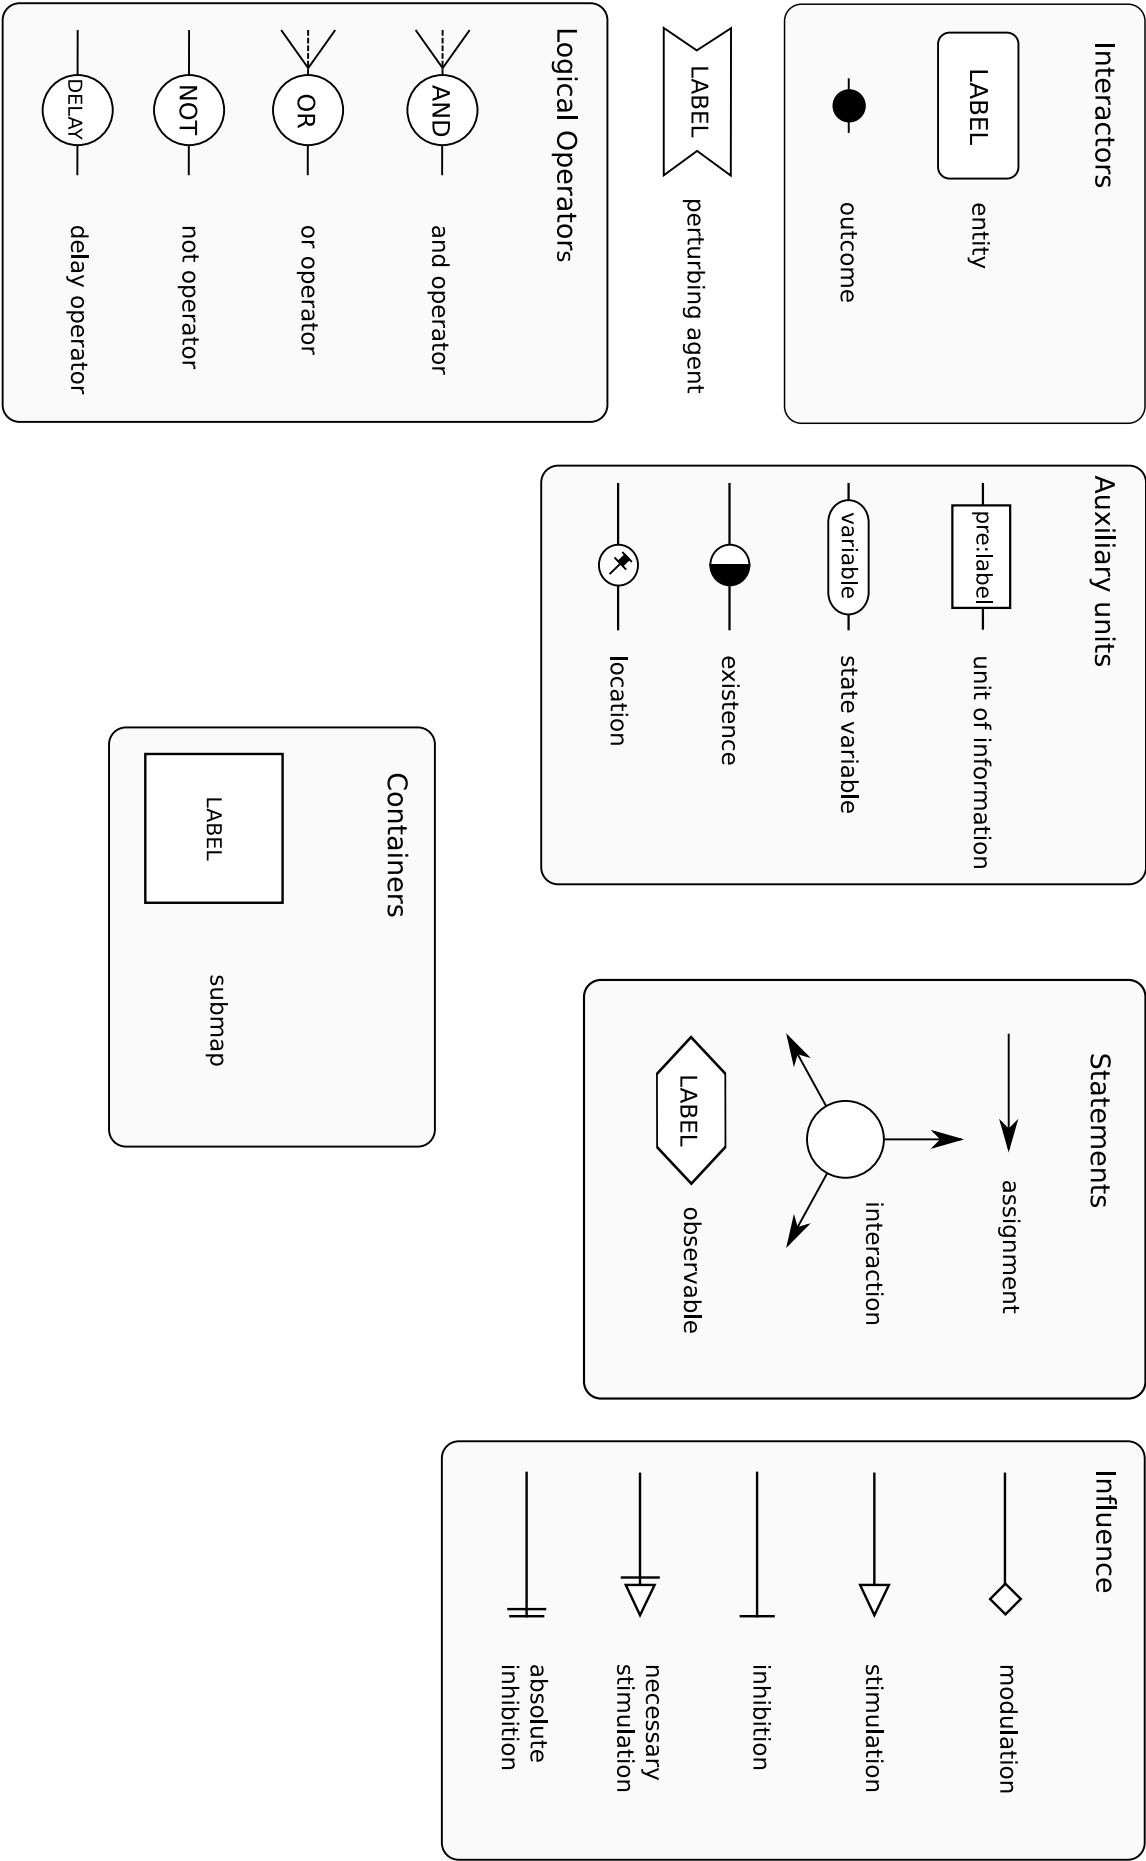

Bibliography

- [1] Gerhard Michal. On representation of metabolic pathways. *BioSystems*, 47:1–7, 1998.
- [2] Kurt W. Kohn. Molecular interaction map of the mammalian cell cycle control and DNA repair systems. *Molecular Biology of the Cell*, 10(8):2703–2734, 1999.
- [3] Peter Pin-Shan S. Chen. The entity-relationship model: Toward a unified view of data. *ACM Transactions on Database Systems*, 1(1):9–36, 1976.
- [4] I. Pirson, N. Fortemaison, C. Jacobs, S. Dremier, J. E. Dumont, and C. Maenhaut. The visual display of regulatory information and networks. *Trends in Cell Biology*, 10(10):404–408, 2000.
- [5] Daniel L. Cook, J. F. Farley, and S. J. Tapscott. A basis for a visual language for describing, archiving and analyzing functional models of complex biological systems. *Genome Biology*, 2(4):research0012.1–research0012.10., 2001.
- [6] E. Demir, O. Babur, U Dogrusoz., A. Gursoy, G. Nisanci, R. Cetin-Atalay, and M. Ozturk. Patika: an integrated visual environment for collaborative construction and analysis of cellular pathways. *Bioinformatics*, 18(7):996–1003, 2002.
- [7] E. Demir, O. Babur, U. Dogrusoz, A. Gursoy, A. Ayaz, G. Gulesir, G. Nisanci, and R. Cetin-Atalay. An ontology for collaborative construction and analysis of cellular pathways. *Bioinformatics*, 20(3):349–356, 2004.
- [8] Ron Maimon and Sam Browning. Diagrammatic notation and computational structure of gene networks. In Hiroaki Kitano, editor, *Proceedings of the 2nd International Conference on Systems Biology*, pages 311–317, Madison, WI, 2001. Omnipress.
- [9] Hiroaki Kitano. A graphical notation for biochemical networks. *BioSilico*, 1:169–176, 2003.
- [10] Hiroaki Kitano, Akira Funahashi, Yukiko Matsuoka, and Kanae Oda. Using process diagrams for the graphical representation of biological networks. *Nature Biotechnology*, 23(8):961–966, 2005.
- [11] Stuart L. Moodie, Anatoly A. Sorokin, Igor Goryanin, and Peter Ghazal. A graphical notation to describe the logical interactions of biological pathways. *Journal of Integrative Bioinformatics*, 3:36, 2006.
- [12] N. Le Novère, S. Moodie, A. Sorokin, M. Hucka, F. Schreiber, E. Demir, H. Mi, Y. Matsuoka, K. Wegner, and H. Kitano. Systems biology graphical notation: Process diagram level 1. *Nature precedings*, 2008.
- [13] M. Hucka, A. Finney, H. M. Sauro, H. Bolouri, J. C. Doyle, H. Kitano, A. P. Arkin, B. J. Bornstein, D. Bray, A. Cornish-Bowden, A. A. Cuellar, S. Dronov, E. D. Gilles, M. Ginkel, V. Gor, I. I. Goryanin, W. J. Hedley, T. C. Hodgman, J.-H. Hofmeyr, P. J. Hunter, N. S. Juty, J. L. Kasberger, A. Kremling, U. Kummer, N. Le Novère, L. M. Loew, D. Lucio, P. Mendes, E. Minch, E. D. Mjolsness, Y. Nakayama, M. R. Nelson,

P. F. Nielsen, T. Sakurada, J. C. Schaff, B. E. Shapiro, T. S. Shimizu, H. D. Spence, J. Stelling, K. Takahashi, M. Tomita, J. Wagner, and J. Wang. The Systems Biology Markup Language (SBML): A medium for representation and exchange of biochemical network models. *Bioinformatics*, 19(4):524–531, 2003.