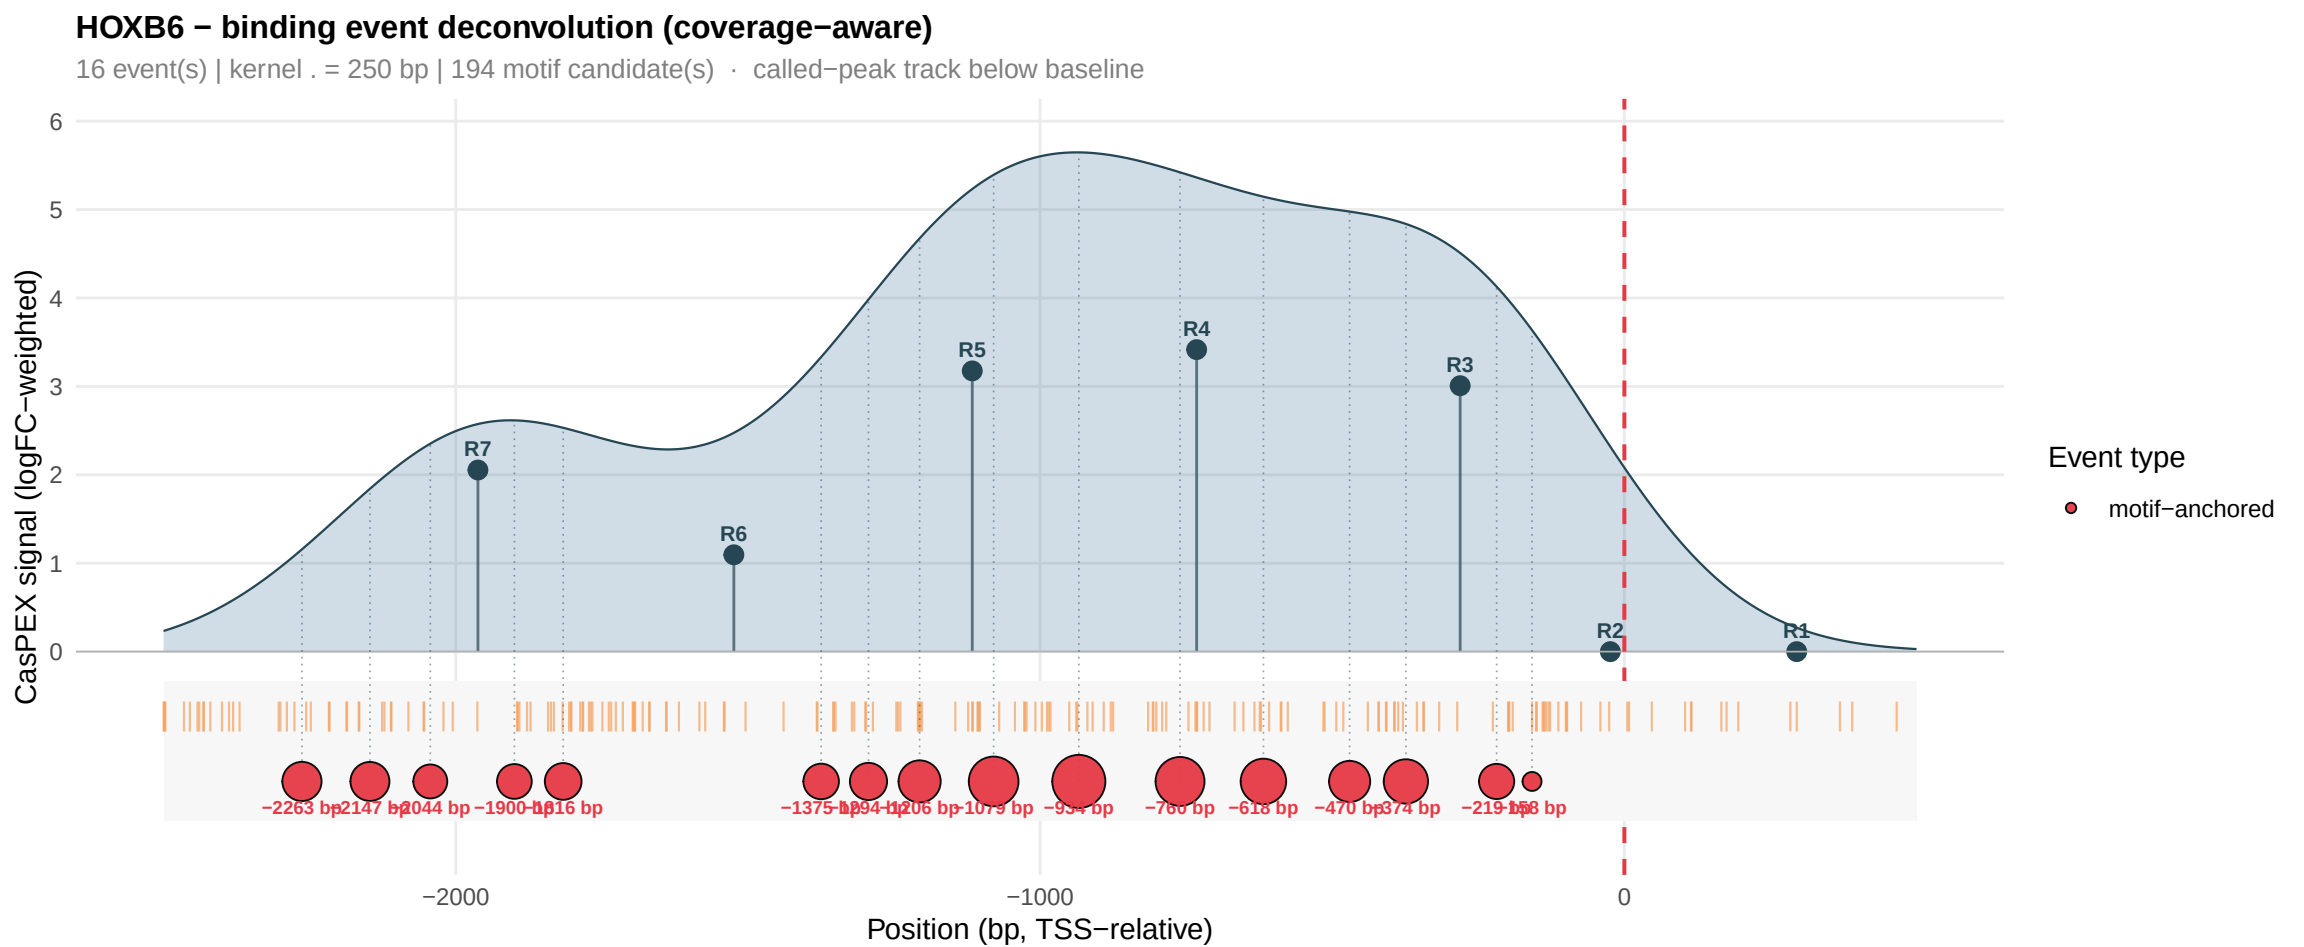
HOXB6 − binding event deconvolution (coverage−aware)
16 event(s) | kernel . = 250 bp | 194 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
Position (bp, TSS−relative)
R1
R2
R3
R4
R5
R6
R7
−2263 bp
−2147 bp
−2044 bp
−1900 bp
−1616 bp
−1375 bp
−1294 bp
−1206 bp
−1079 bp
−934 bp
−760 bp
−618 bp
−470 bp
−374 bp
−219 bp
−158 bp
Event type
motif−anchored

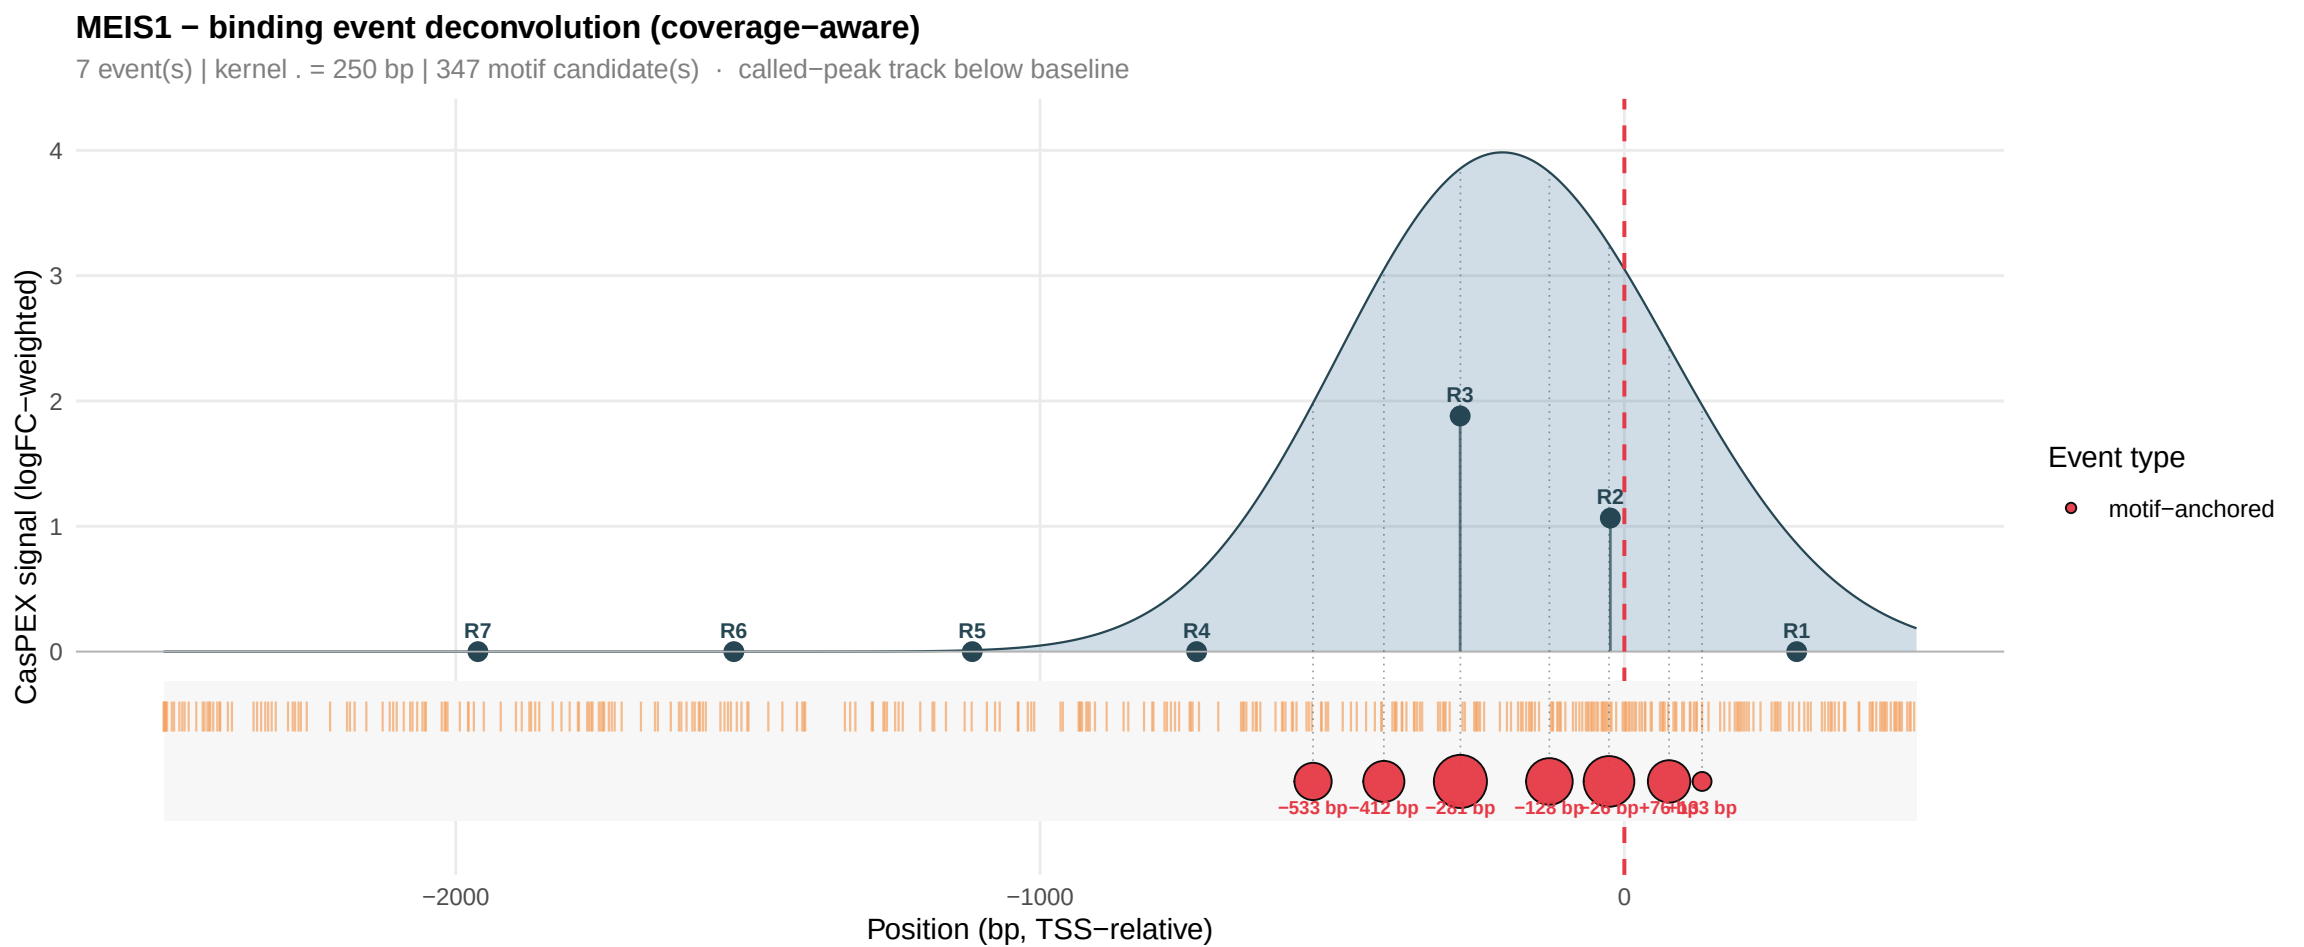
MEIS1 − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 250 bp | 347 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−533 bp
−412 bp
−281 bp
−128 bp
−26 bp
+76 bp
+103 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

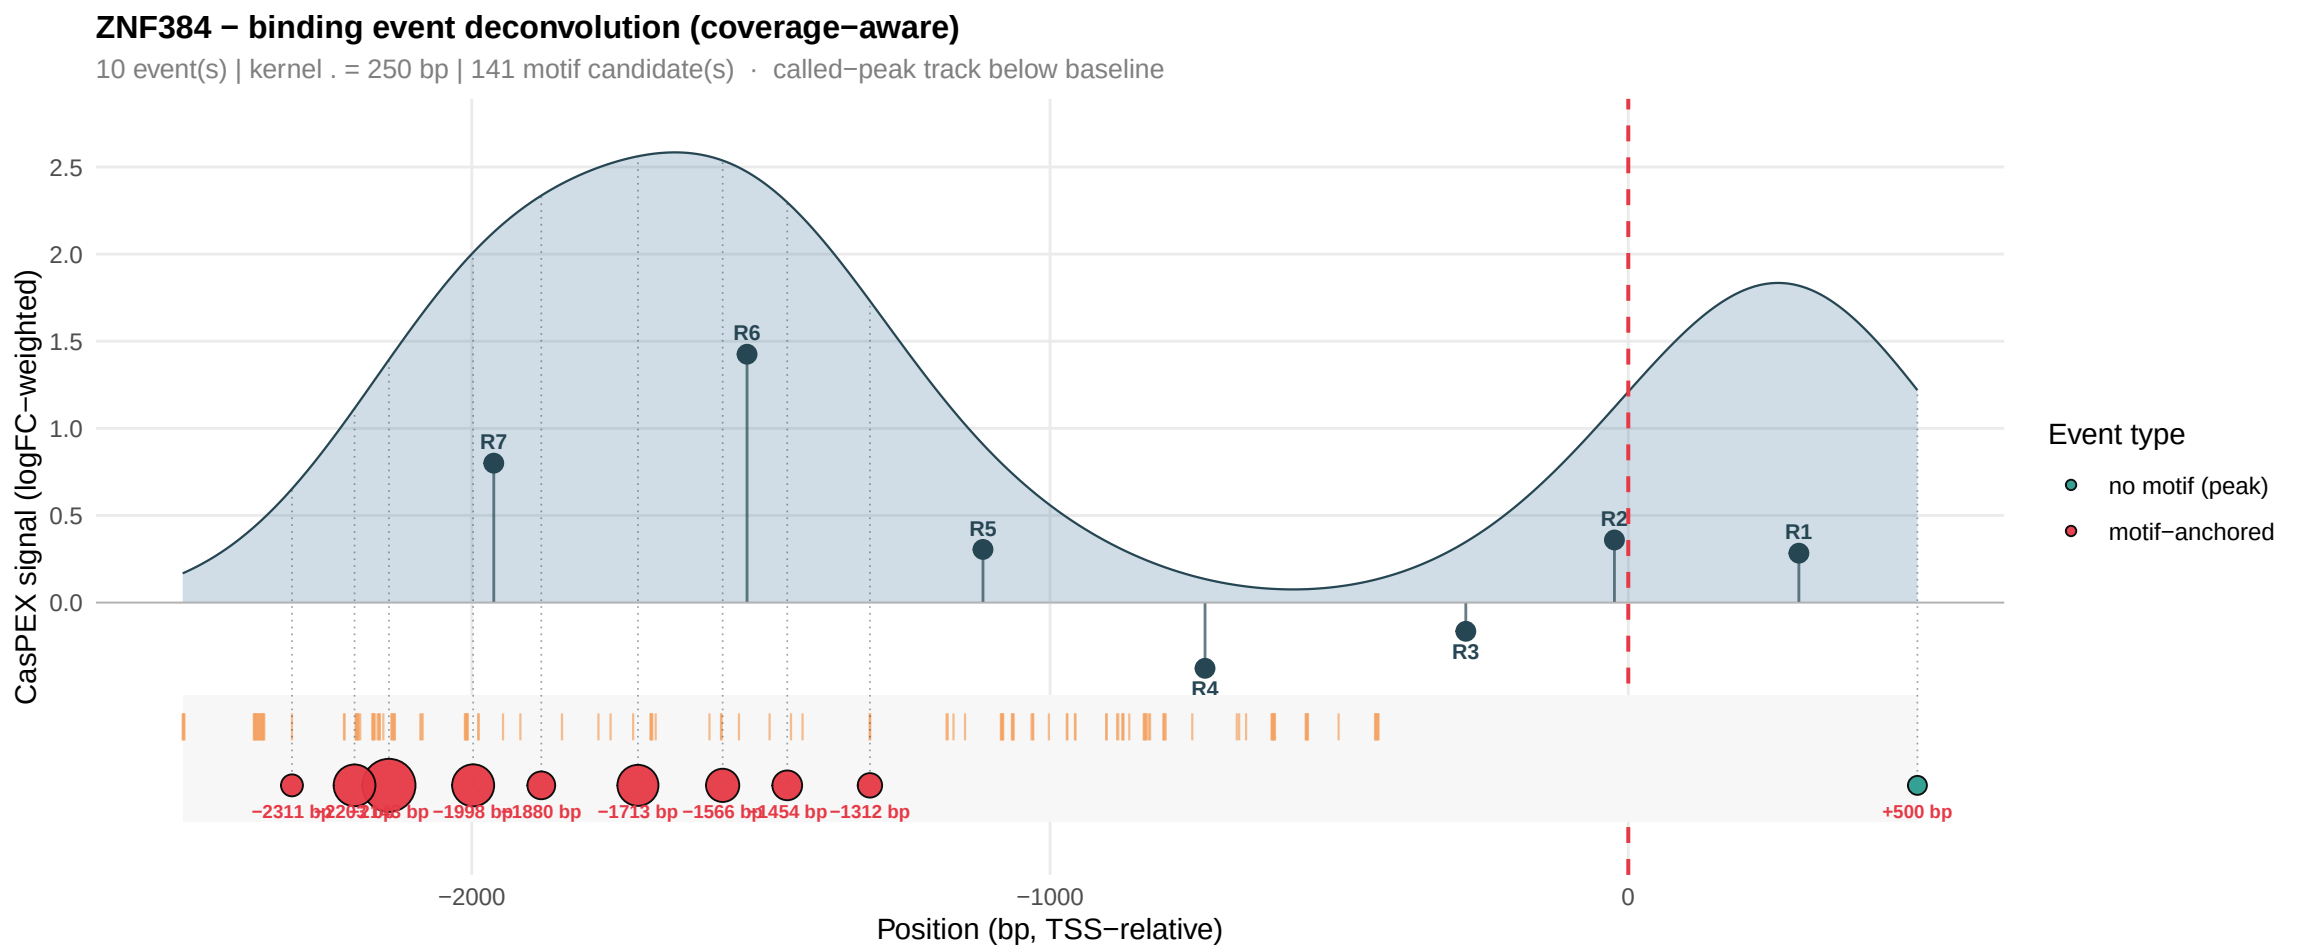
ZNF384 − binding event deconvolution (coverage−aware)
10 event(s) | kernel . = 250 bp | 141 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R6
R7
R5
R4
R3
R2
R1
−2311 bp
−1998 bp
1880 bp
−1713 bp
−1566 bp
1454 bp
−1312 bp
+500 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)
motif−anchored

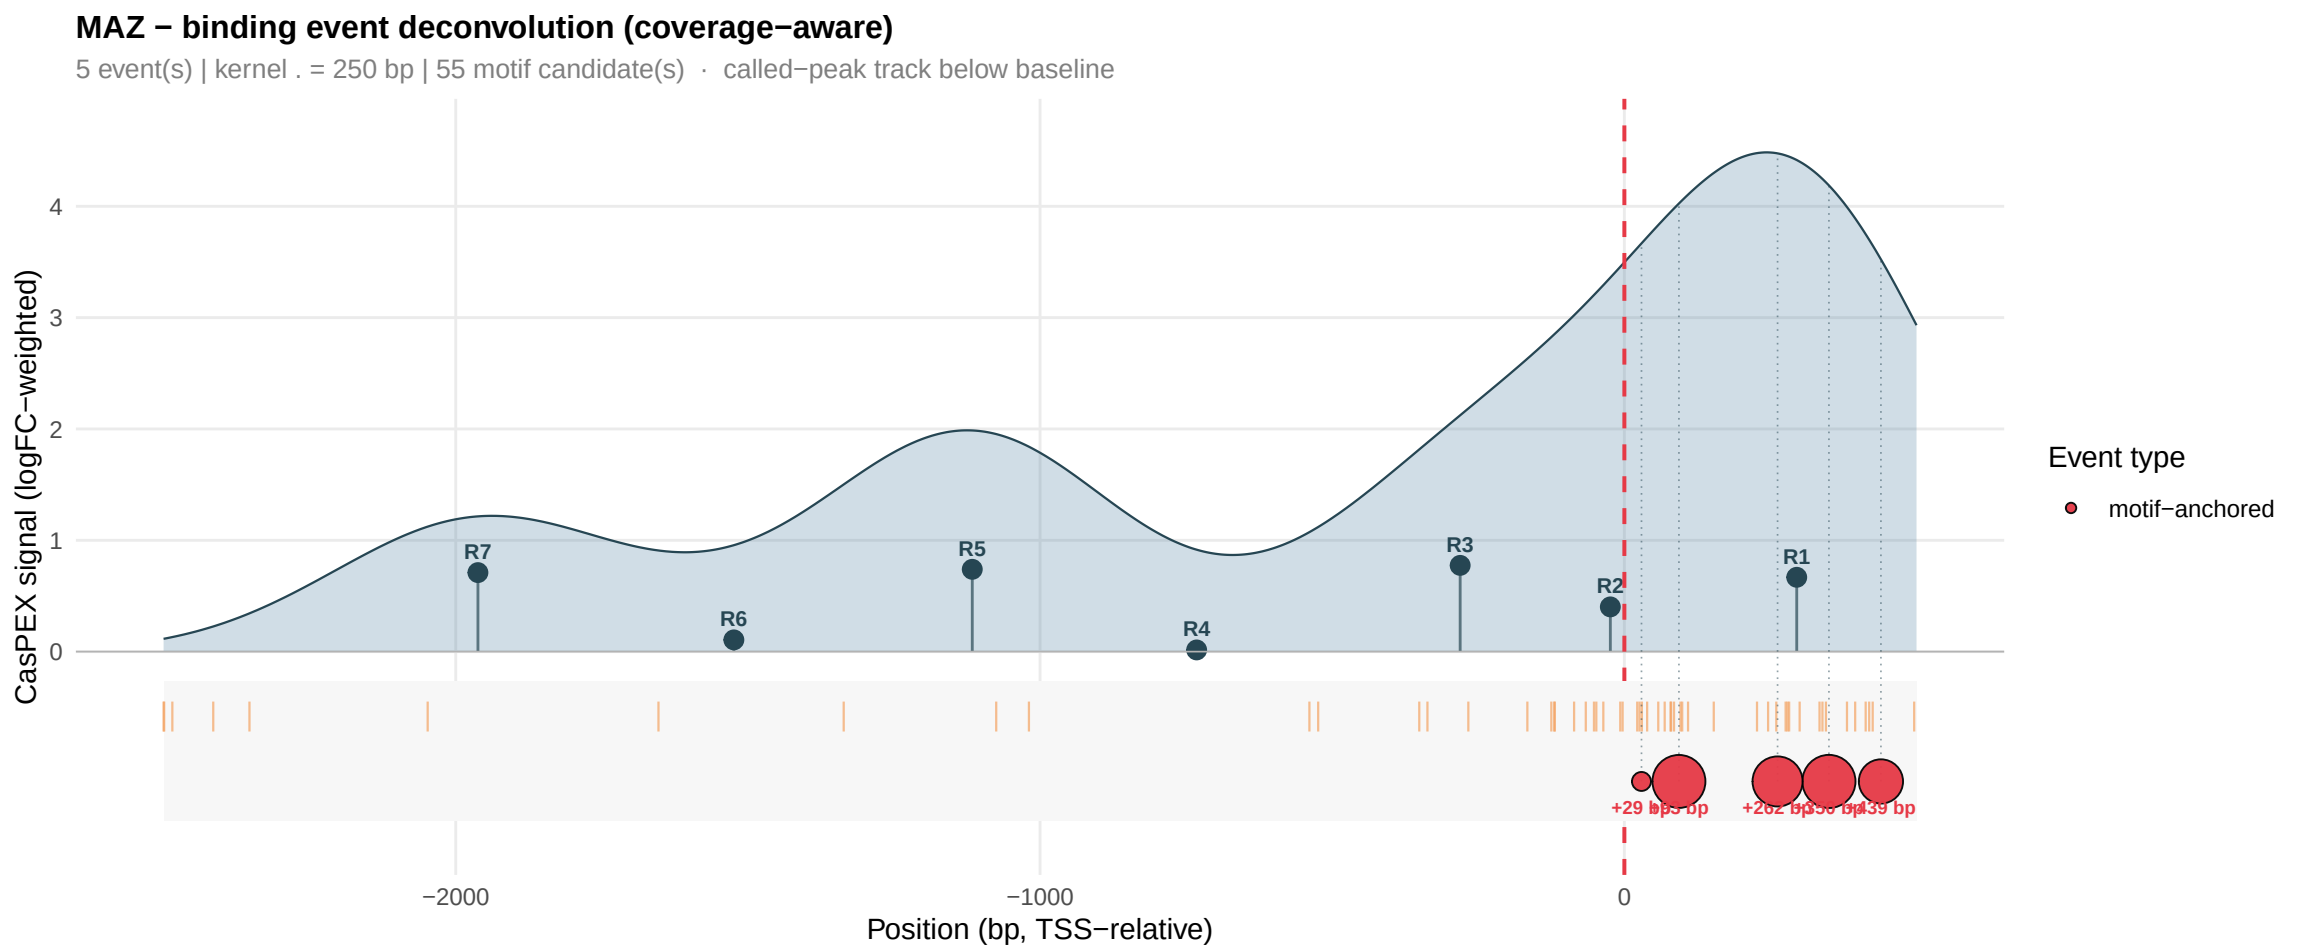
MAZ − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 250 bp | 55 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
+29 bp
+282 bp
+339 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

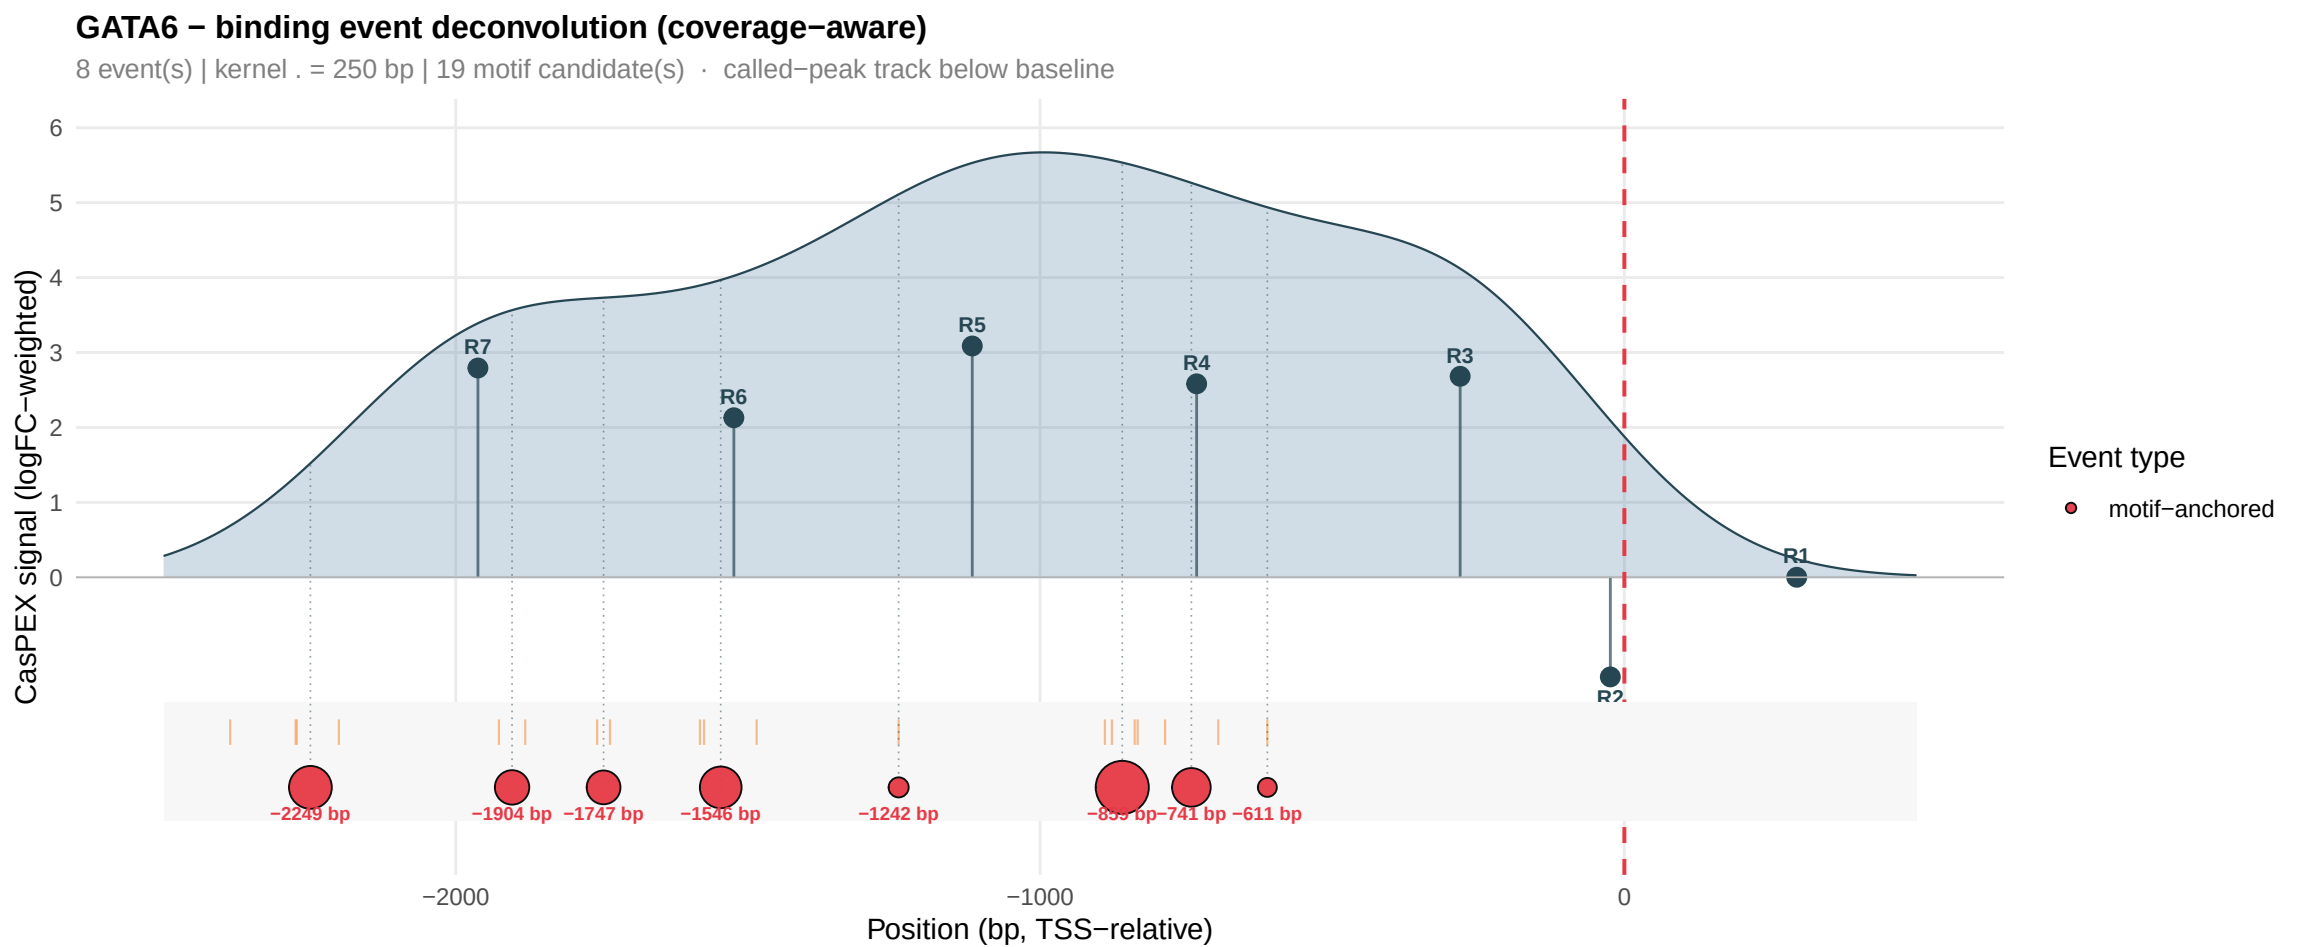
GATA6 − binding event deconvolution (coverage−aware)
8 event(s) | kernel . = 250 bp | 19 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R1
R2
−2249 bp
−1904 bp
−1747 bp
−1546 bp
−1242 bp
−741 bp
−611 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

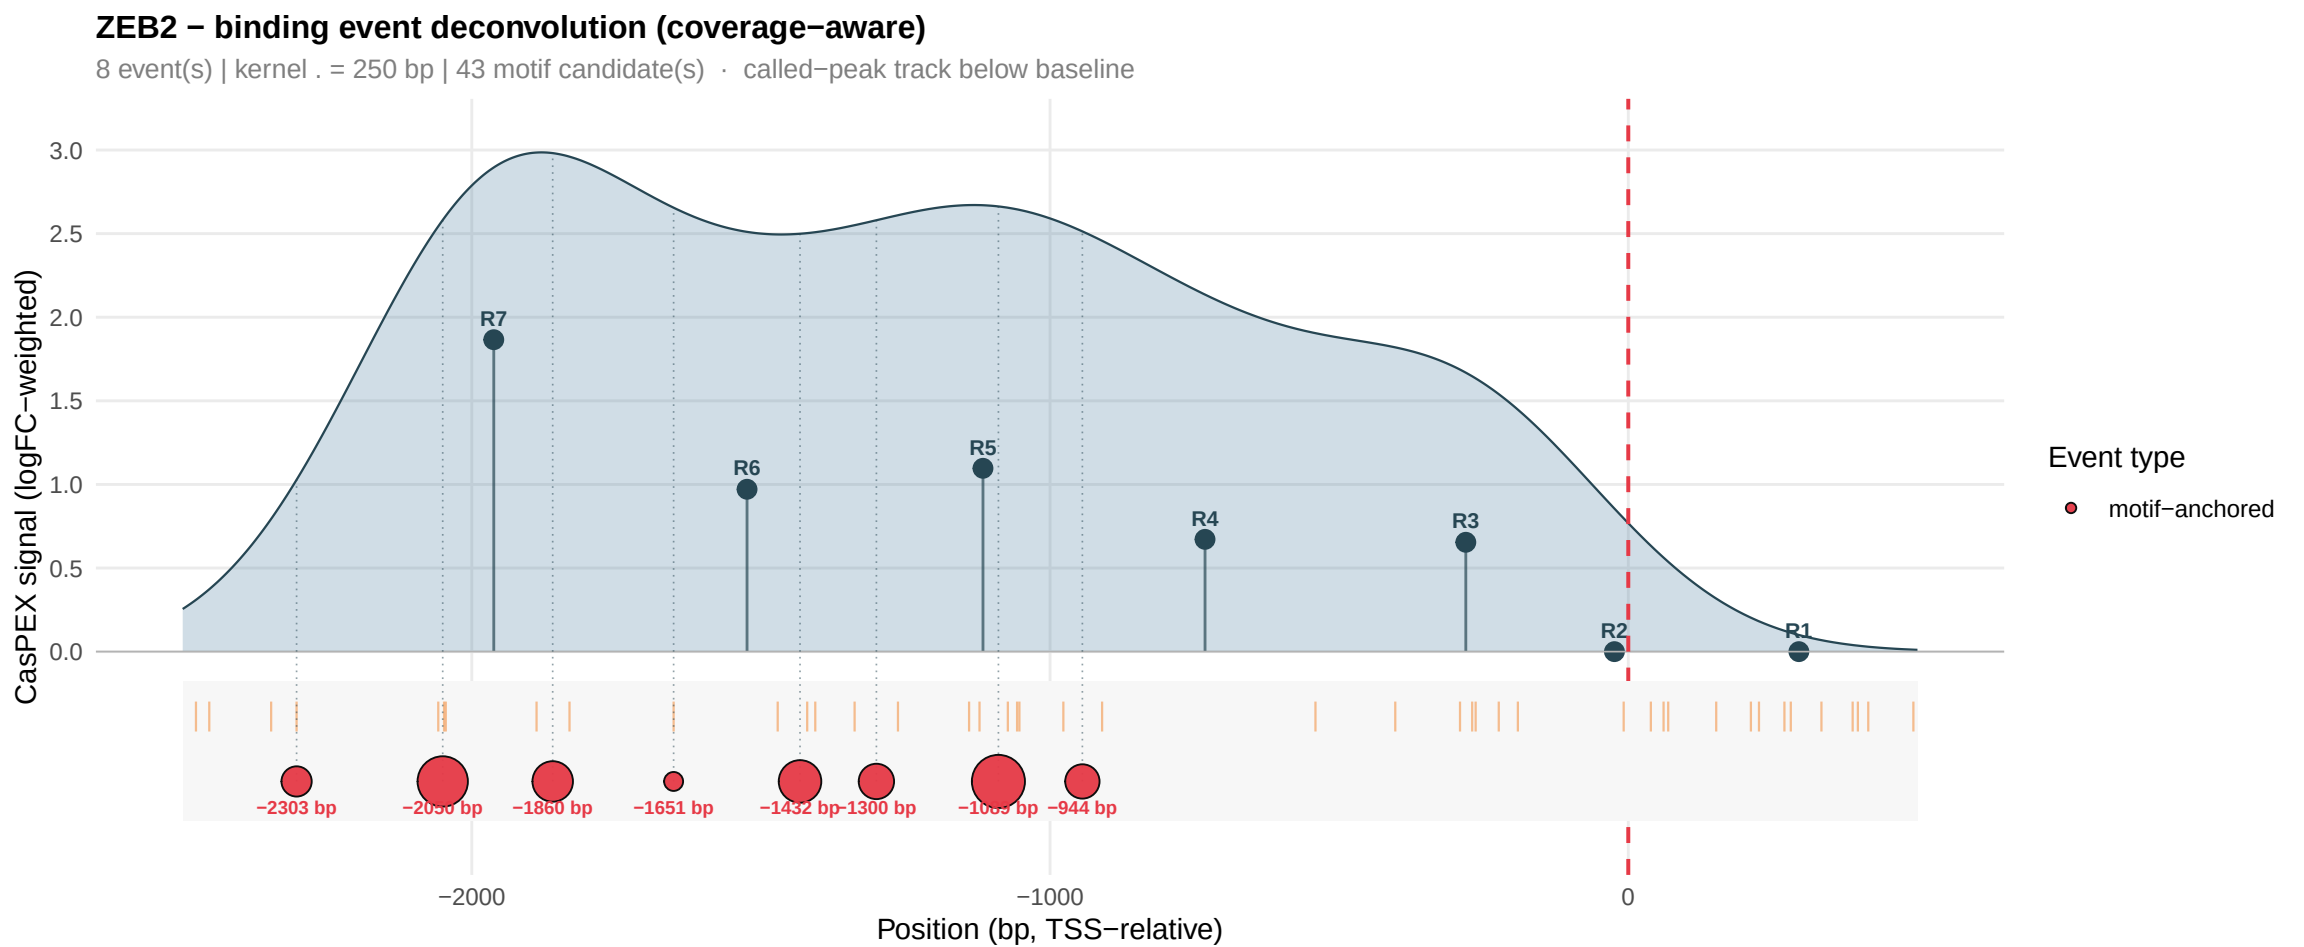
ZEB2 − binding event deconvolution (coverage−aware)
8 event(s) | kernel . = 250 bp | 43 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−2303 bp
−2050 bp
−1860 bp
−1651 bp
−1432 bp
−1300 bp
−1069 bp
−944 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

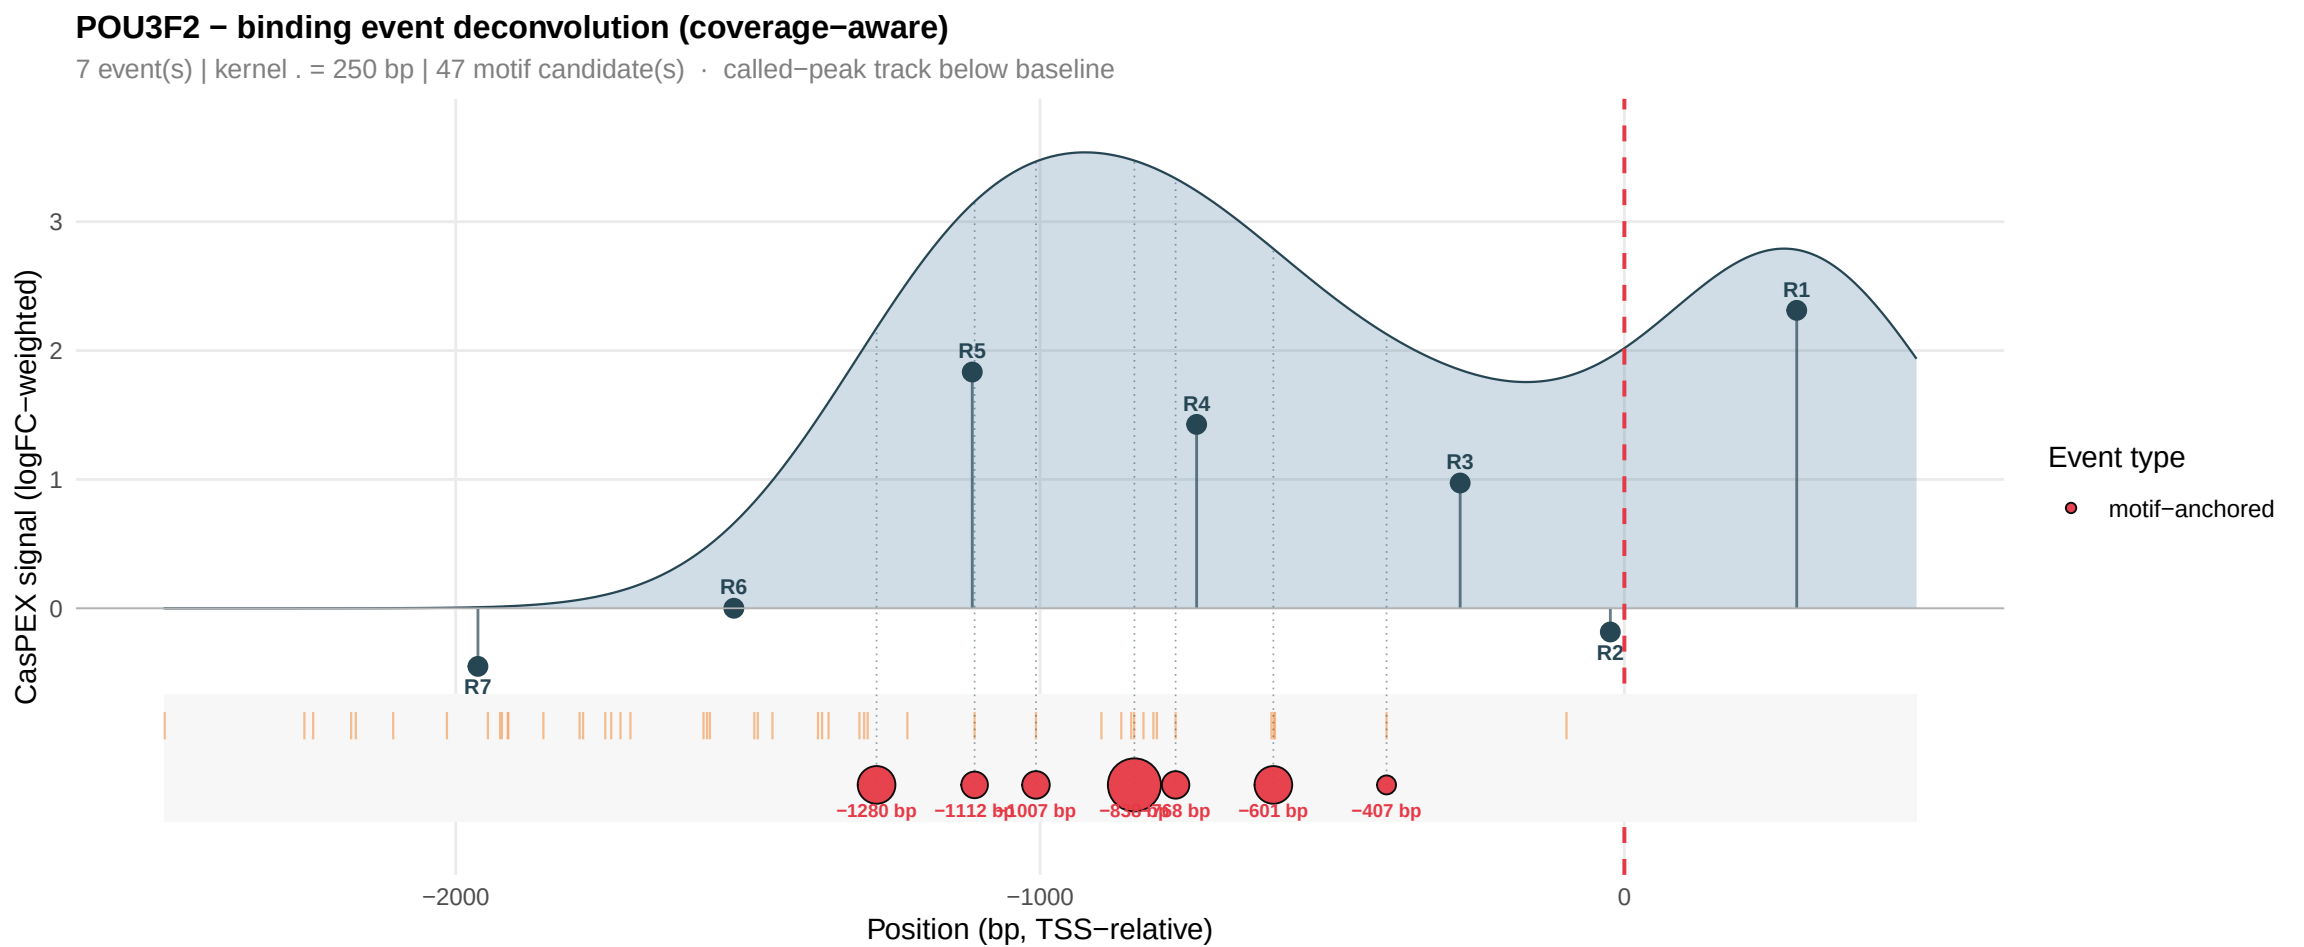
POU3F2 − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 250 bp | 47 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1280 bp
−1112 bp
−1007 bp
−601 bp
−407 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

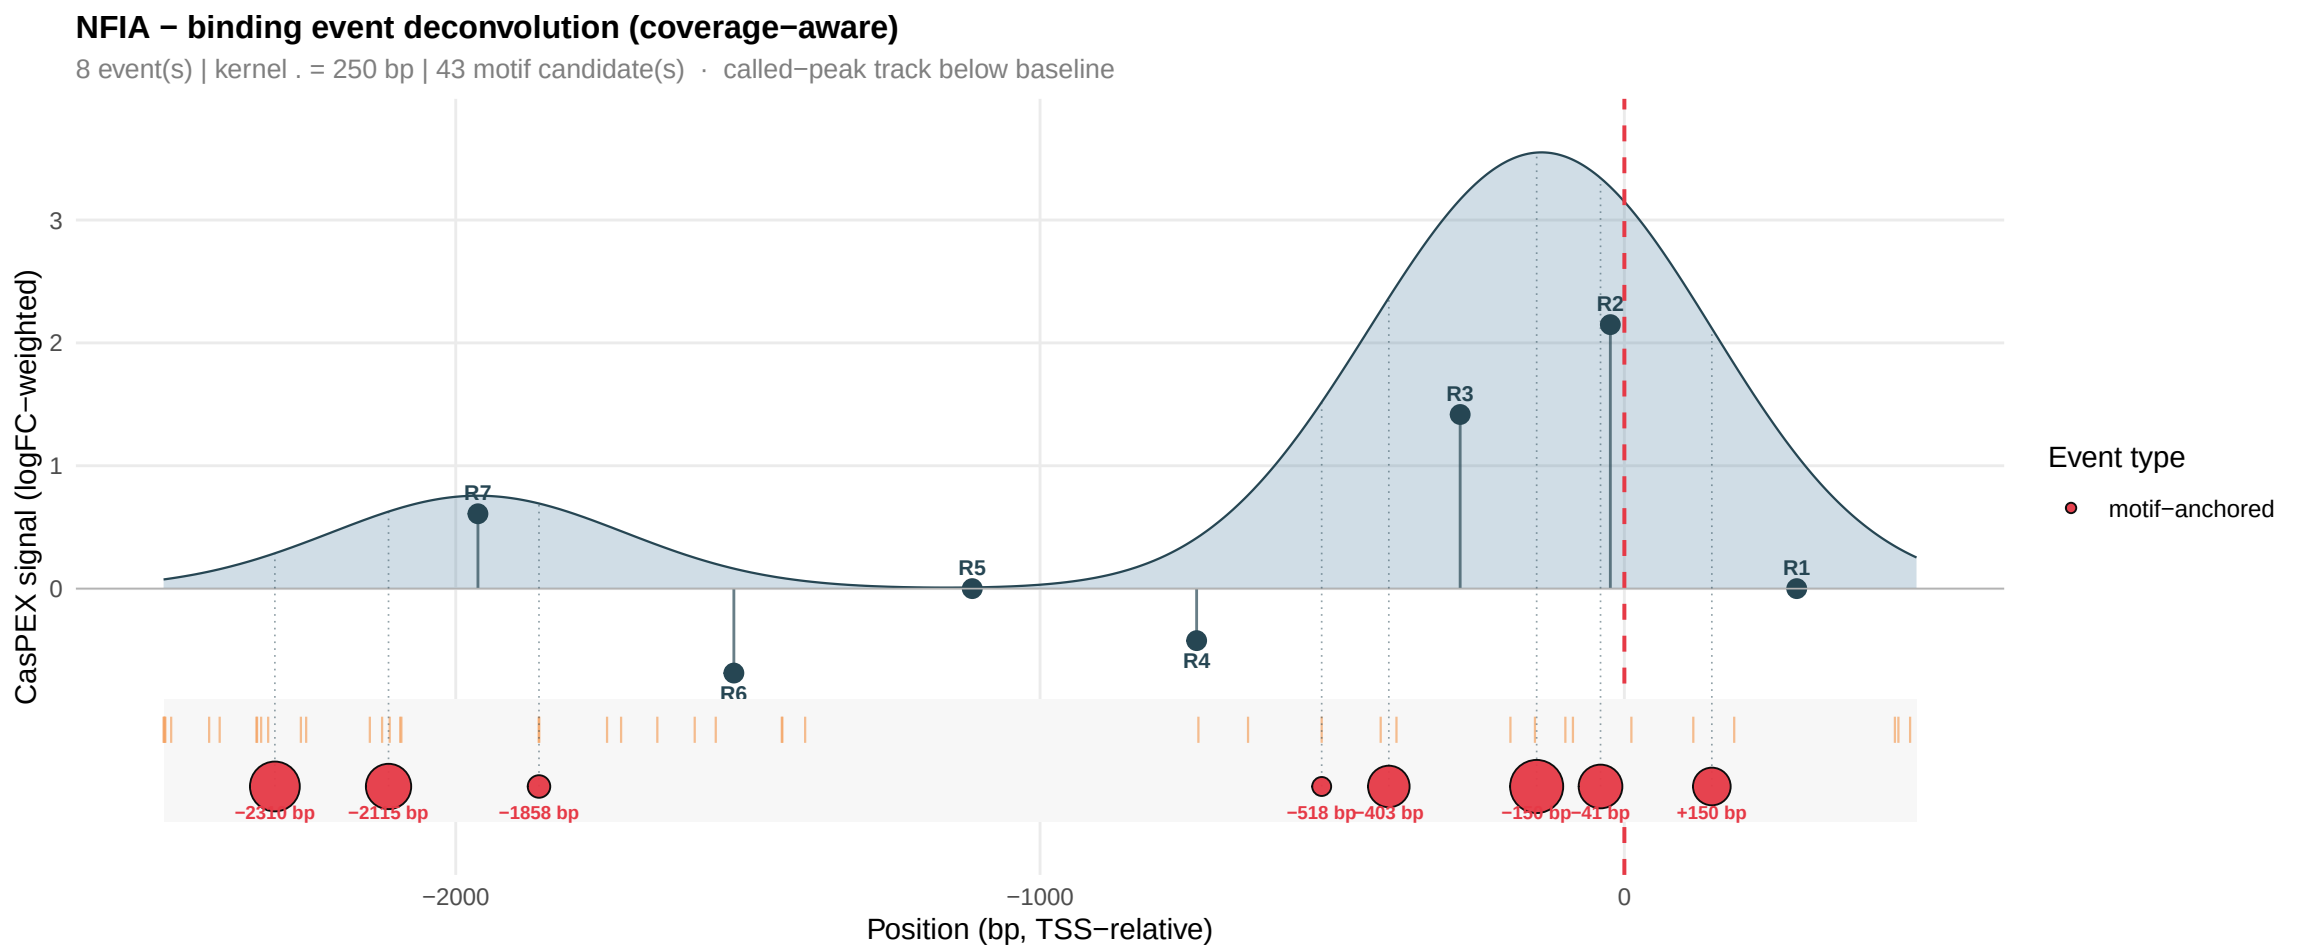
NFIA − binding event deconvolution (coverage−aware)
8 event(s) | kernel . = 250 bp | 43 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−2310 bp
−2115 bp
−1858 bp
−518 bp
−403 bp
−156 bp
−41 bp
+150 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

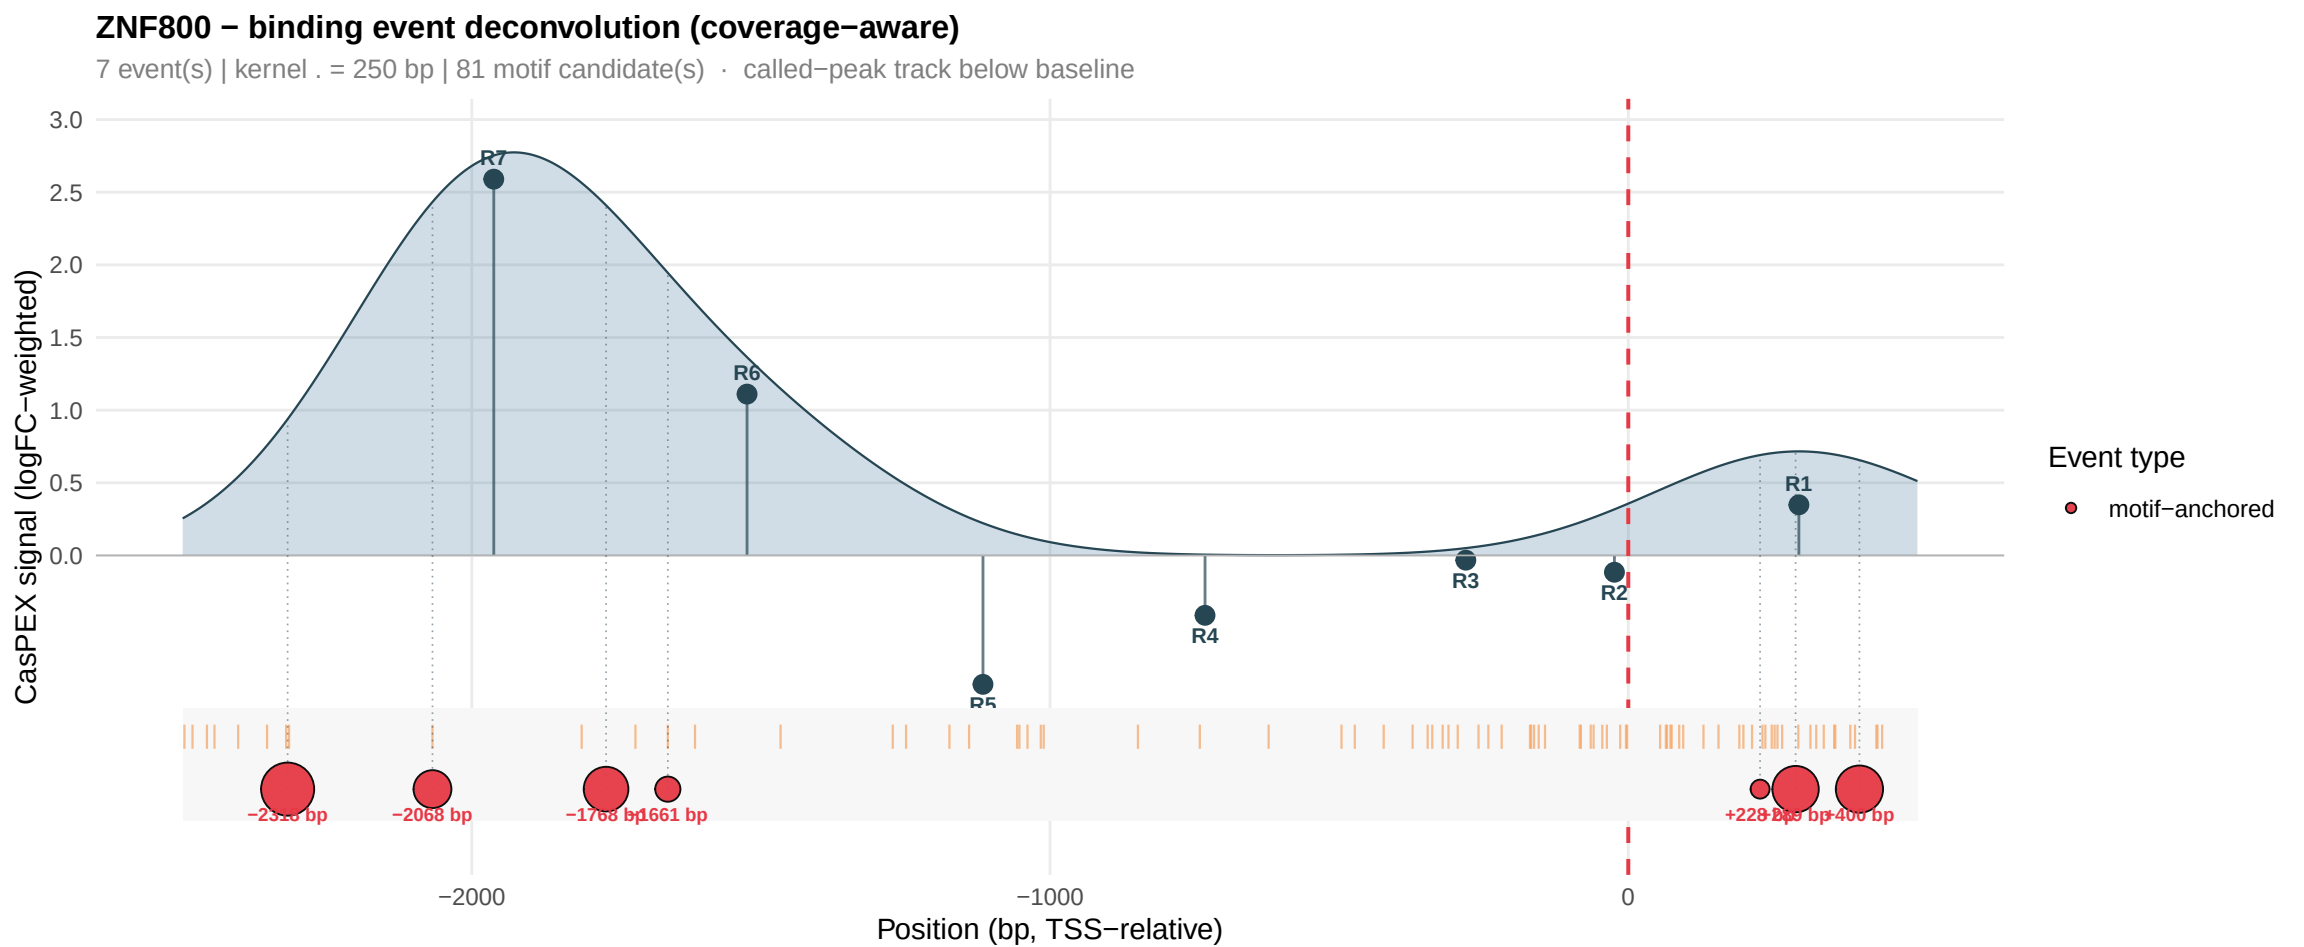
ZNF800 − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 250 bp | 81 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−2318 bp
−2068 bp
−1768 bp
−1661 bp
+228 bp
+249 bp
+400 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

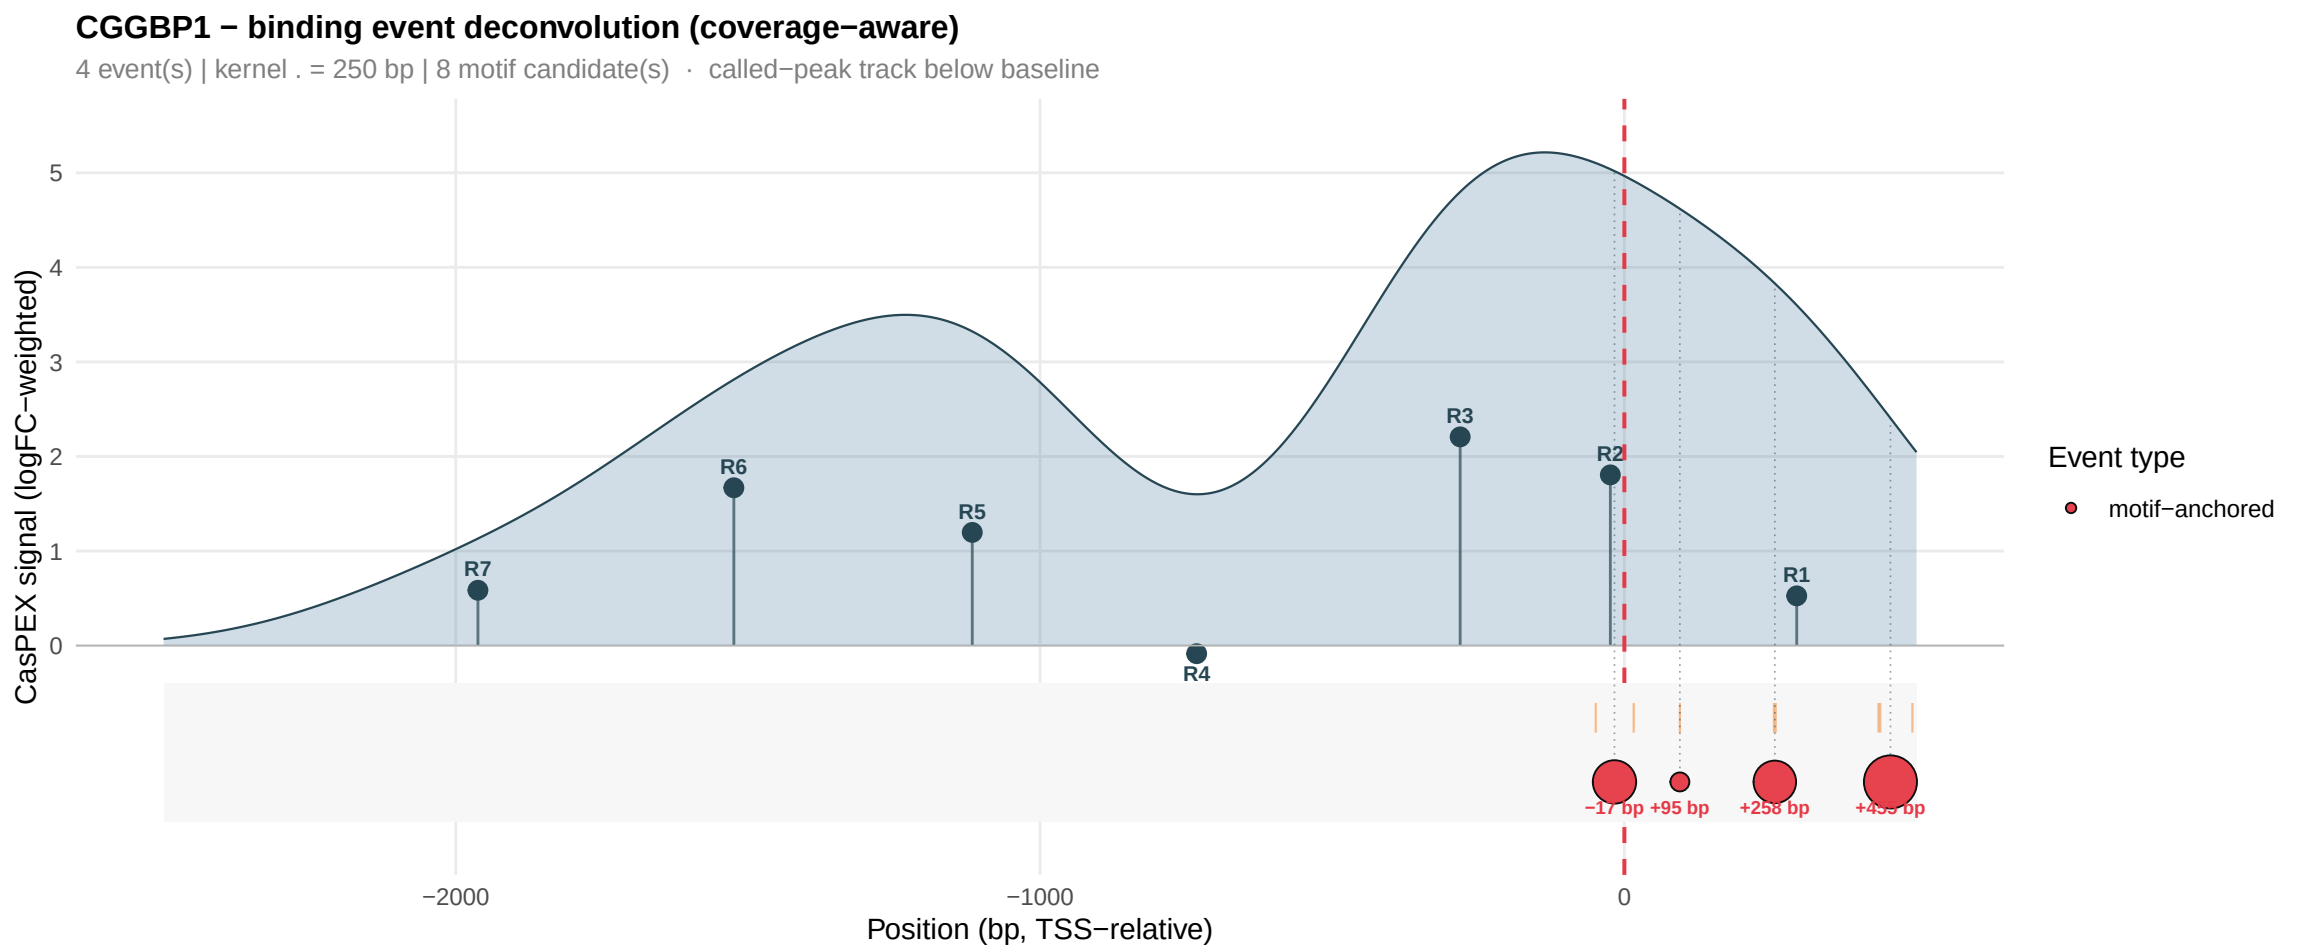
CGGBP1 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 250 bp | 8 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−17 bp
+95 bp
+258 bp
+455 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

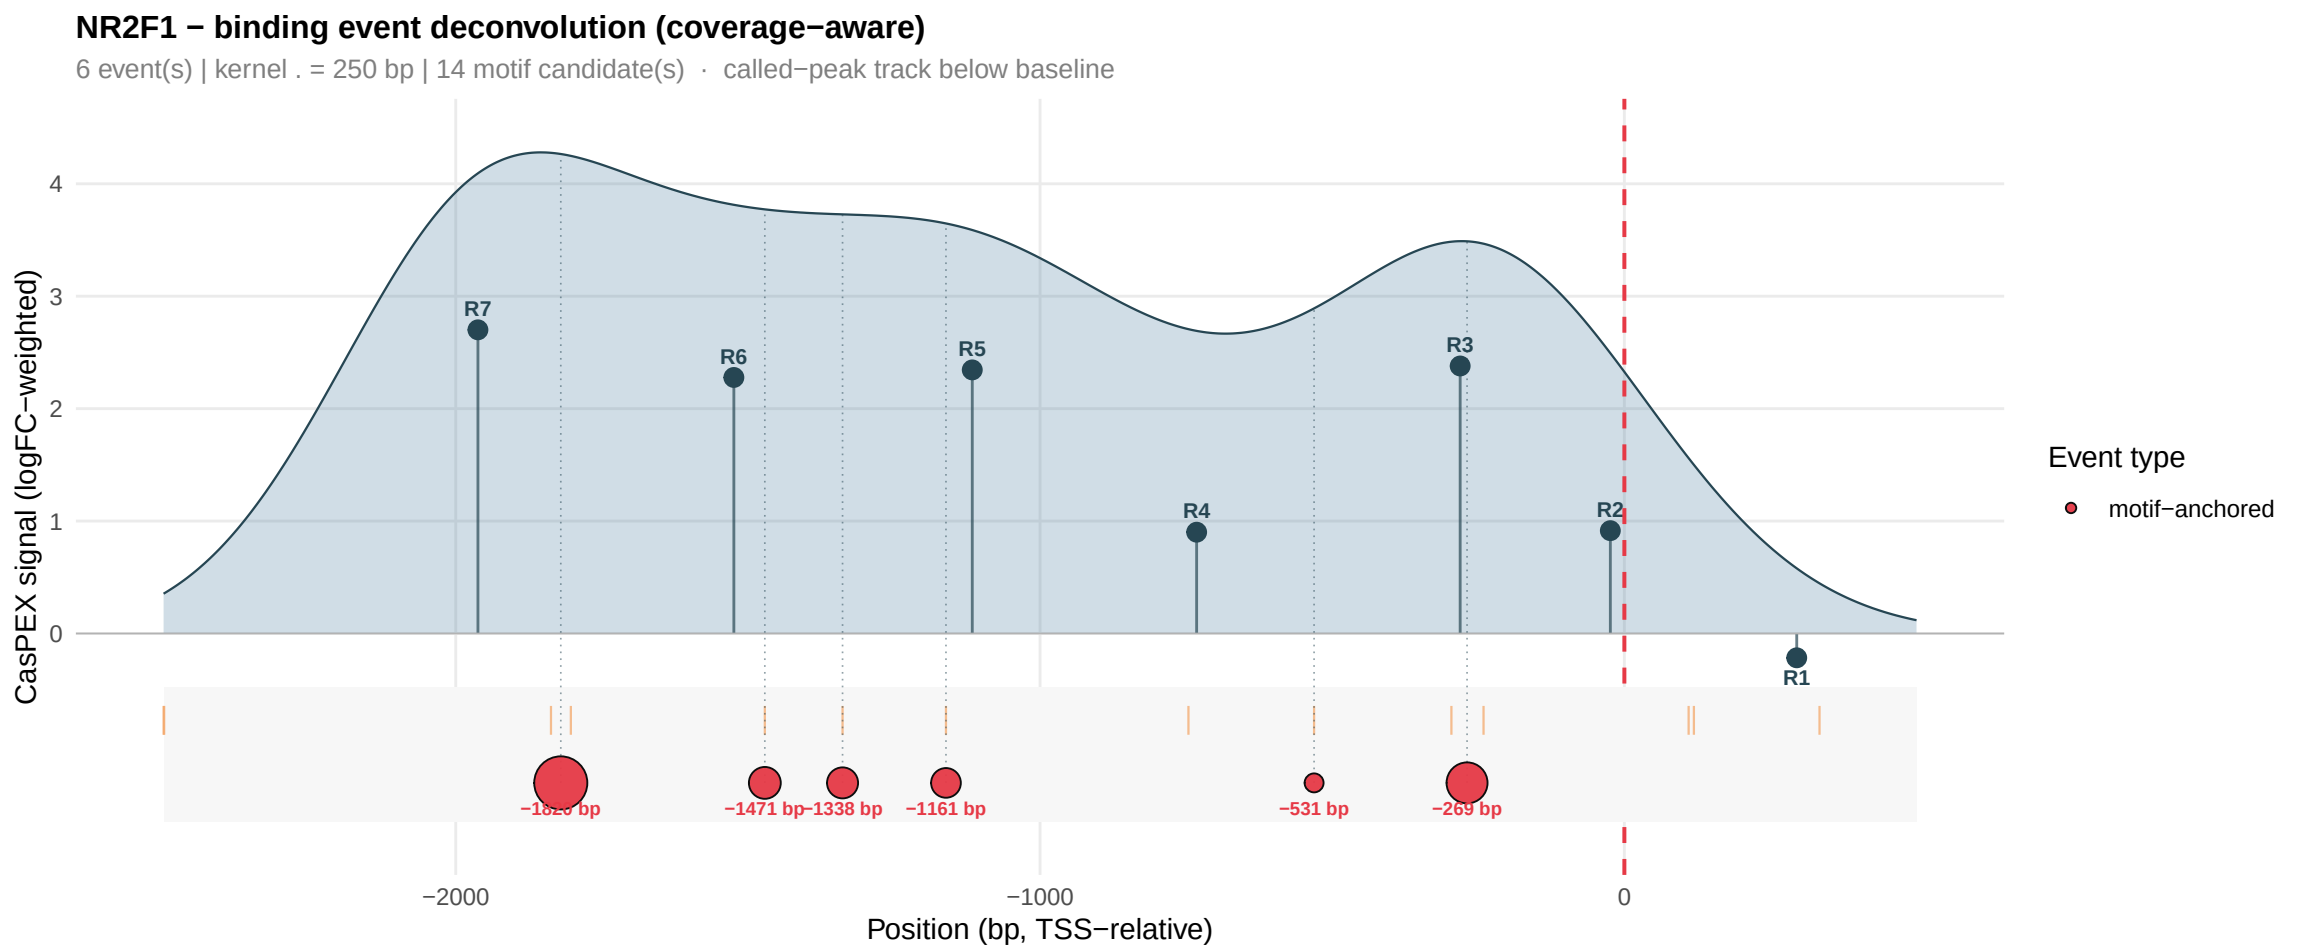
NR2F1 − binding event deconvolution (coverage−aware)
6 event(s) | kernel . = 250 bp | 14 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1820 bp
−1471 bp
−1338 bp
−1161 bp
−531 bp
−269 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

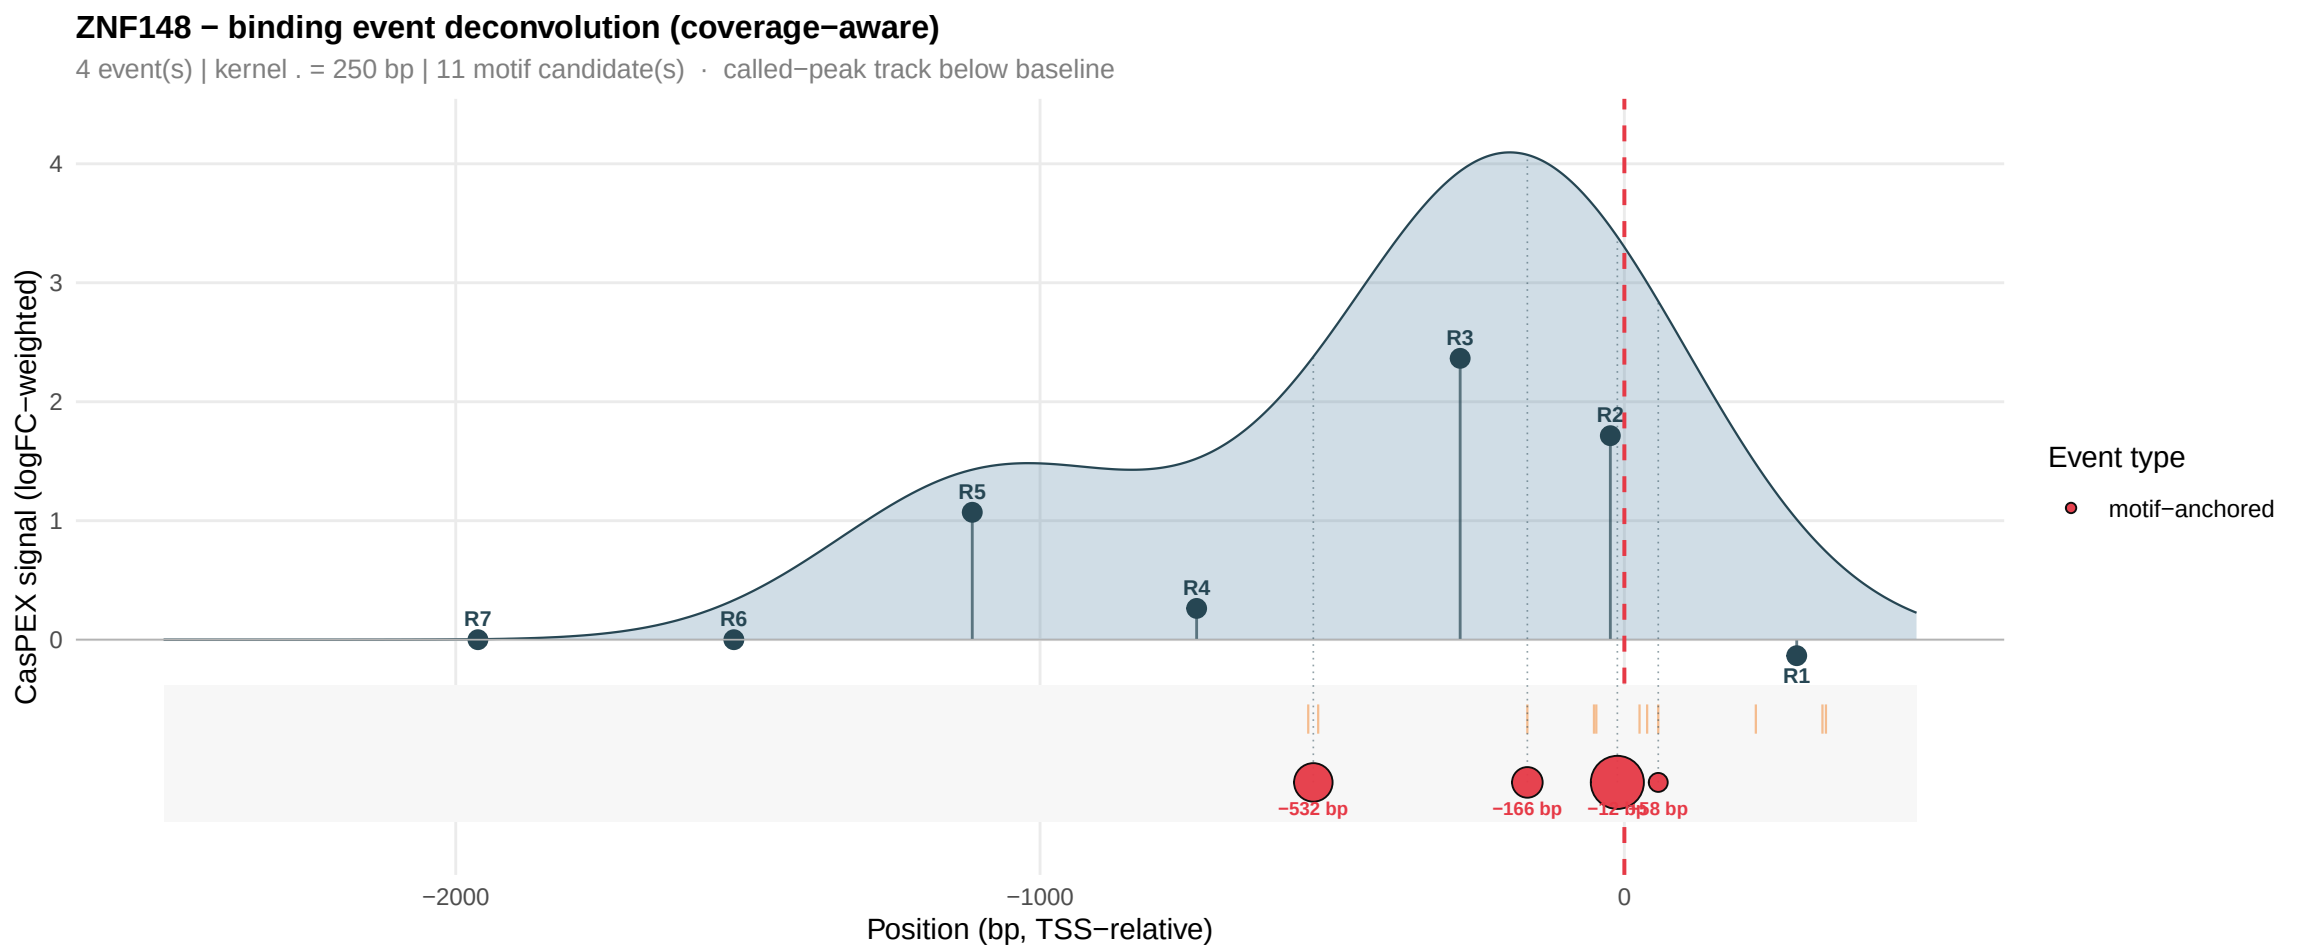
ZNF148 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 250 bp | 11 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−532 bp
−166 bp
−12 bp
58 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

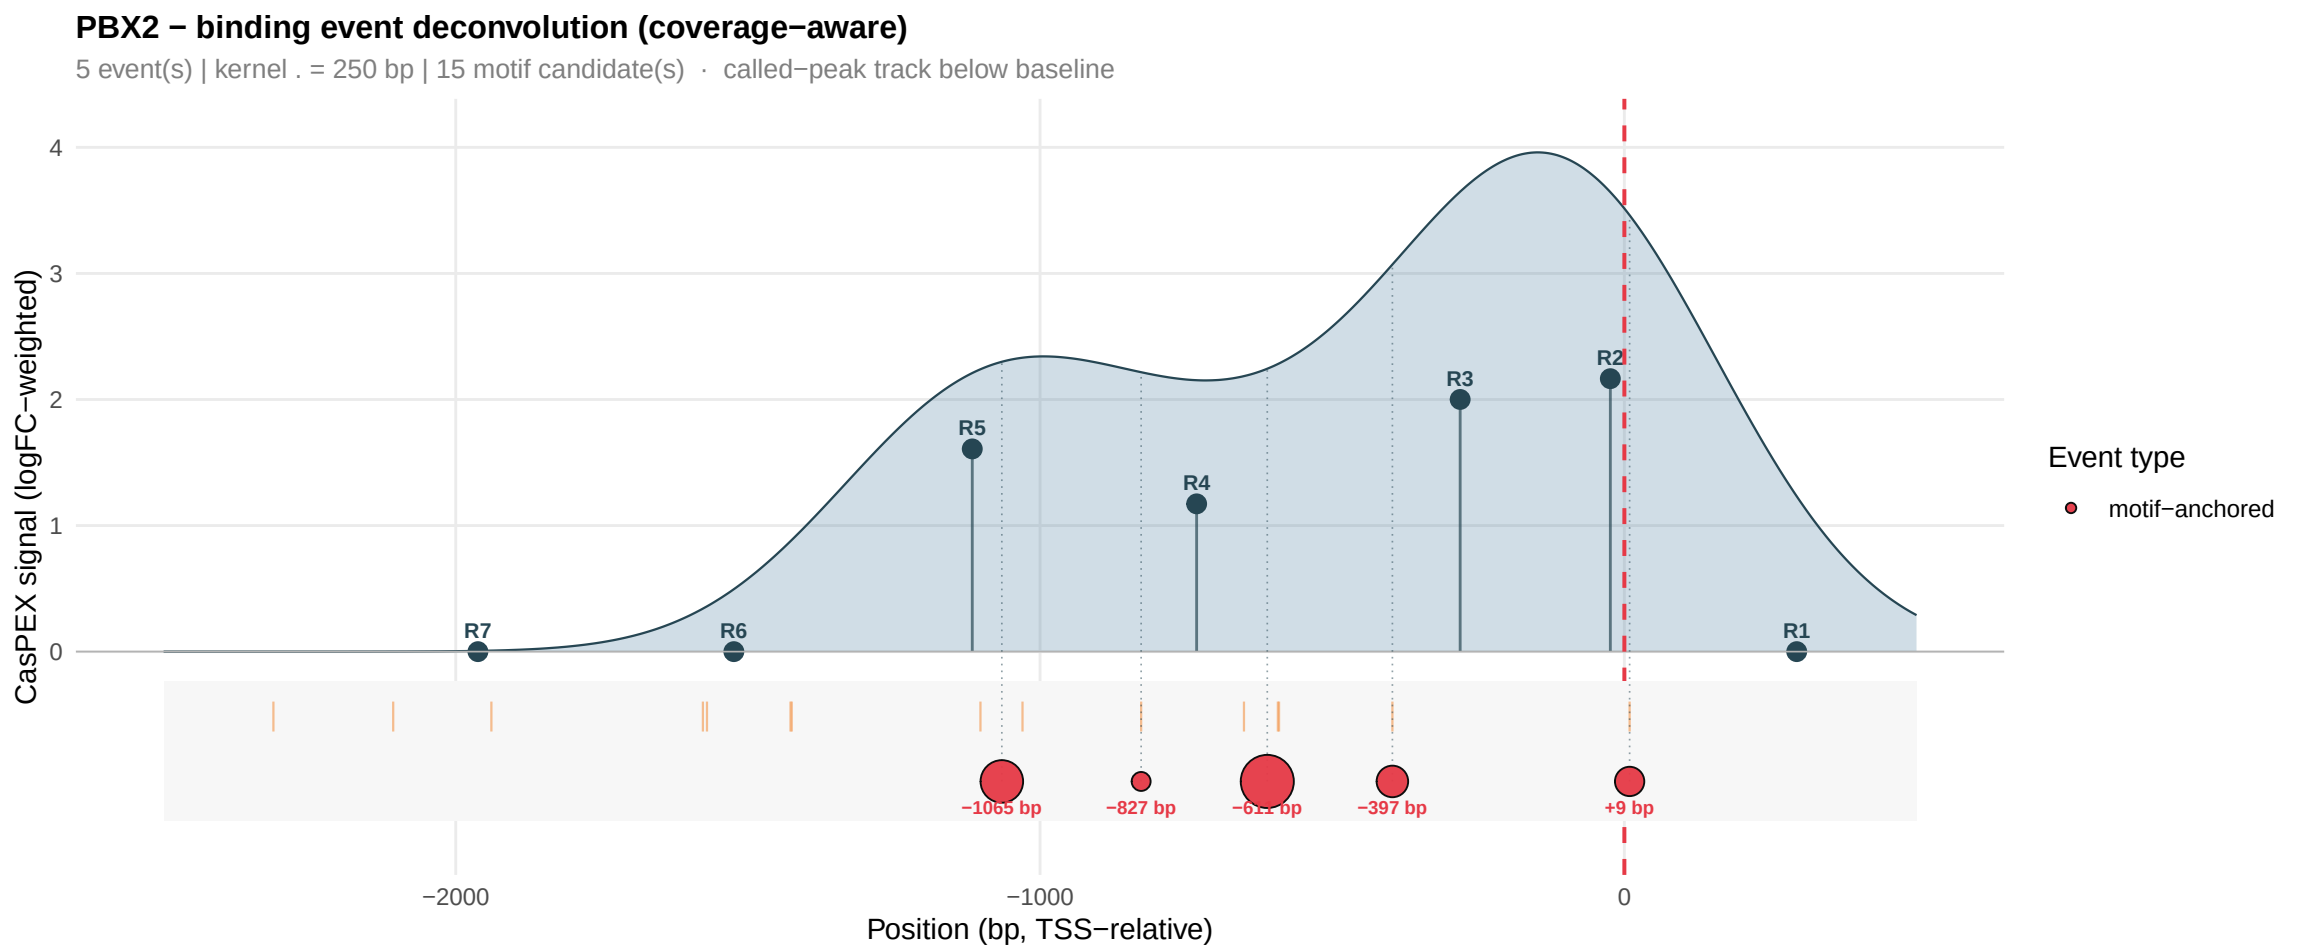
PBX2 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 250 bp | 15 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1065 bp
−827 bp
−611 bp
−397 bp
+9 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

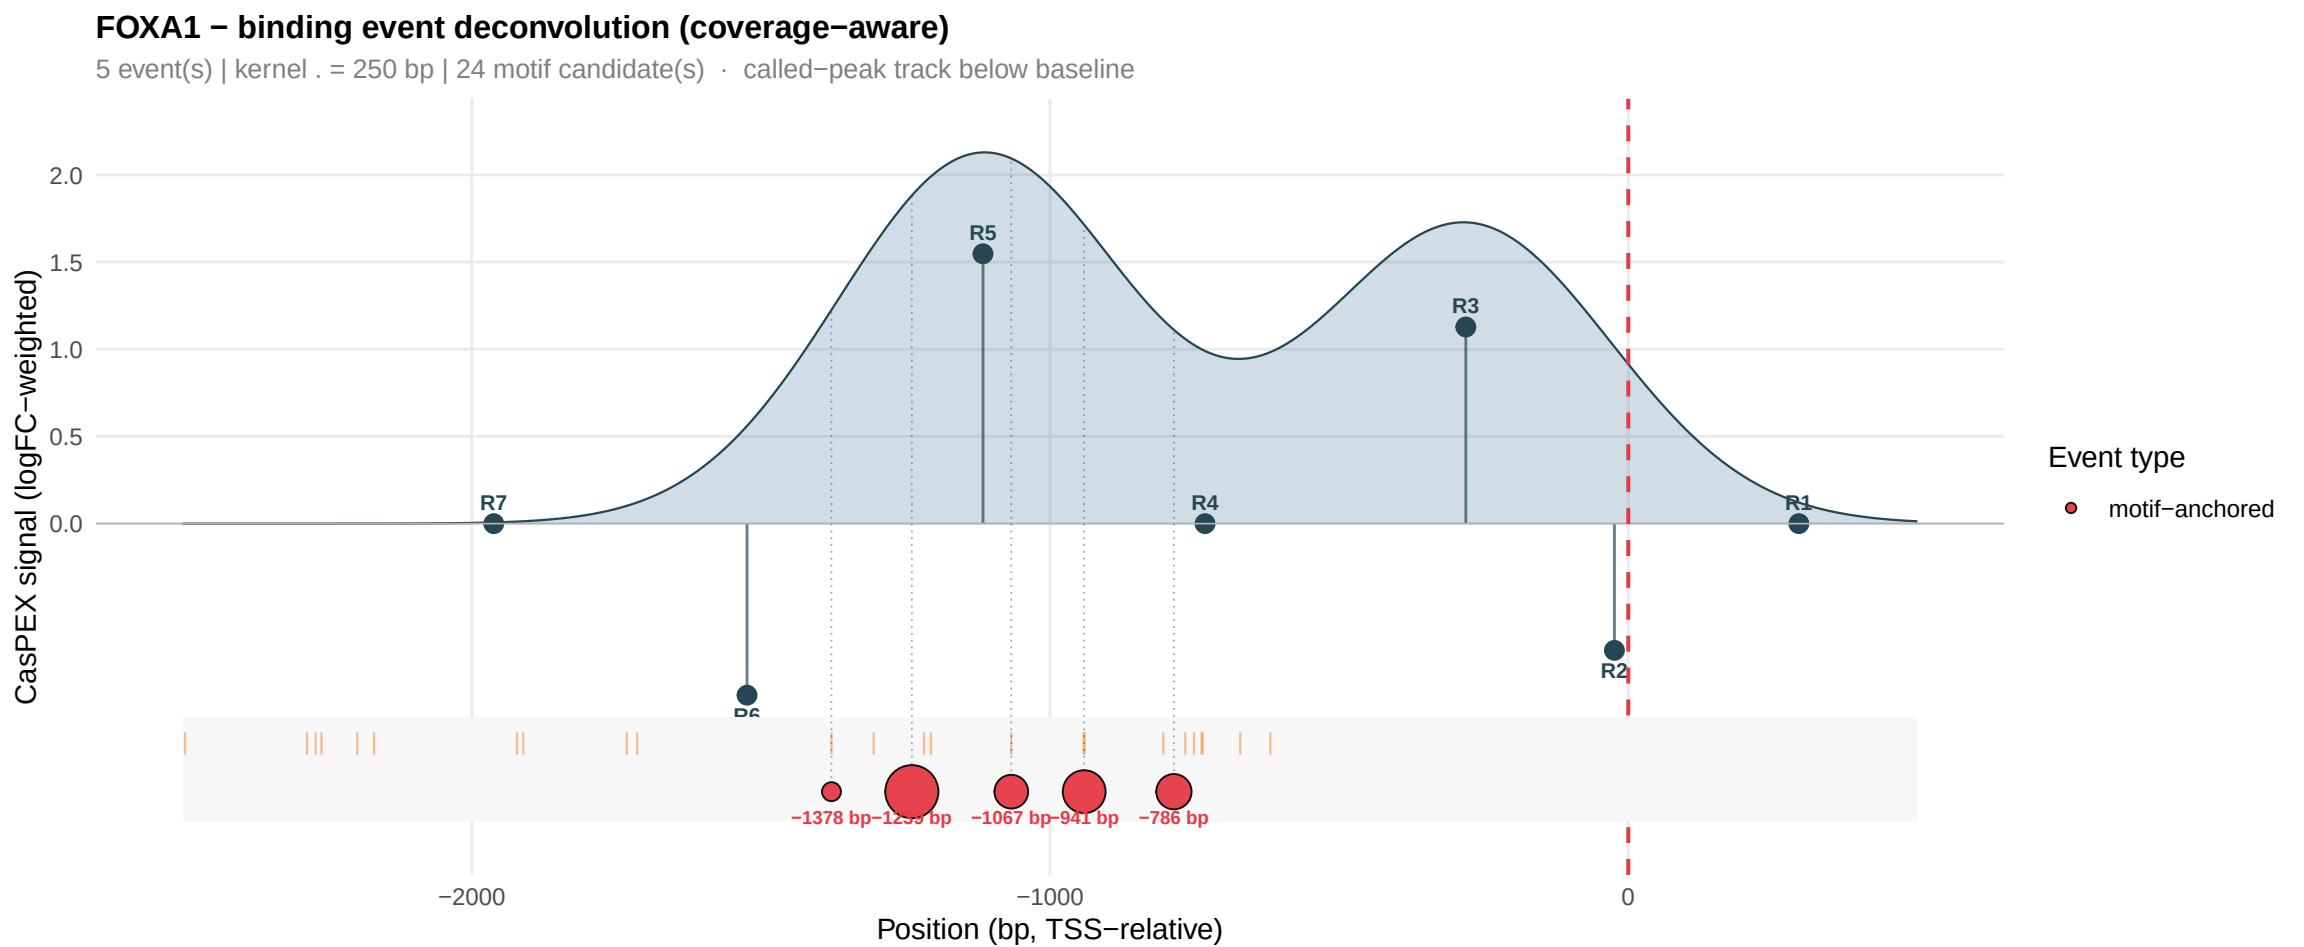
FOXA1 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 250 bp | 24 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R5
R3
R7
R4
R1
R6
R2
−1378 bp
−1239 bp
−1067 bp
−941 bp
−786 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

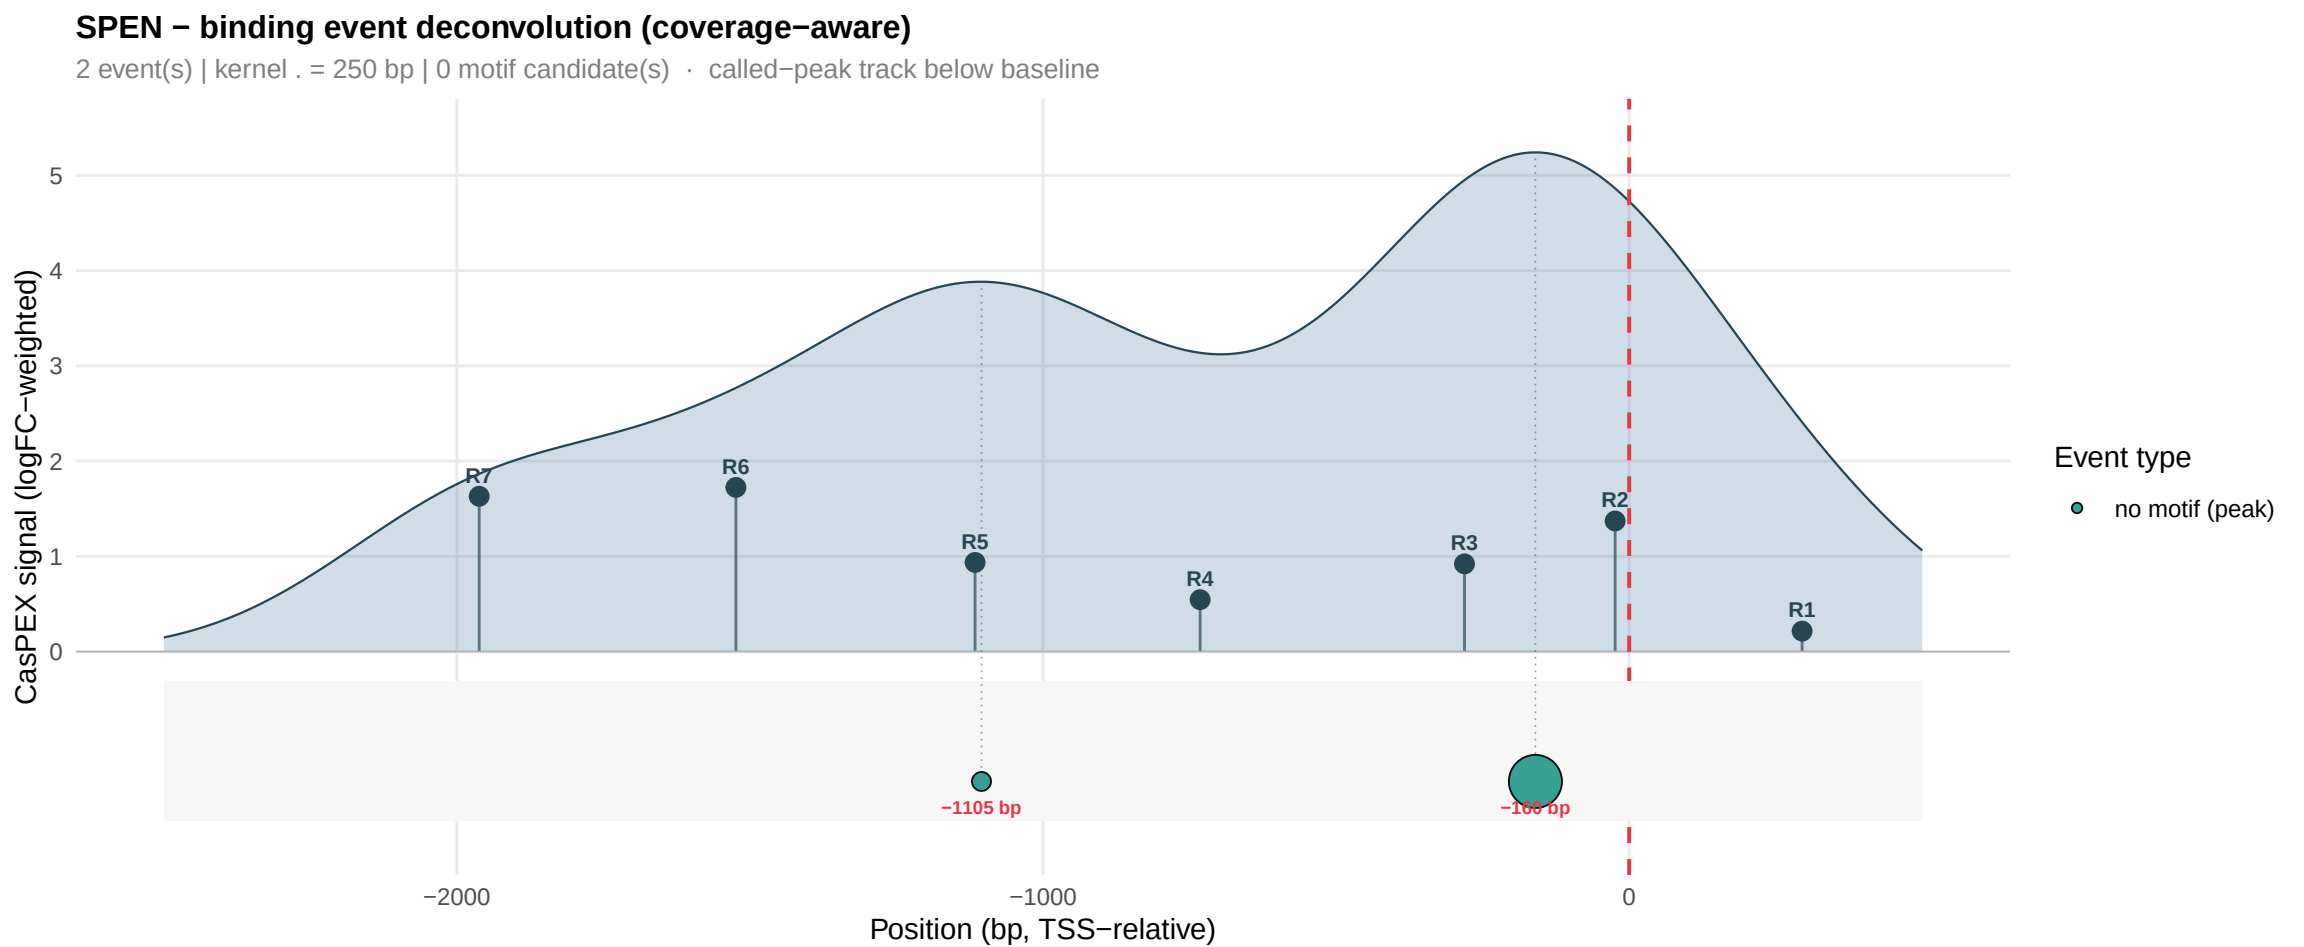
SPEN − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1105 bp
−168 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

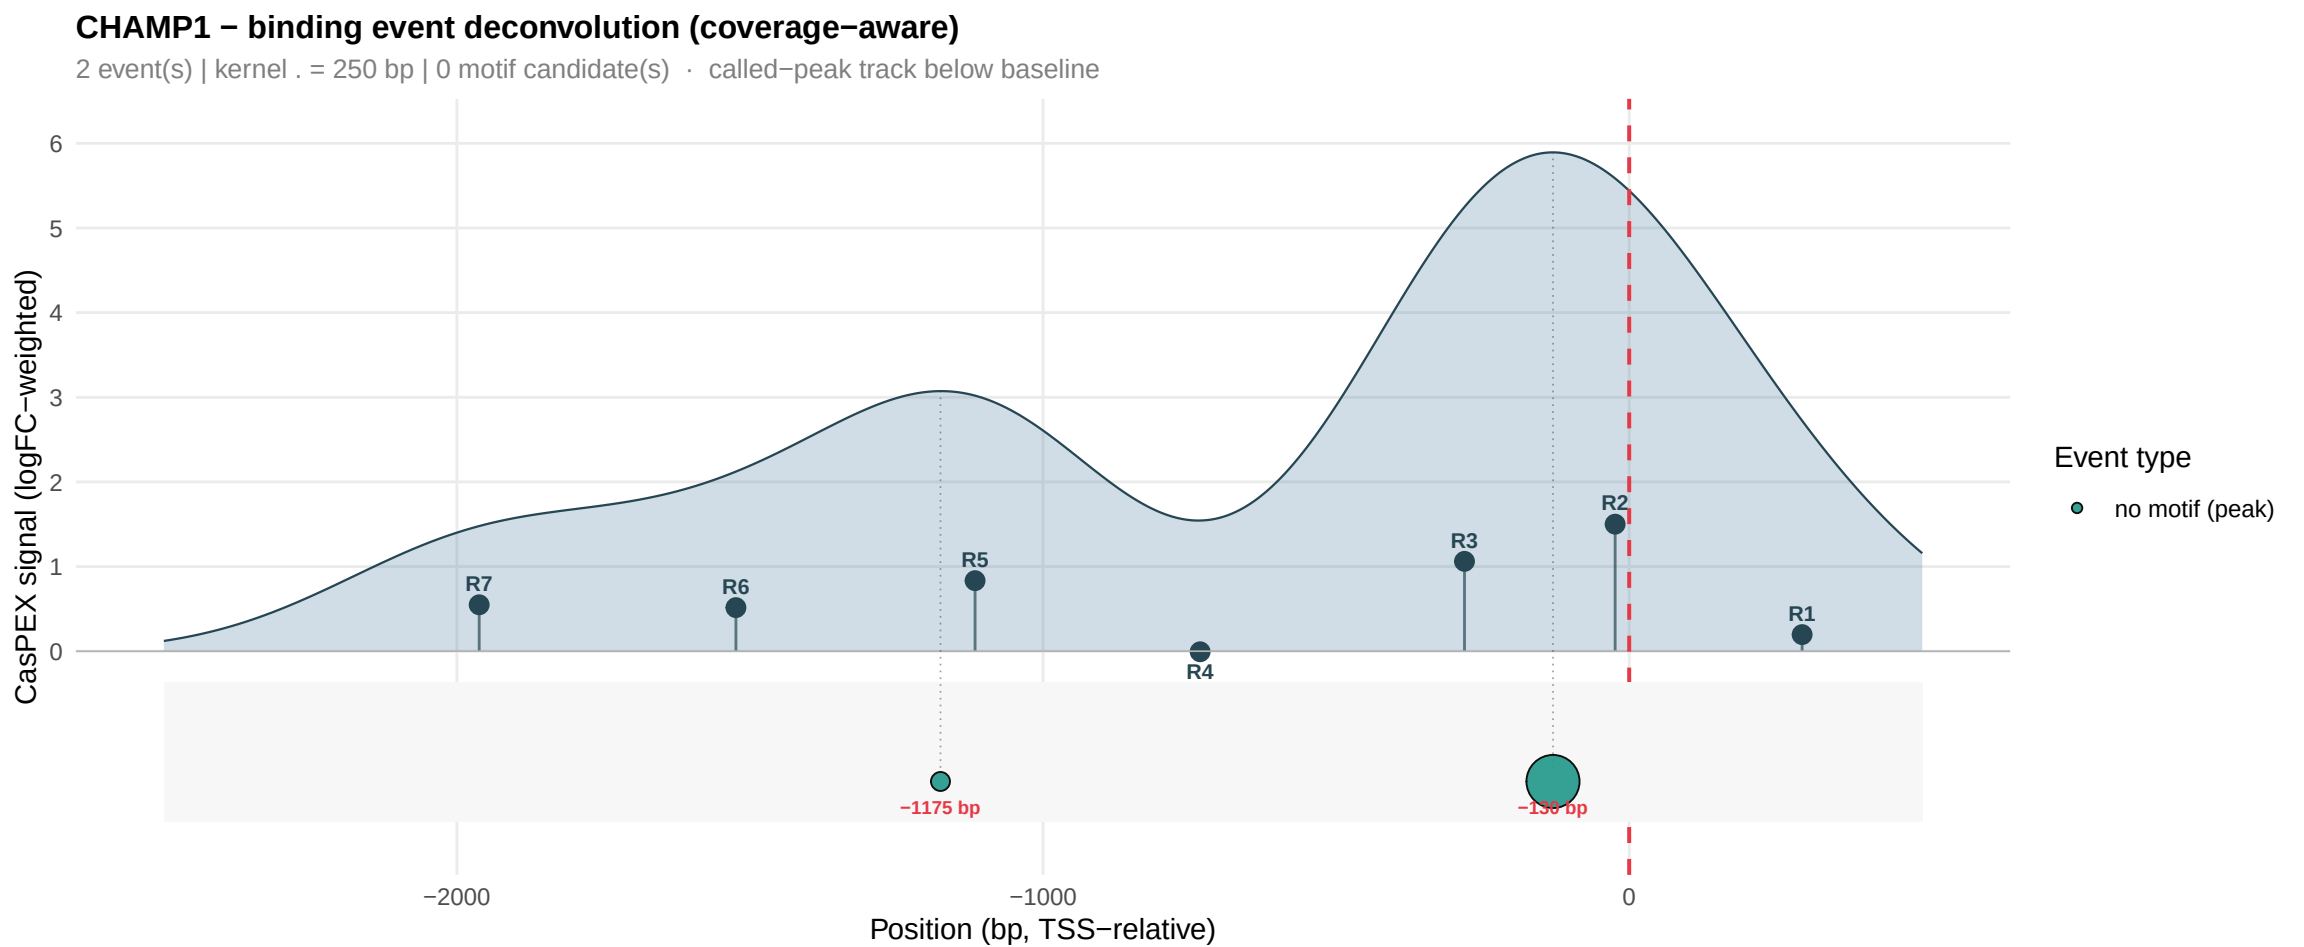
CHAMP1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1175 bp
−138 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

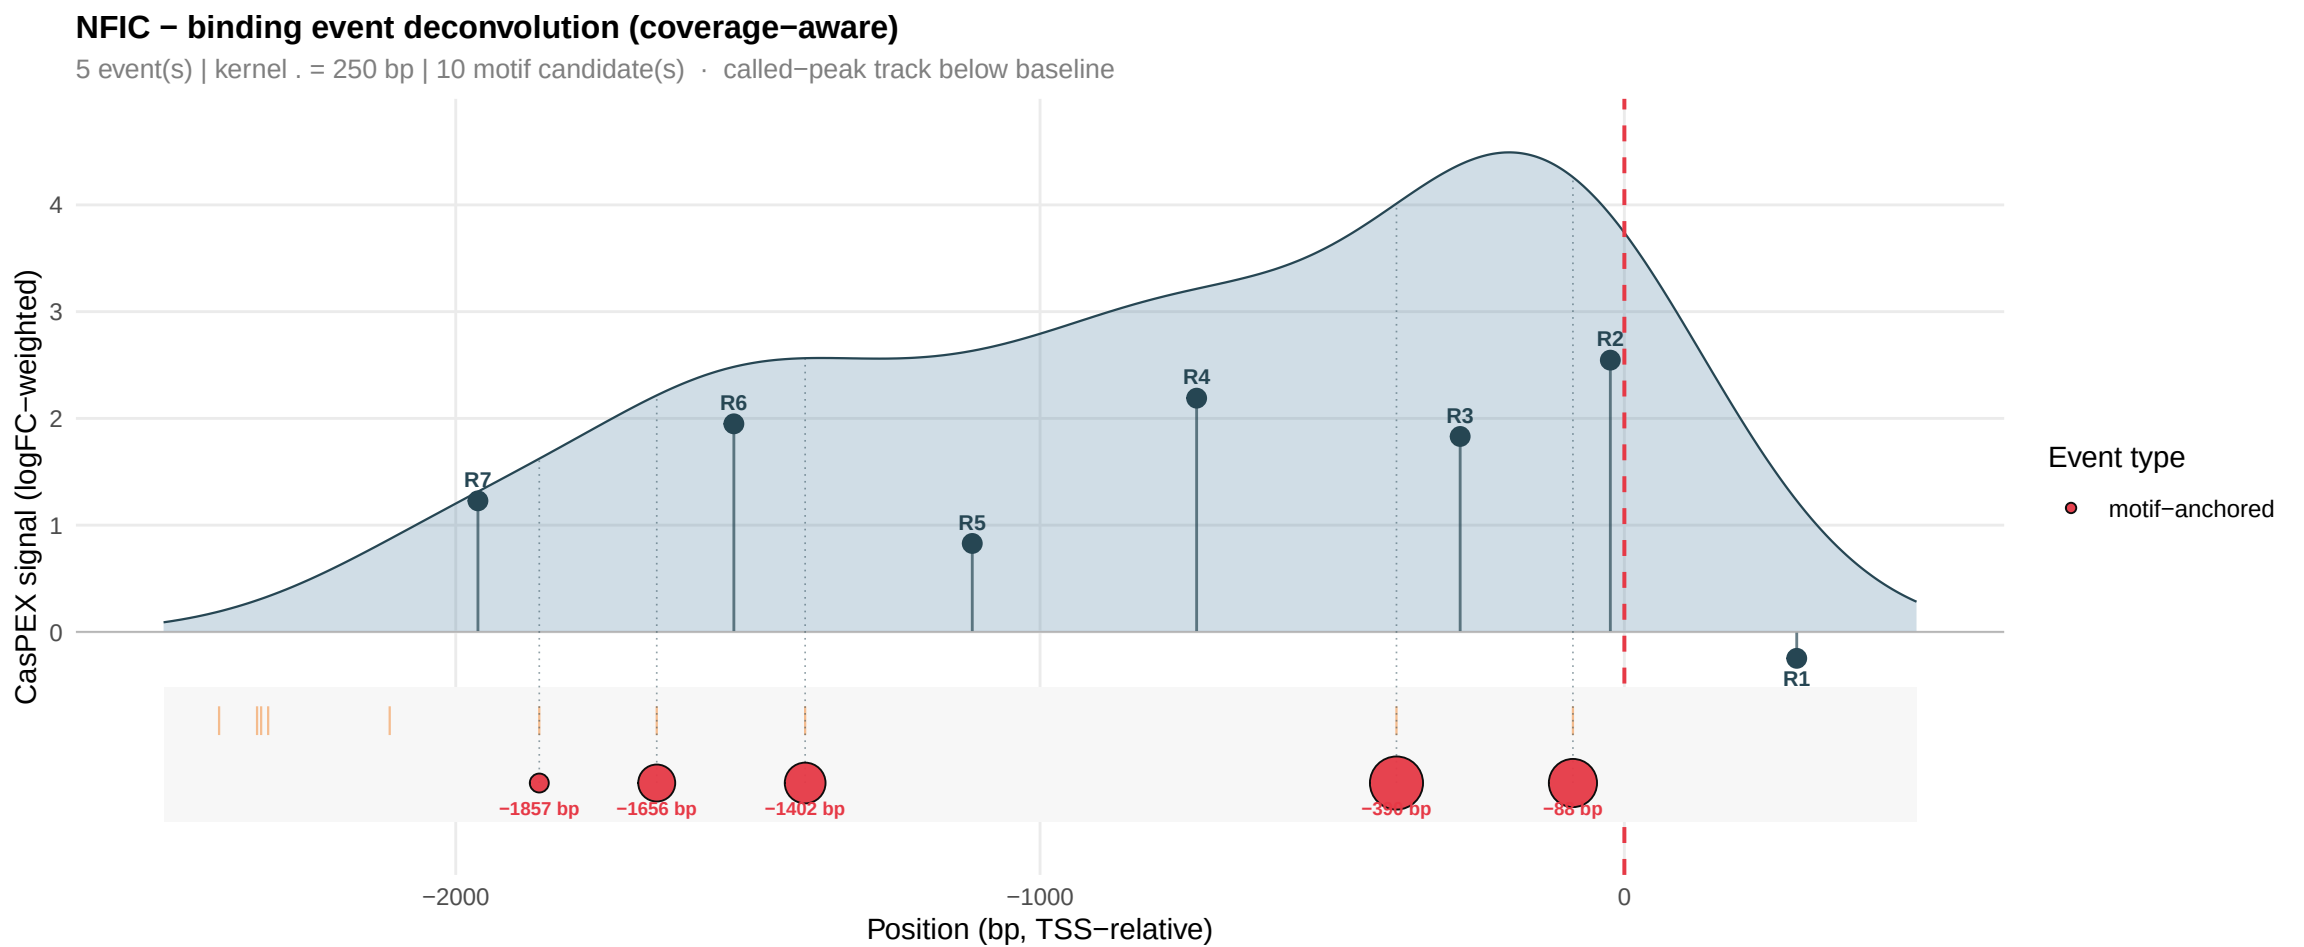
NFIC − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 250 bp | 10 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
0
1
2
3
4
R1
R2
R3
R4
R5
R6
R7
−1857 bp
−1656 bp
−1402 bp
−396 bp
−88 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

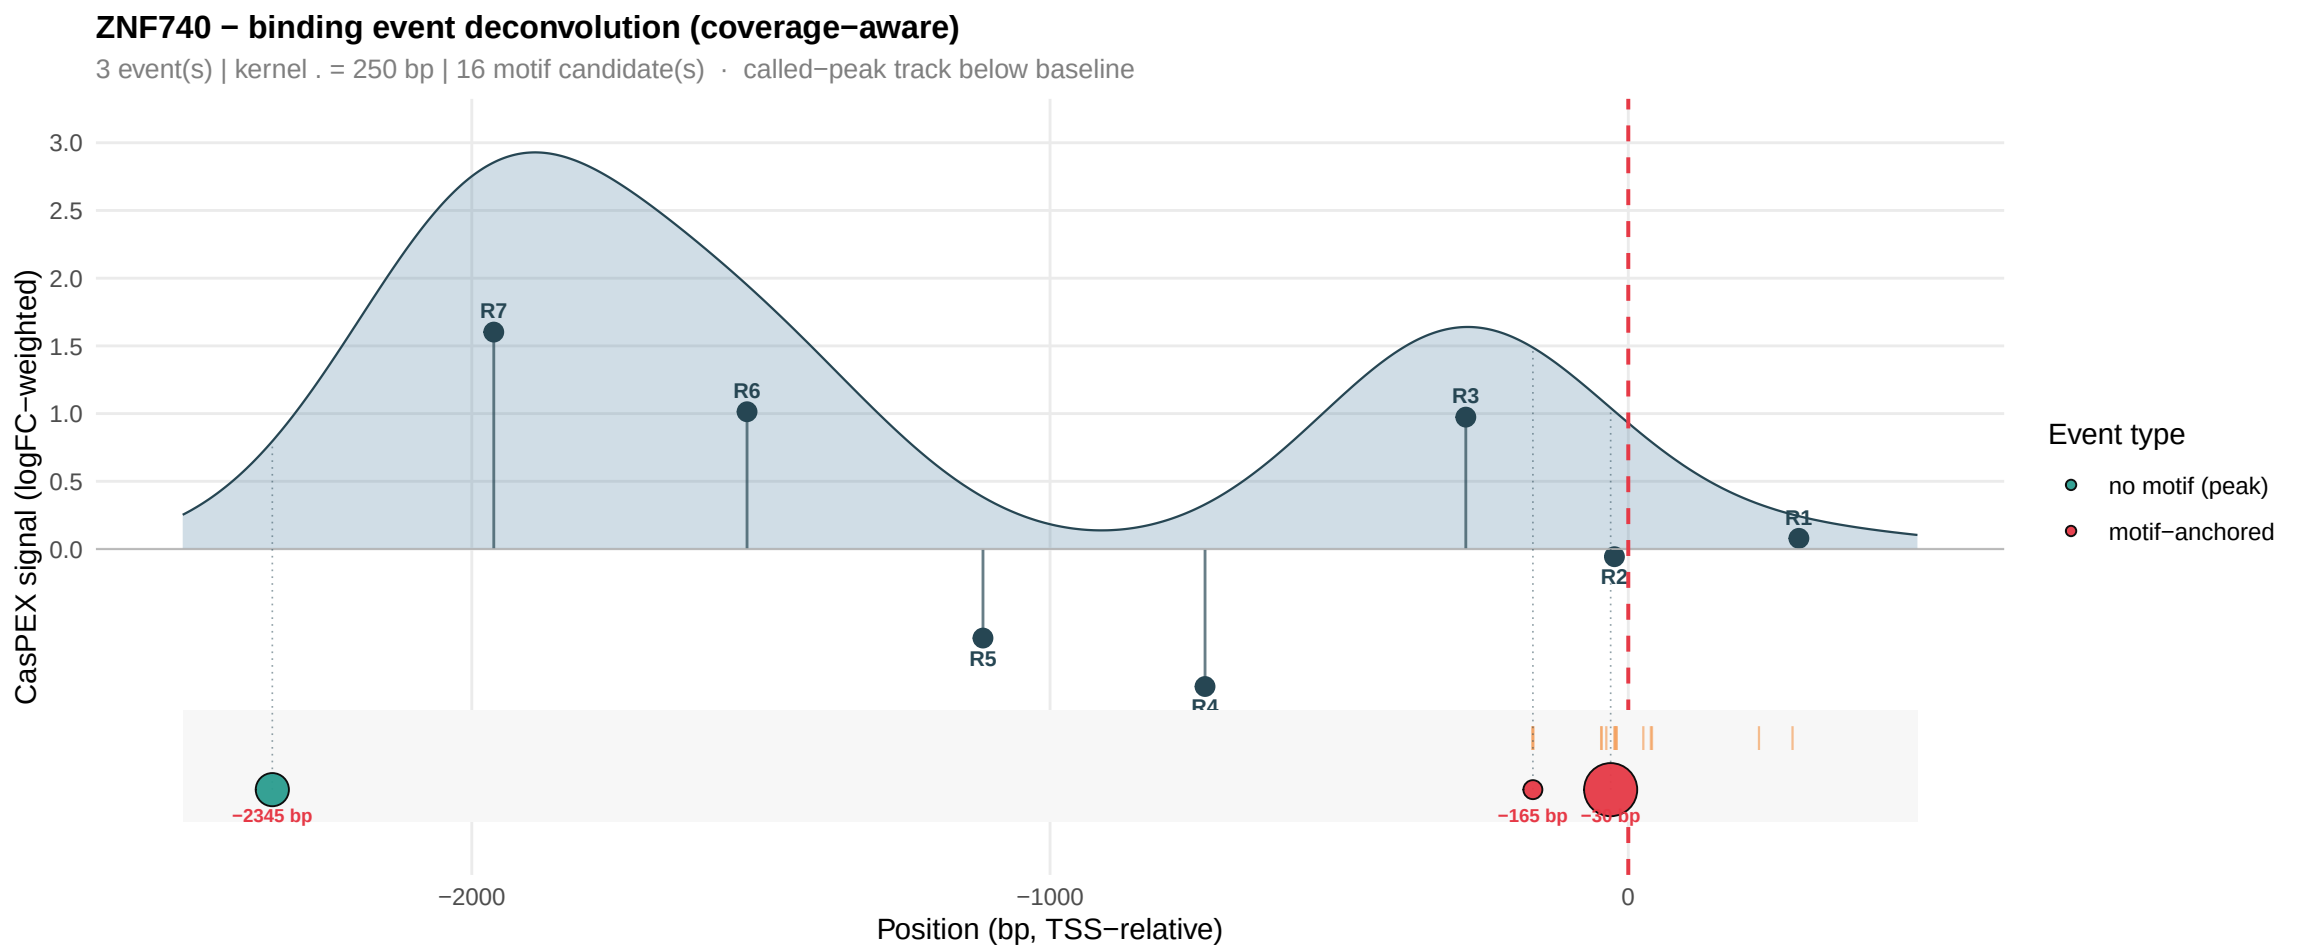
ZNF740 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 16 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−2345 bp
−165 bp
−38 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)
motif−anchored

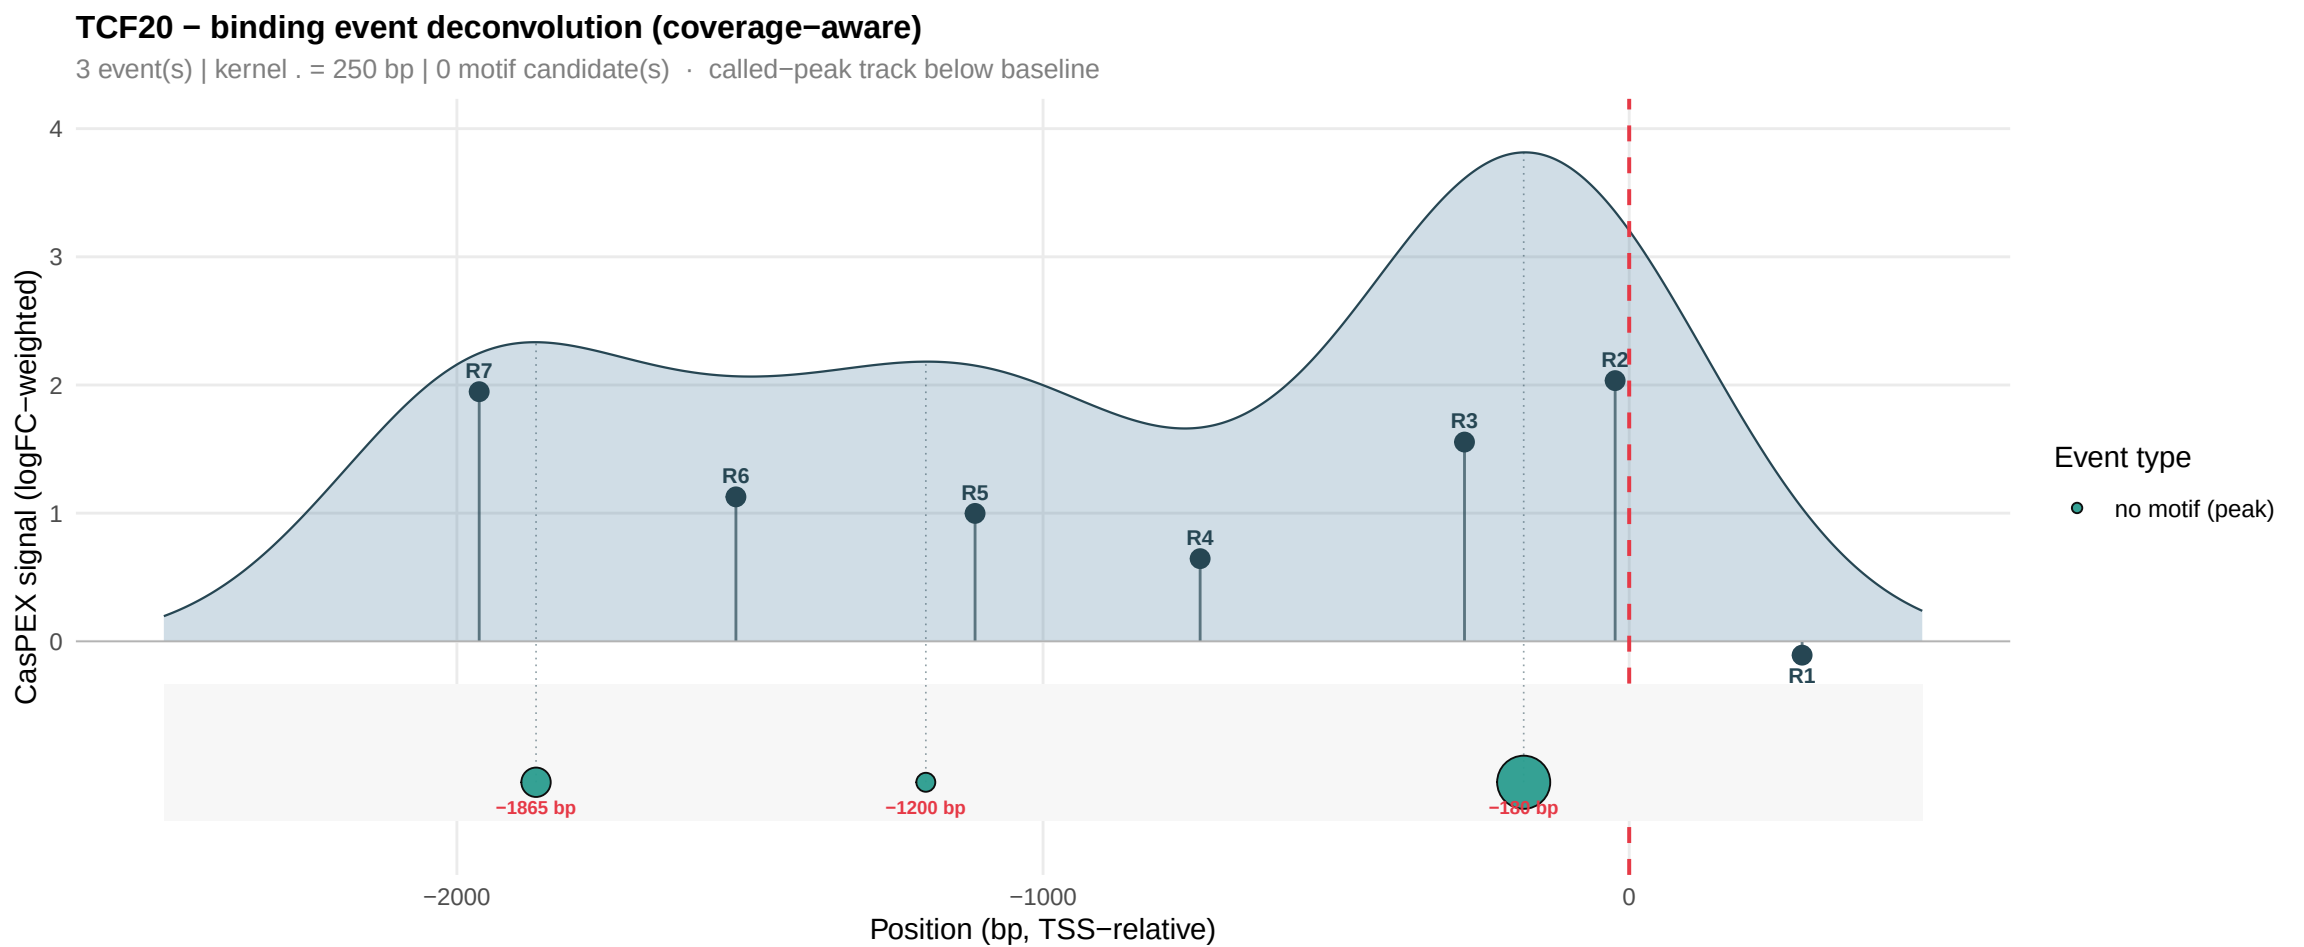
TCF20 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1865 bp
−1200 bp
−188 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

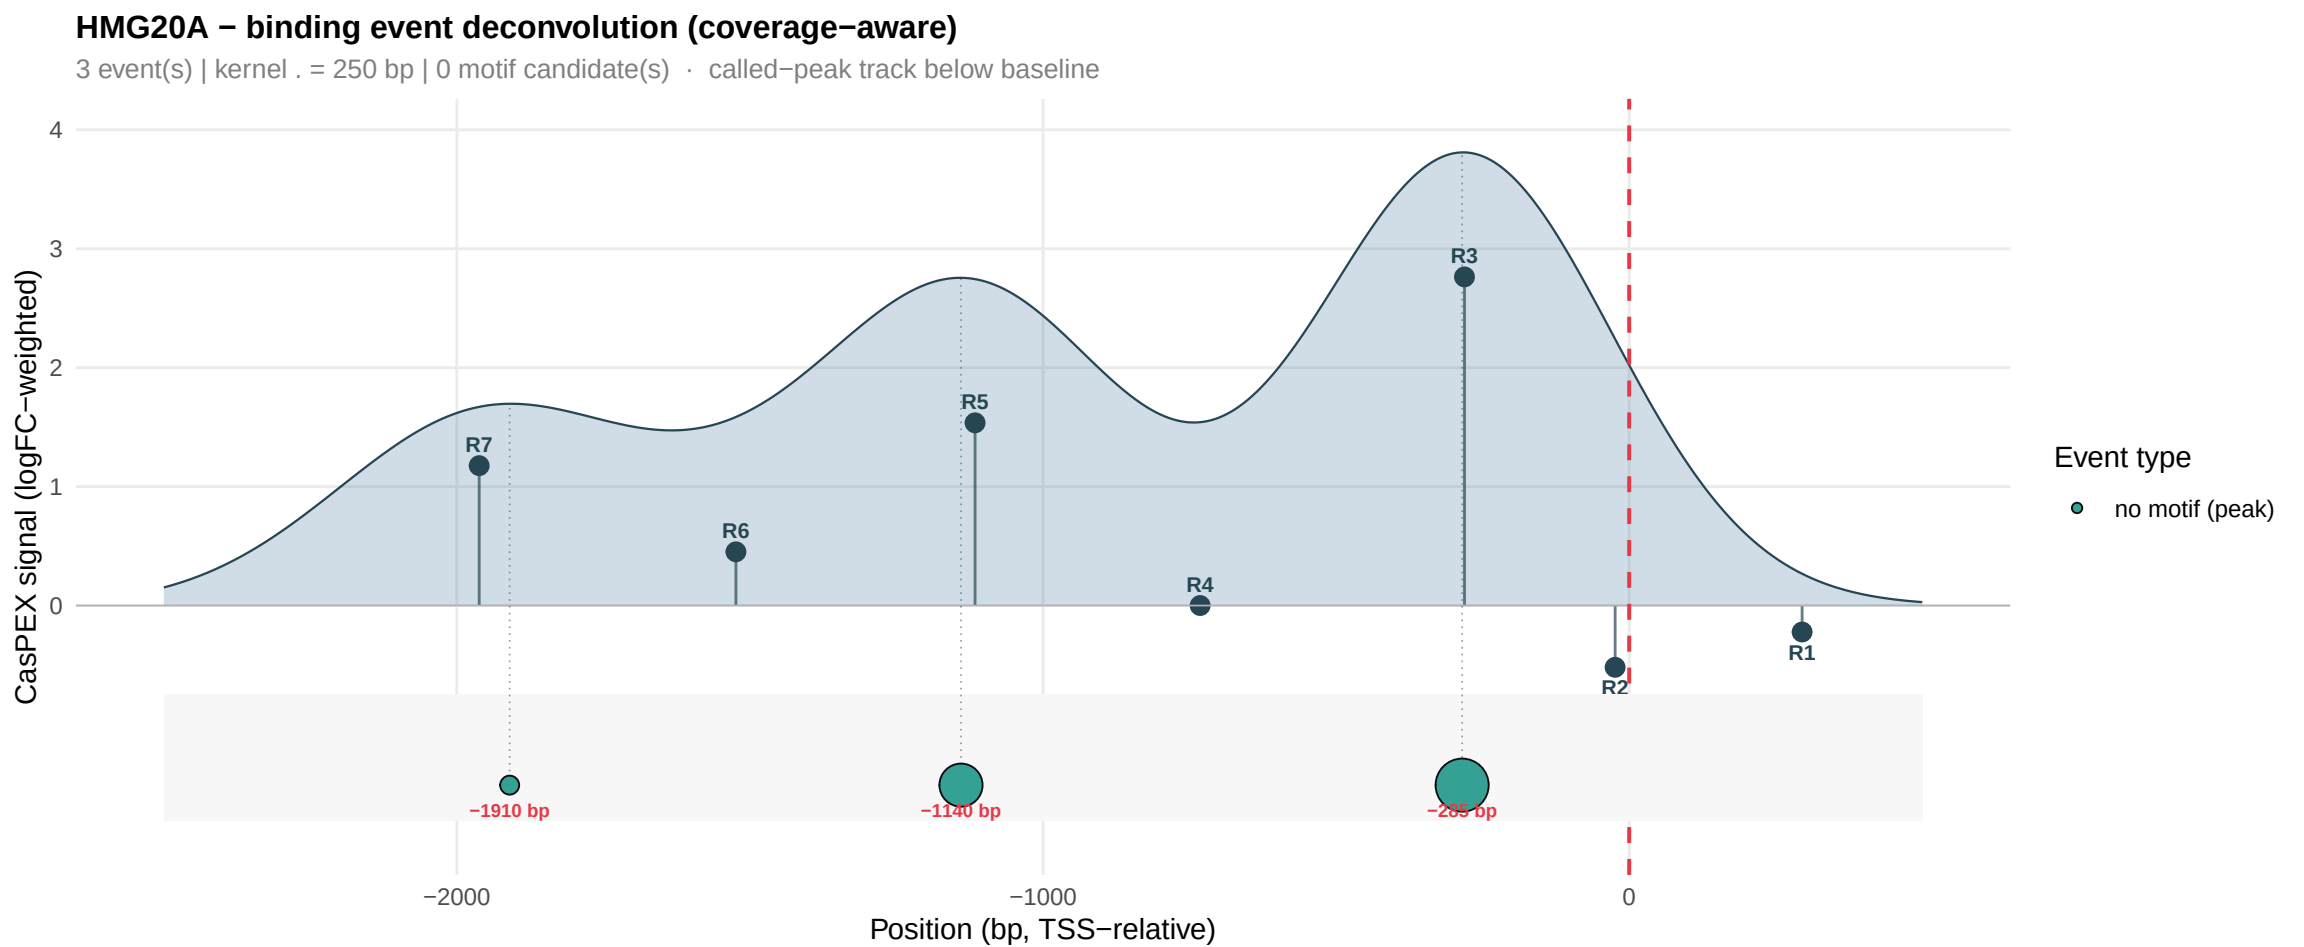
HMG20A − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1910 bp
−1140 bp
−285 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

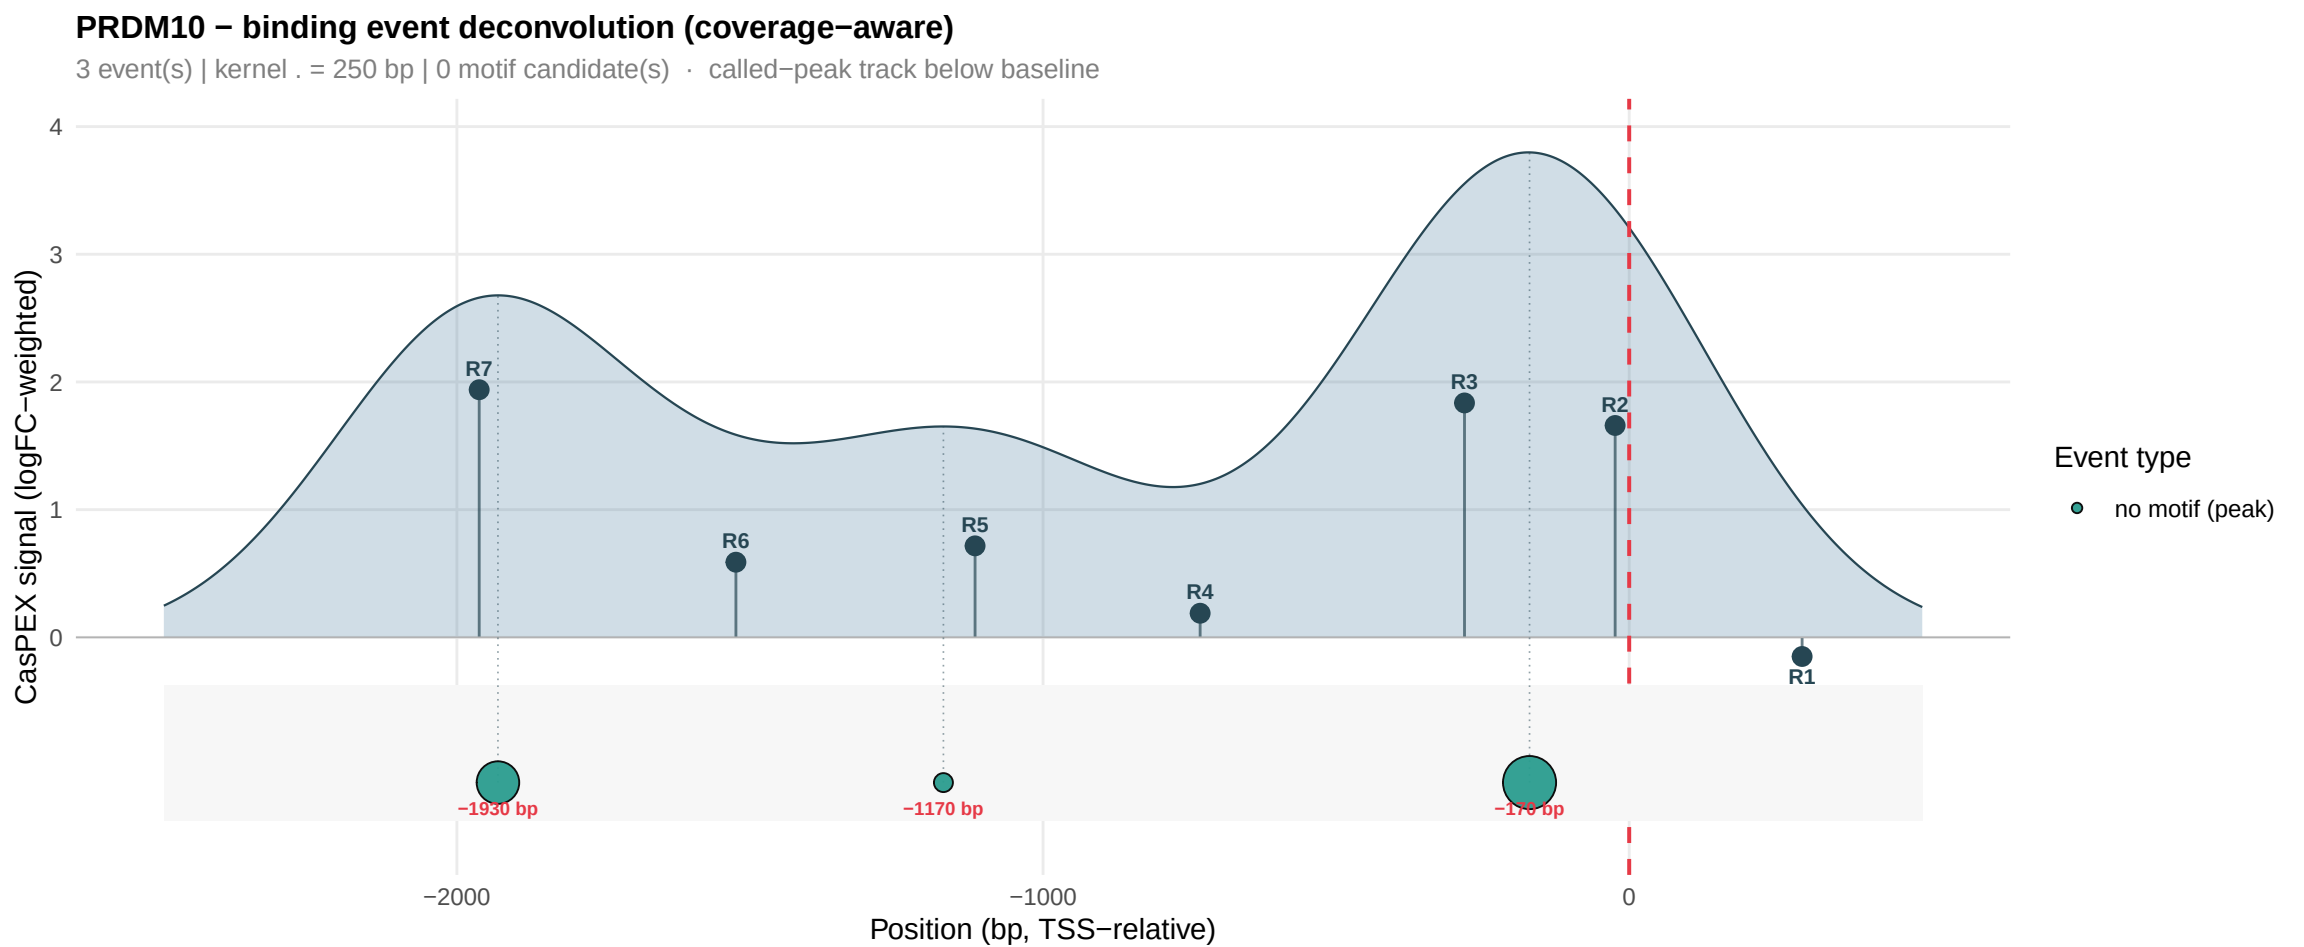
PRDM10 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1930 bp
−1170 bp
−170 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

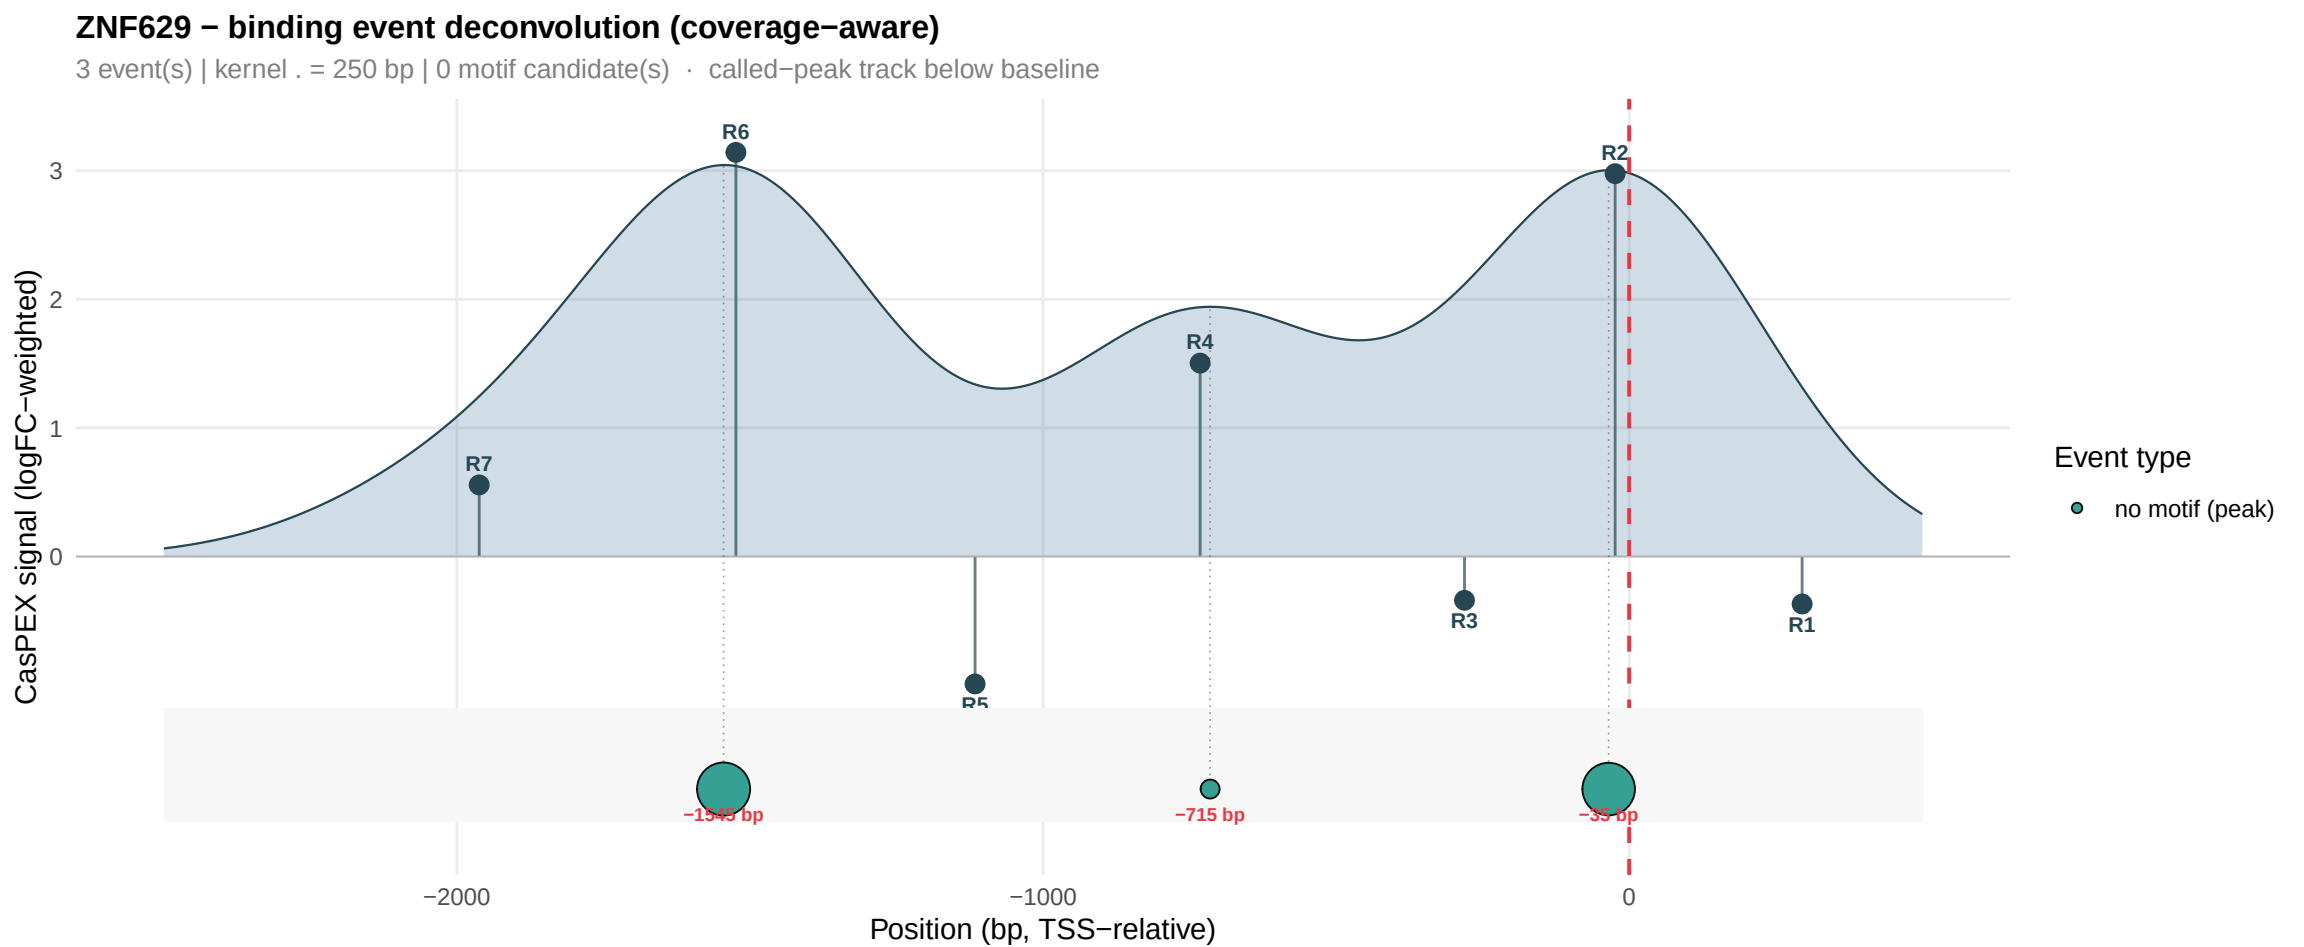
ZNF629 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R6
R2
R4
R7
R5
R3
R1
−1545 bp
−715 bp
−35 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

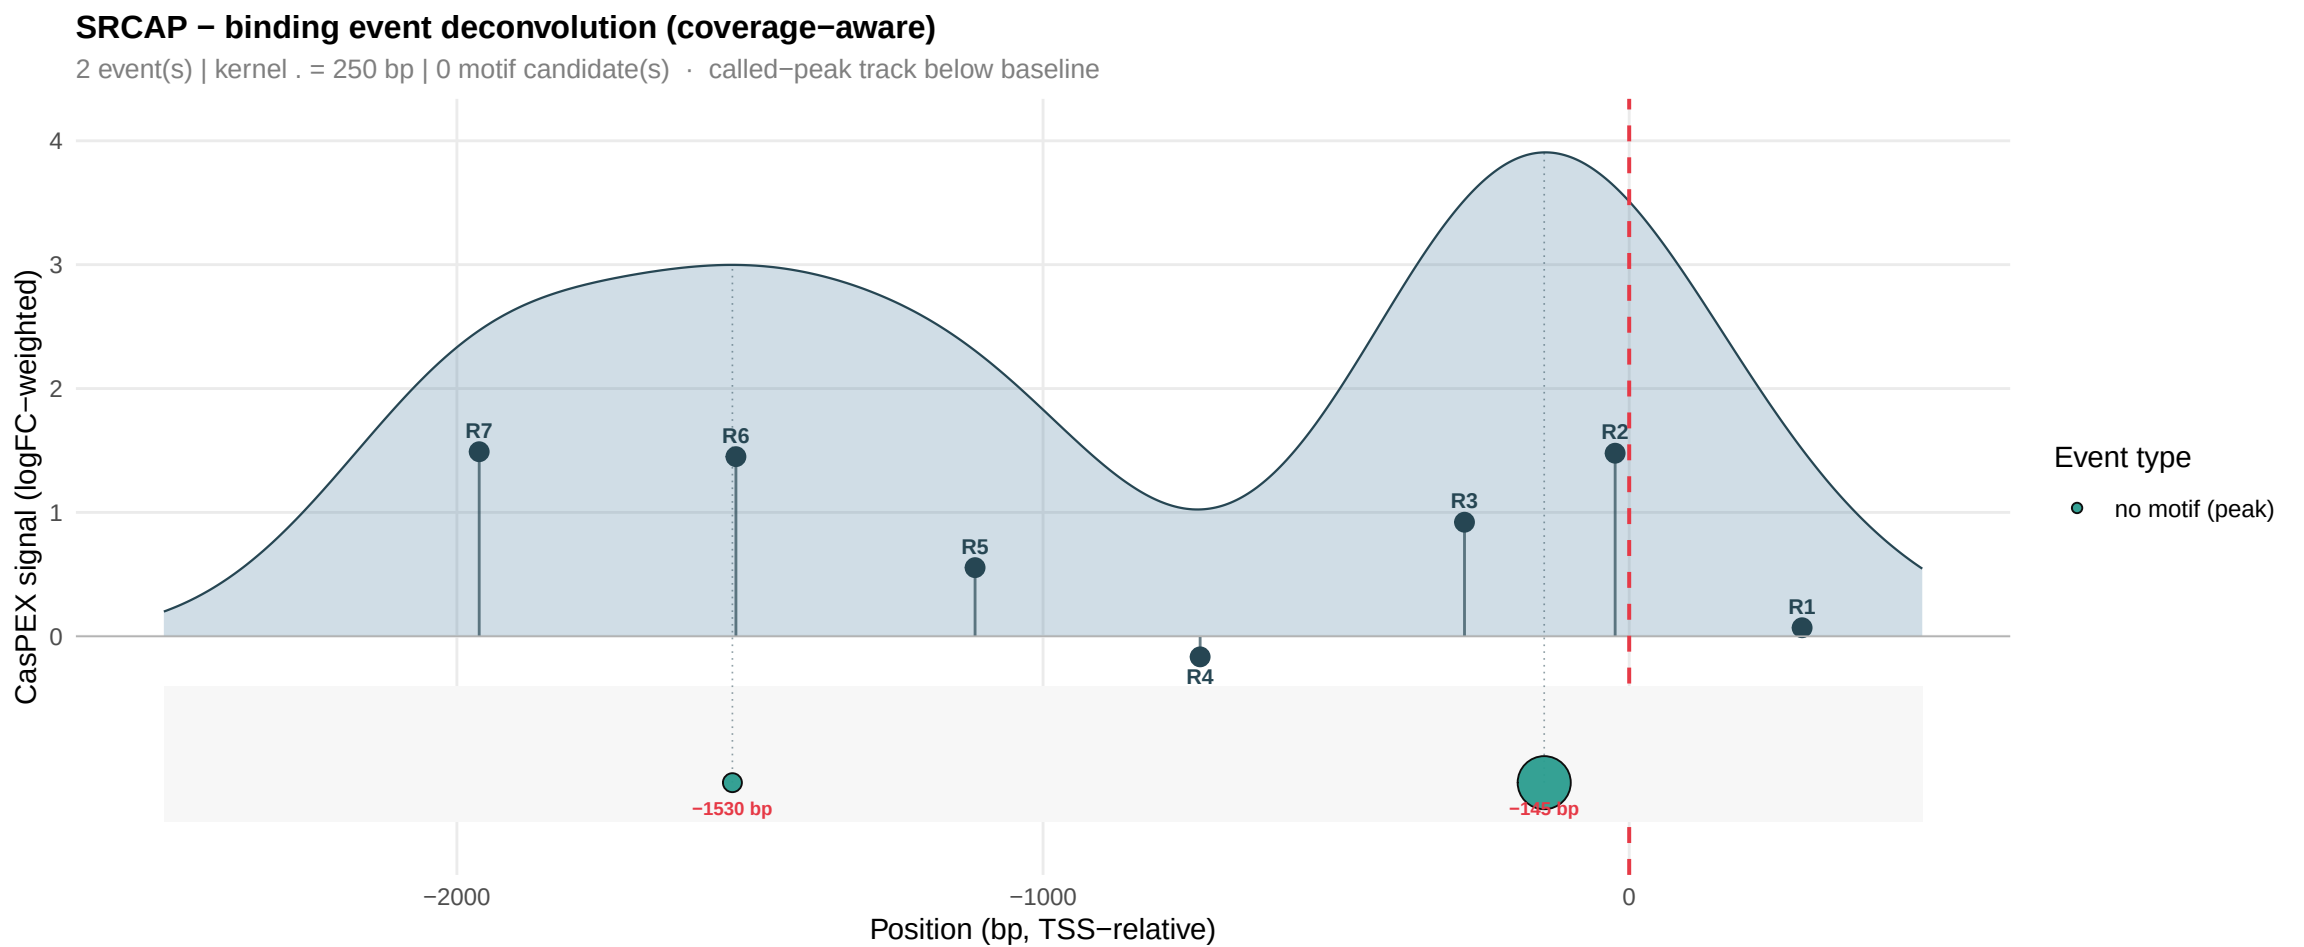
SRCAP − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1530 bp
−145 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

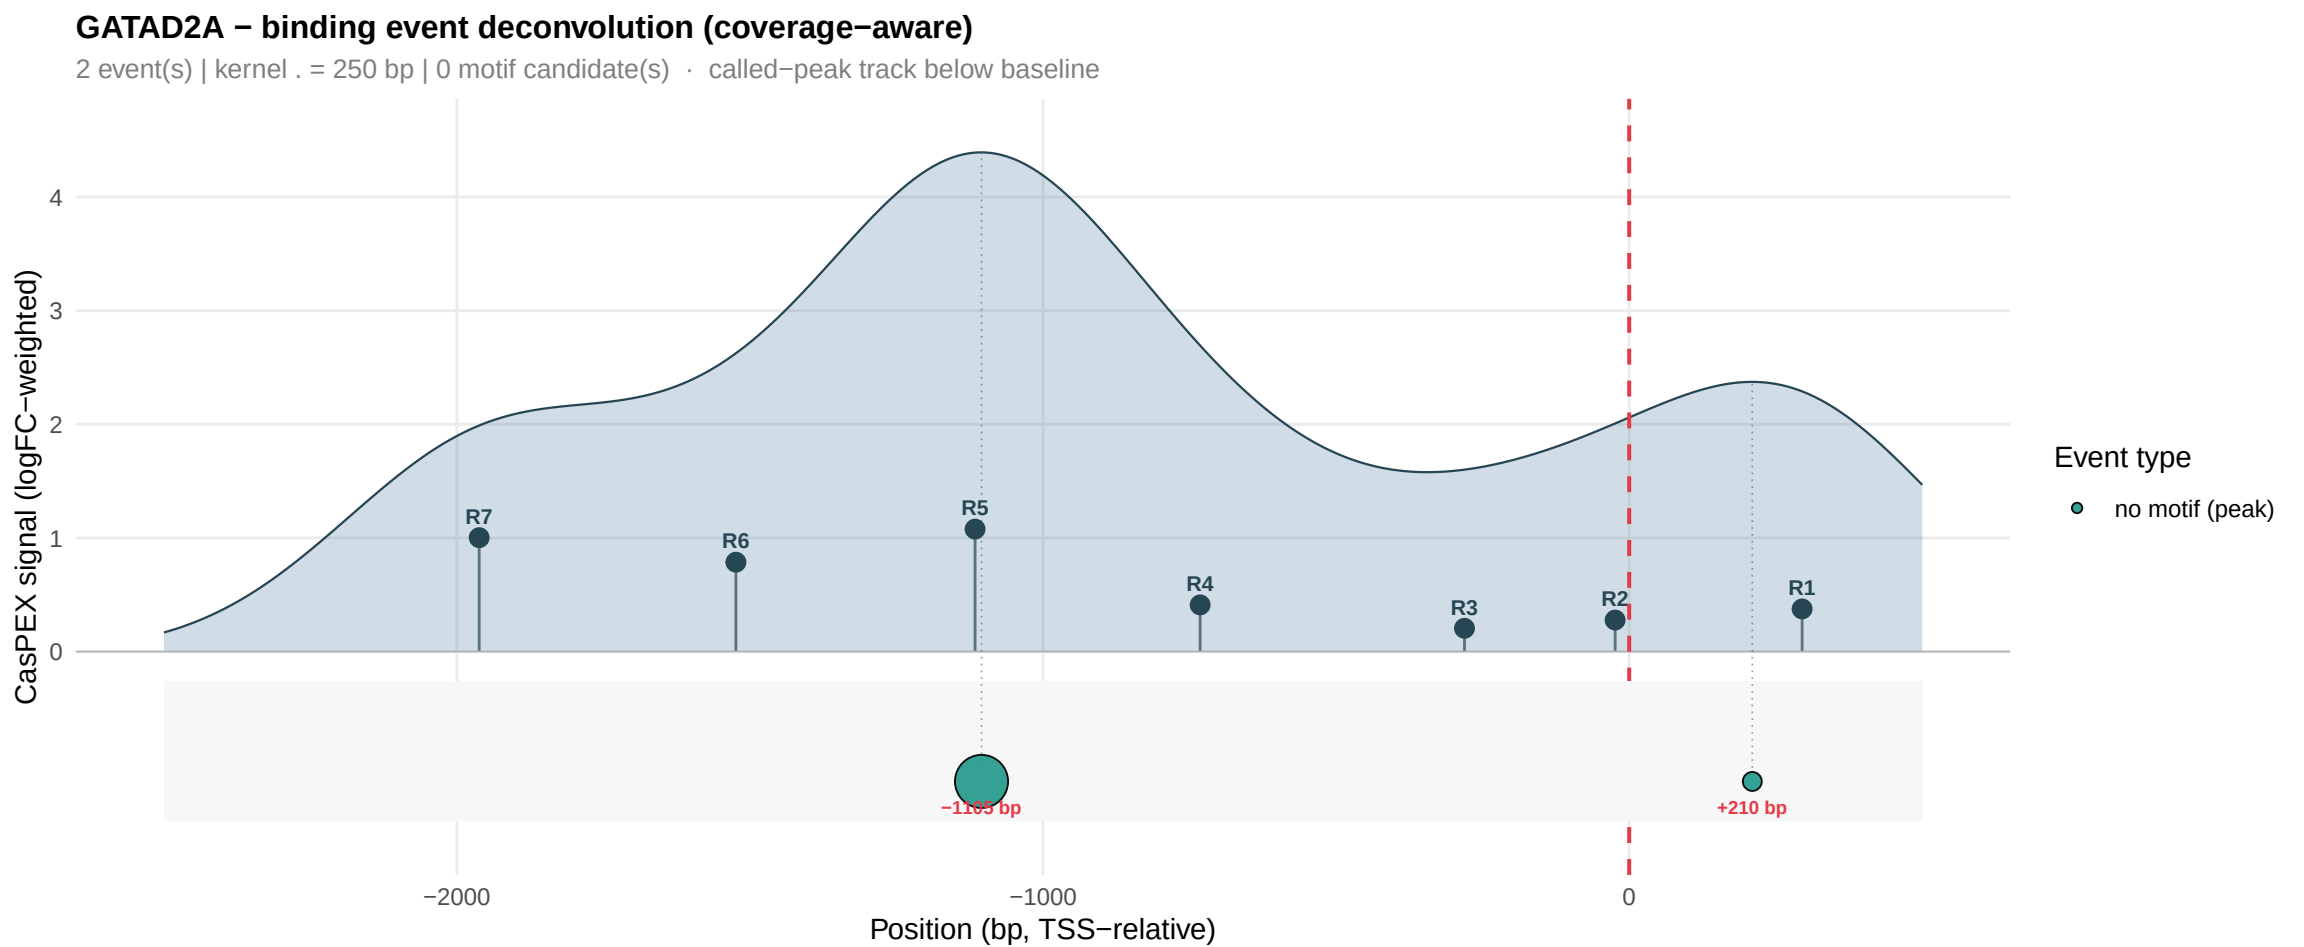
GATAD2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1165 bp
+210 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

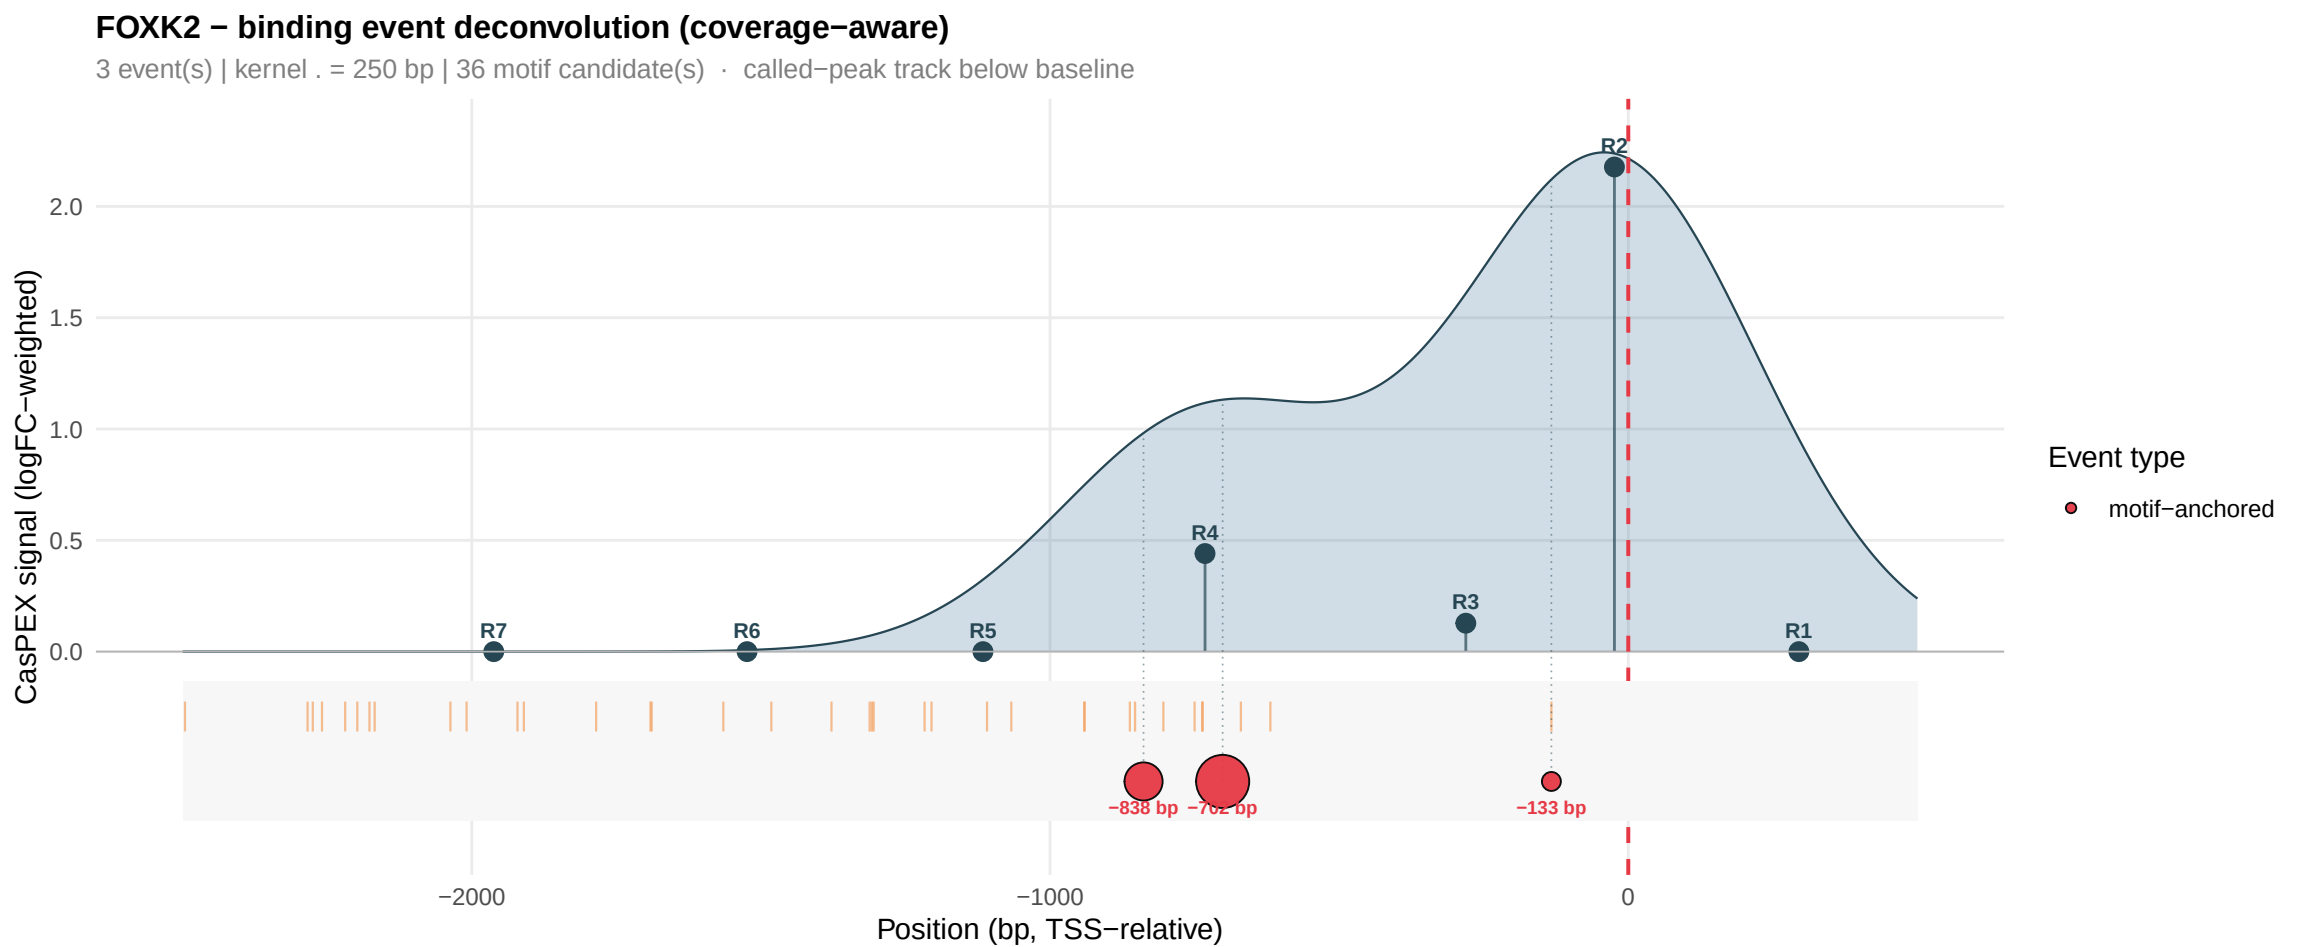
FOXK2 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 36 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−838 bp
−702 bp
−133 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

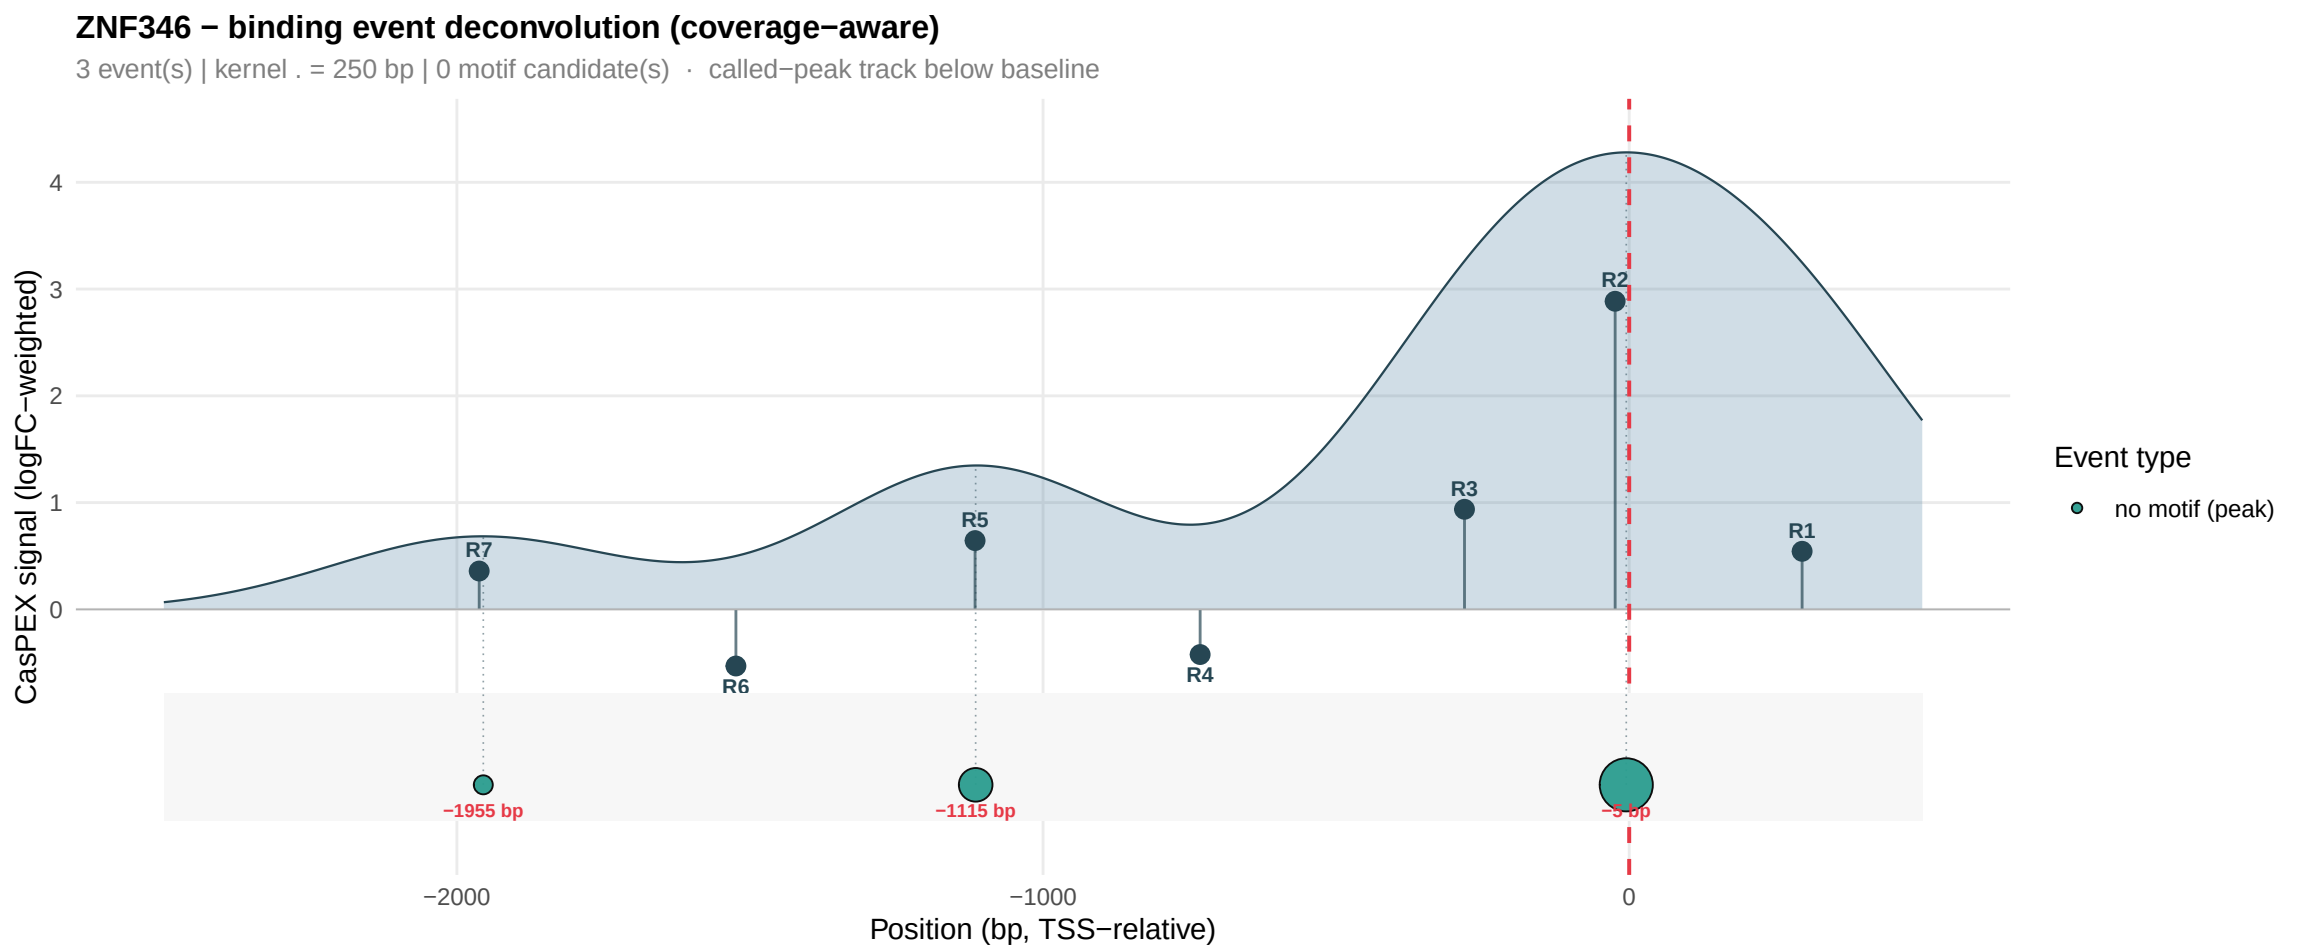
ZNF346 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1955 bp
−1115 bp
−5 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

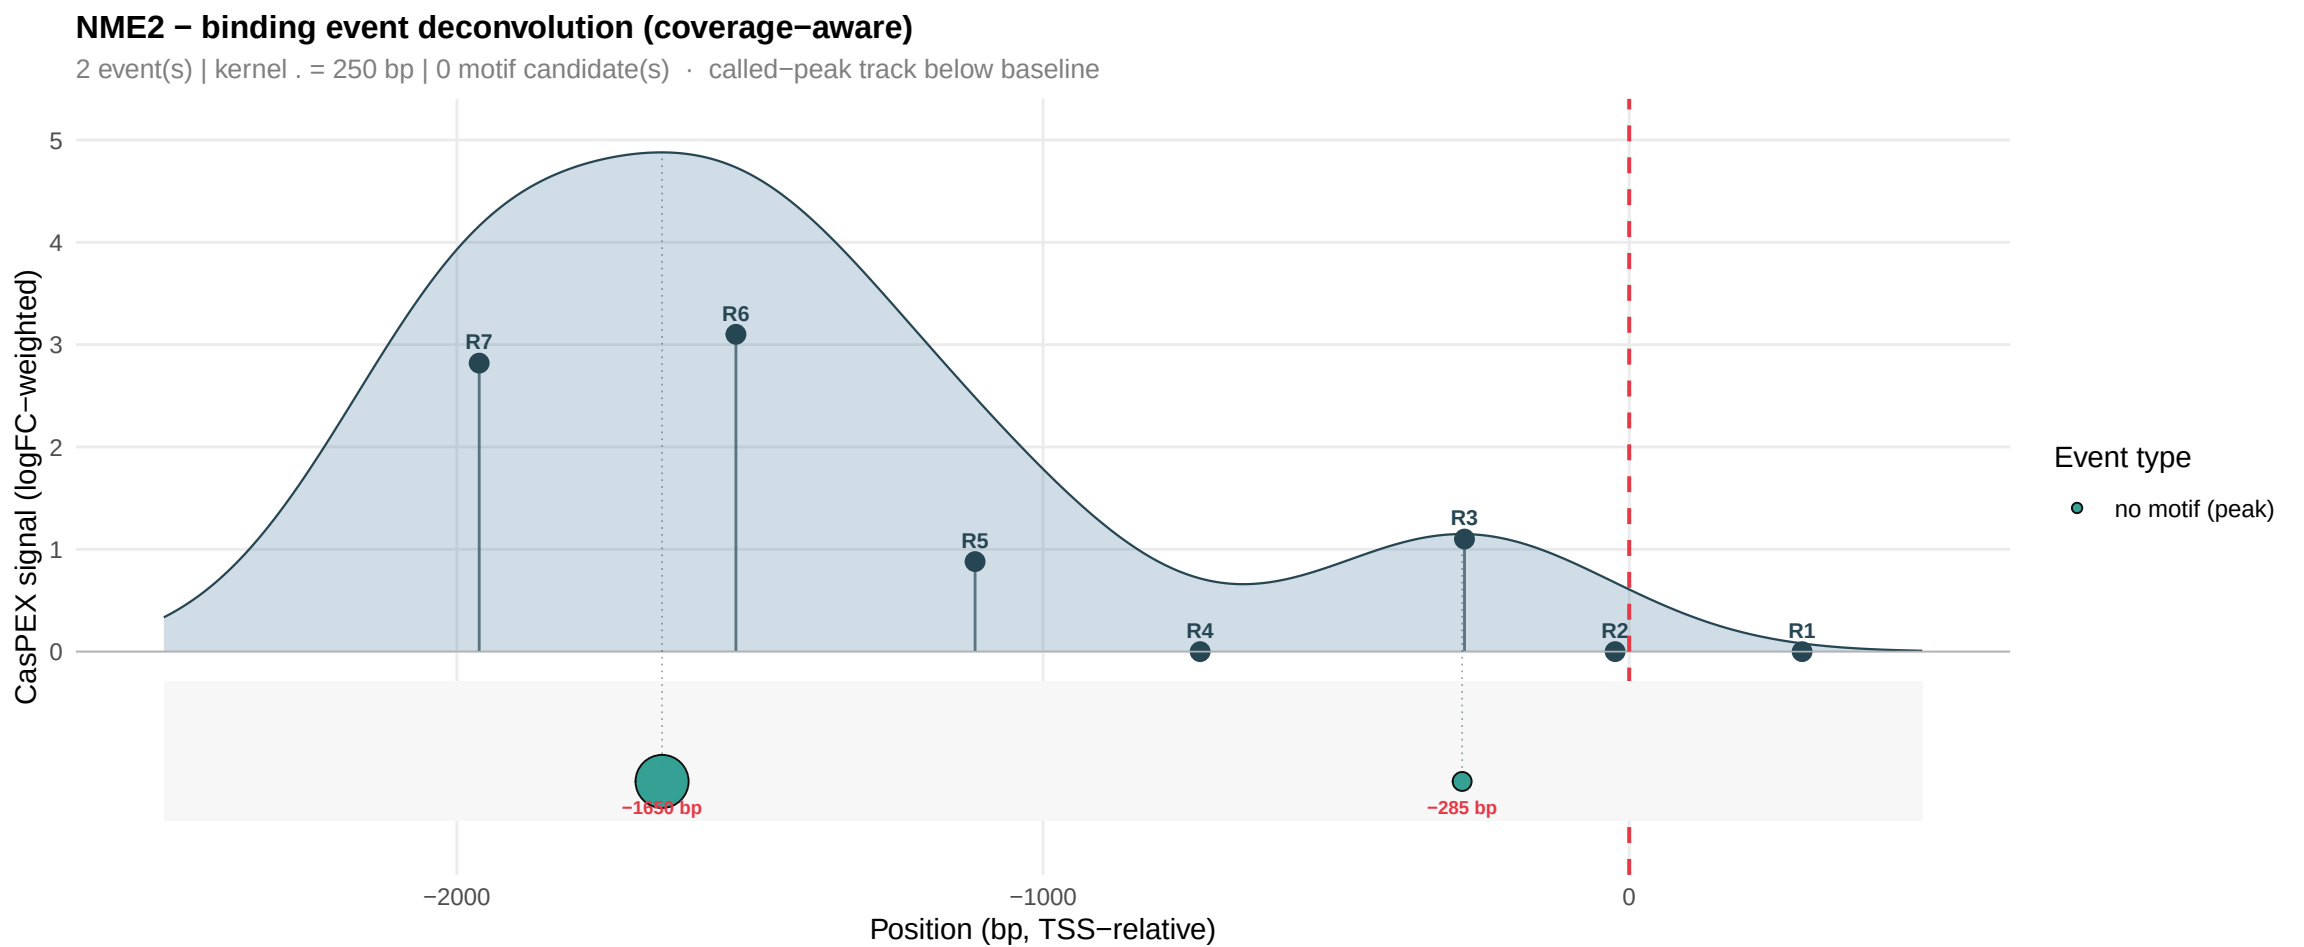
NME2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1850 bp
−285 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

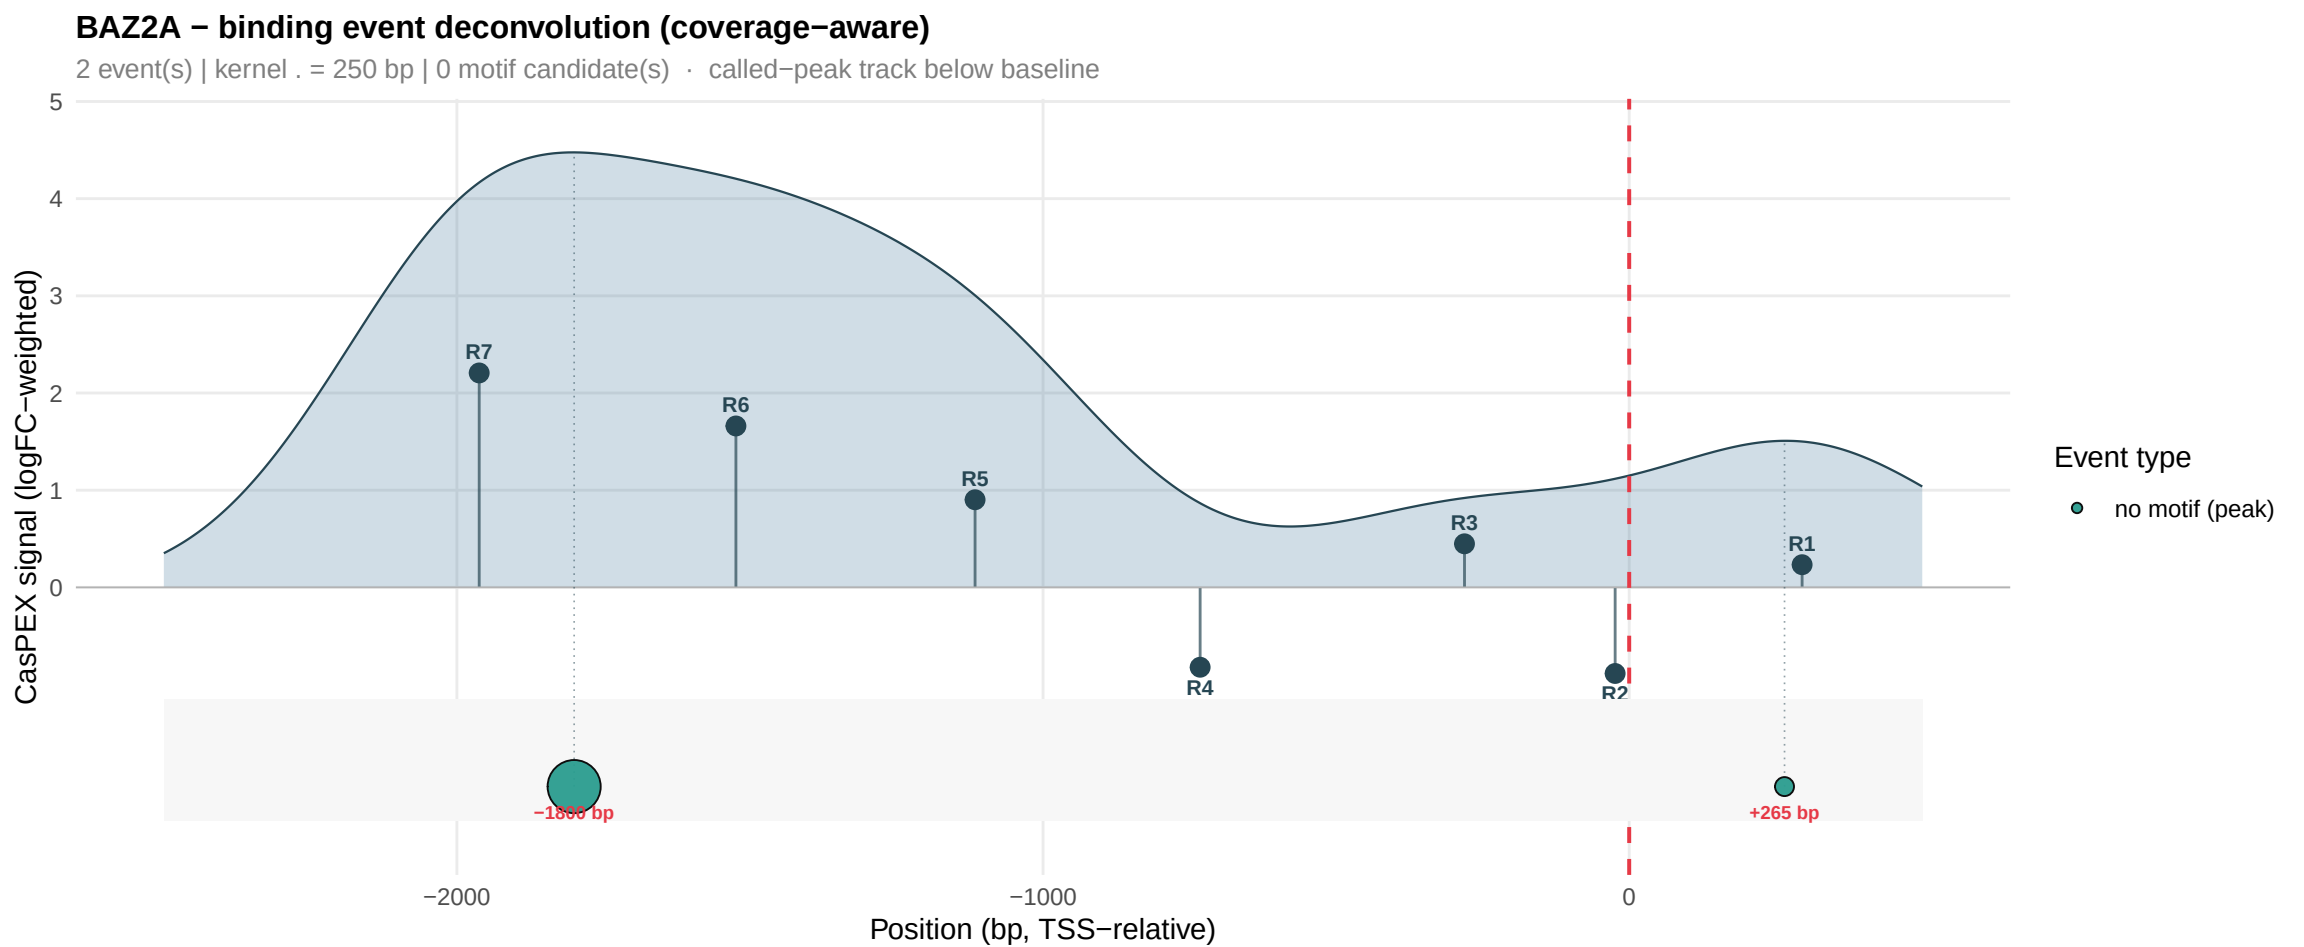
BAZ2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1860 bp
+265 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

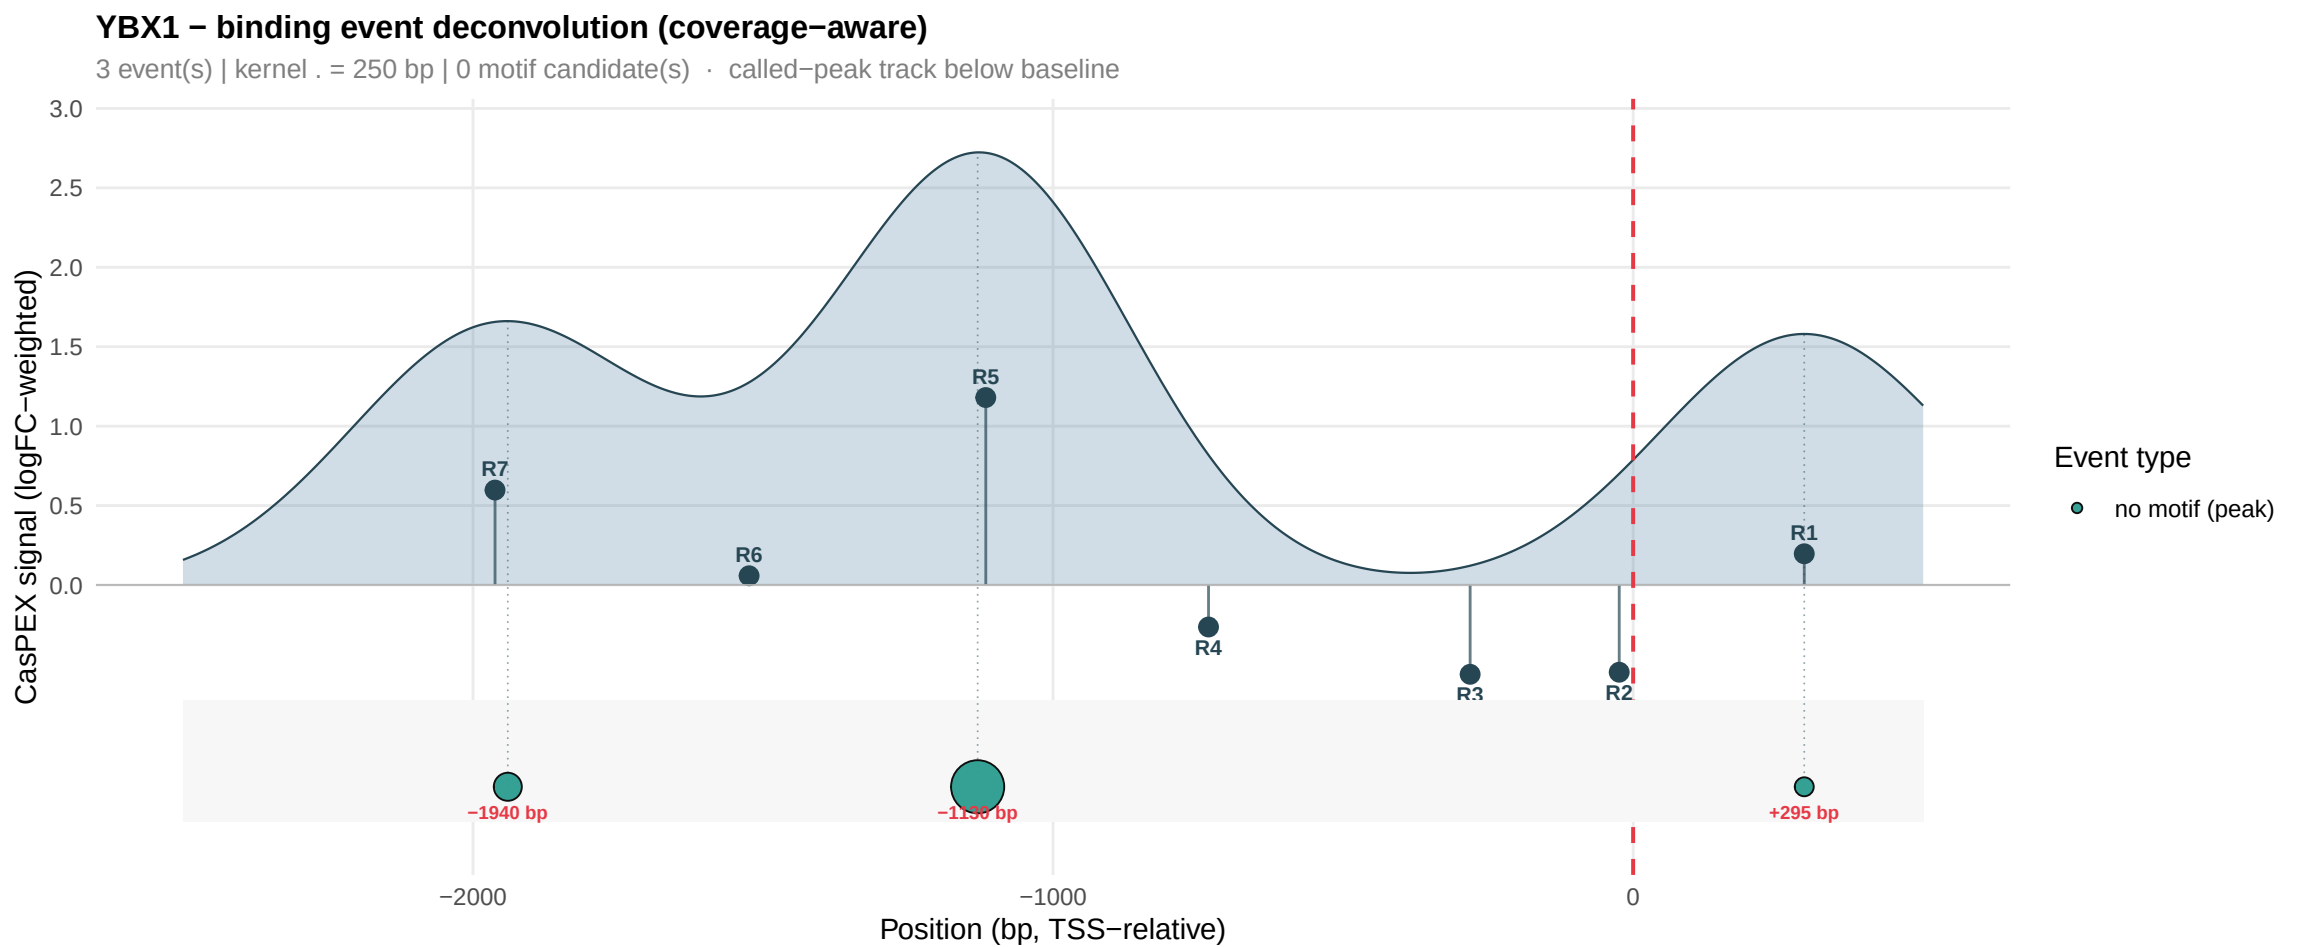
YBX1 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1940 bp
−1150 bp
+295 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

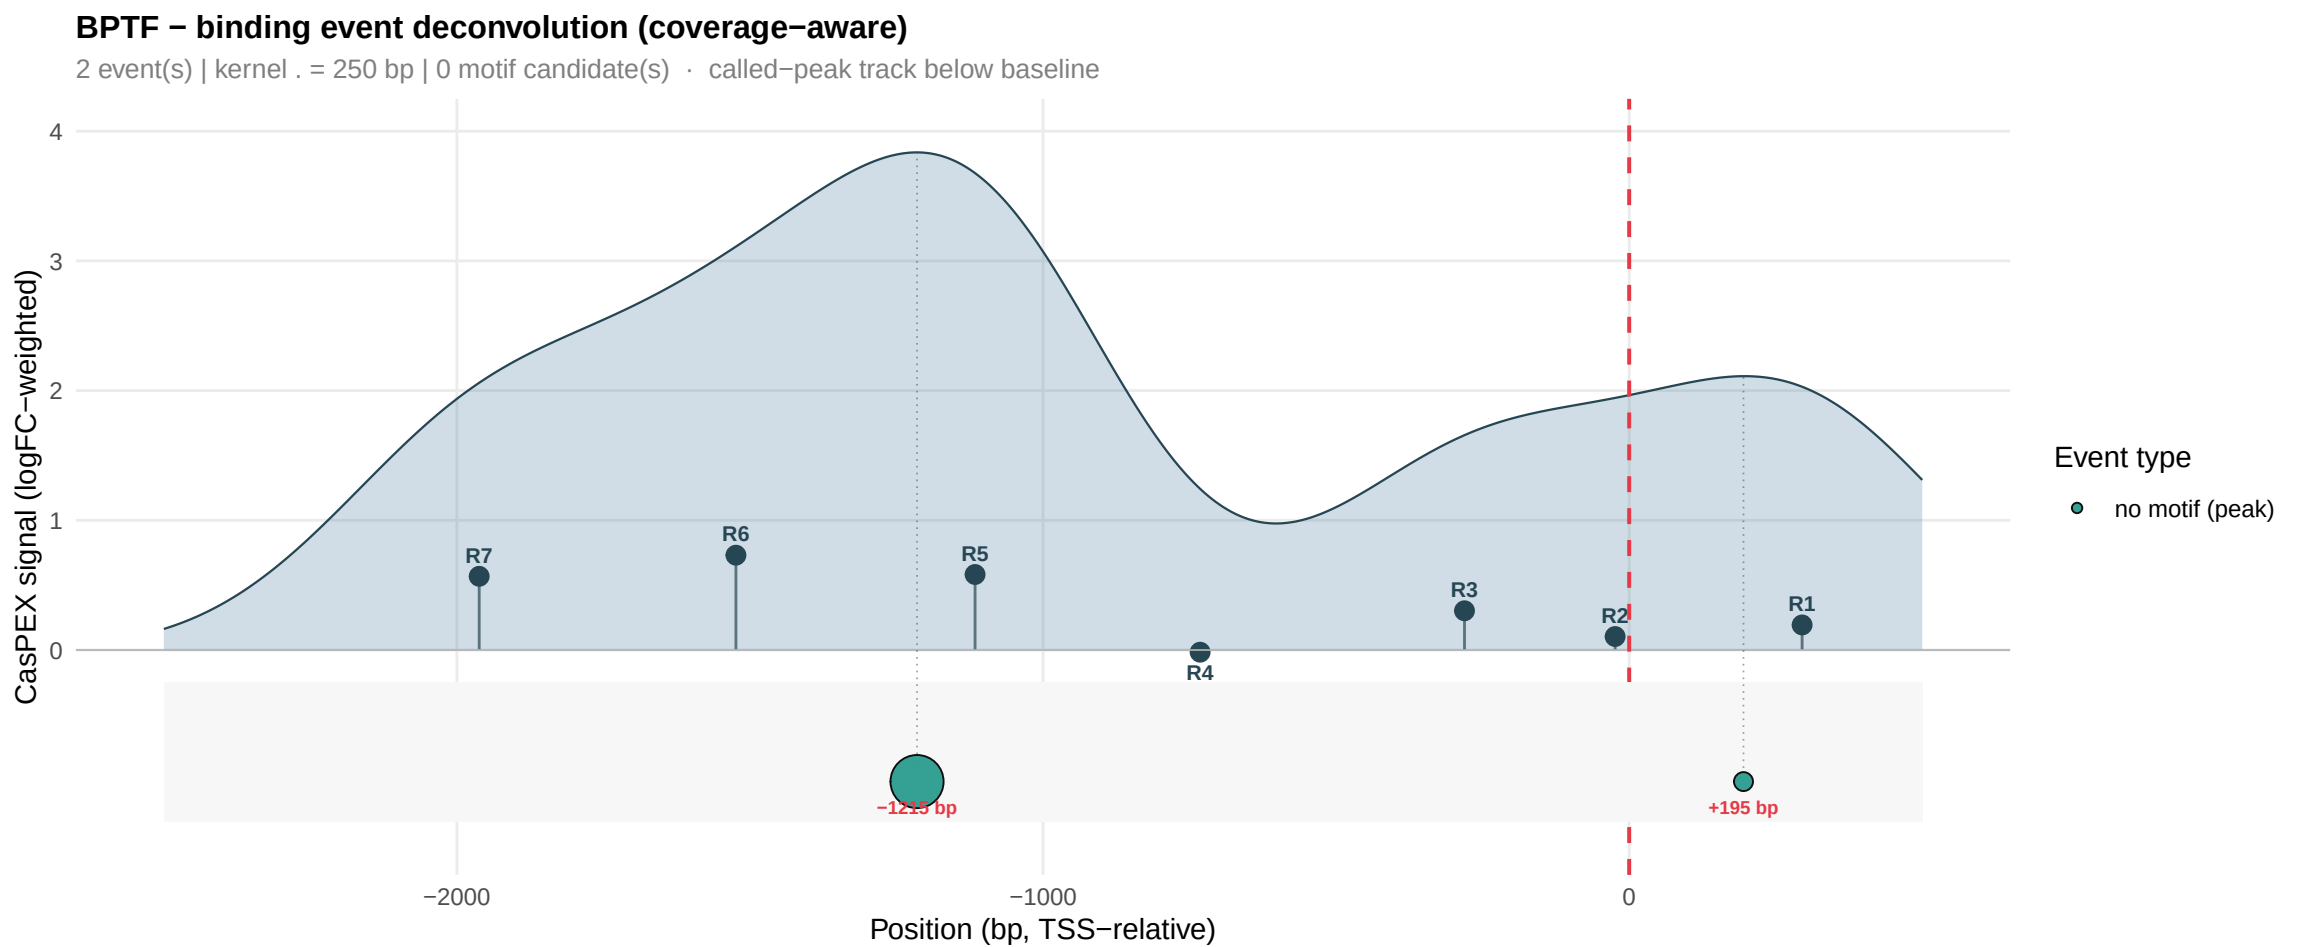
BPTF − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1215 bp
+195 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

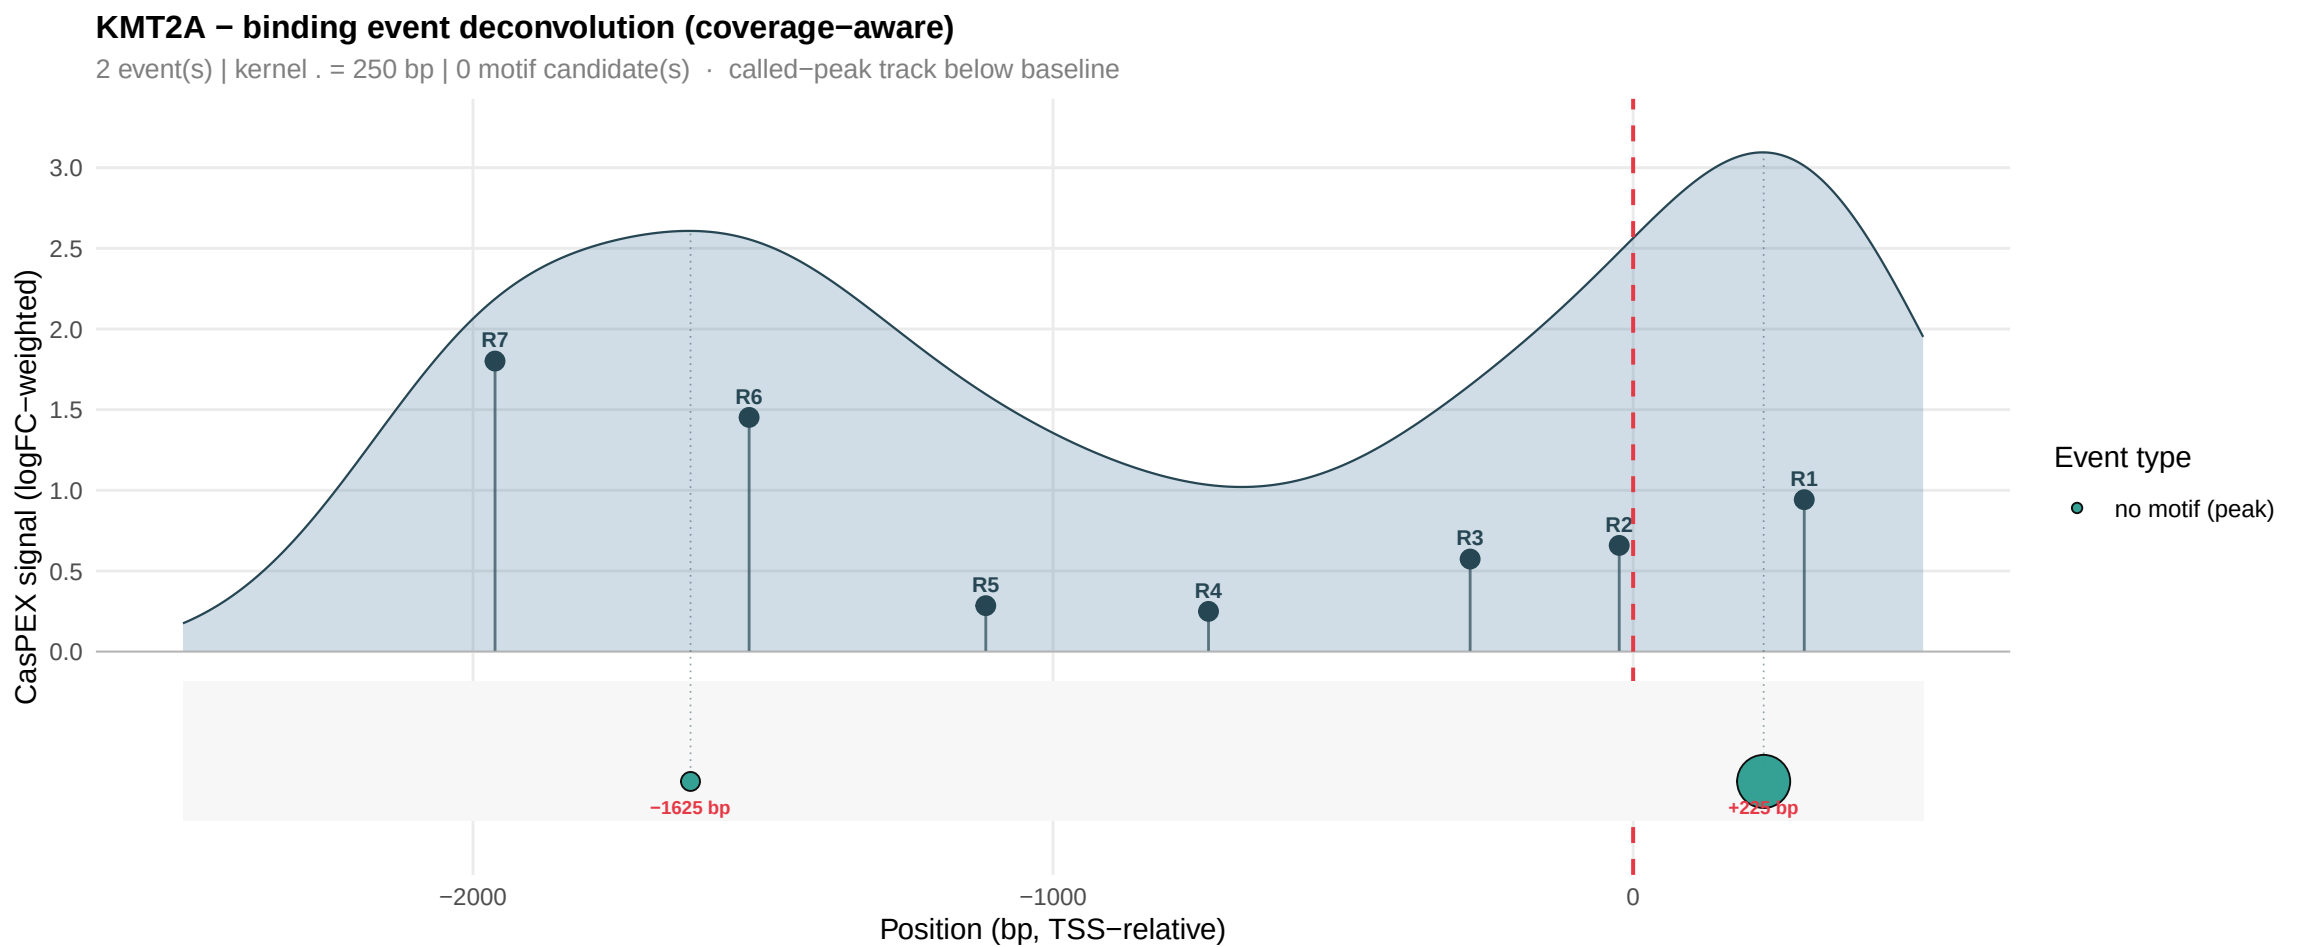
KMT2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1625 bp
+225 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

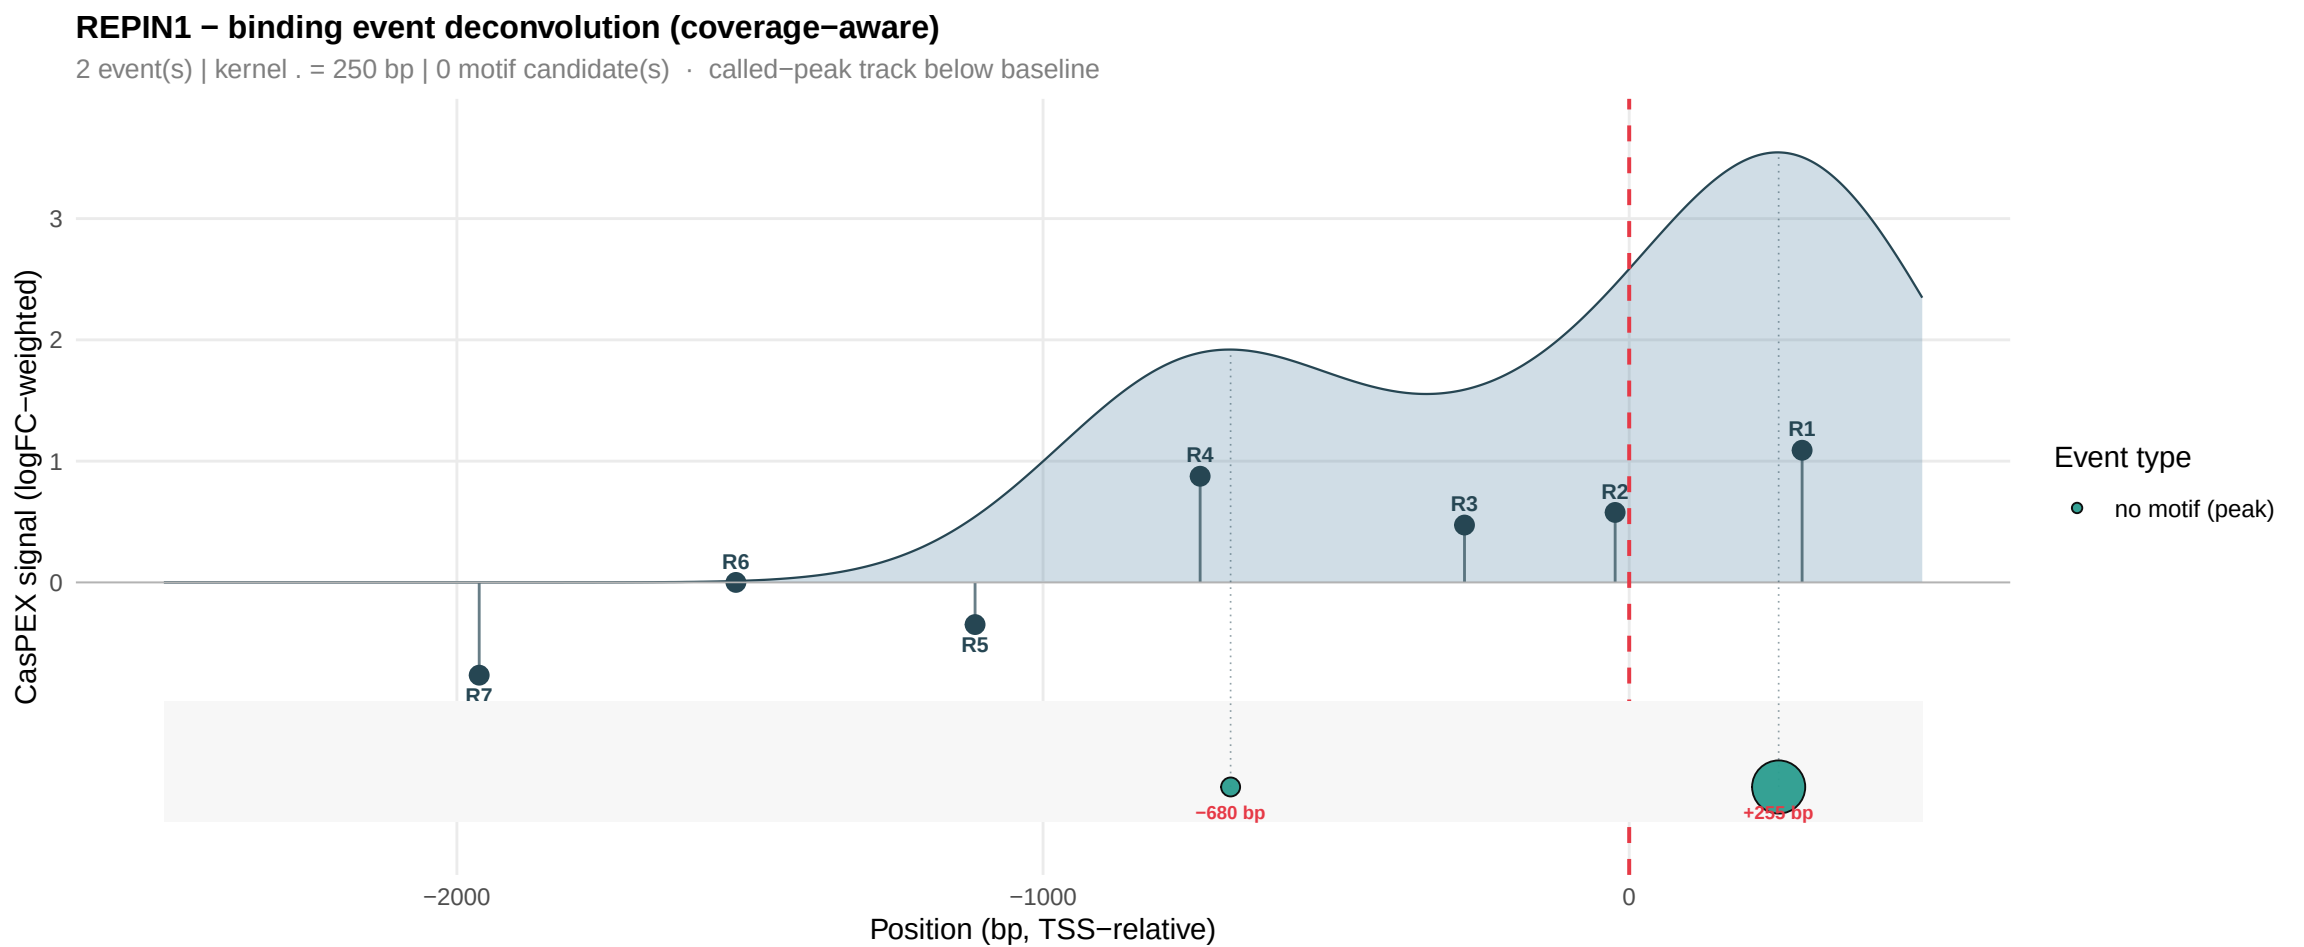
REPIN1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−680 bp
+255 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

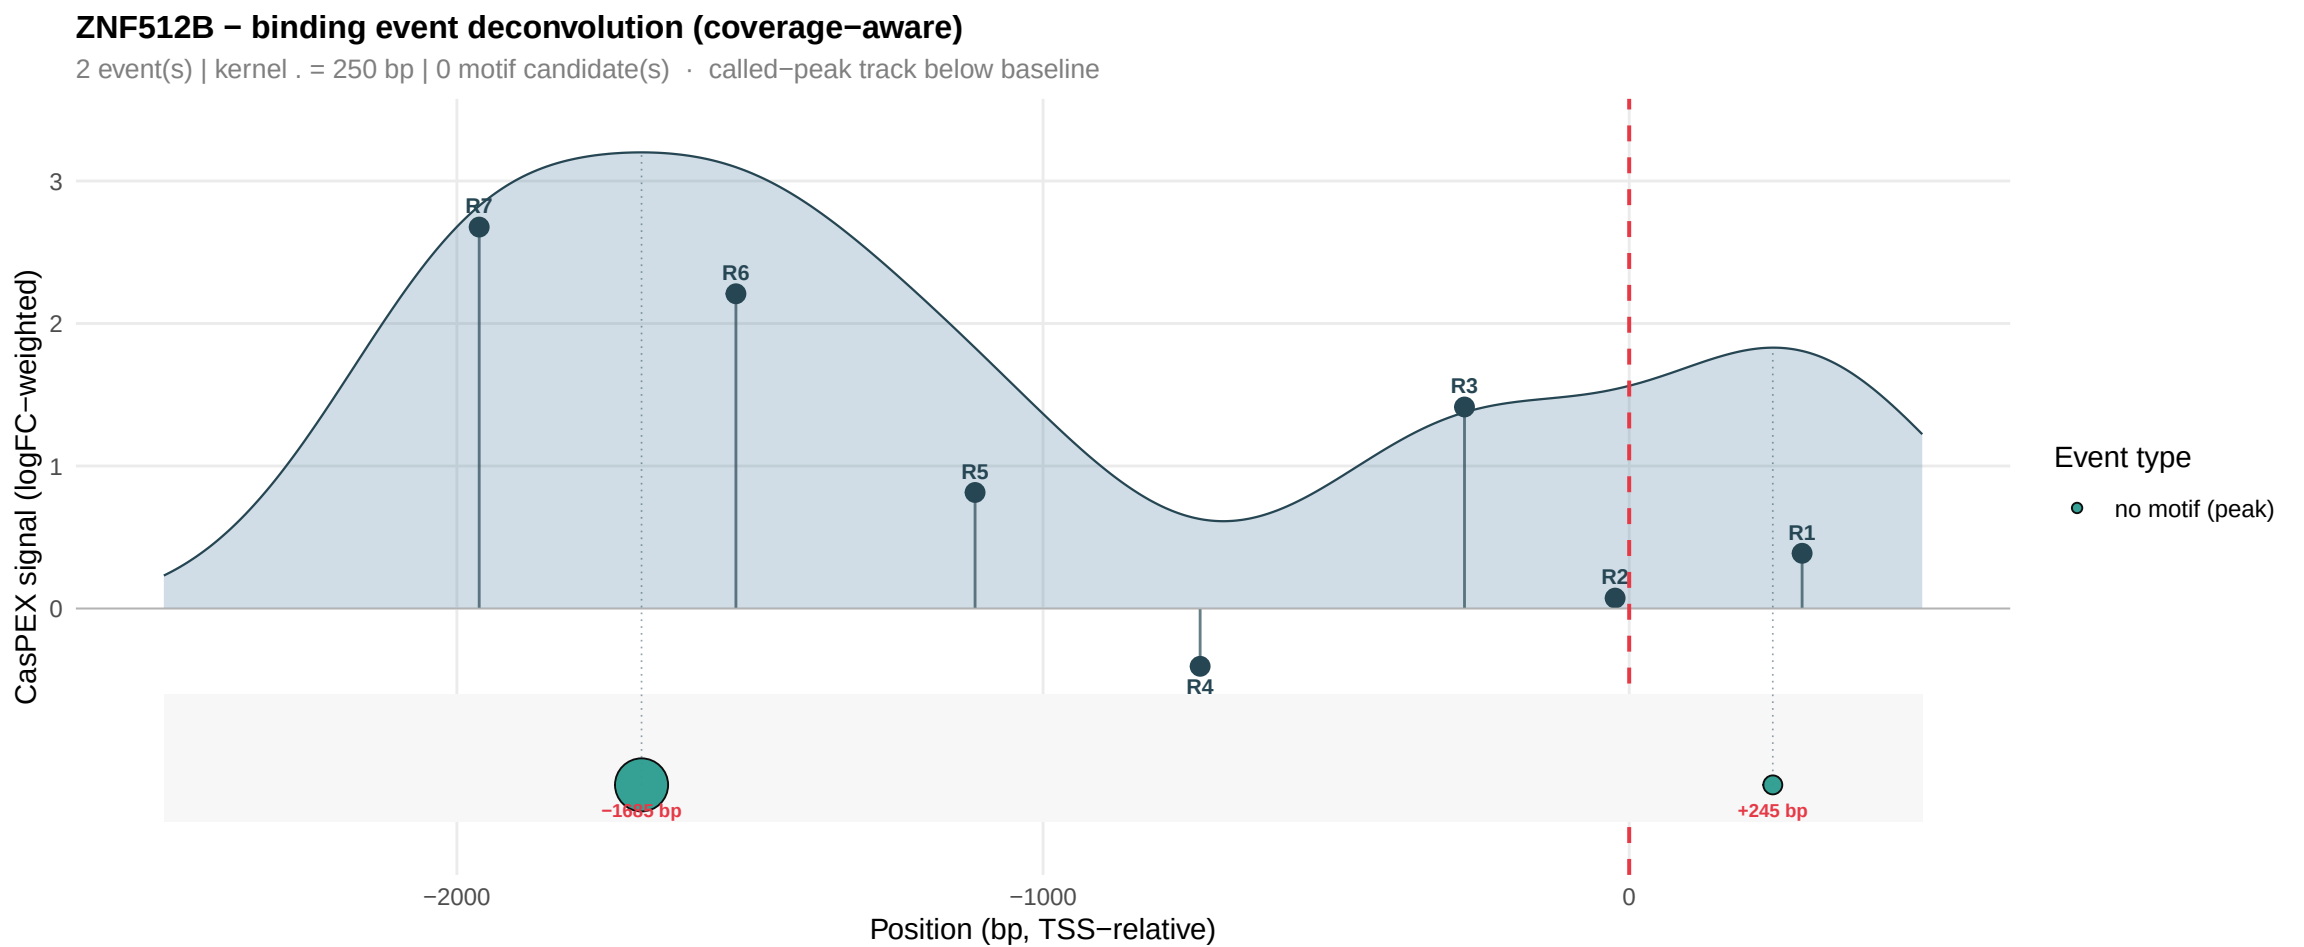
ZNF512B − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1685 bp
+245 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

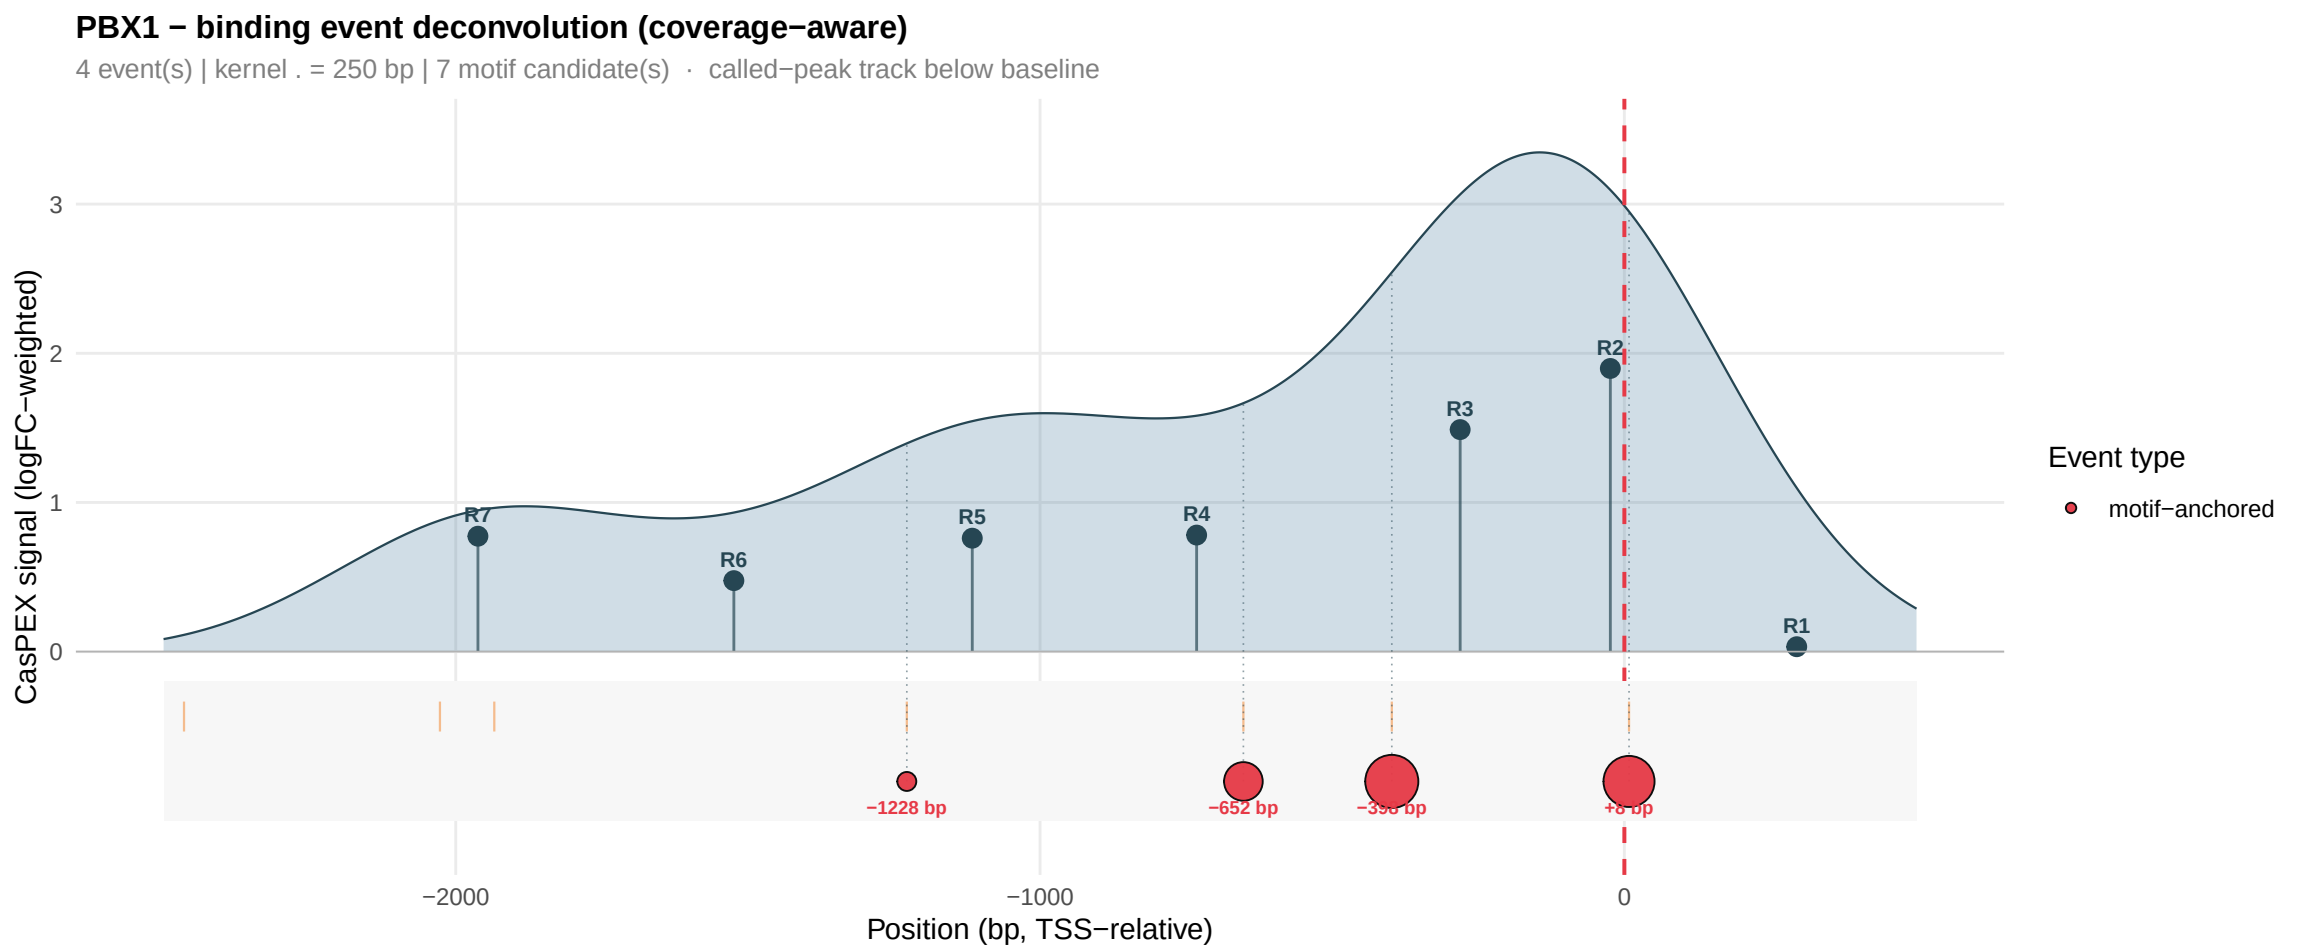
PBX1 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 250 bp | 7 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1228 bp
−652 bp
−398 bp
+8 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

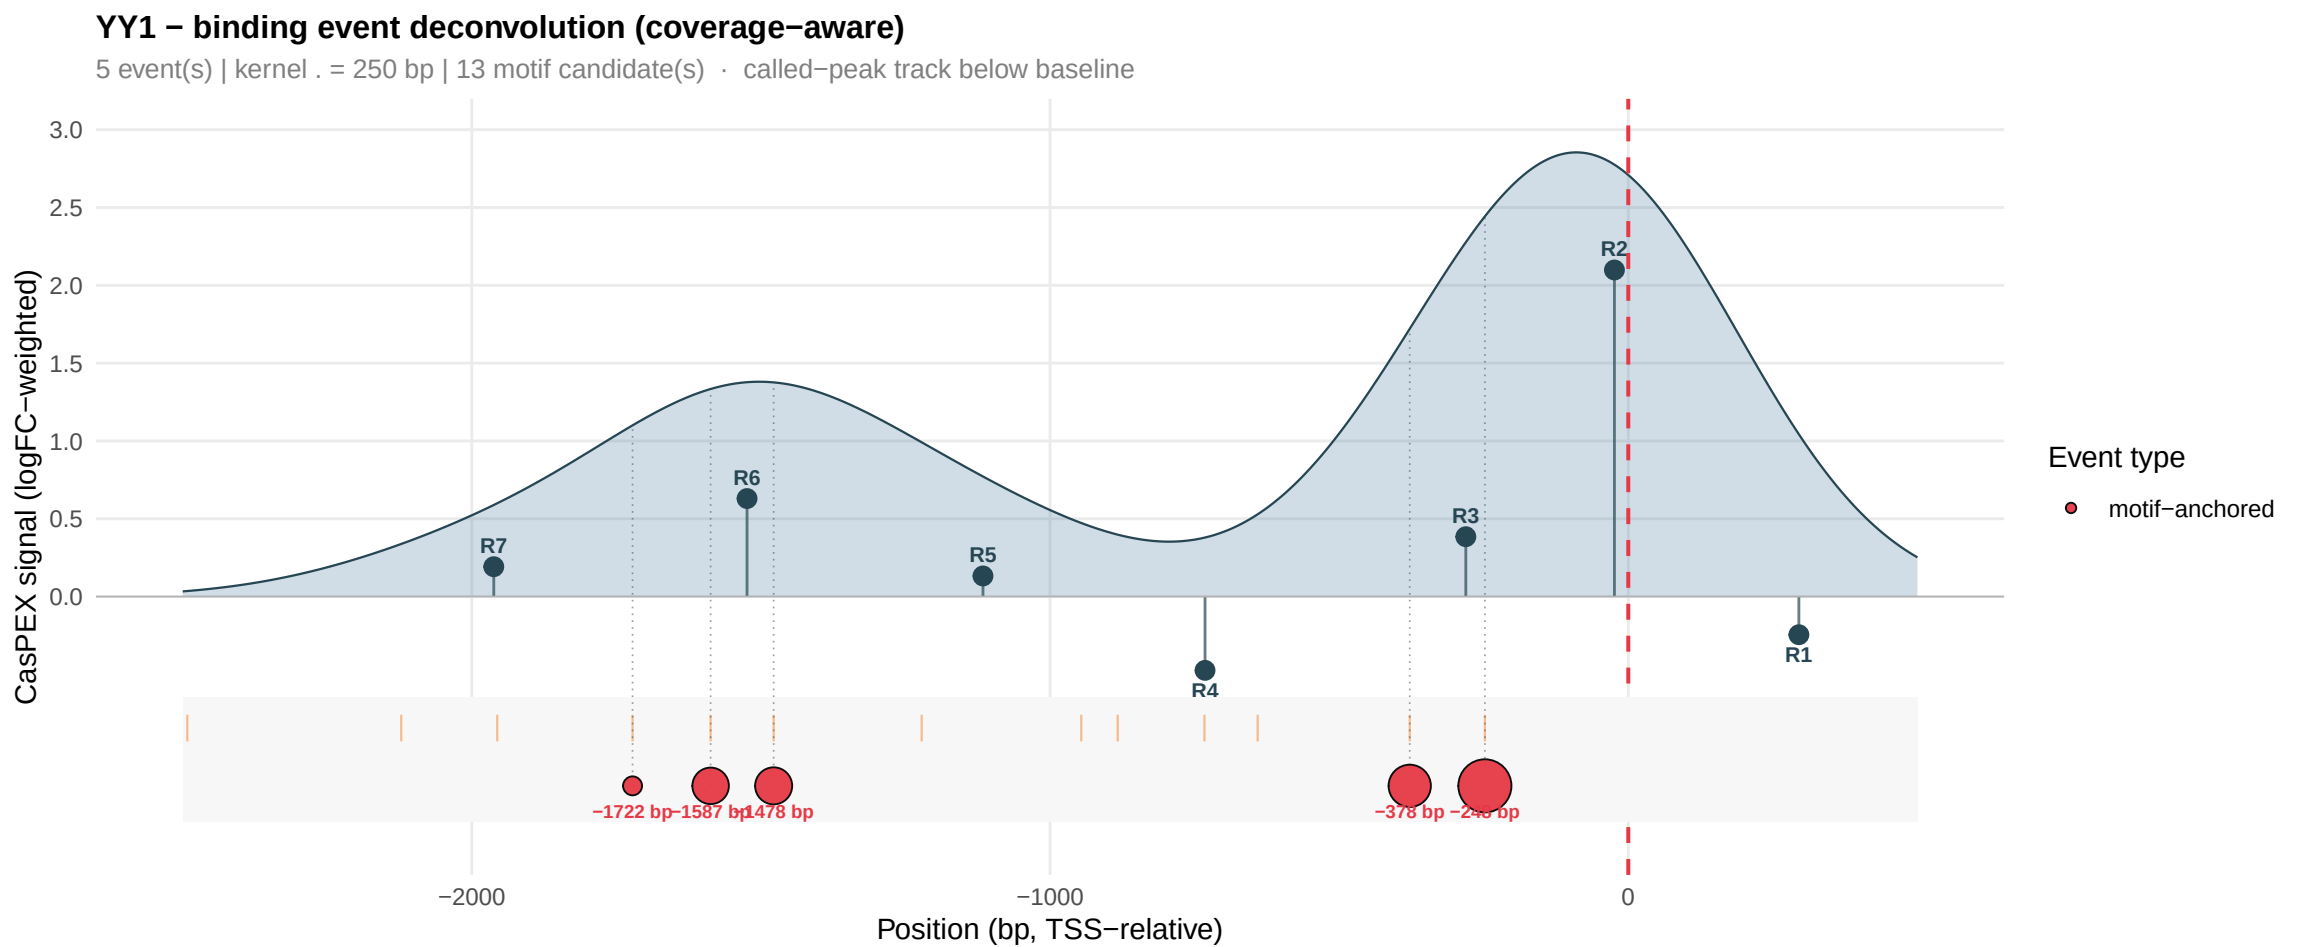
YY1 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 250 bp | 13 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−1722 bp
−1587 bp
−1478 bp
−378 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

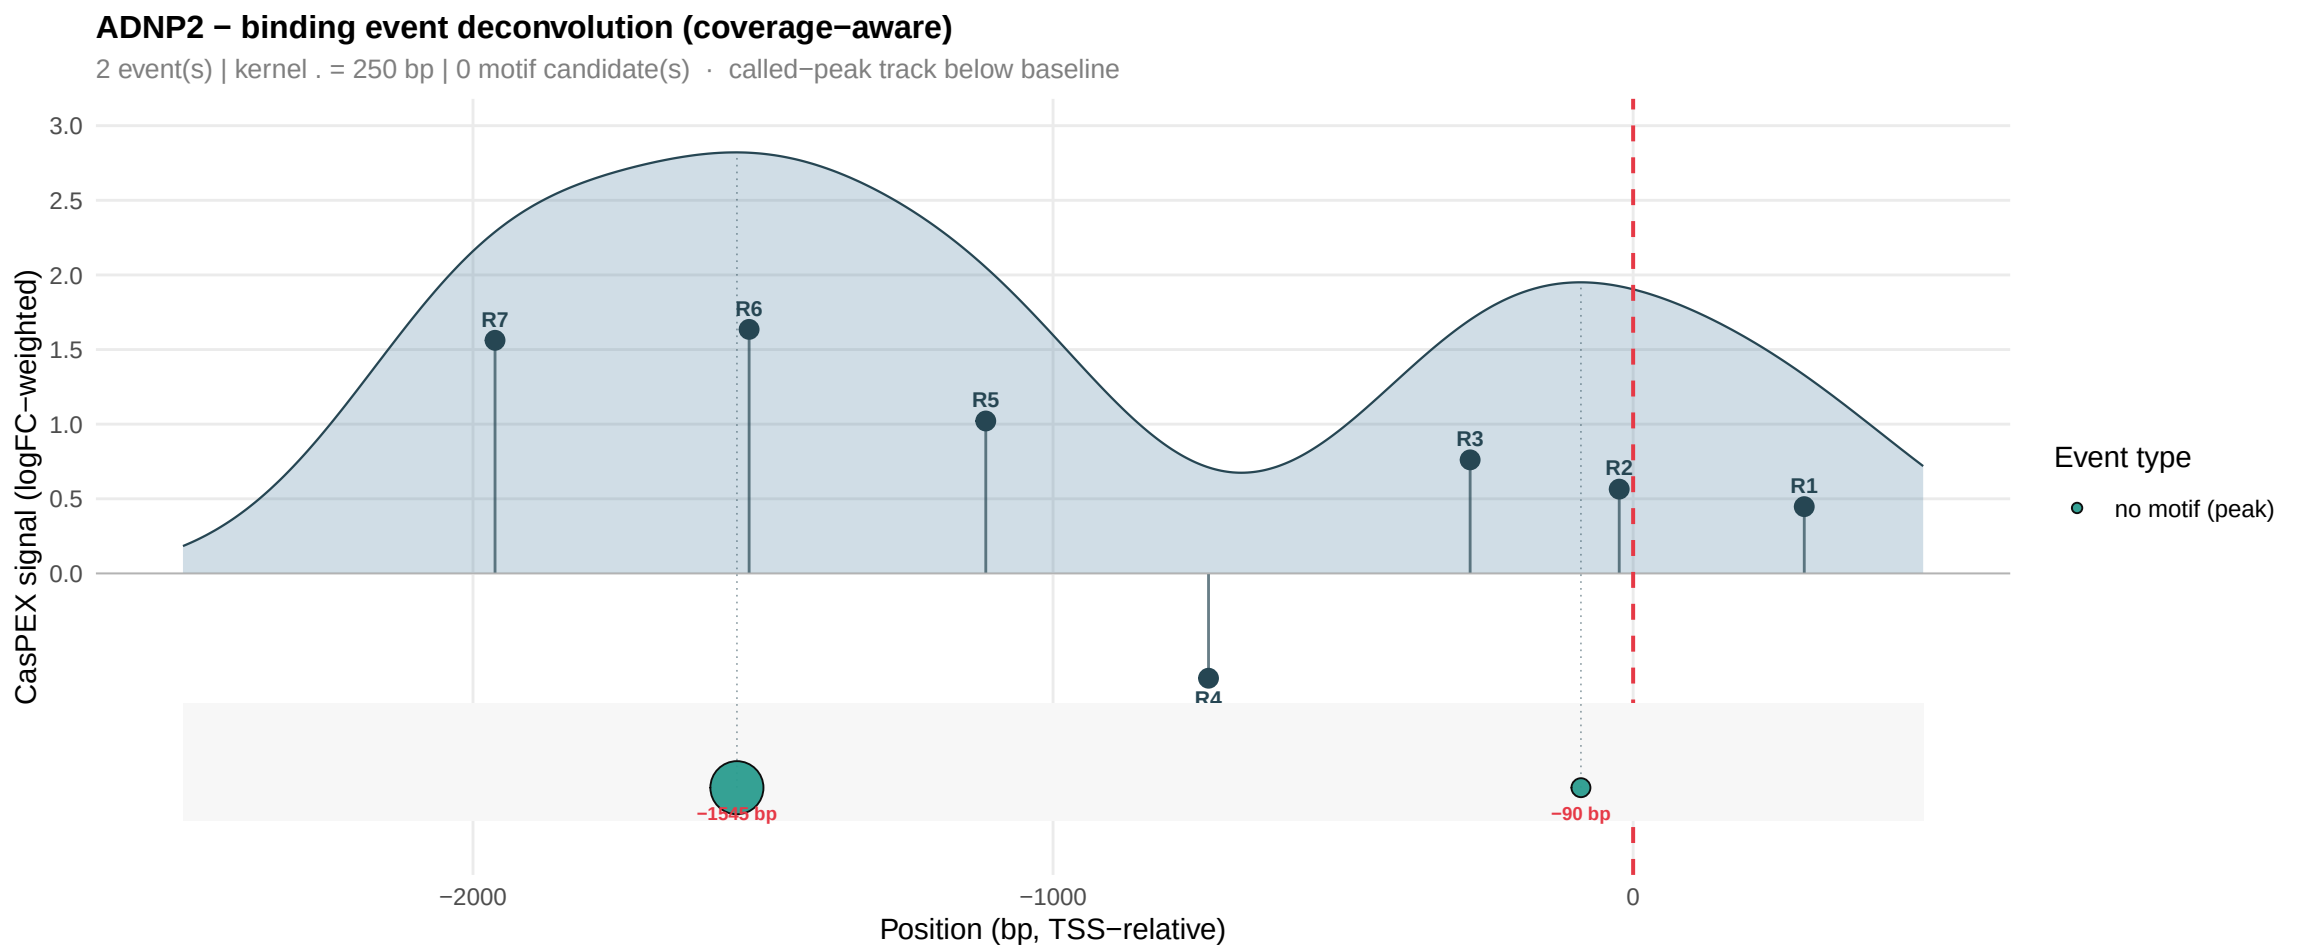
ADNP2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1545 bp
−90 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

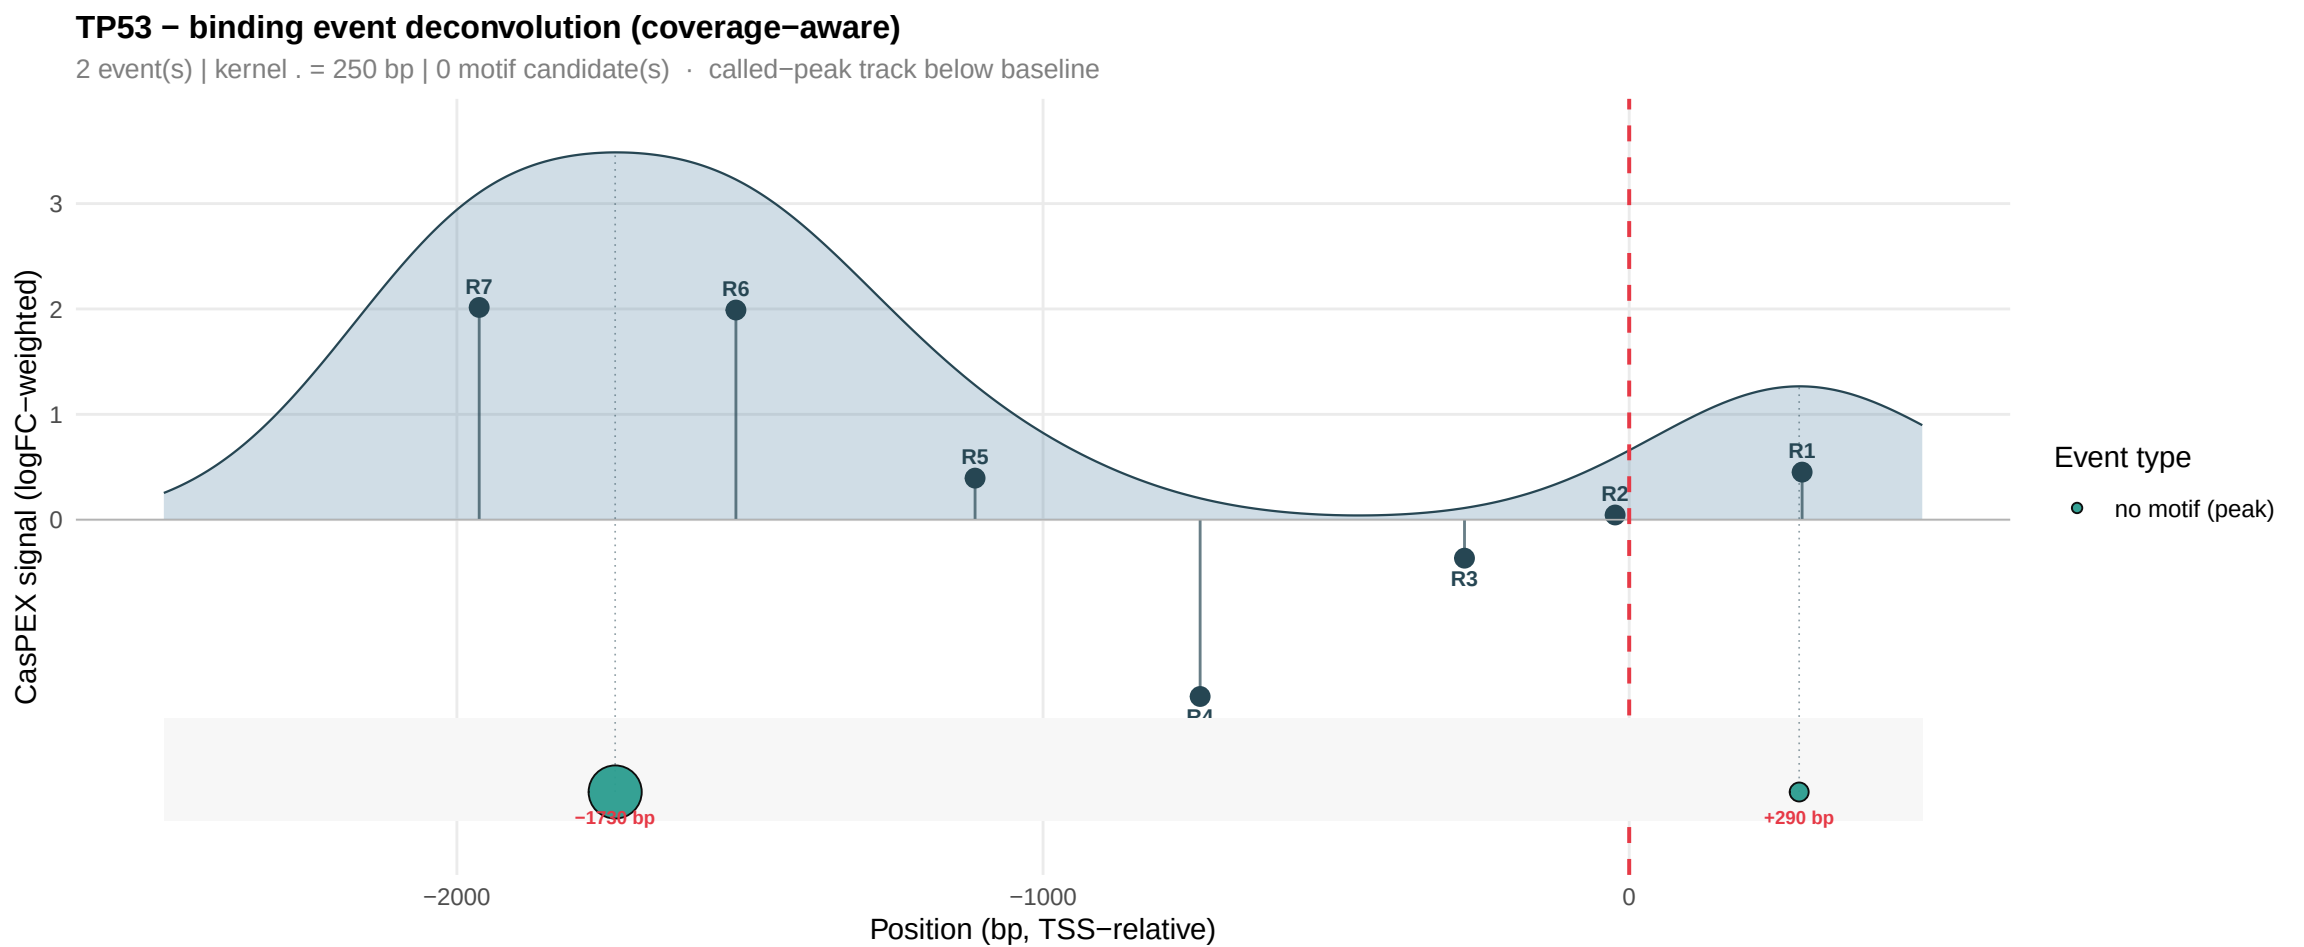
TP53 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1750 bp
+290 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

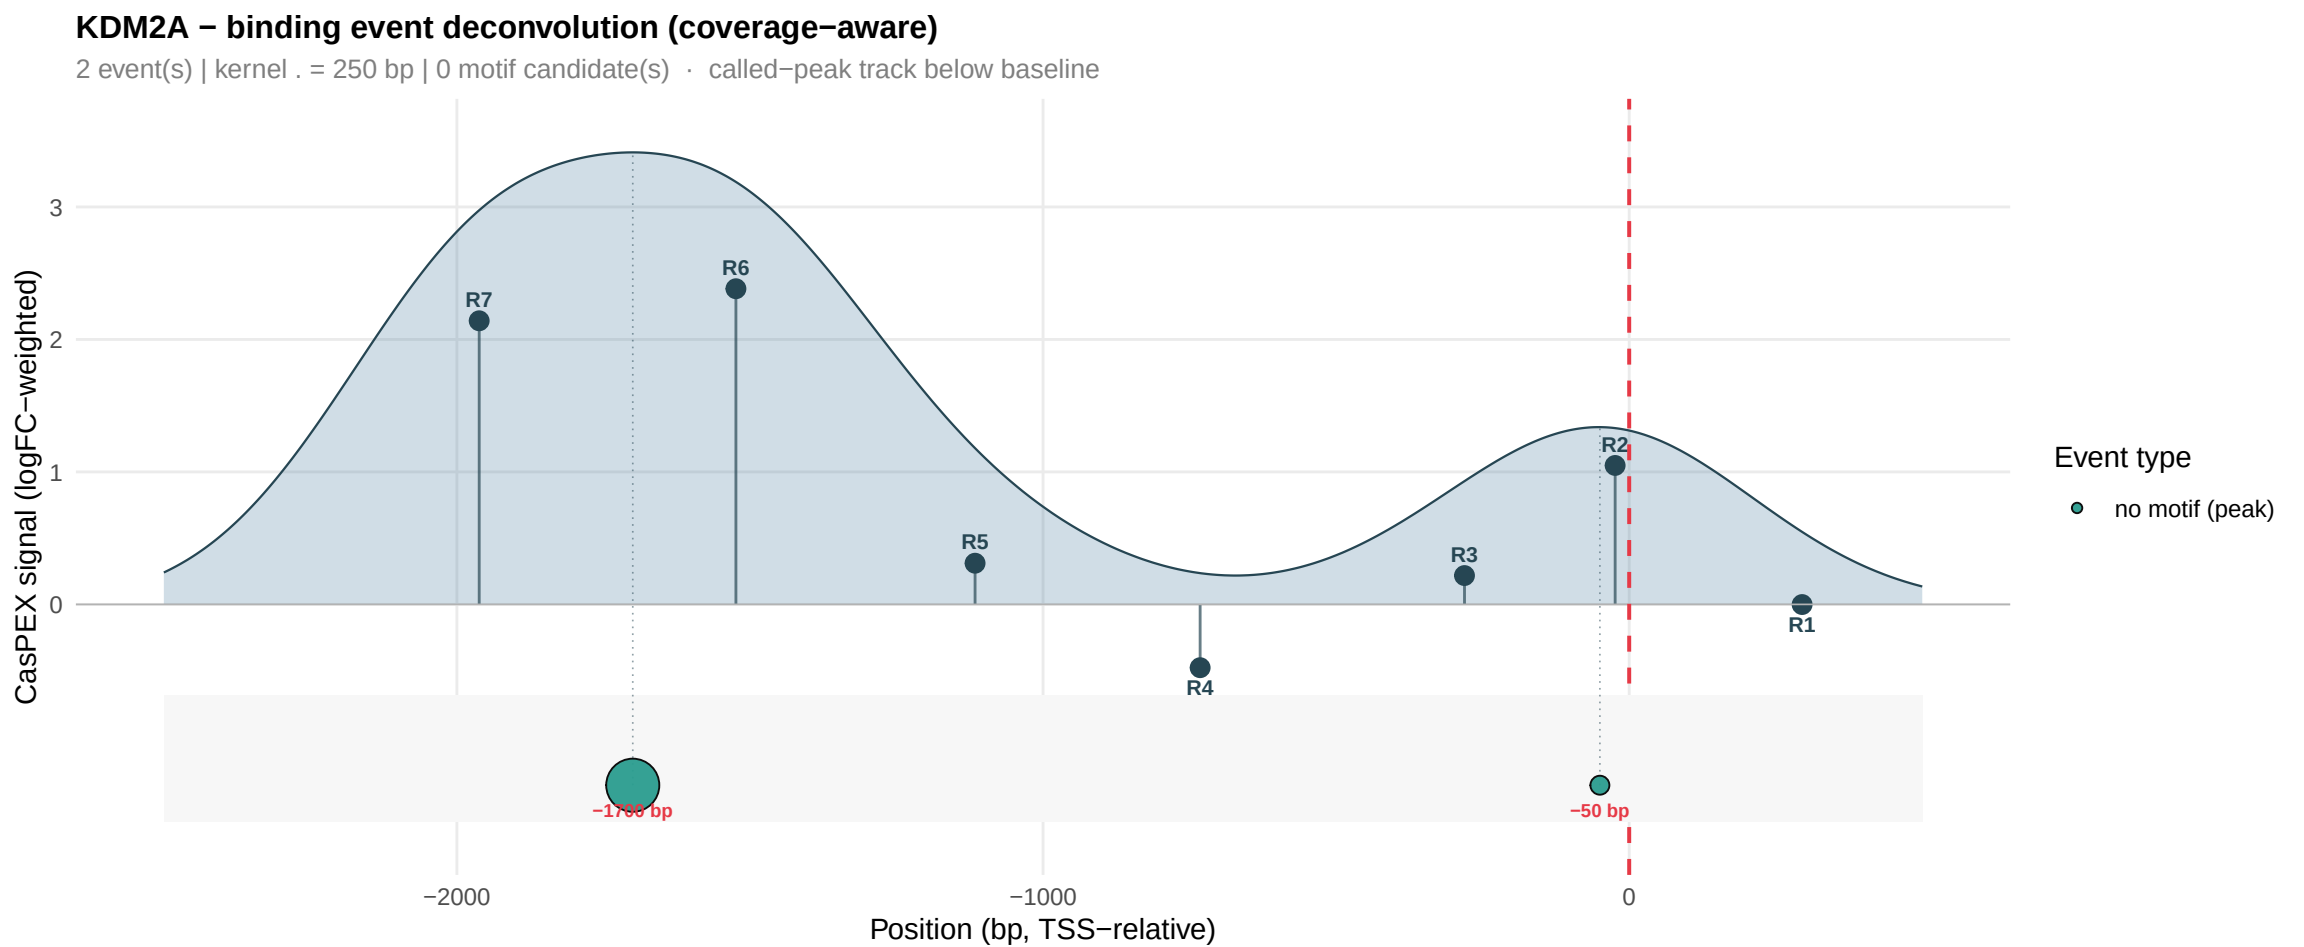
KDM2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1780 bp
−50 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

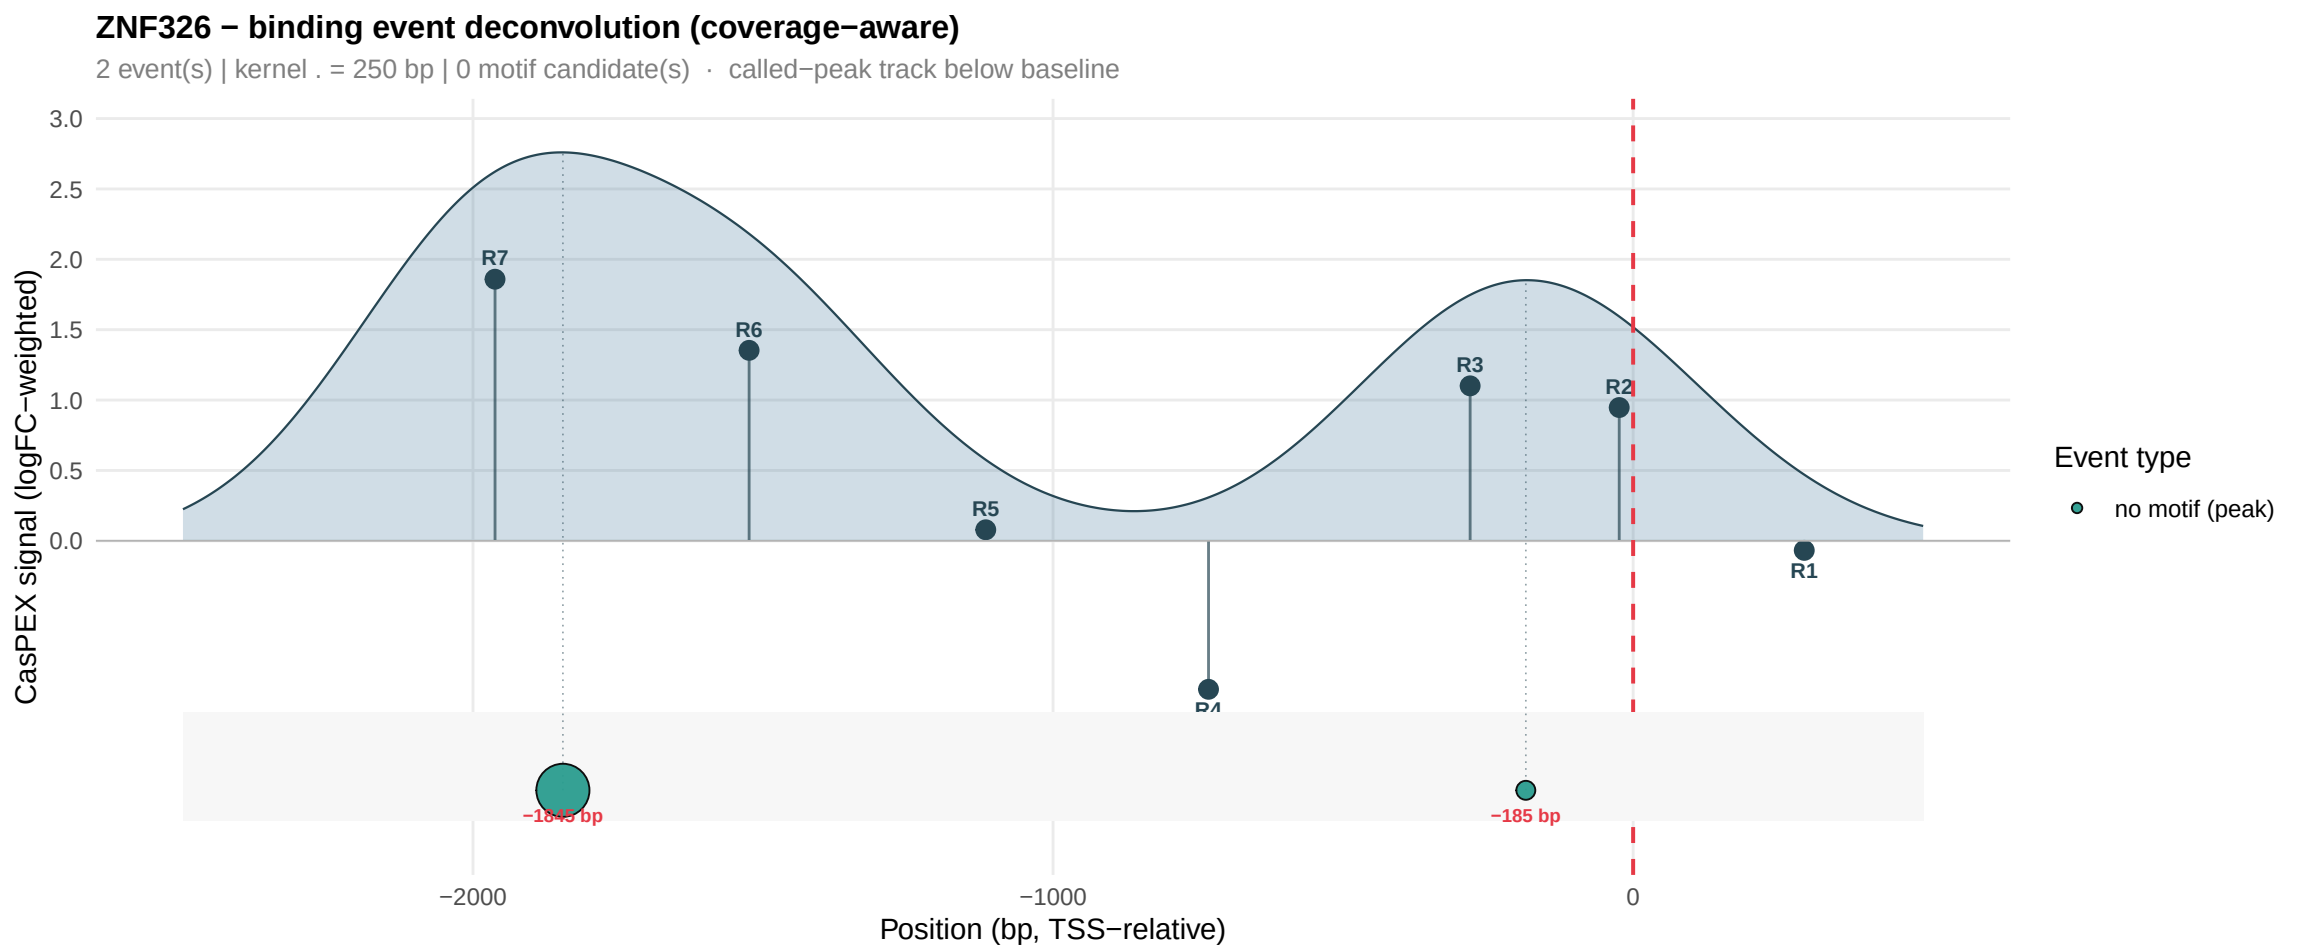
ZNF326 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1845 bp
−185 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

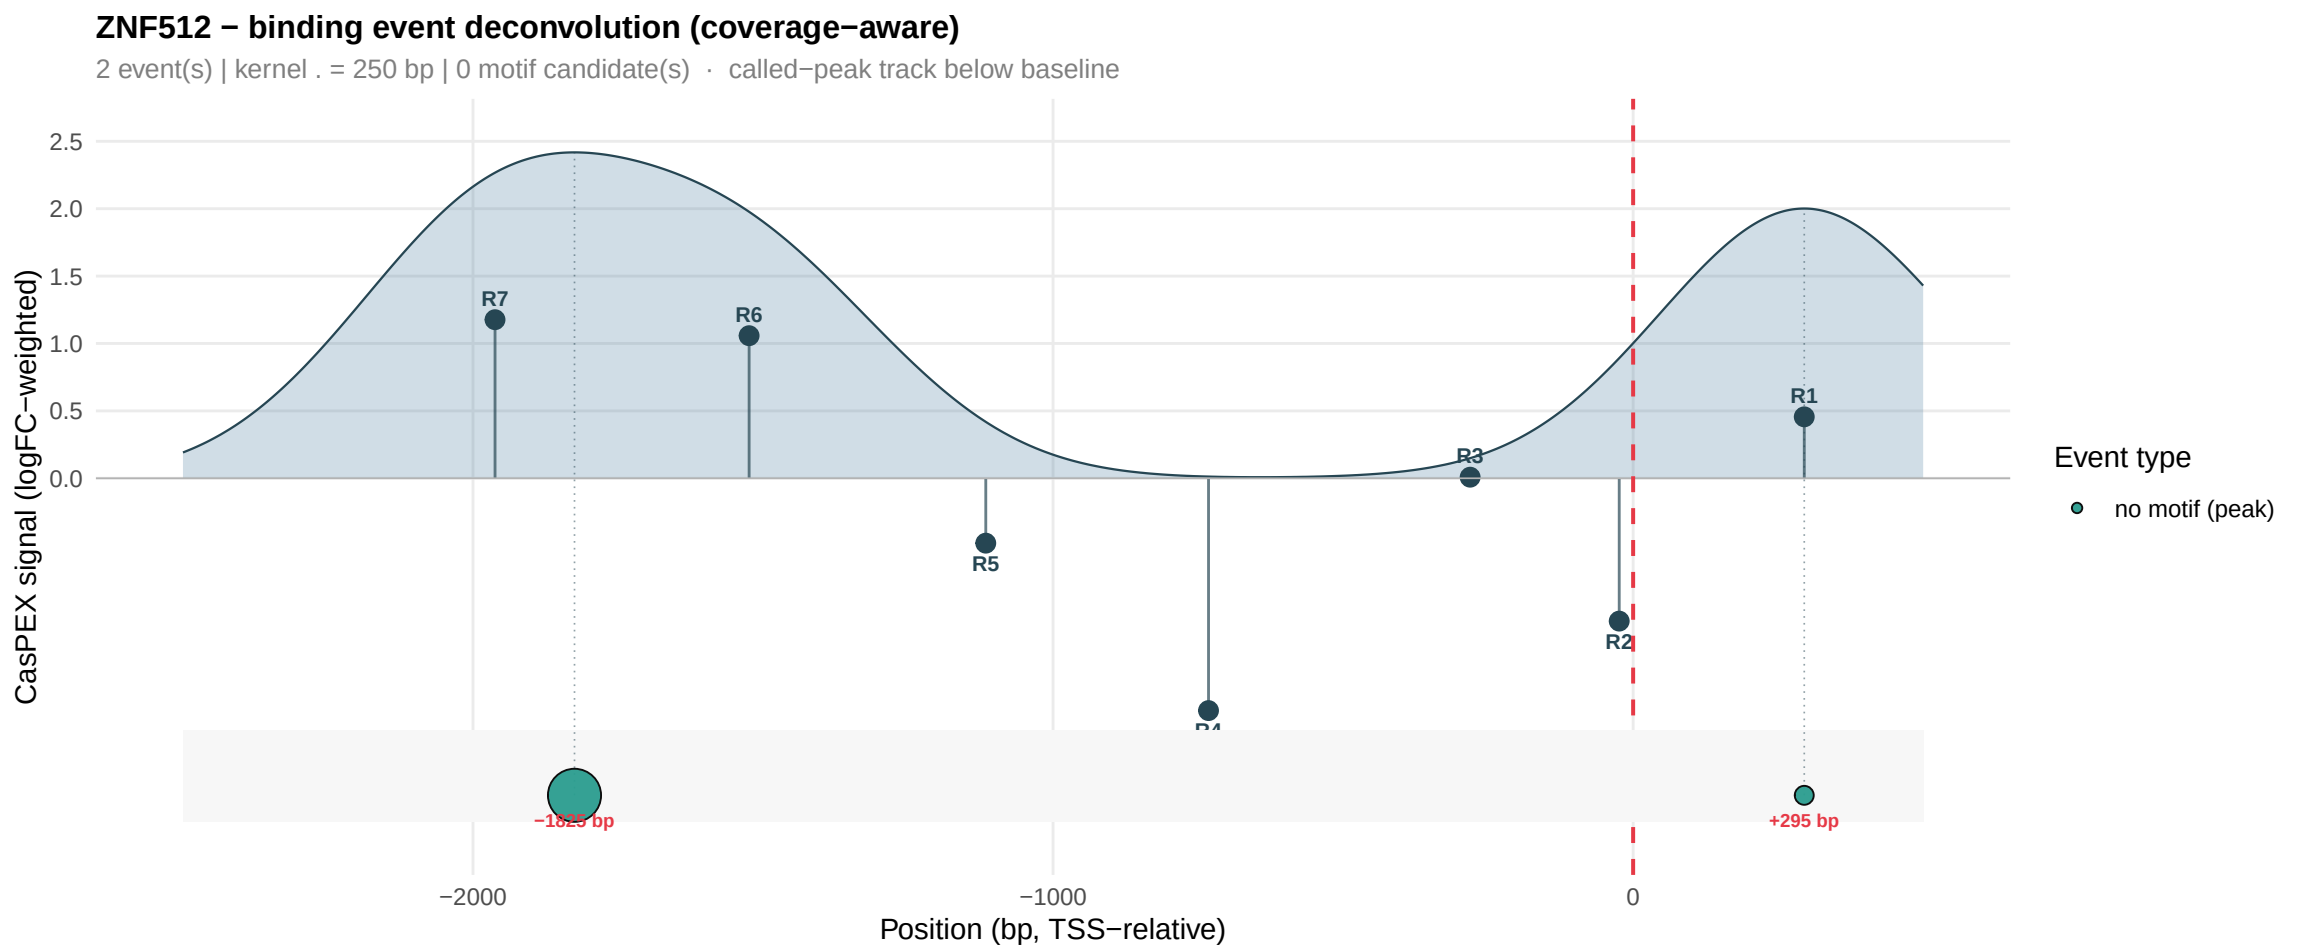
ZNF512 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1825 bp
+295 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

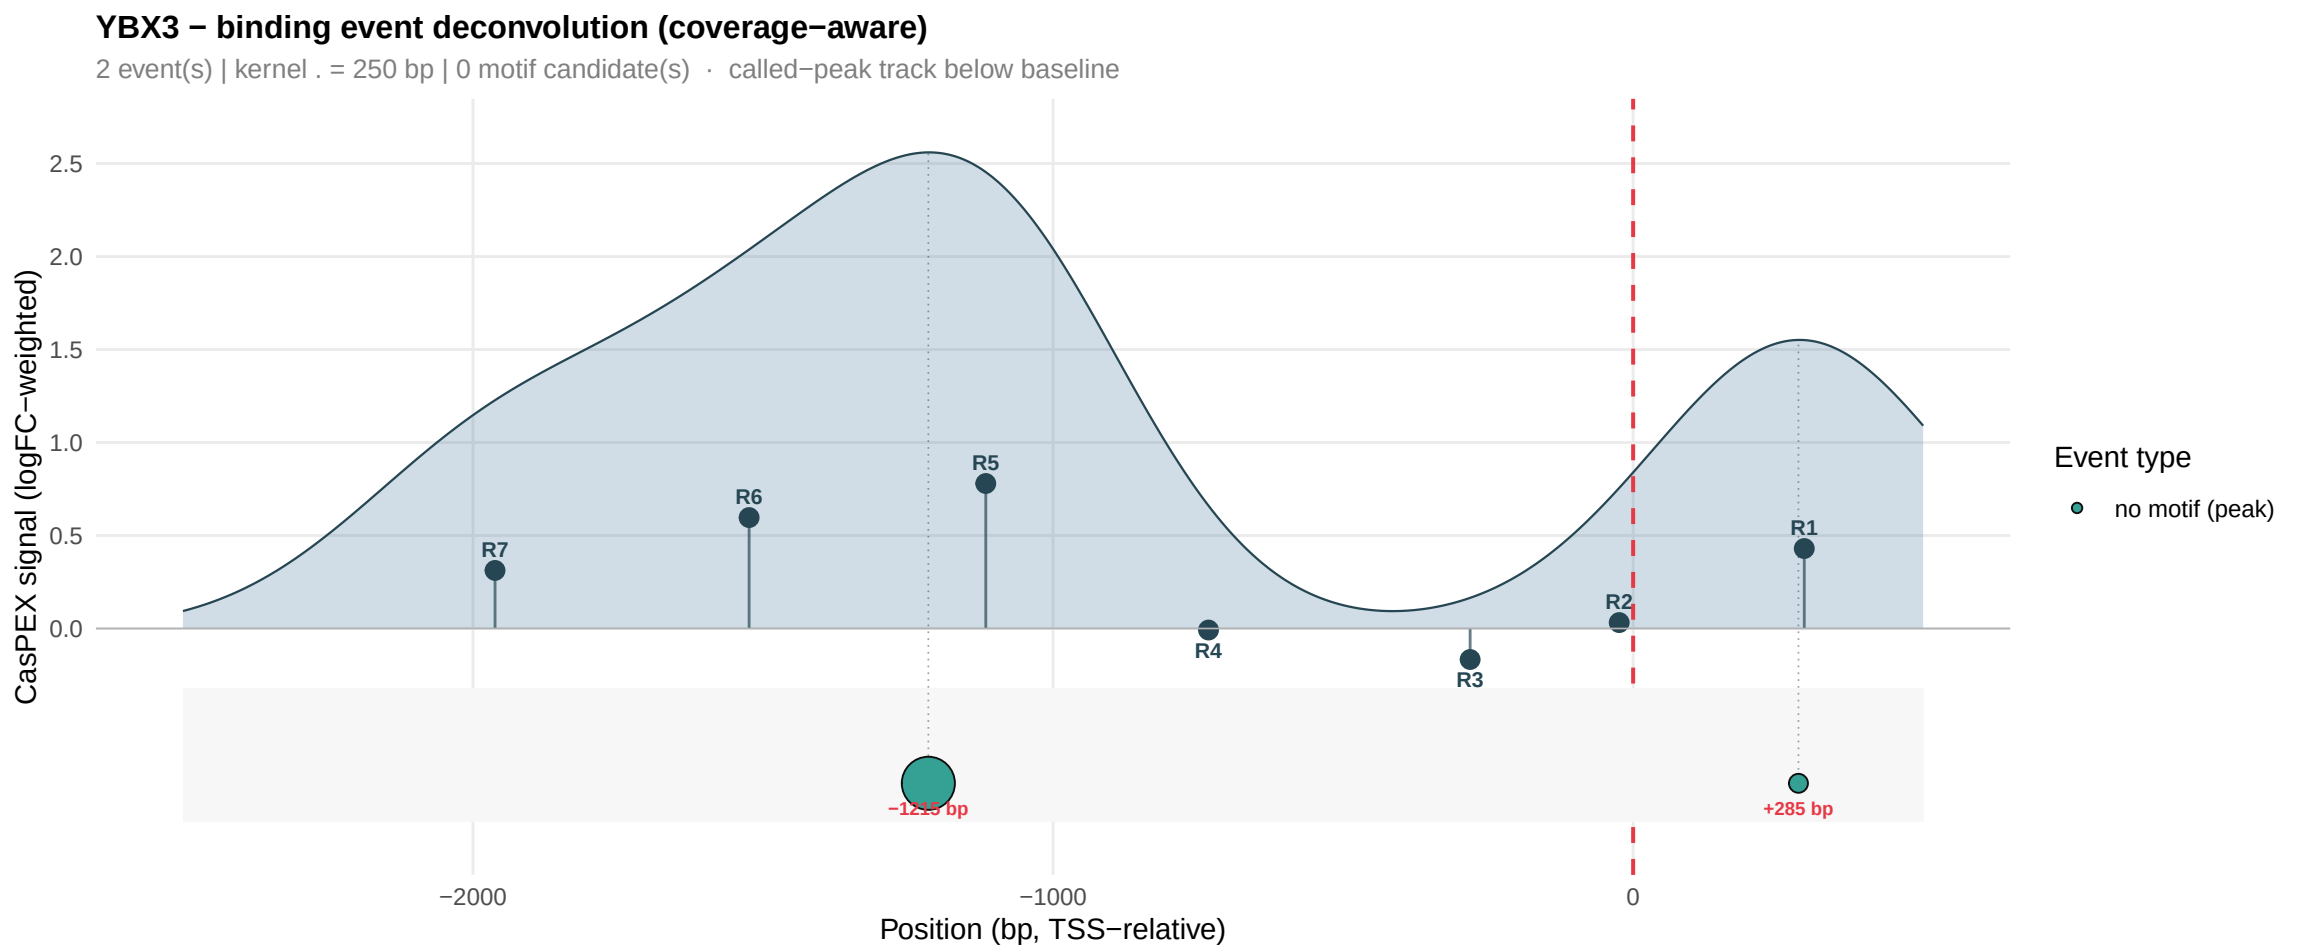
YBX3 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1215 bp
+285 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

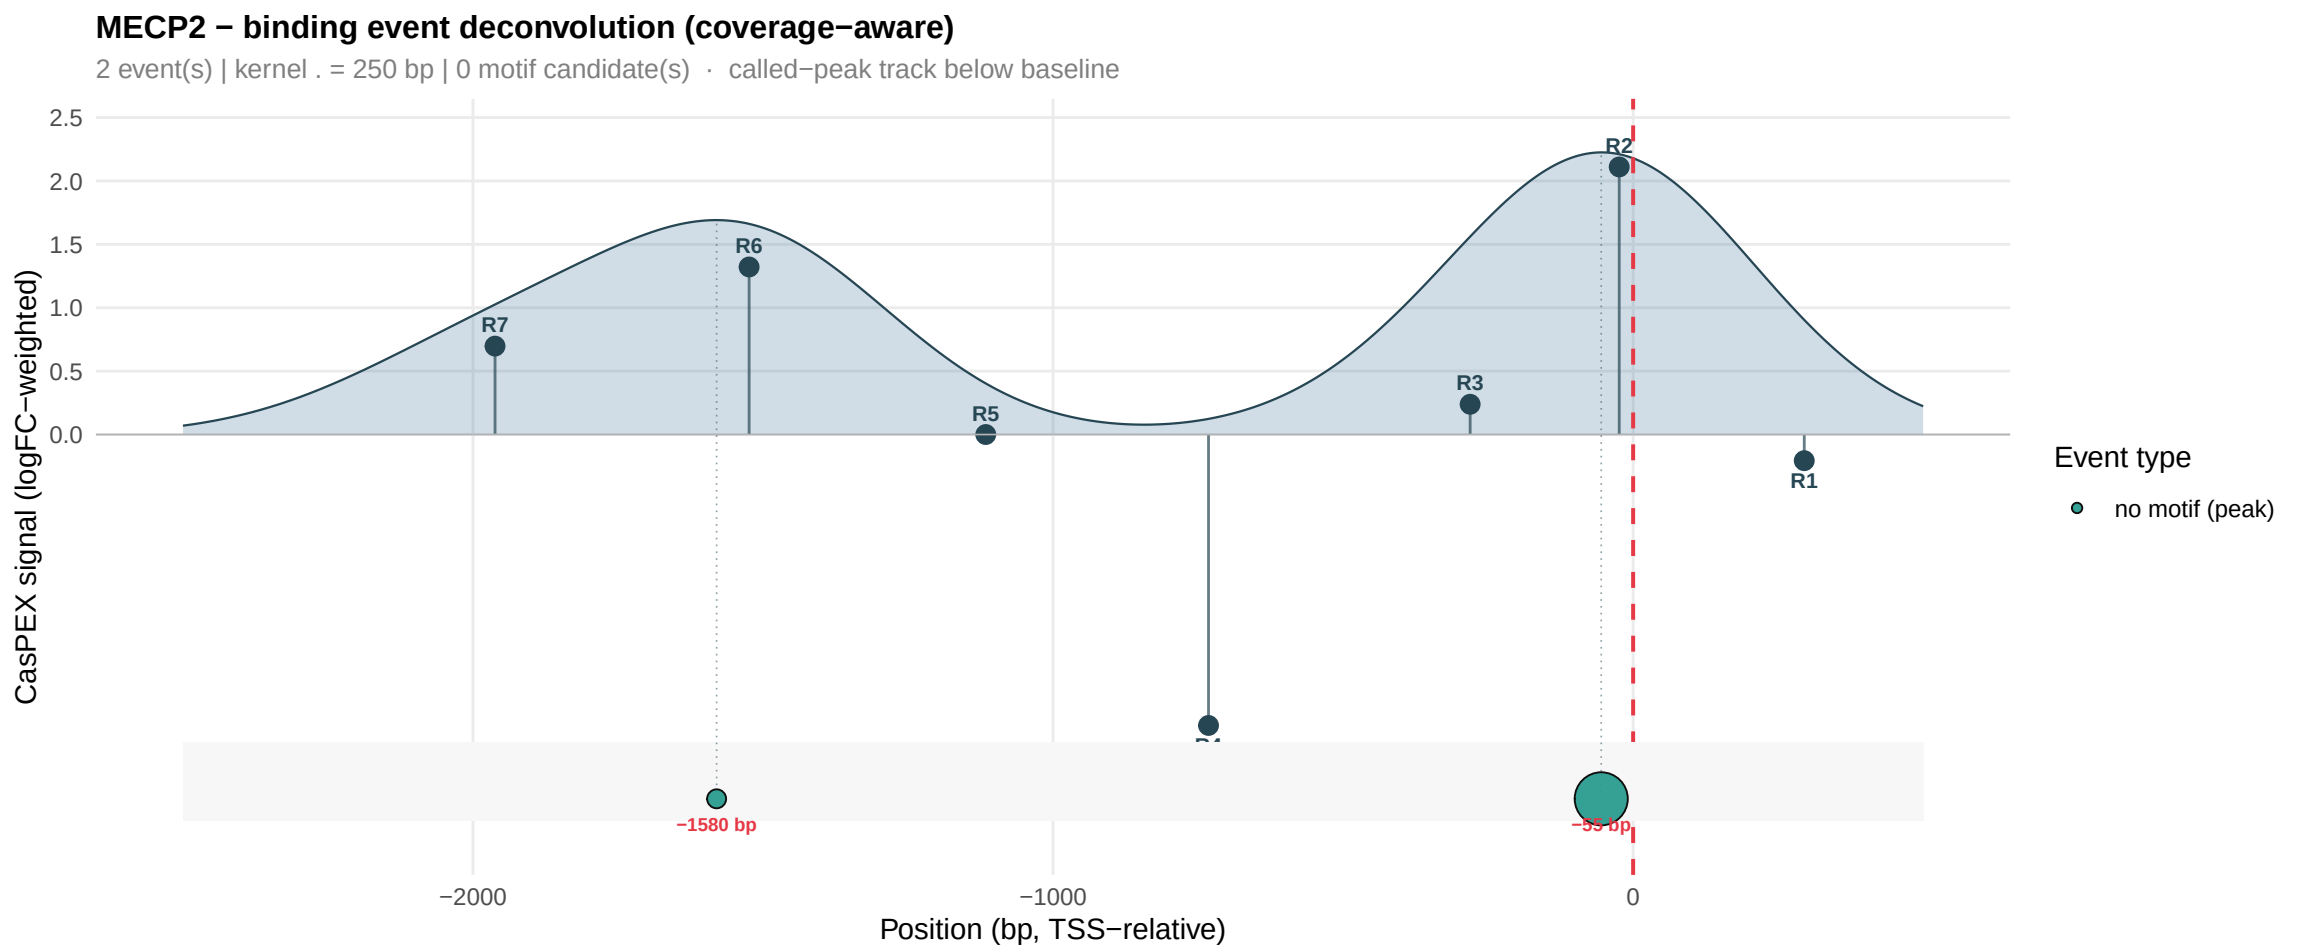
MECP2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R3
R2
R1
−1580 bp
−55 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

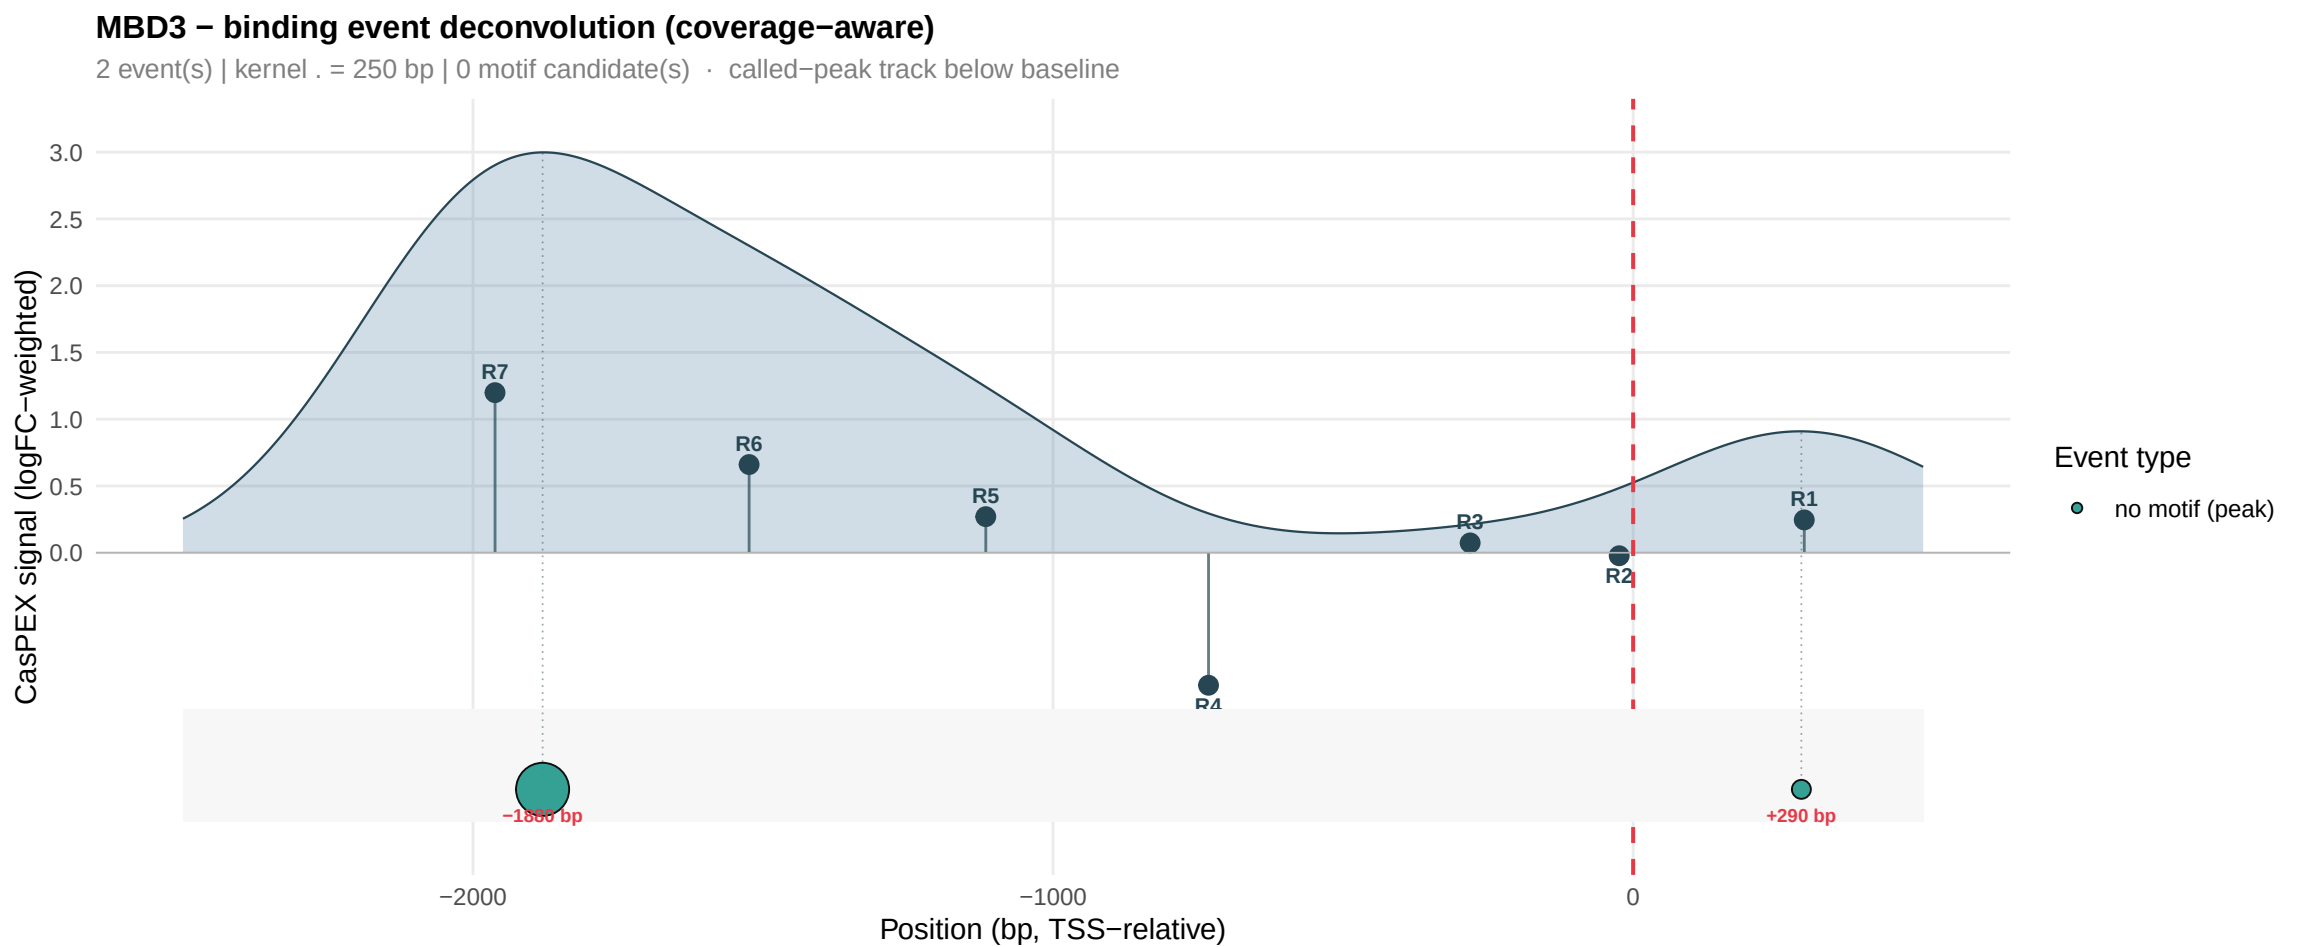
MBD3 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1880 bp
+290 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

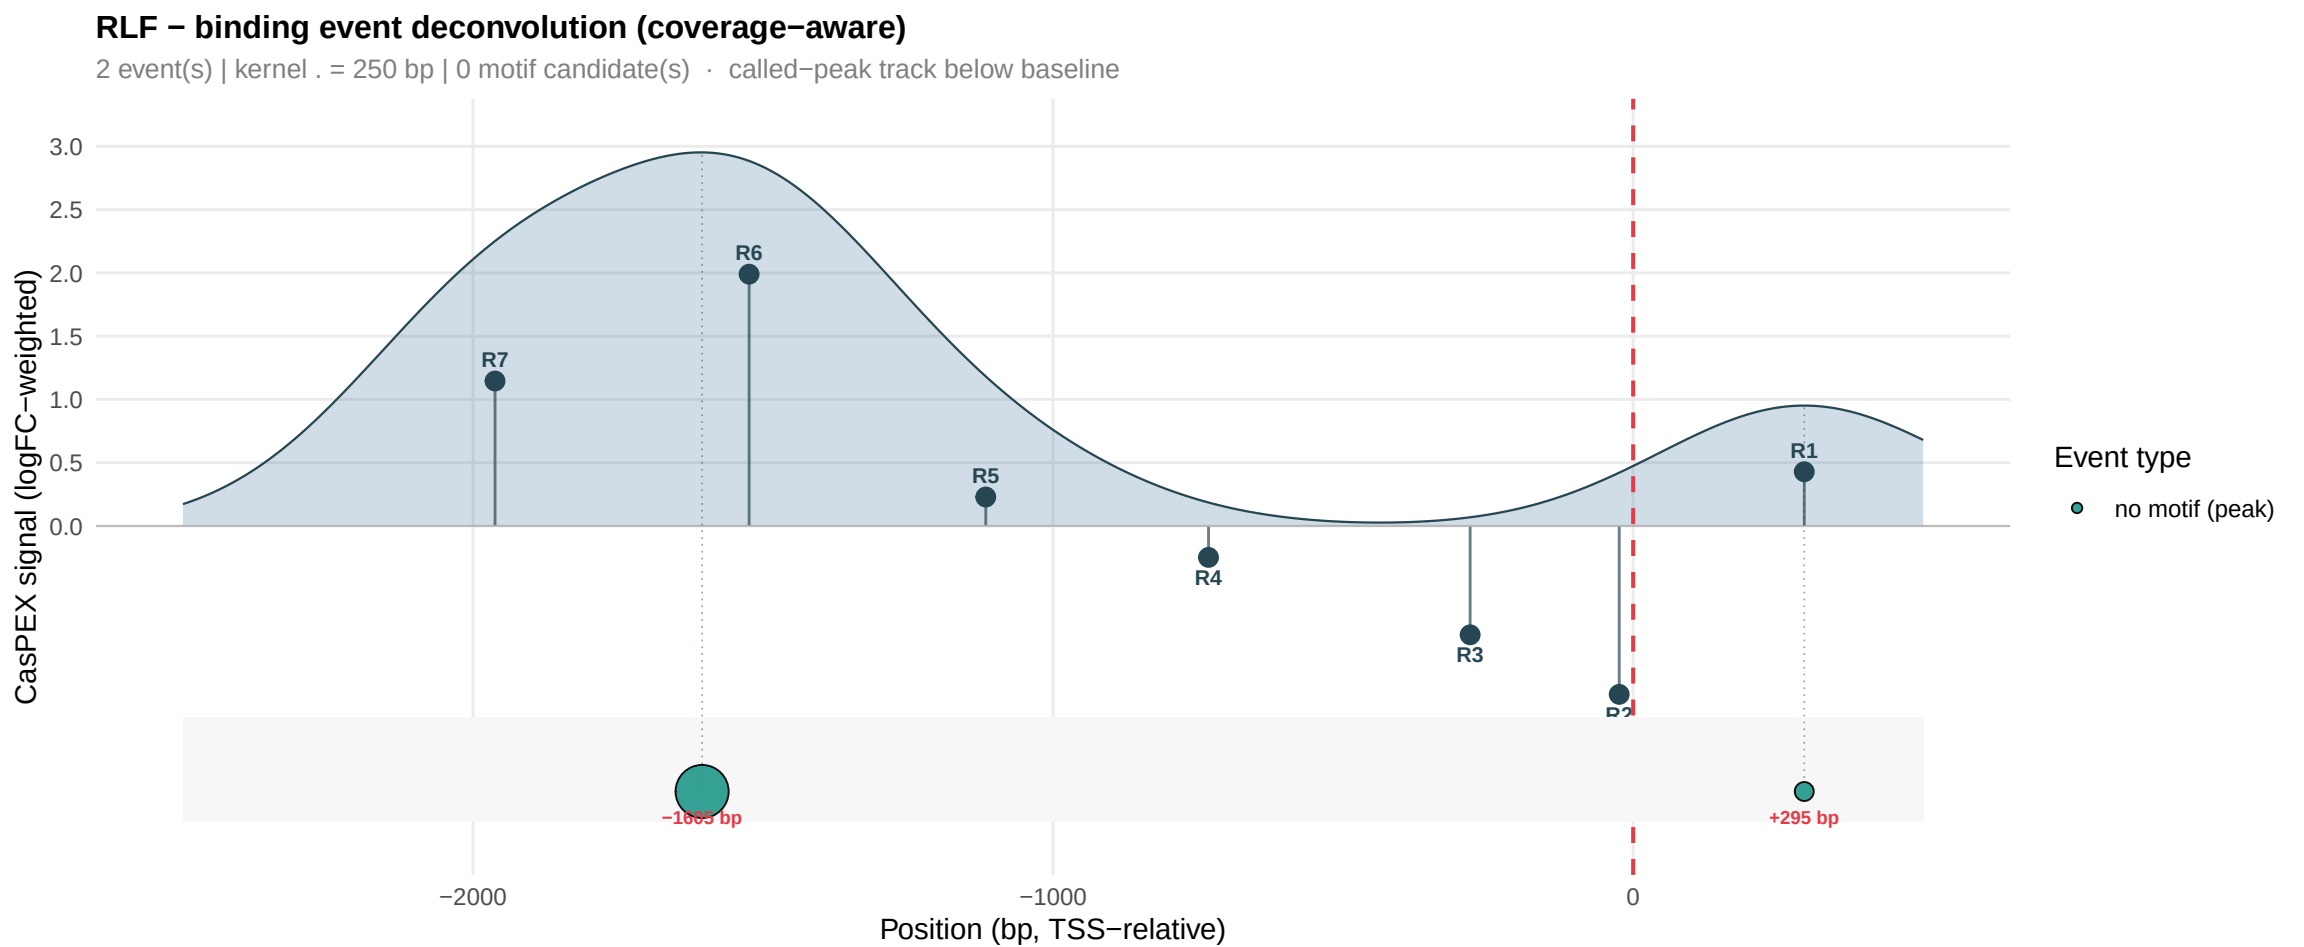
RLF − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1605 bp
+295 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

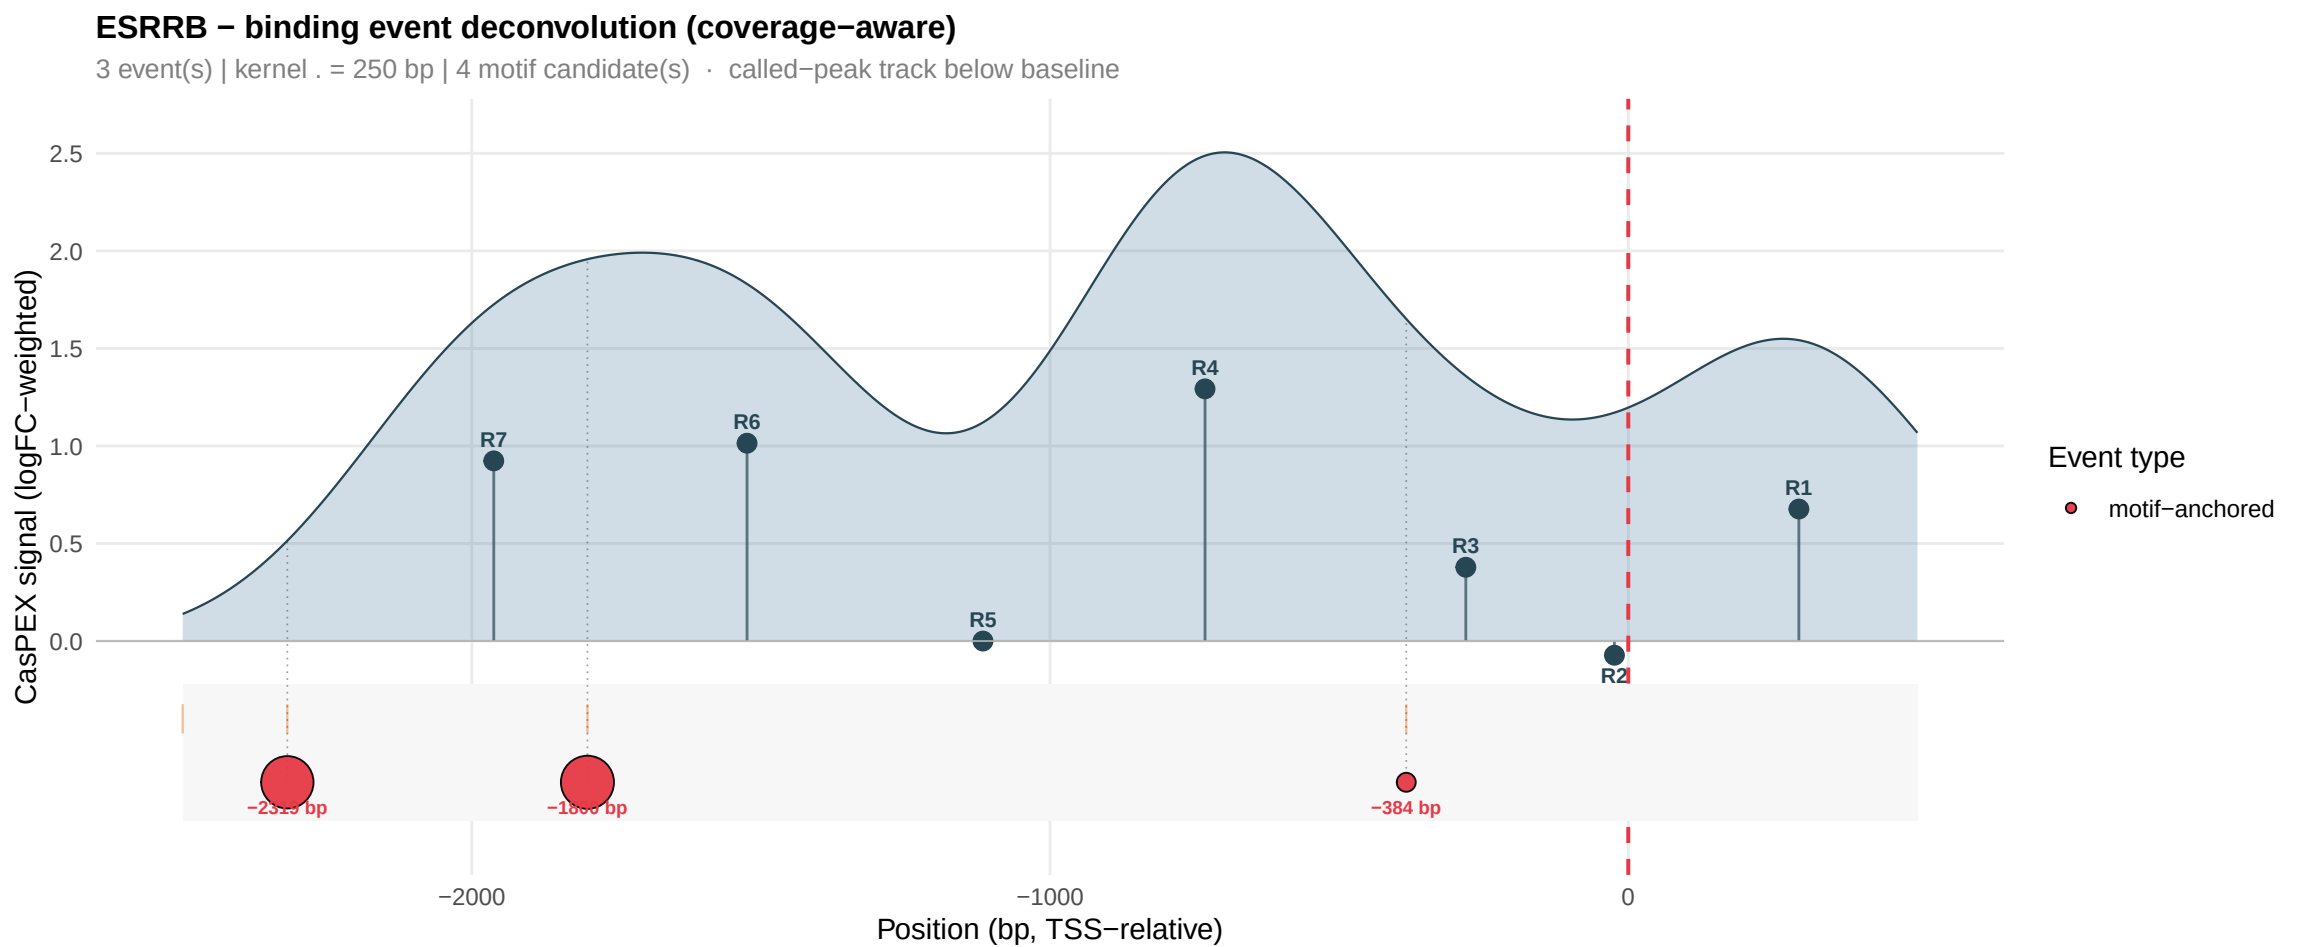
ESRRB − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 4 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−2313 bp
−1808 bp
−384 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

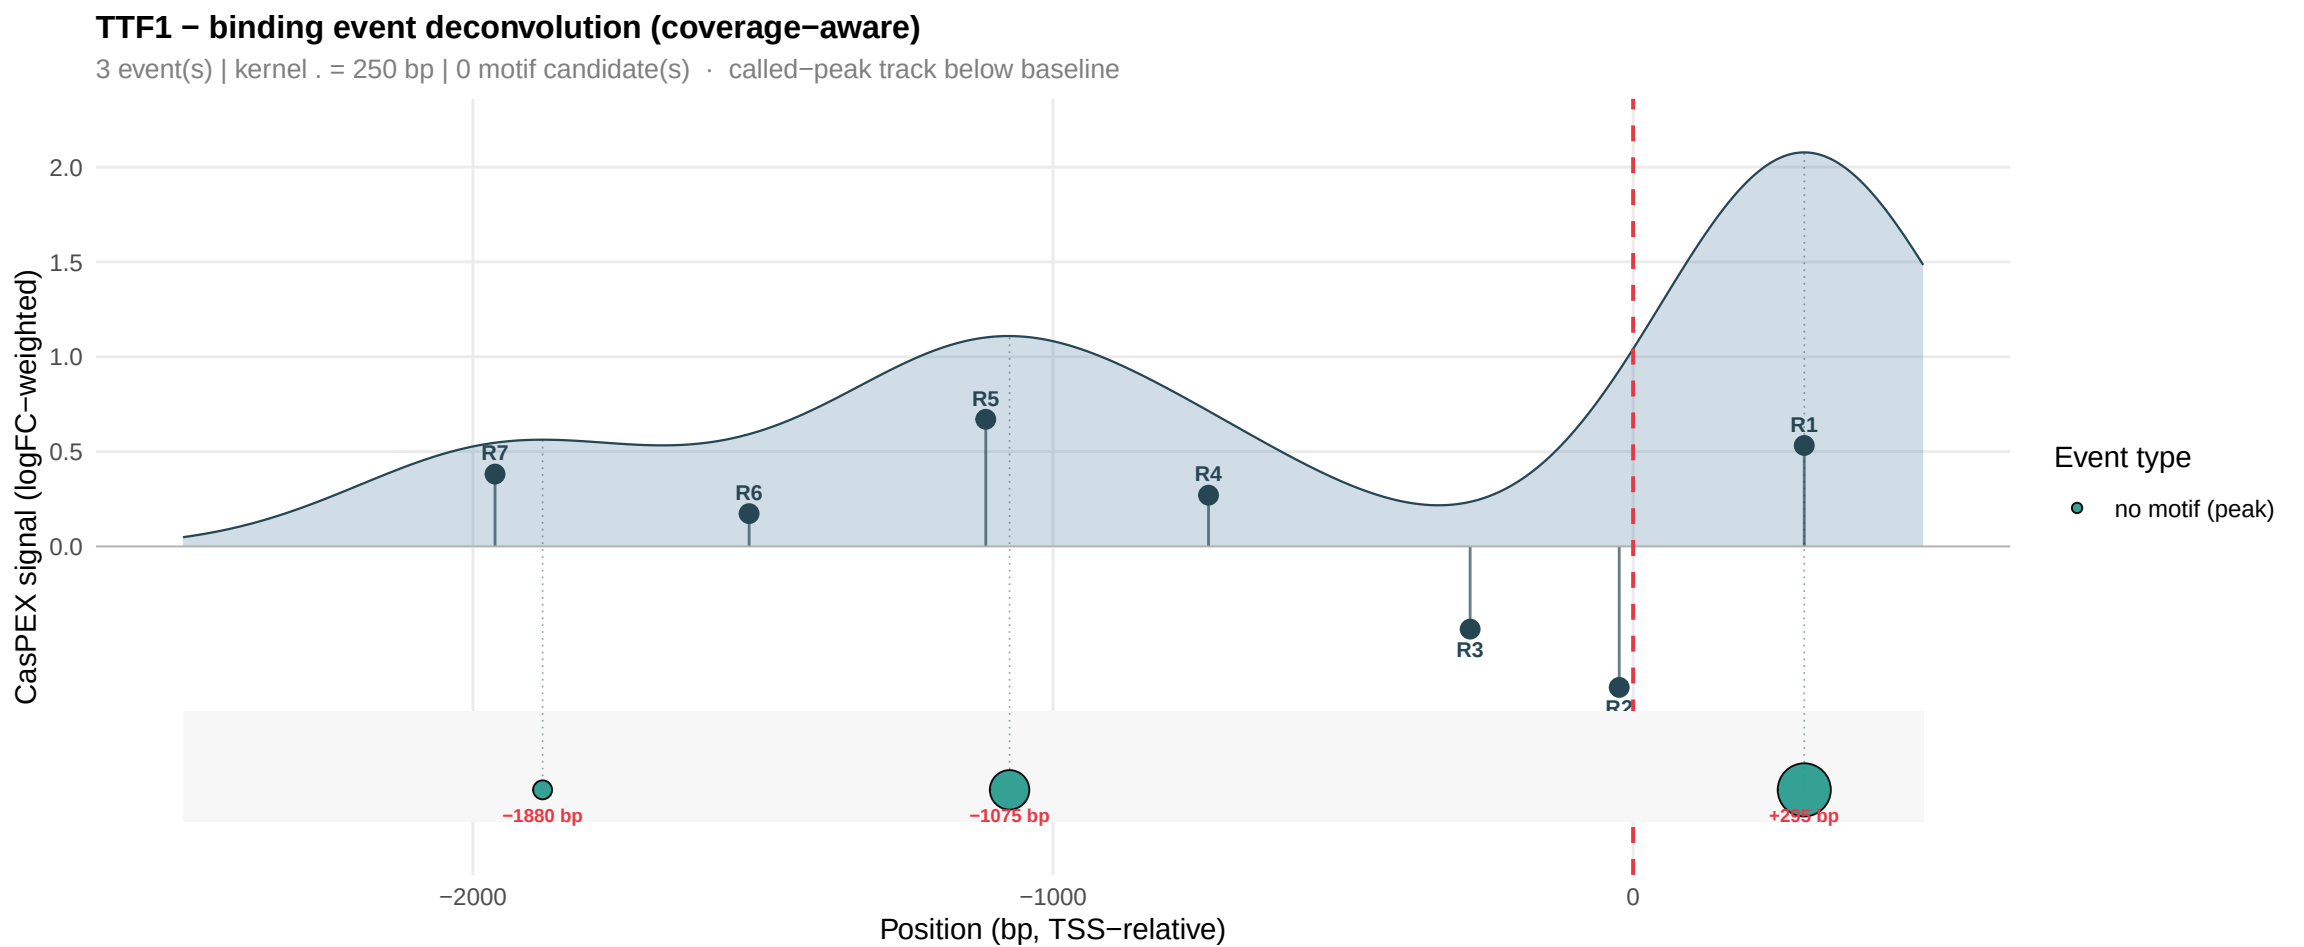
TTF1 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1880 bp
−1075 bp
+295 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

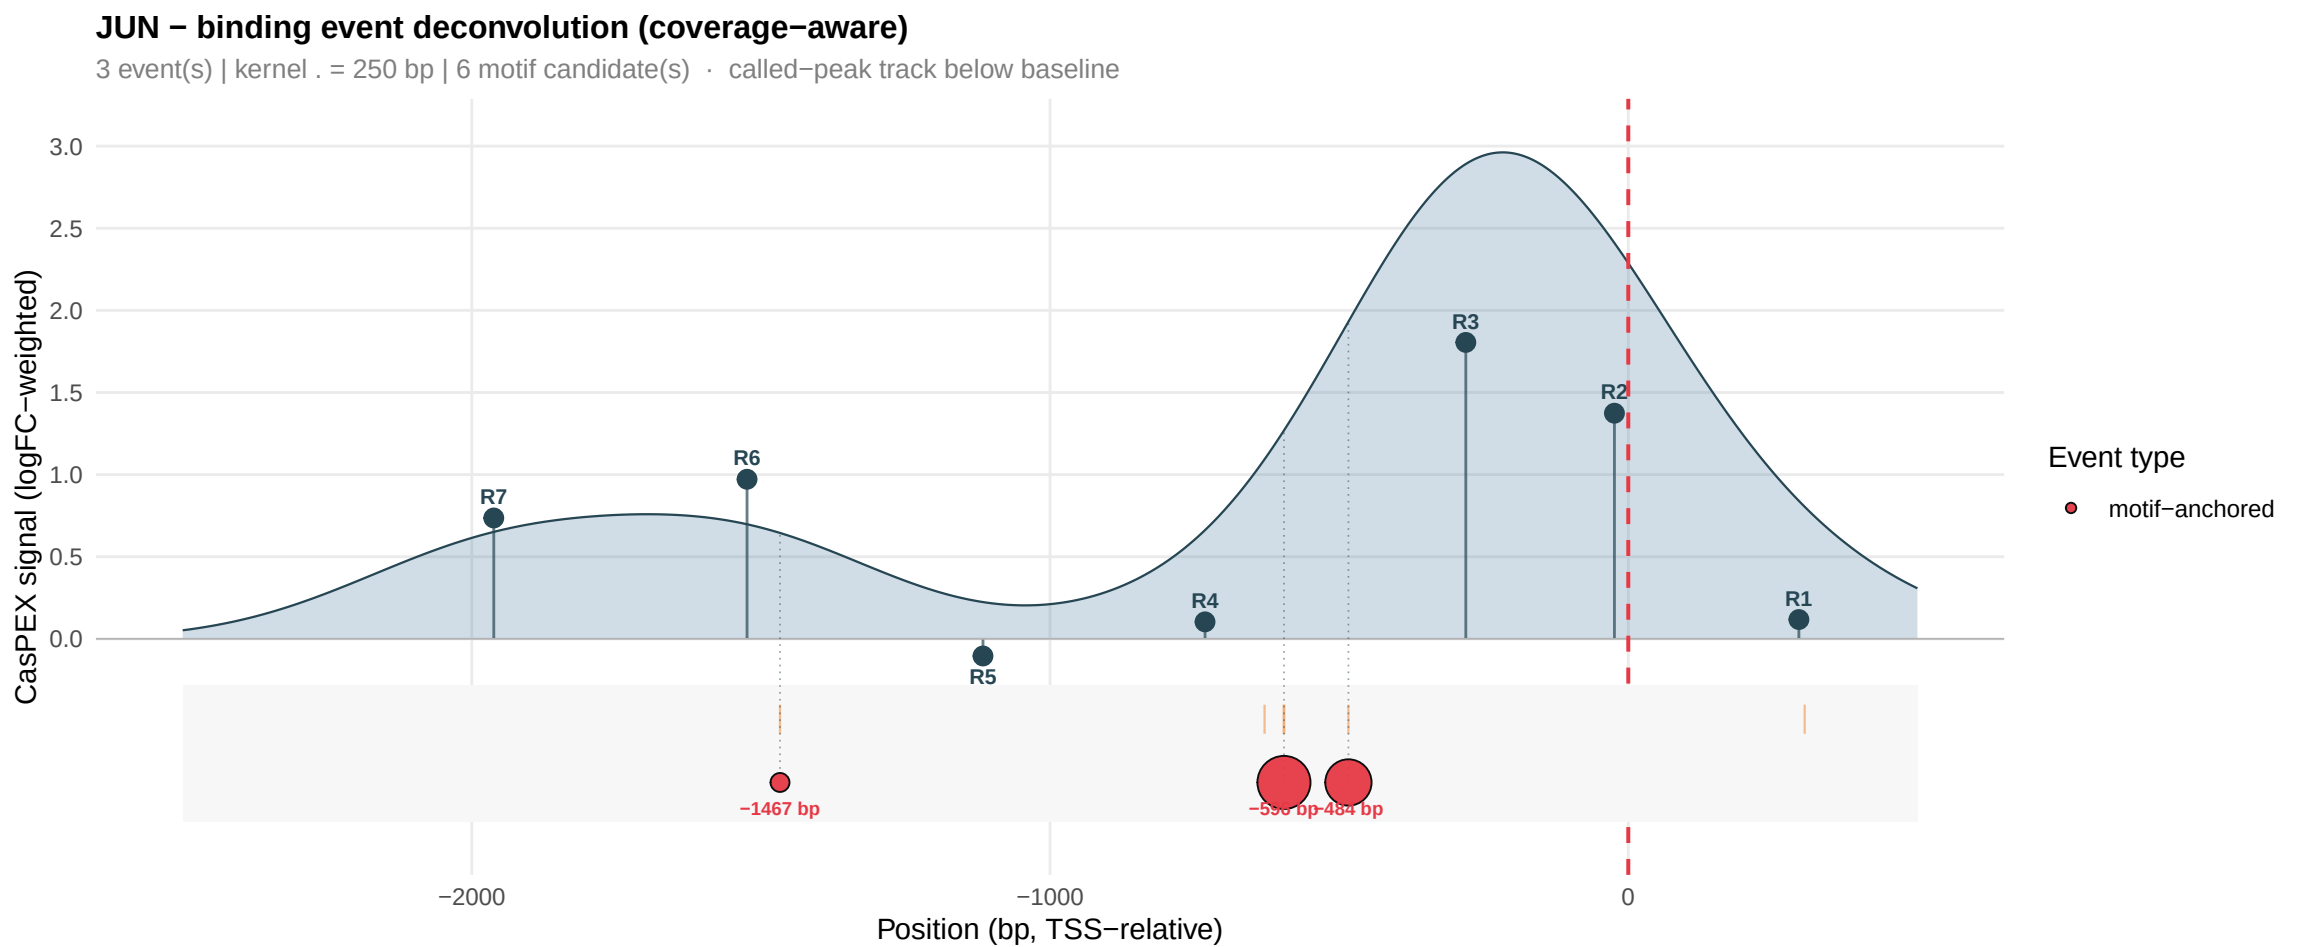
JUN − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 250 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−1467 bp
−590 bp
−484 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

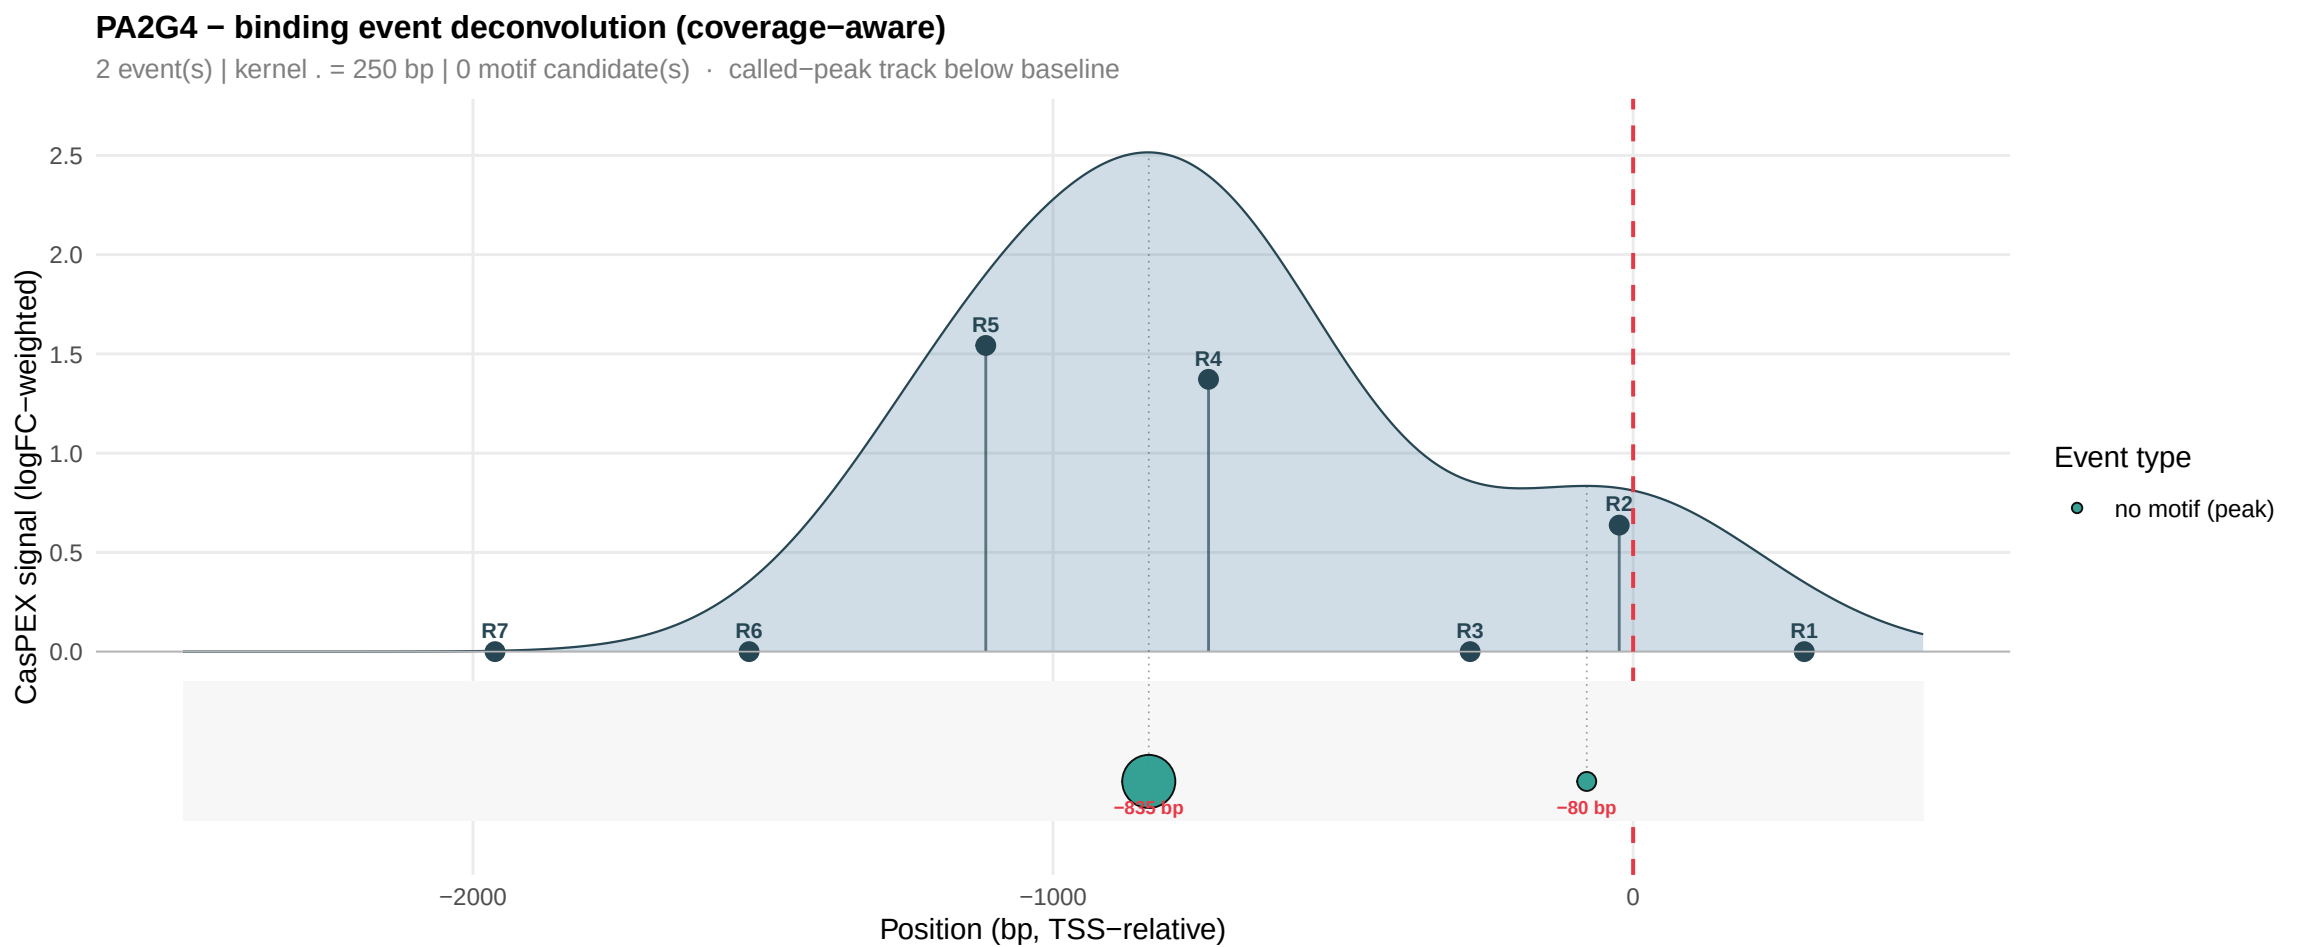
PA2G4 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R5
R4
R2
R7
R6
R3
R1
−835 bp
−80 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

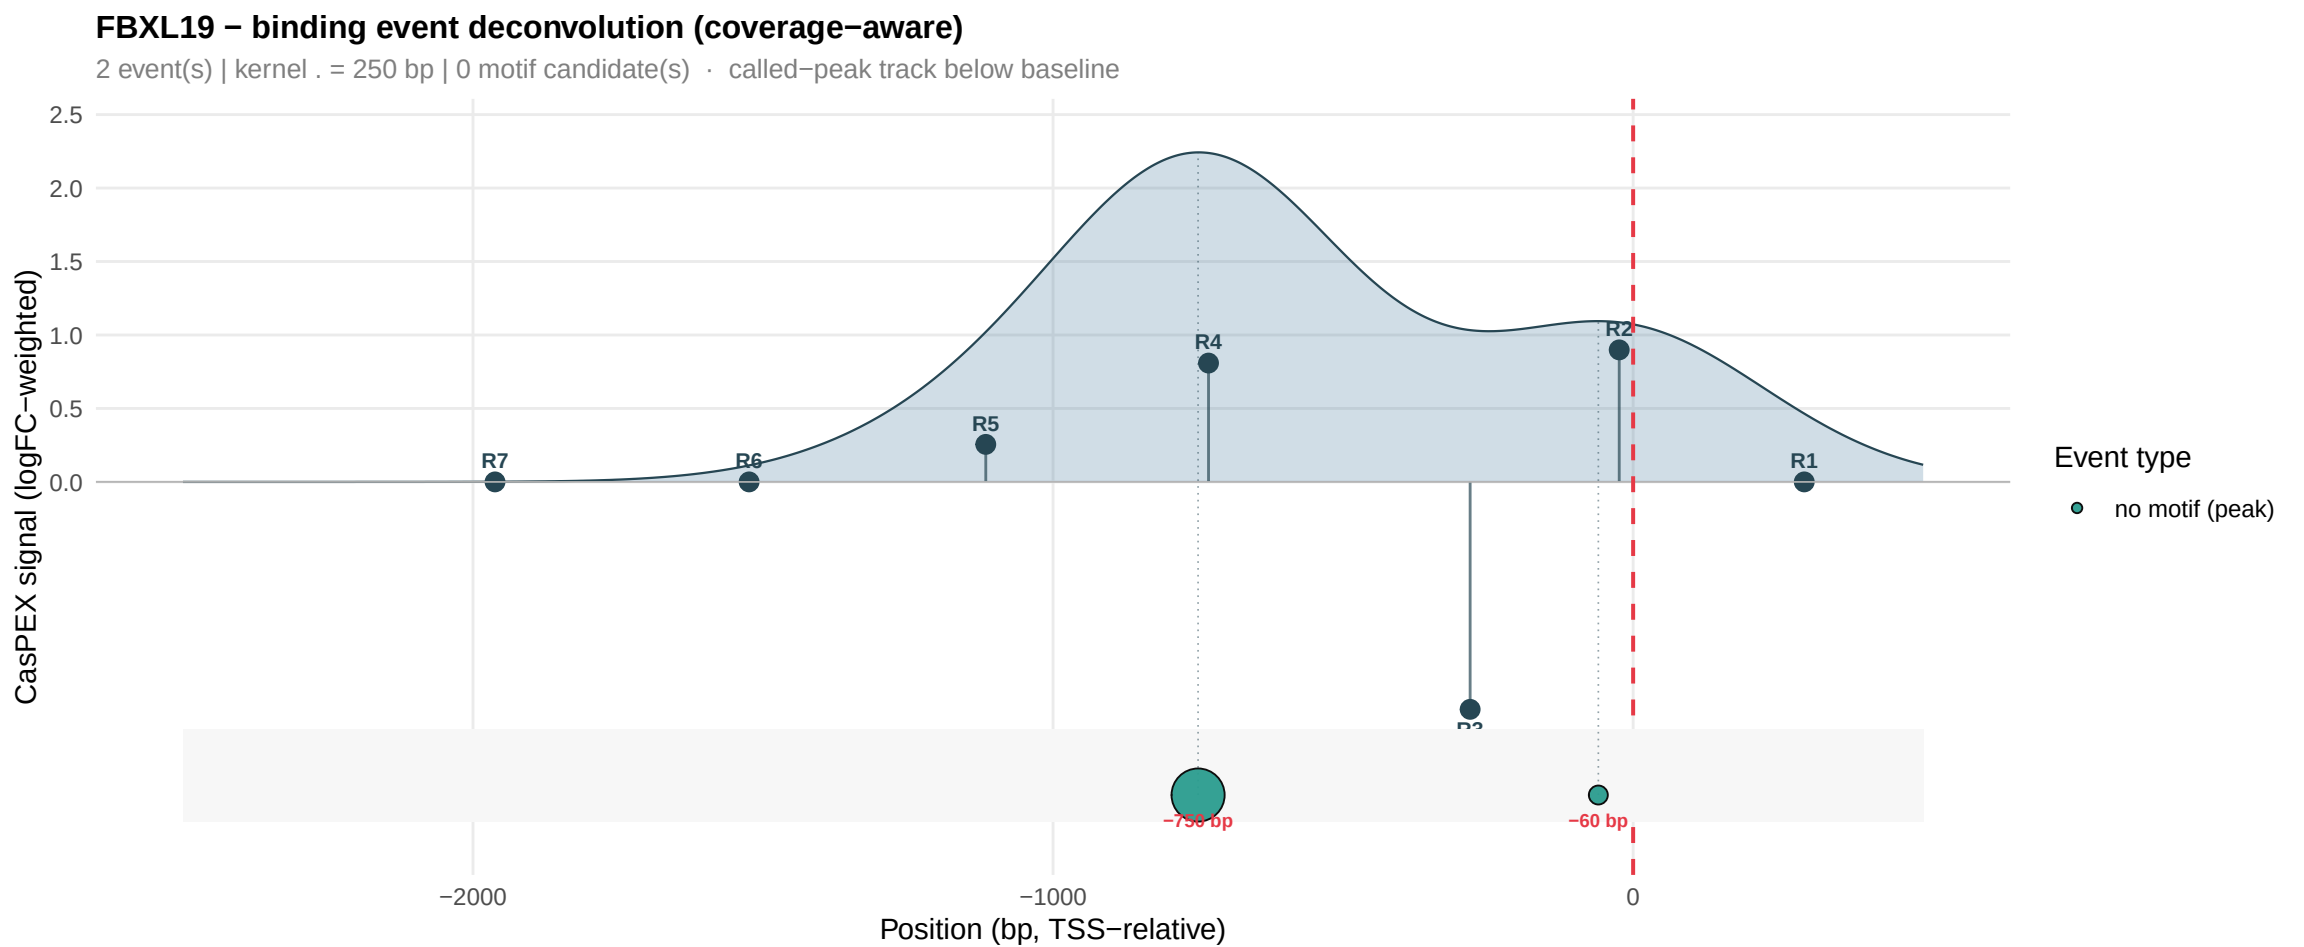
FBXL19 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−750 bp
−60 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

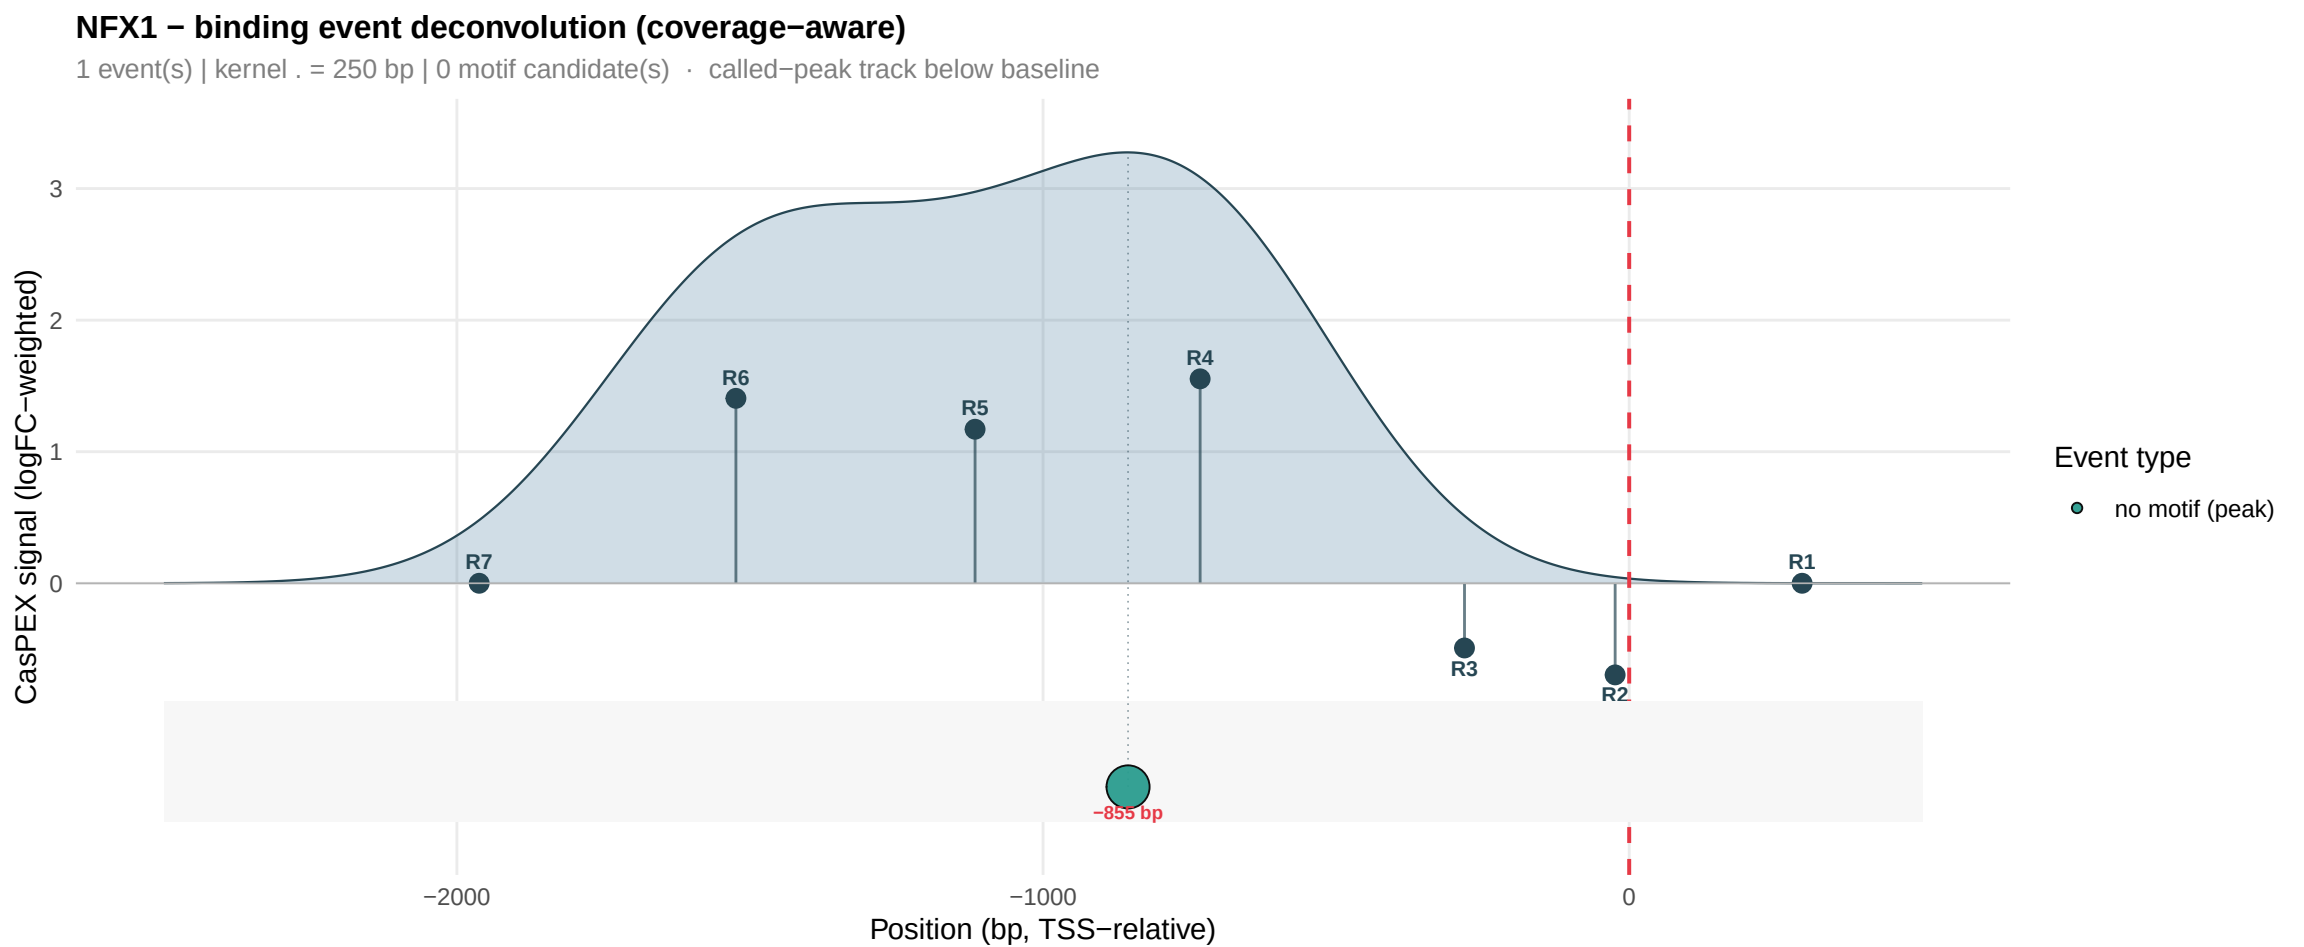
NFX1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R6
R5
R4
R7
R1
R3
R2
−855 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

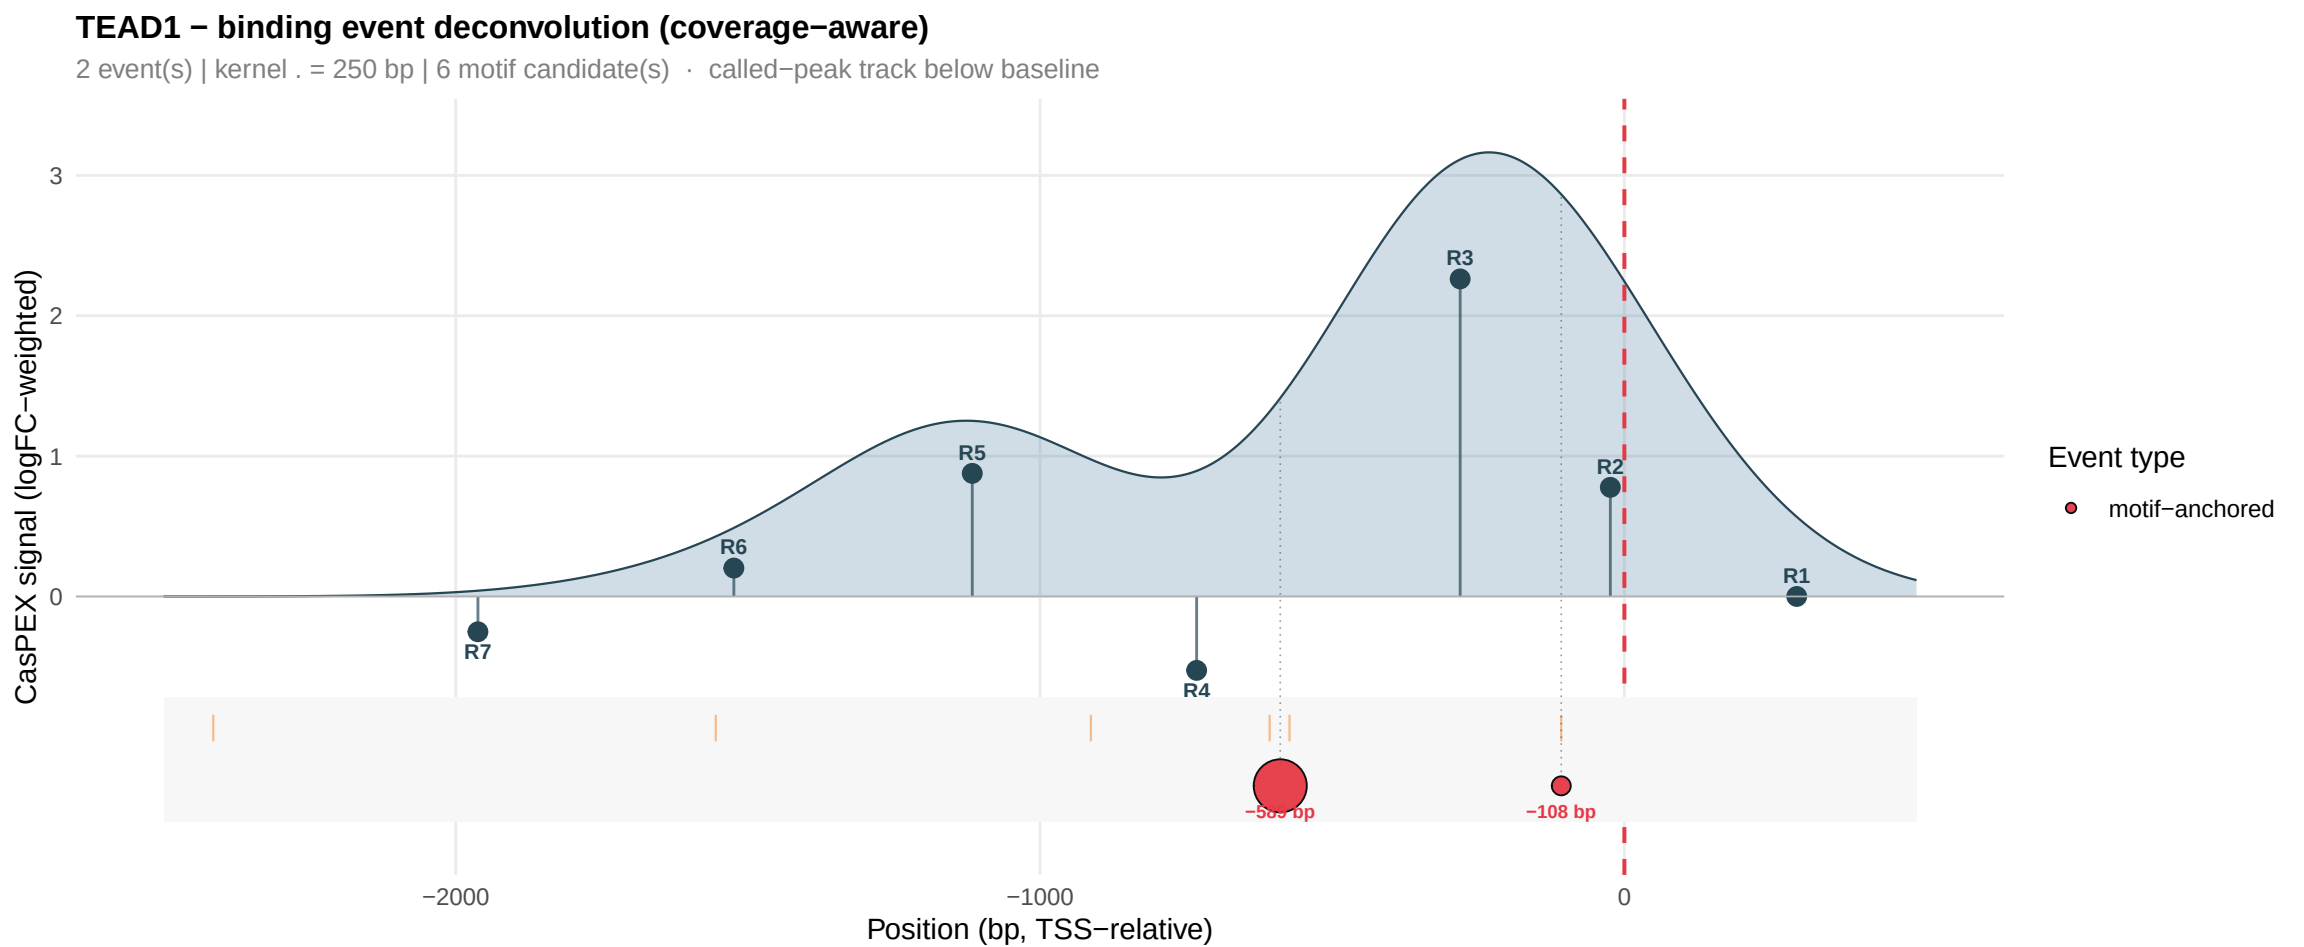
TEAD1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−589 bp
−108 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

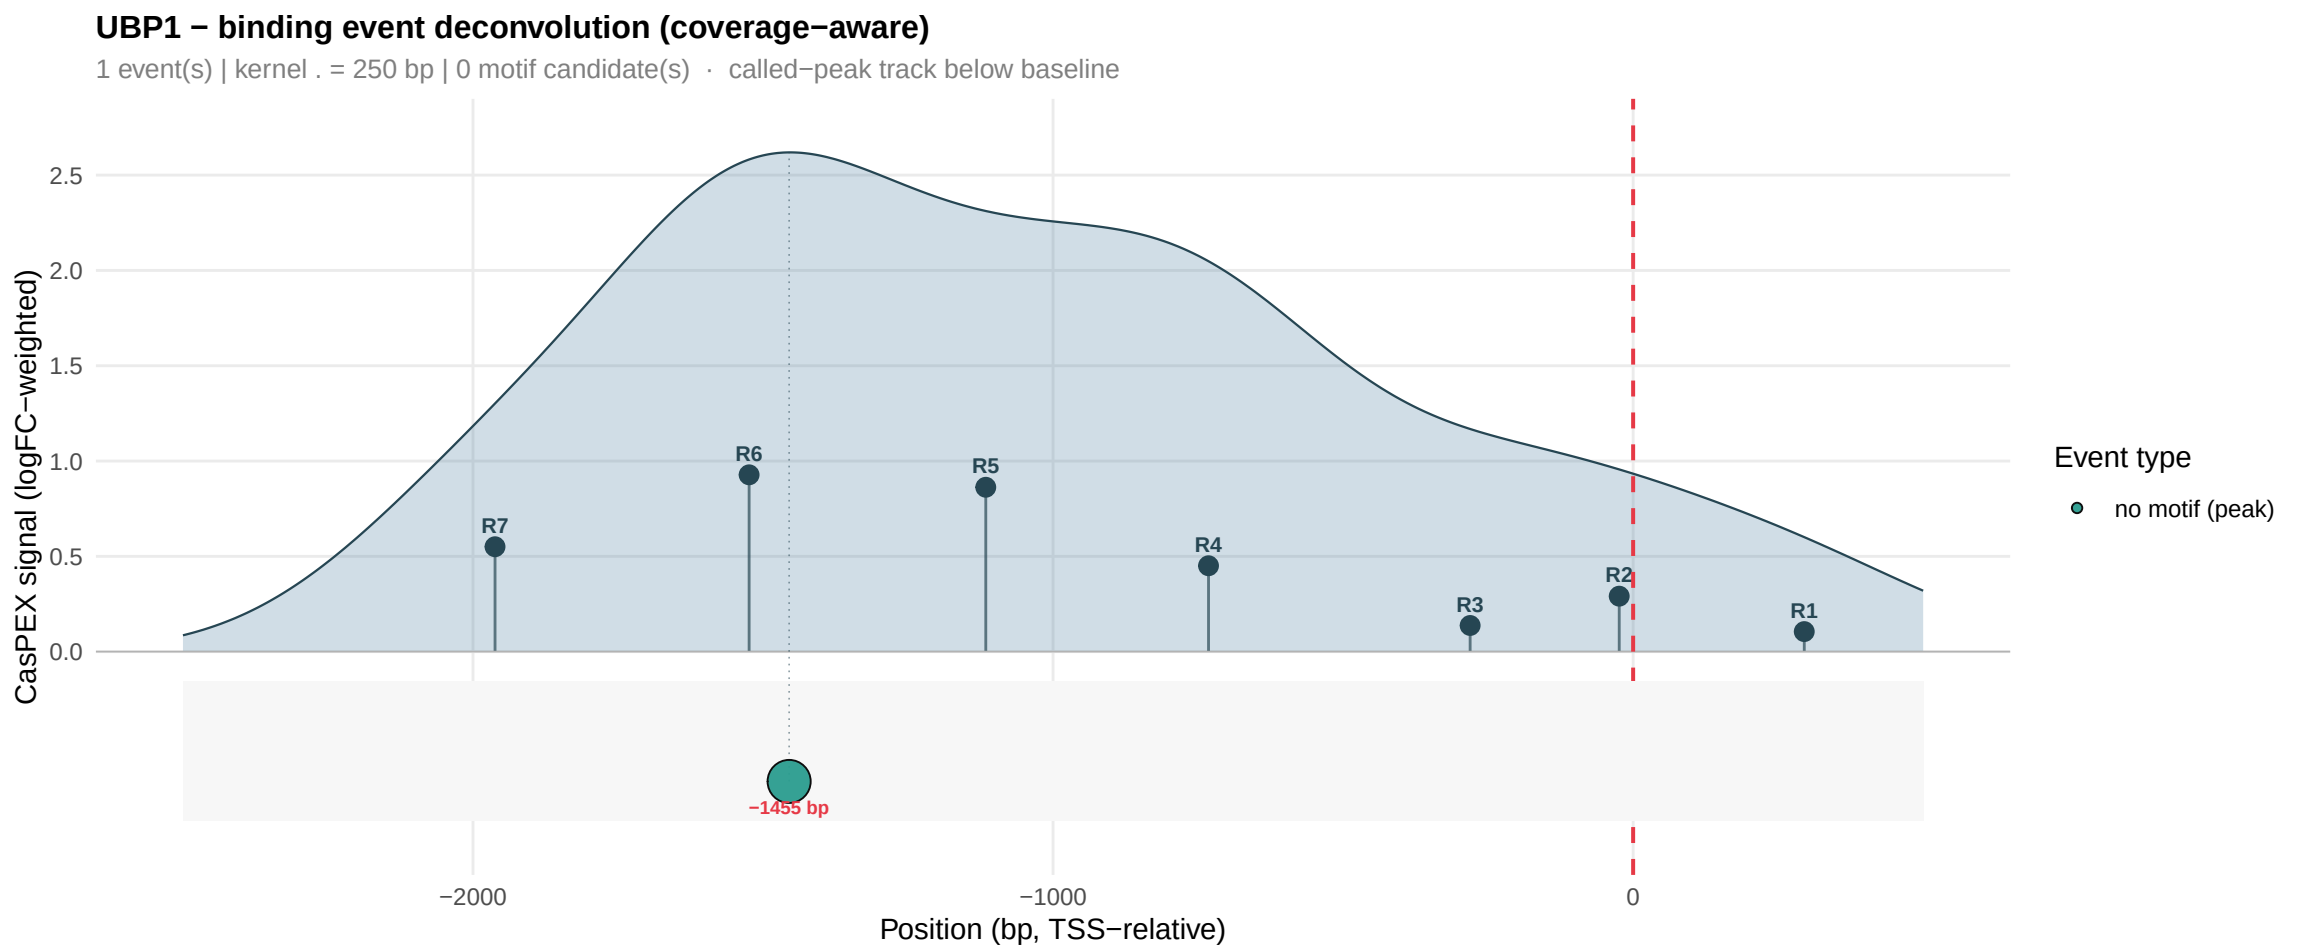
UBP1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1455 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

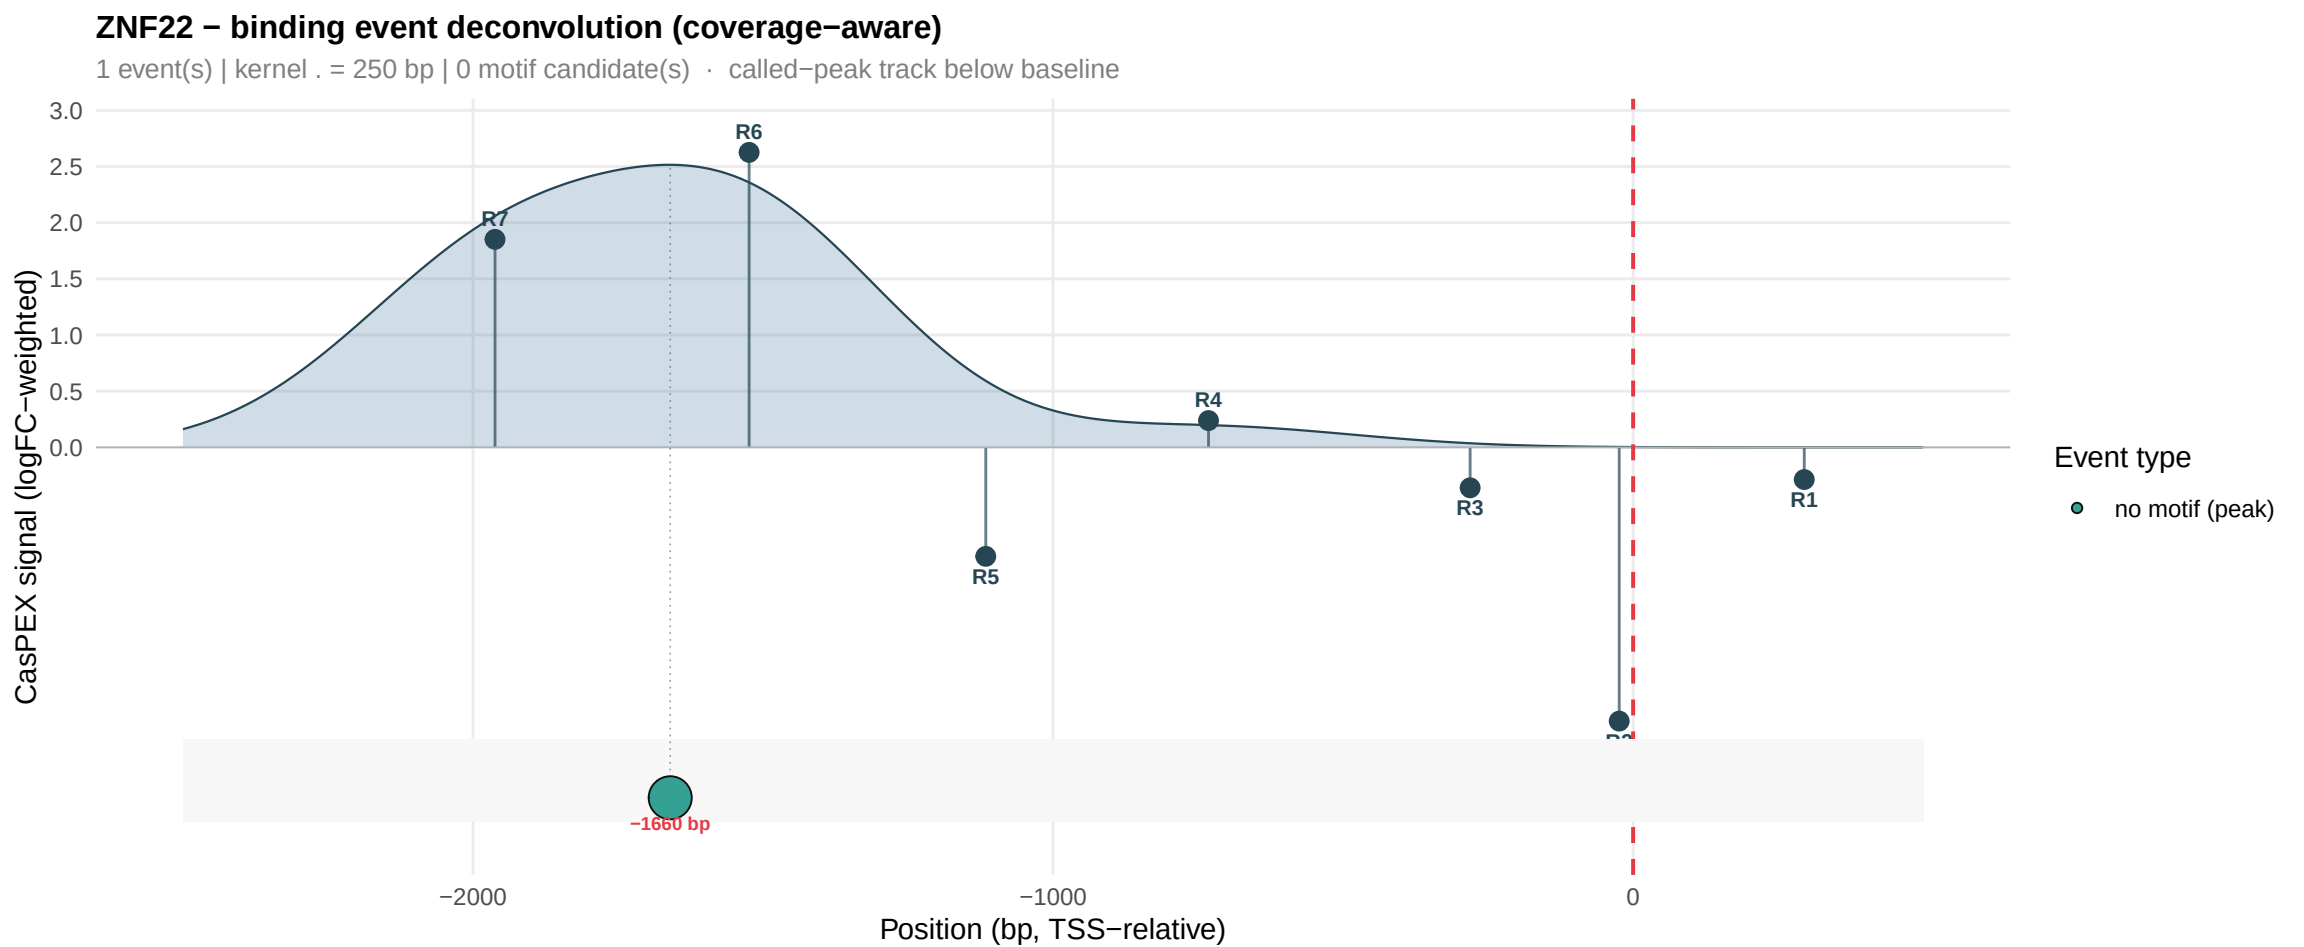
ZNF22 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R6
R7
R4
R5
R3
R1
−1660 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

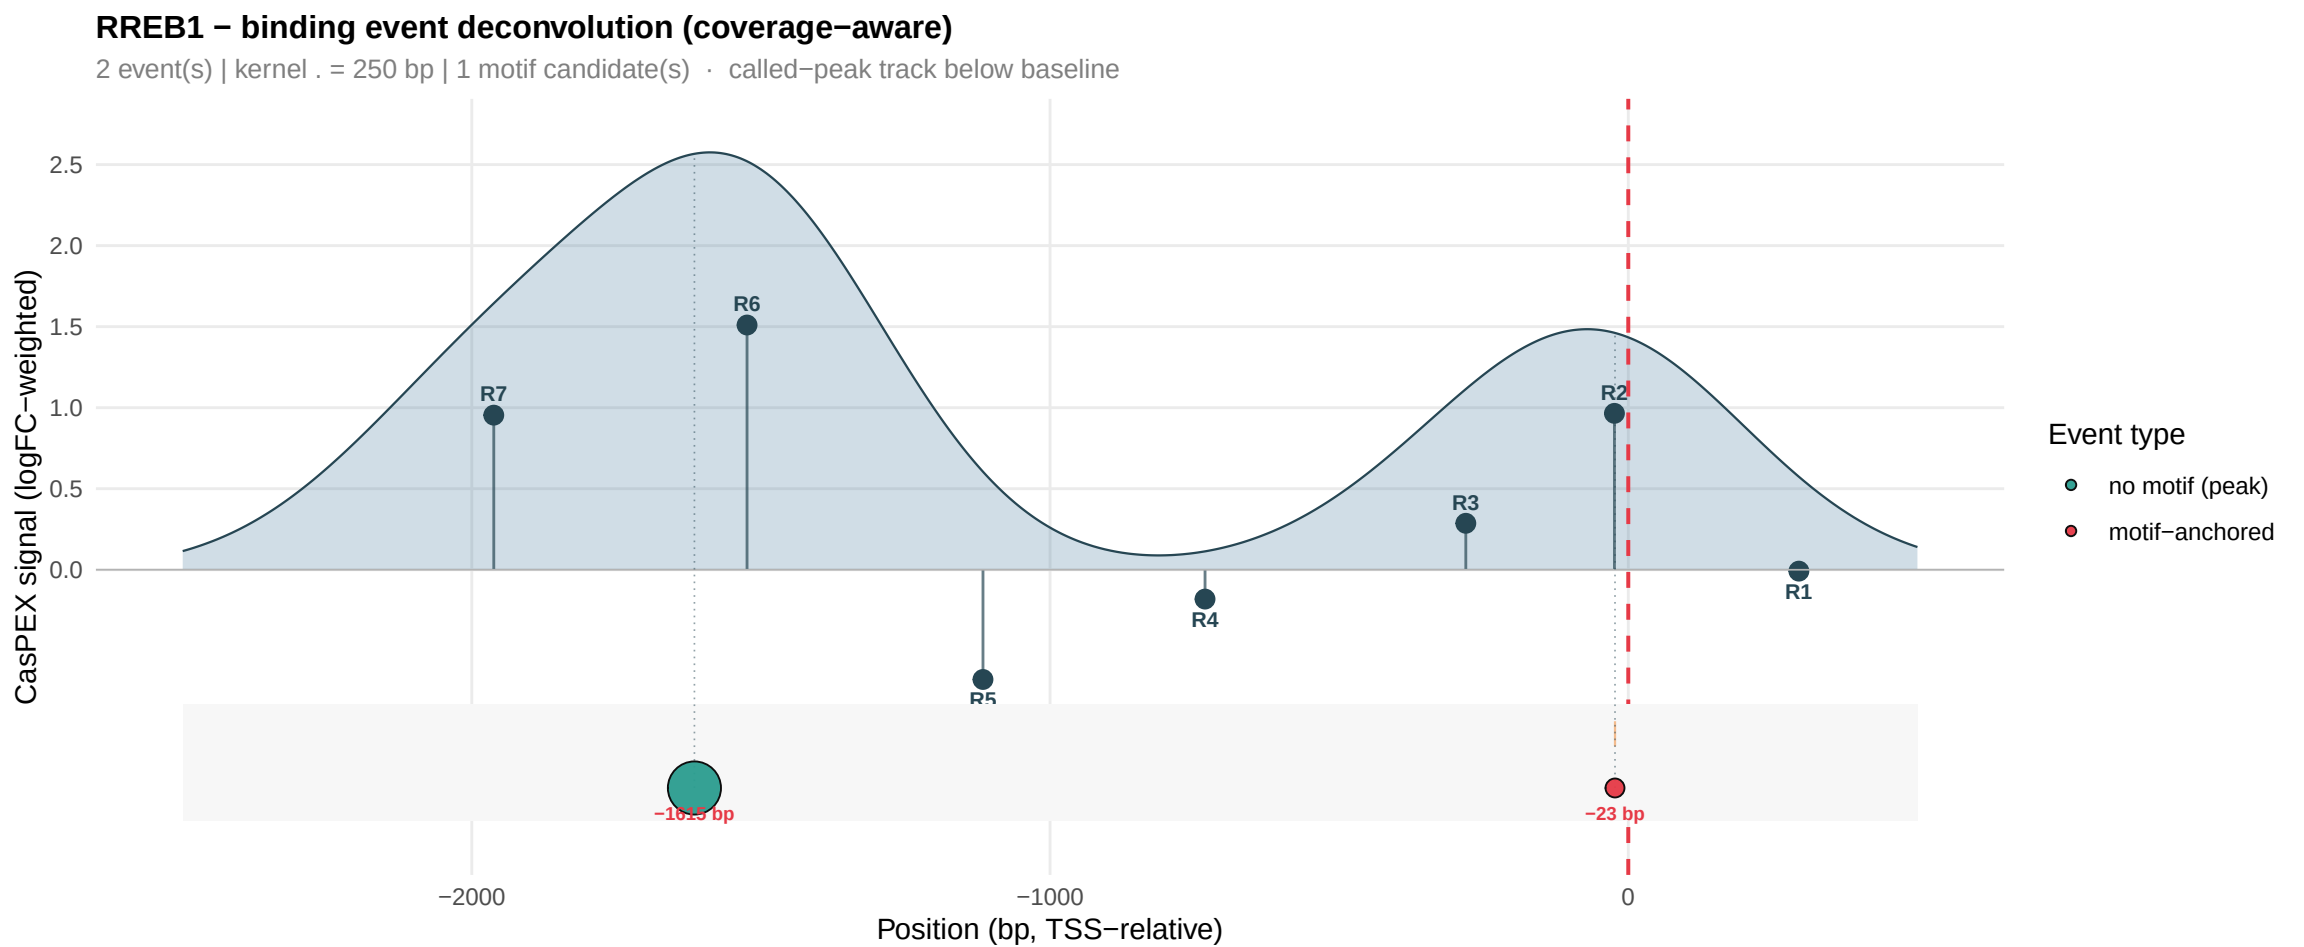
RREB1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 1 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1615 bp
−23 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)
motif−anchored

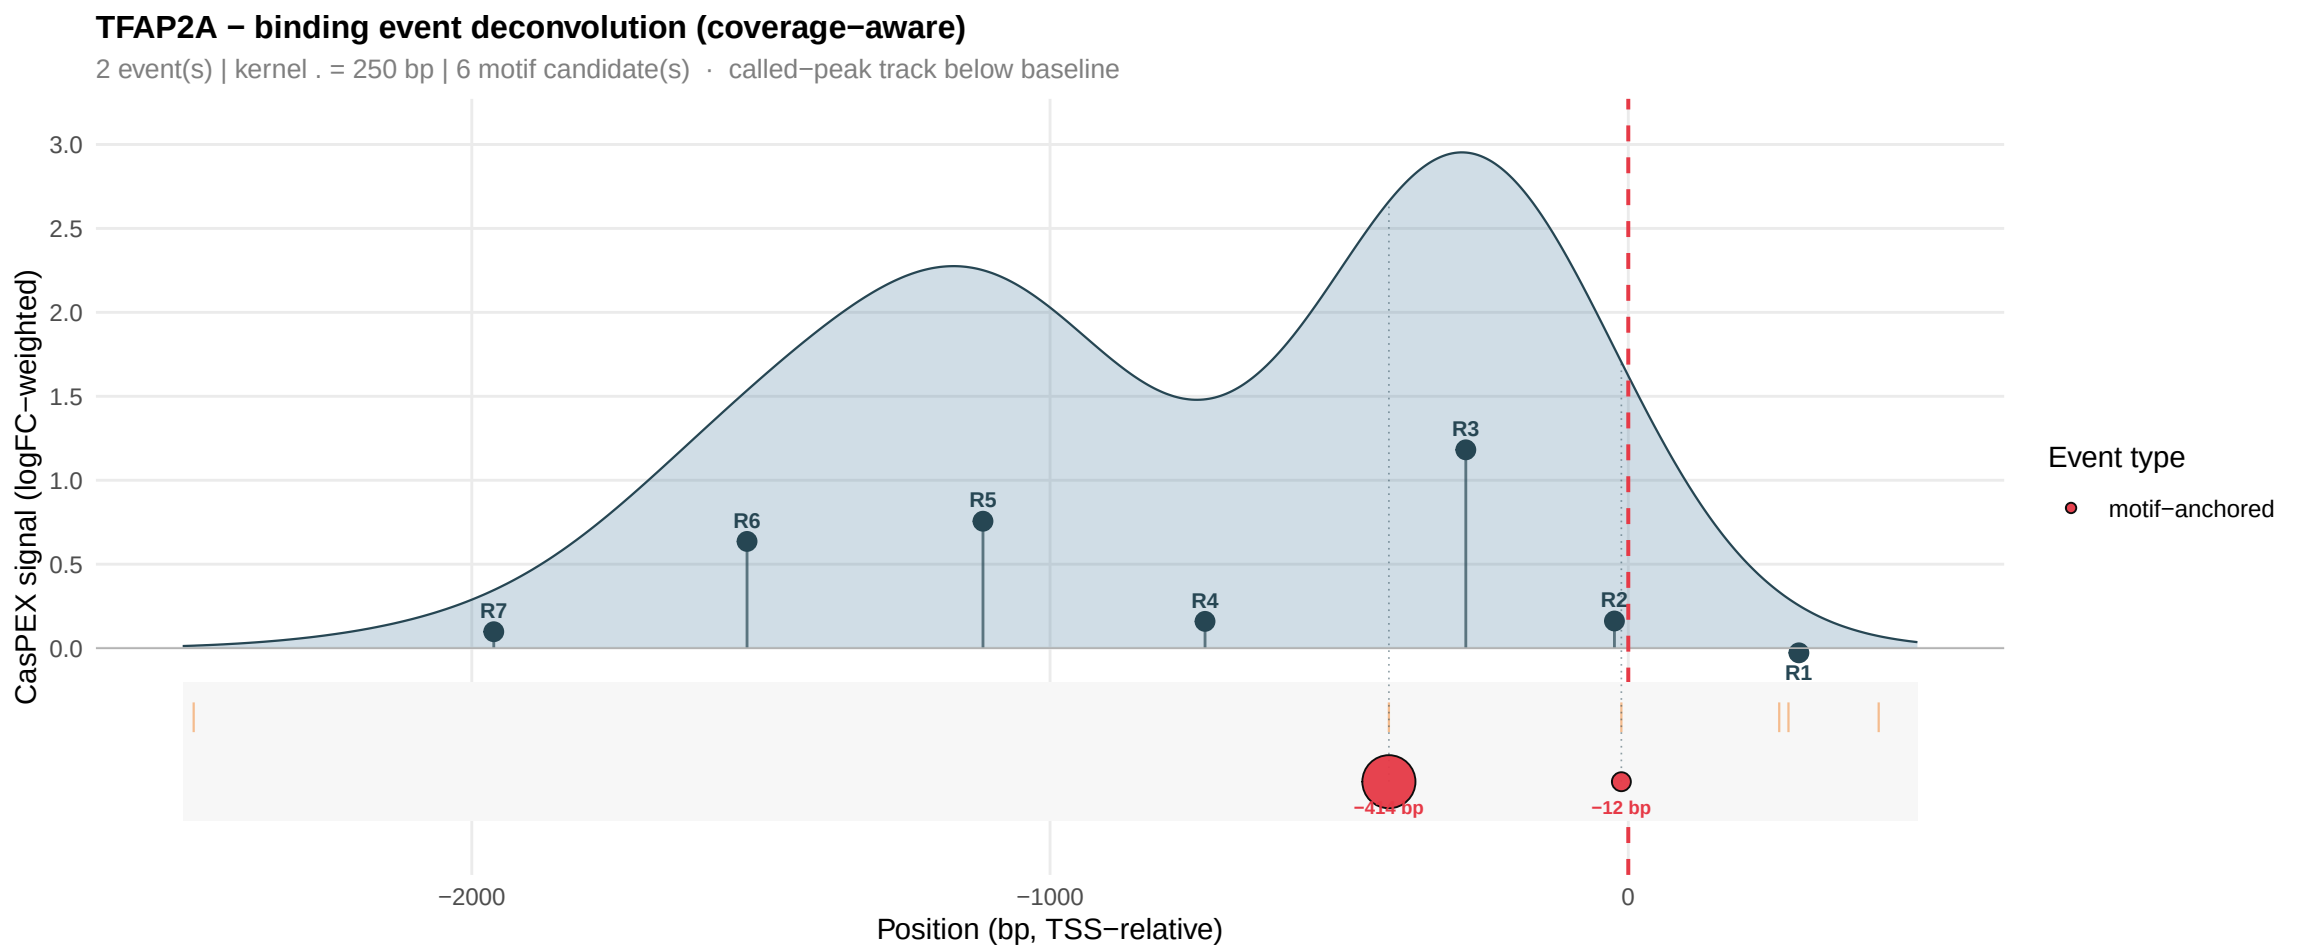
TFAP2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 250 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−414 bp
−12 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

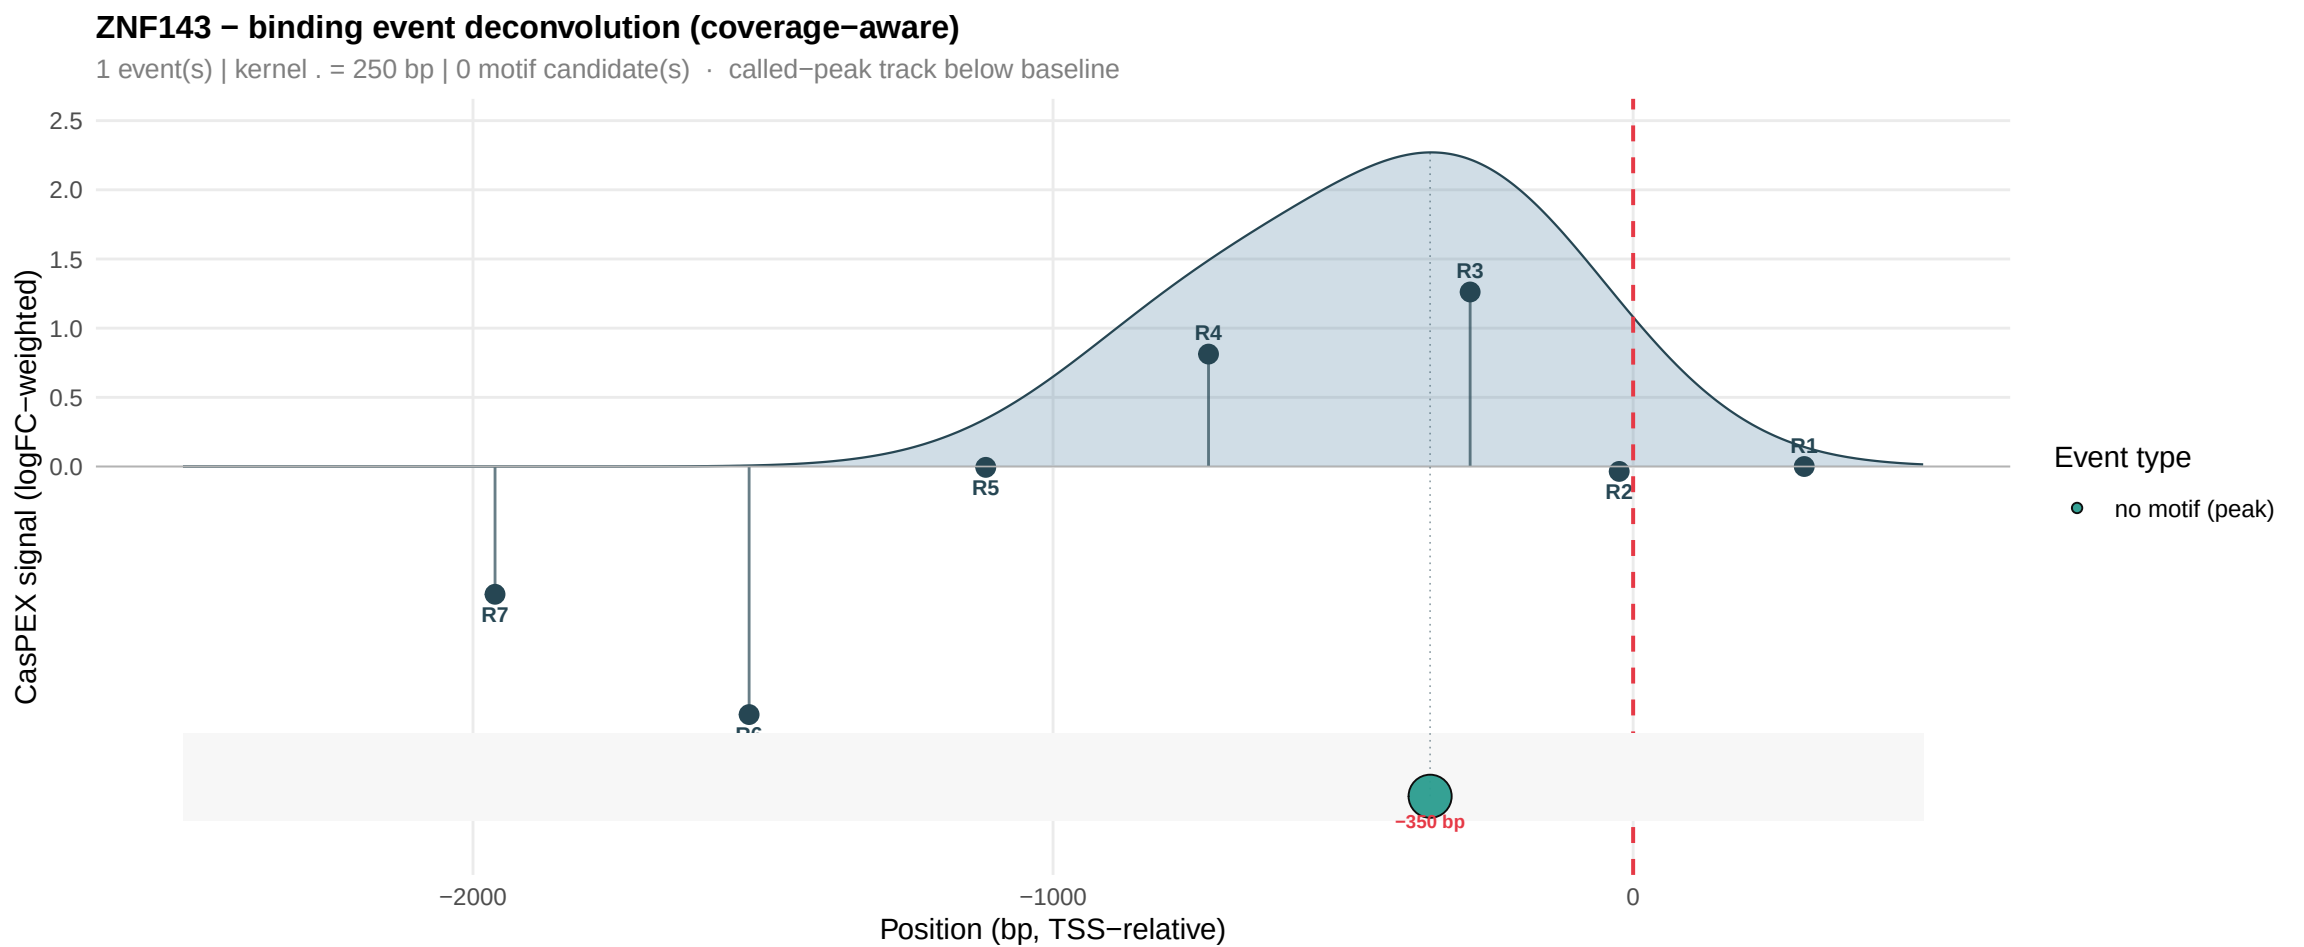
ZNF143 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R7
−350 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

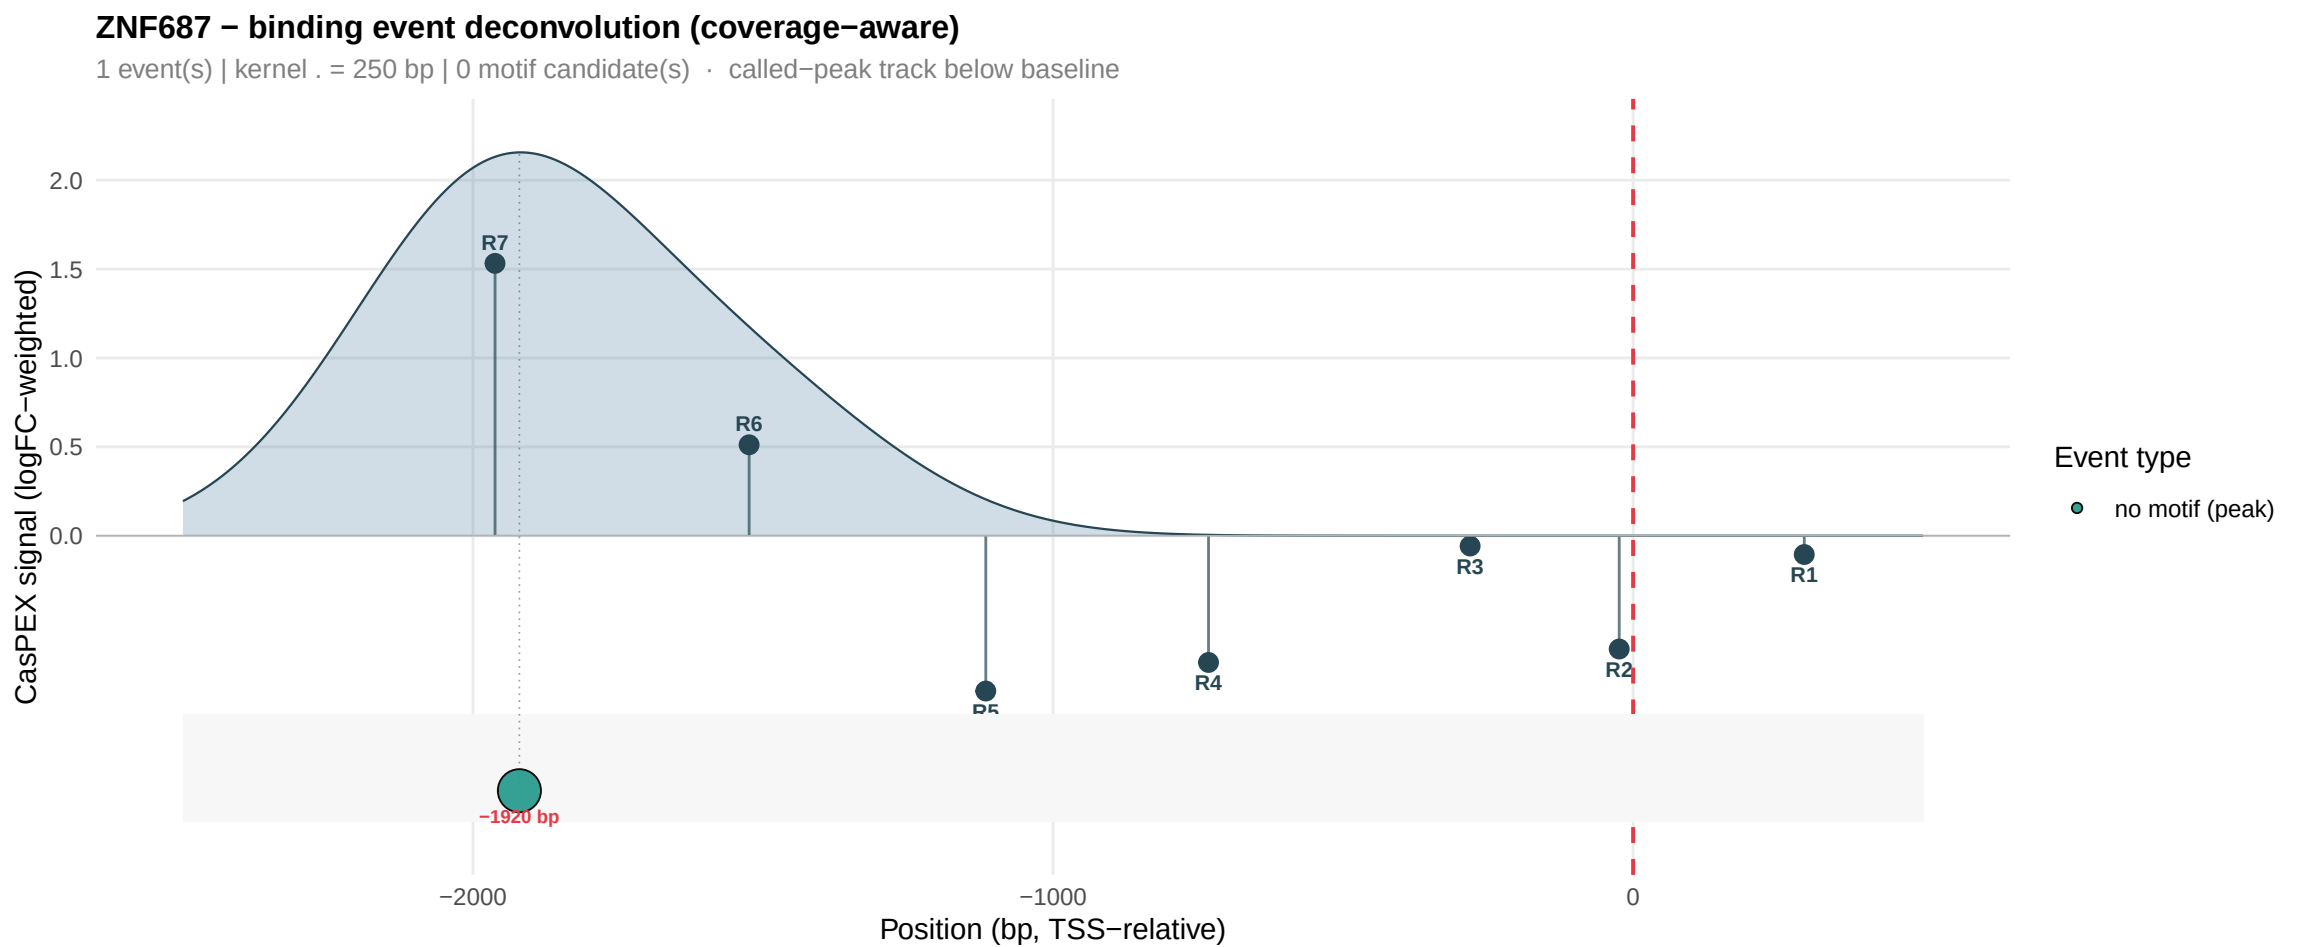
ZNF687 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1920 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

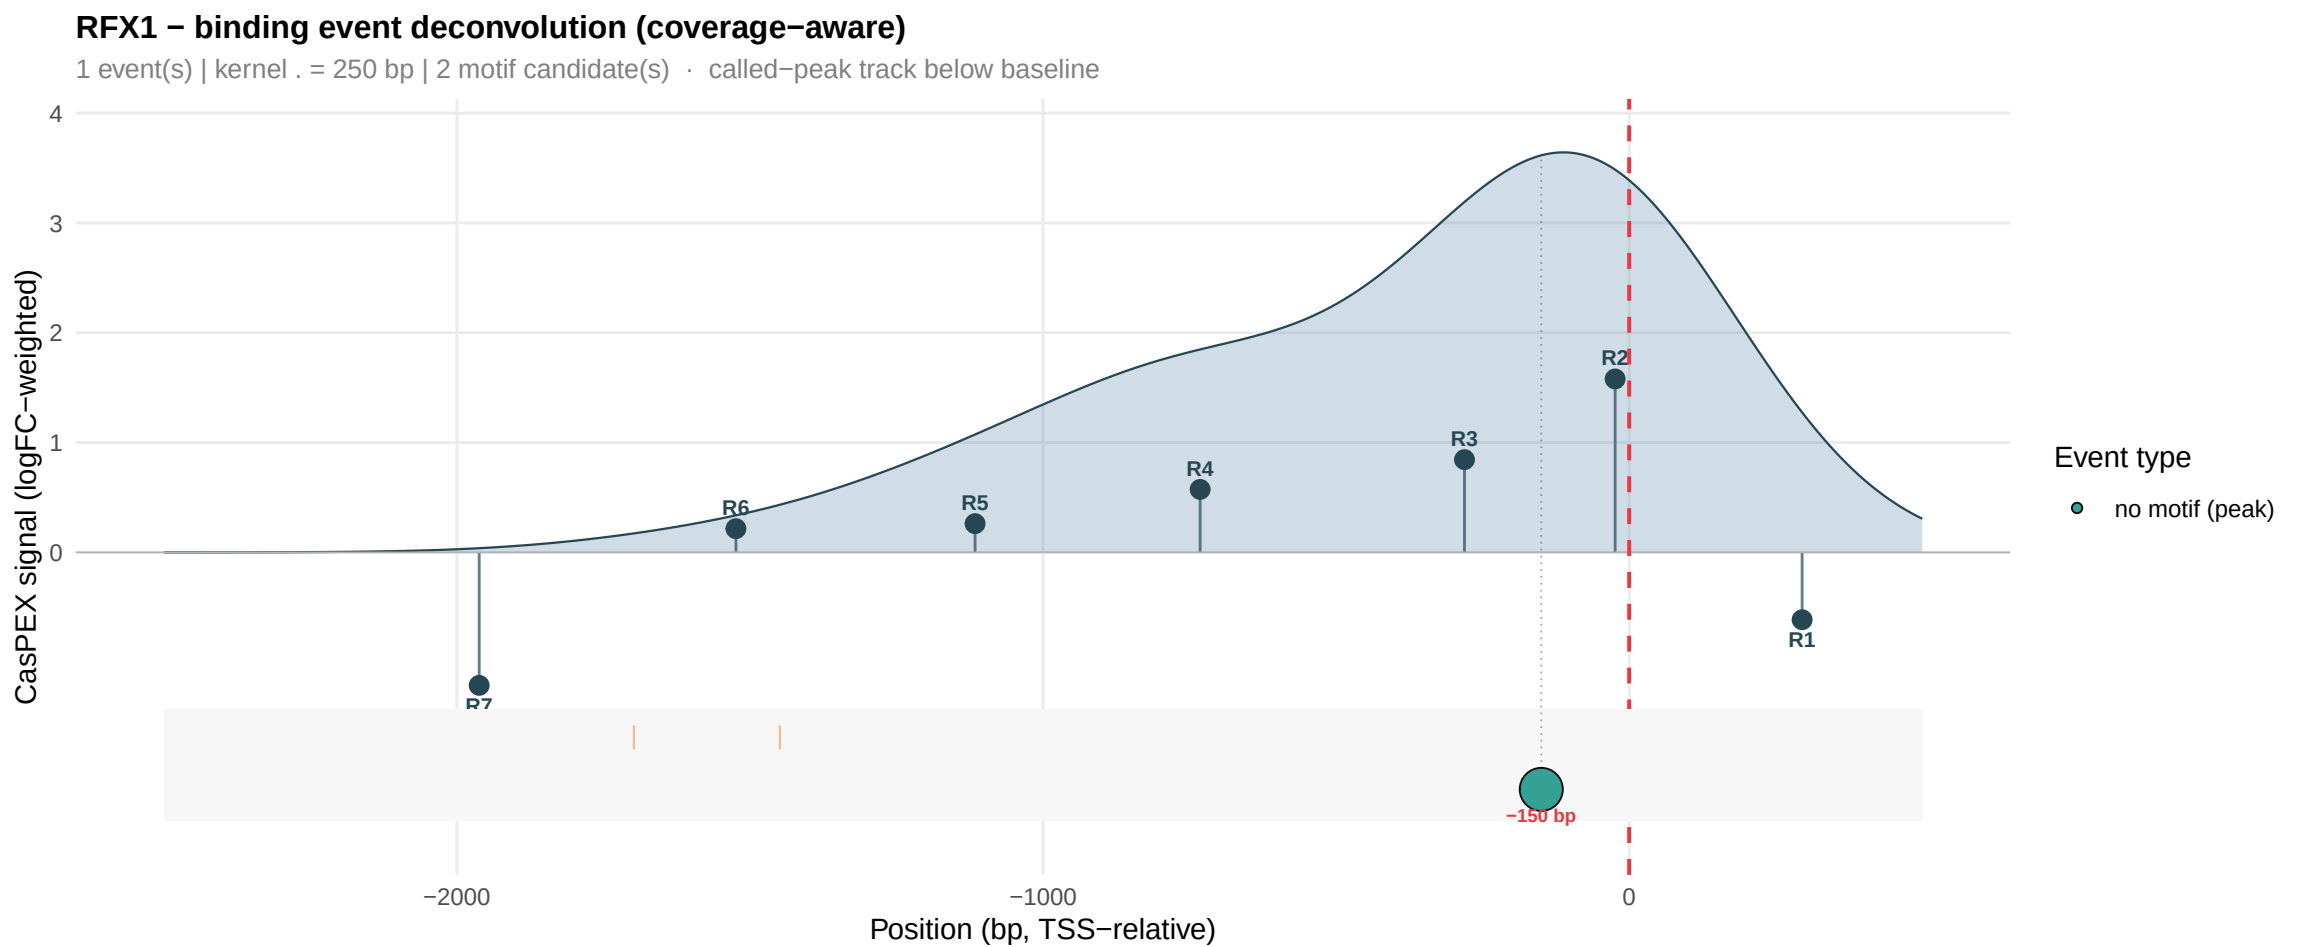
RFX1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 2 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−150 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

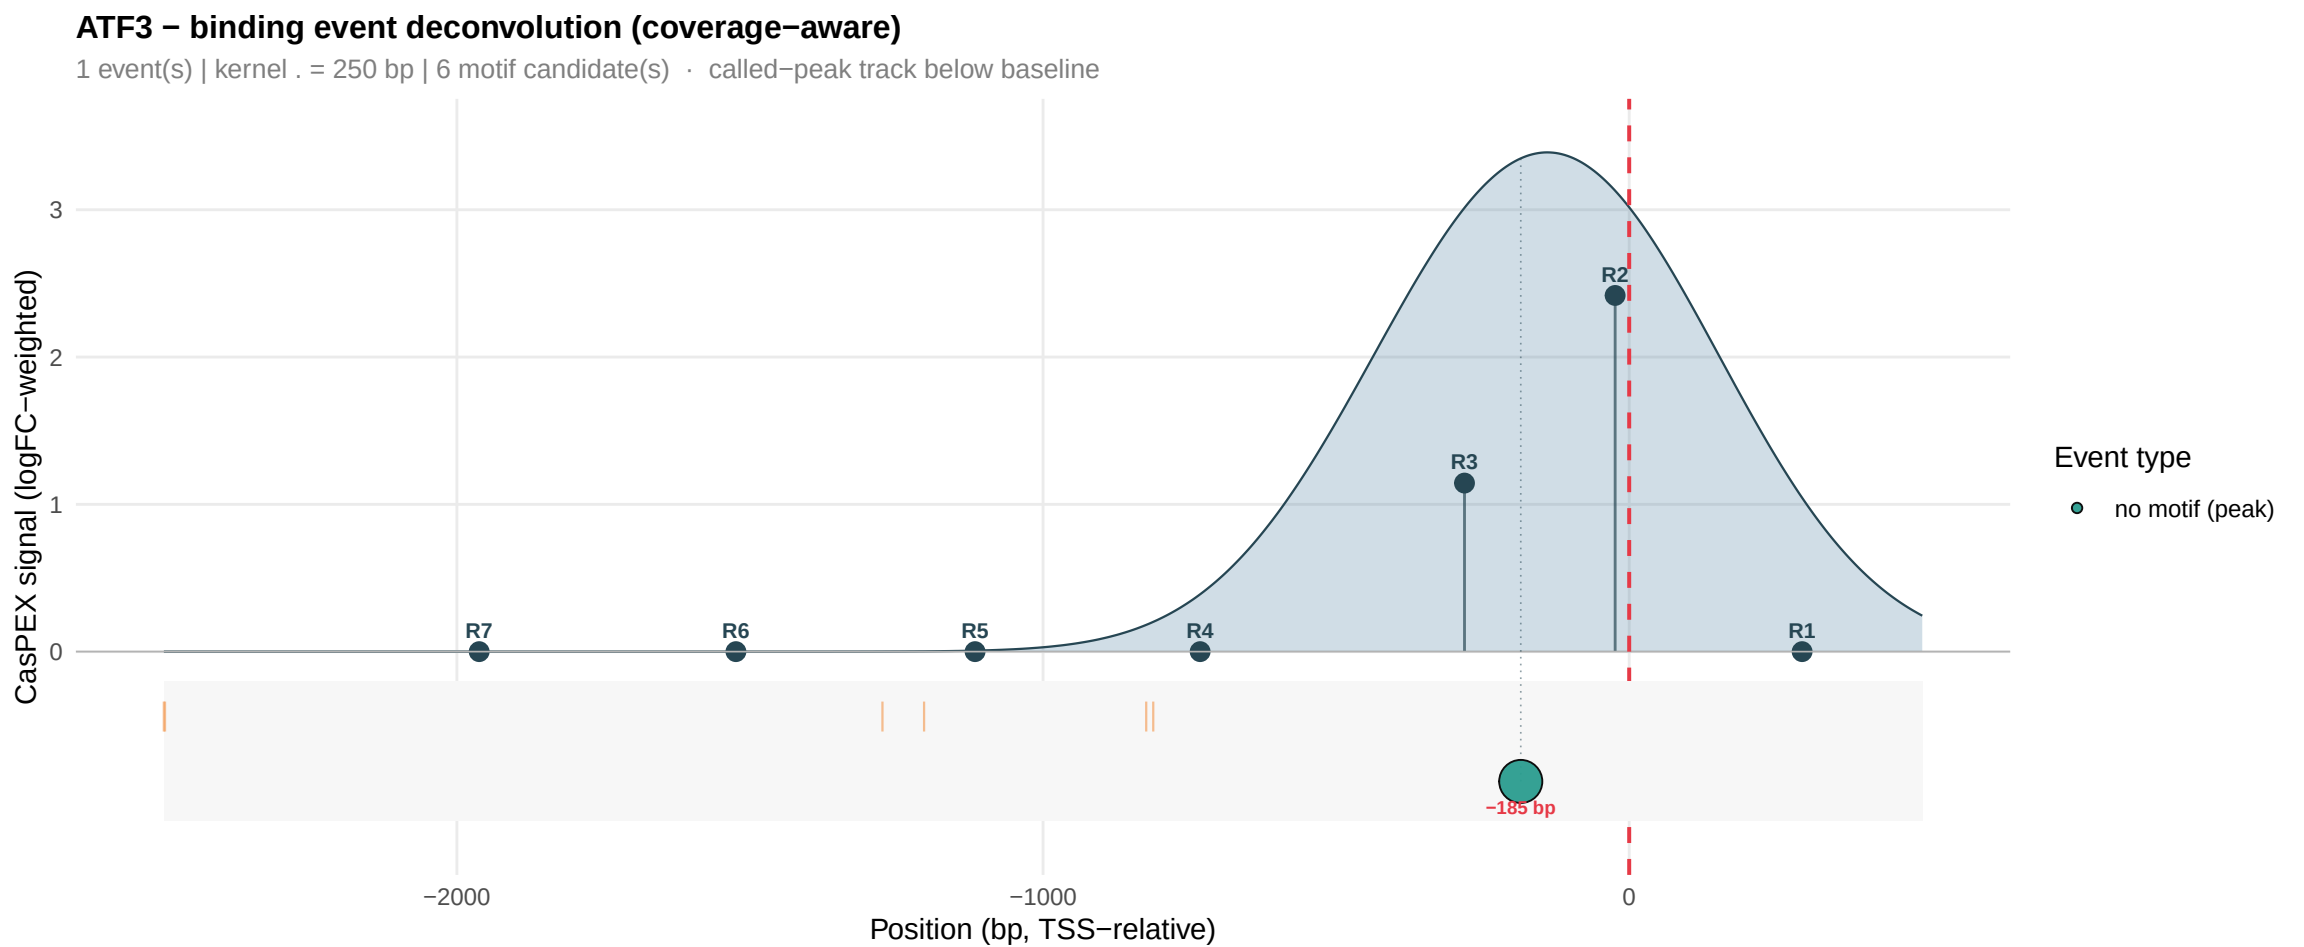
ATF3 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−185 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

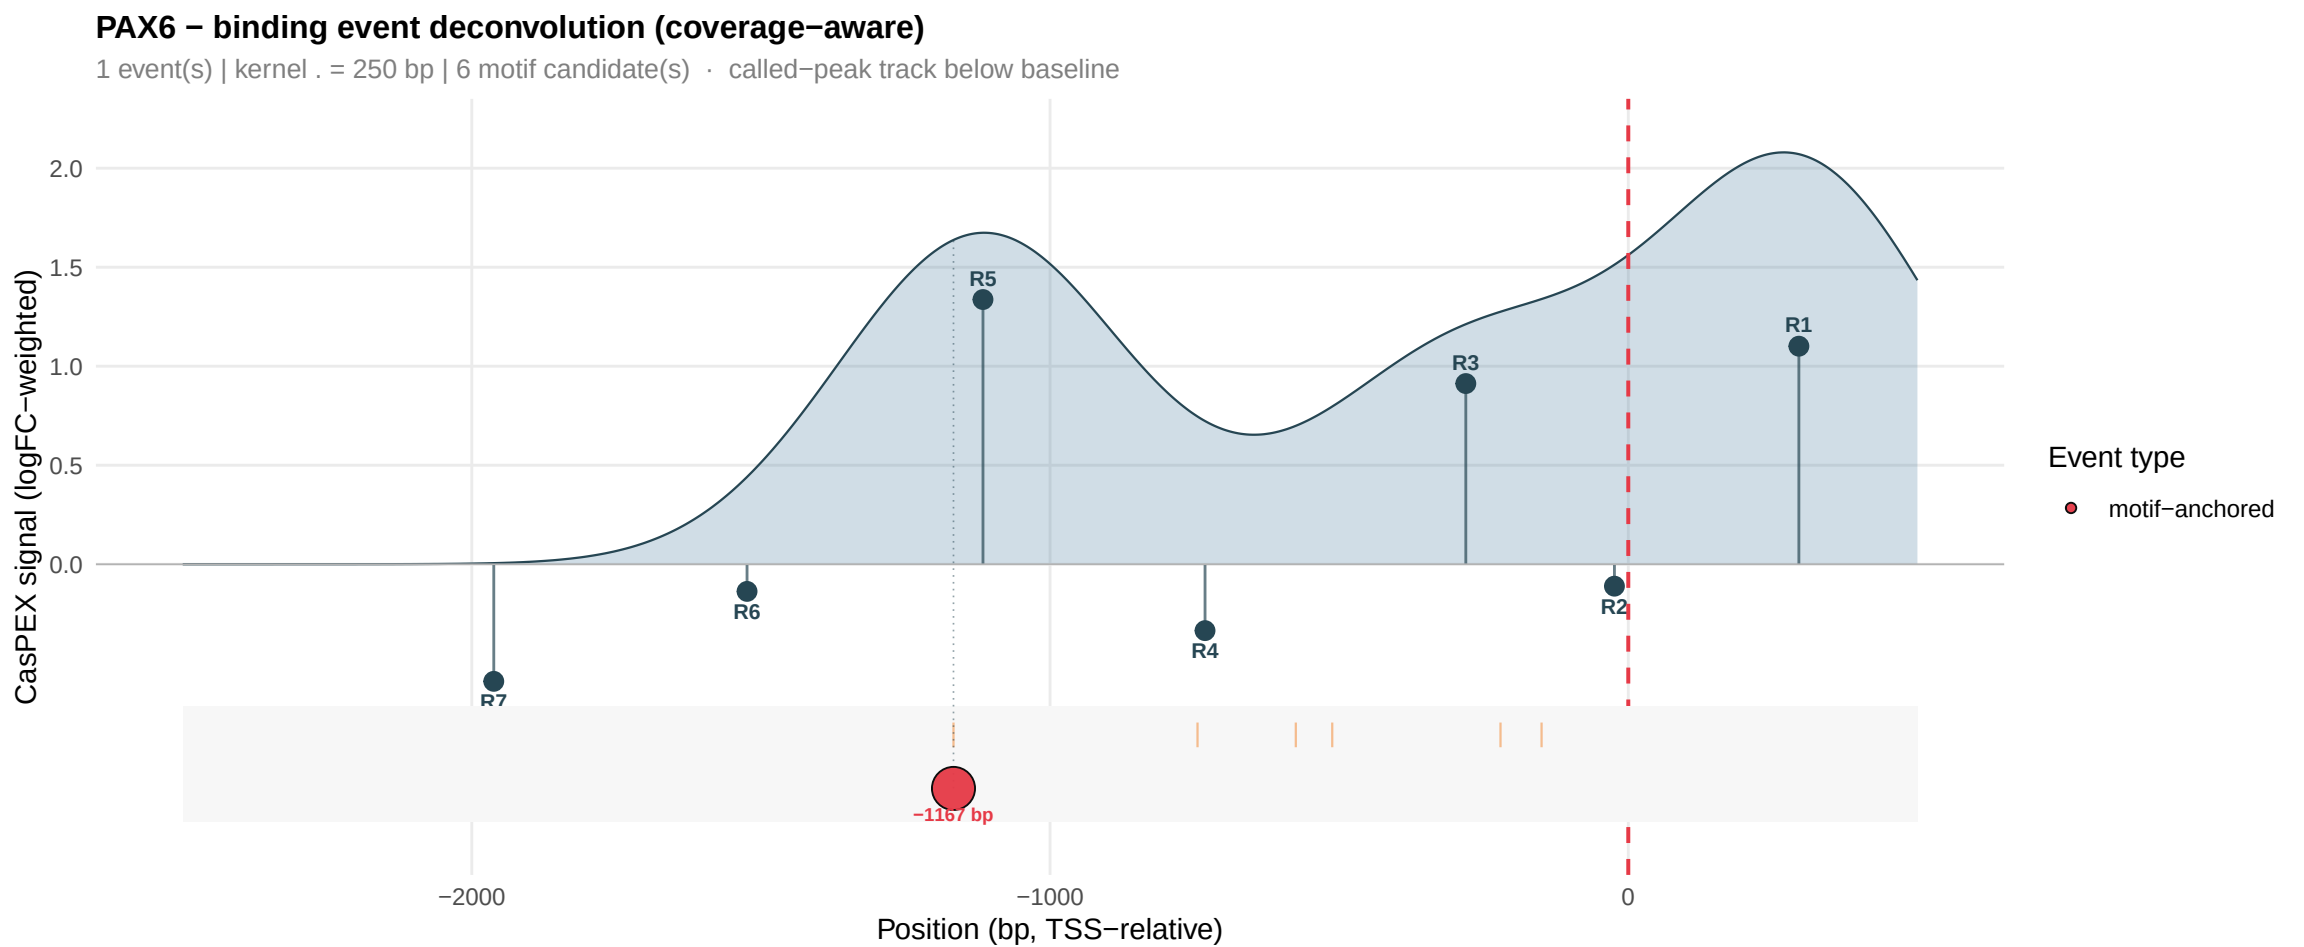
PAX6 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 250 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−1167 bp
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored