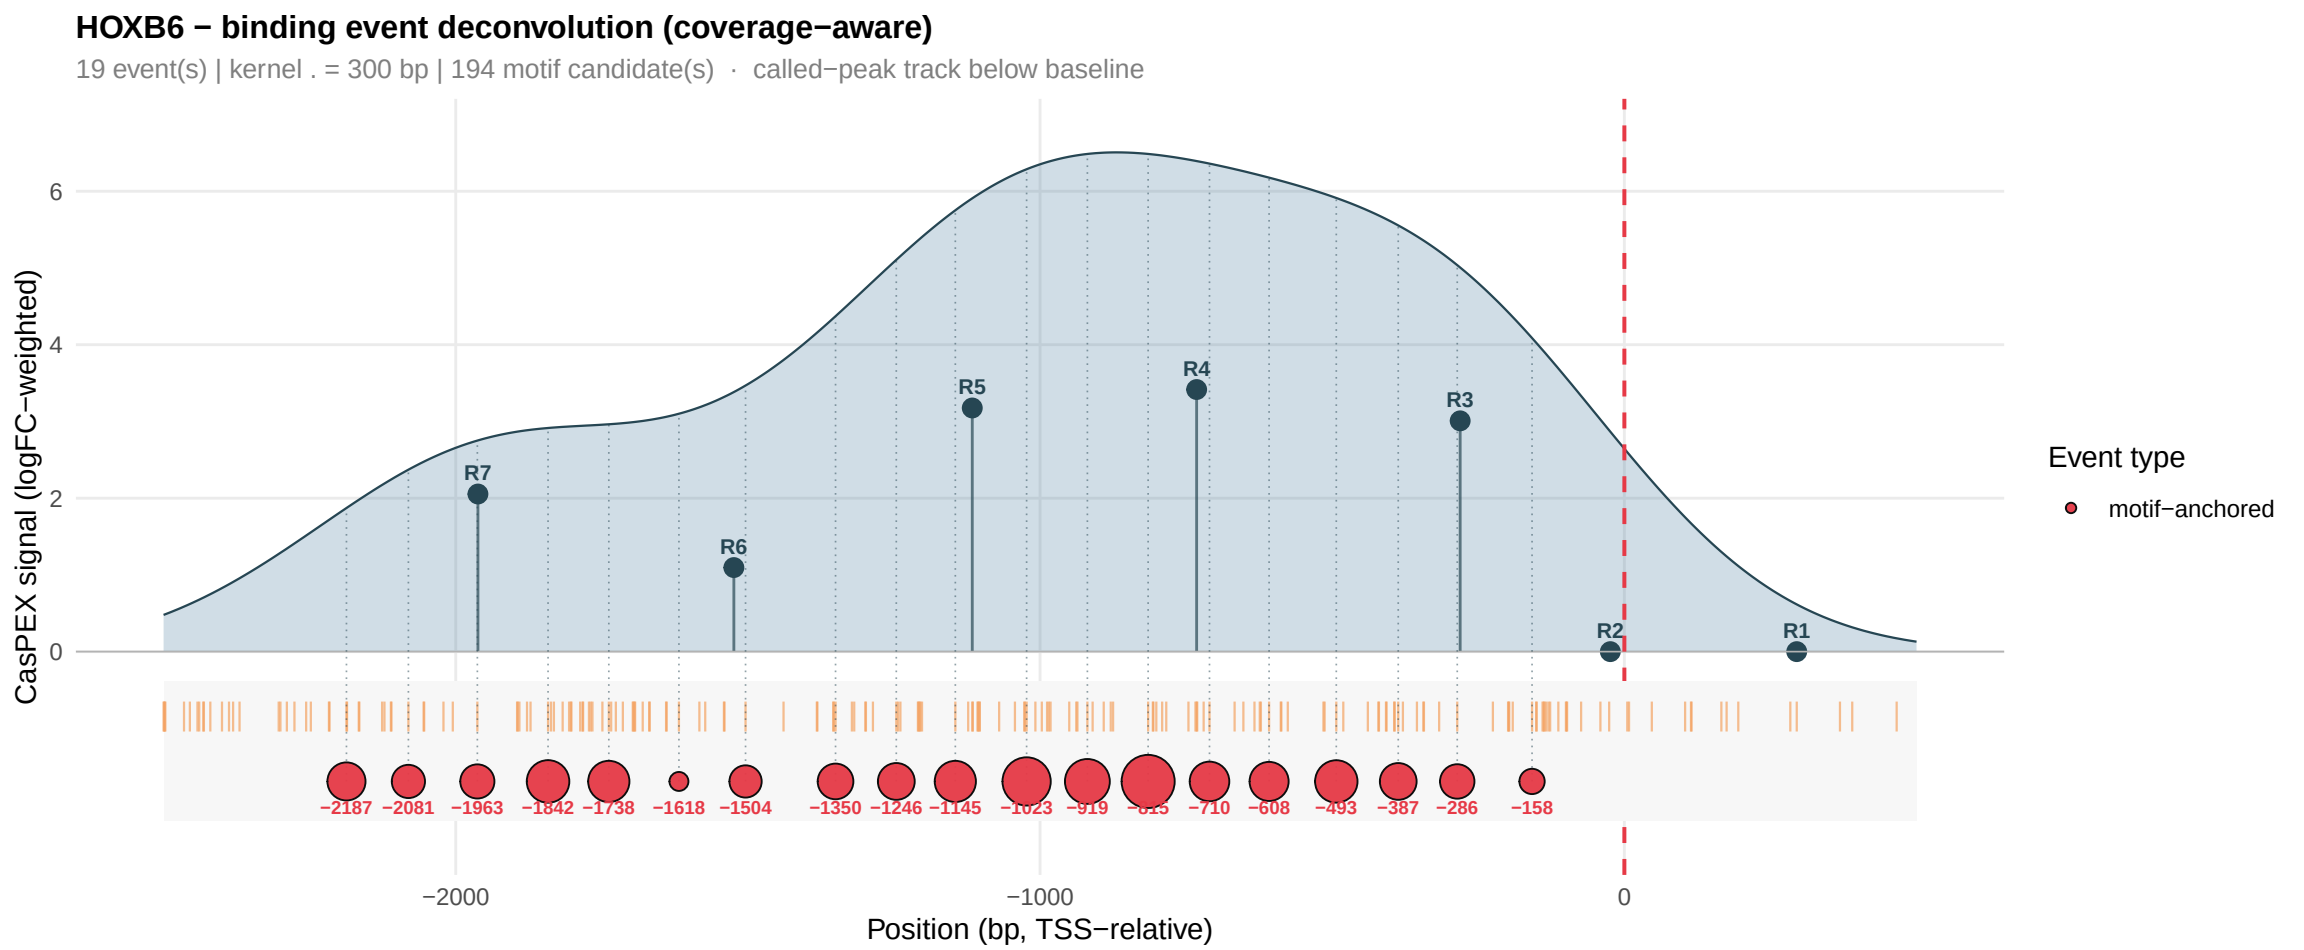
HOXB6 − binding event deconvolution (coverage−aware)
19 event(s) | kernel . = 300 bp | 194 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
4
2
0
R1
R2
R3
R4
R5
R6
R7
−2187
−2081
−1963
−1842
−1738
−1618
−1504
−1350
−1246
−1145
−1023
−919
−815
−710
−608
−493
−387
−286
−158
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

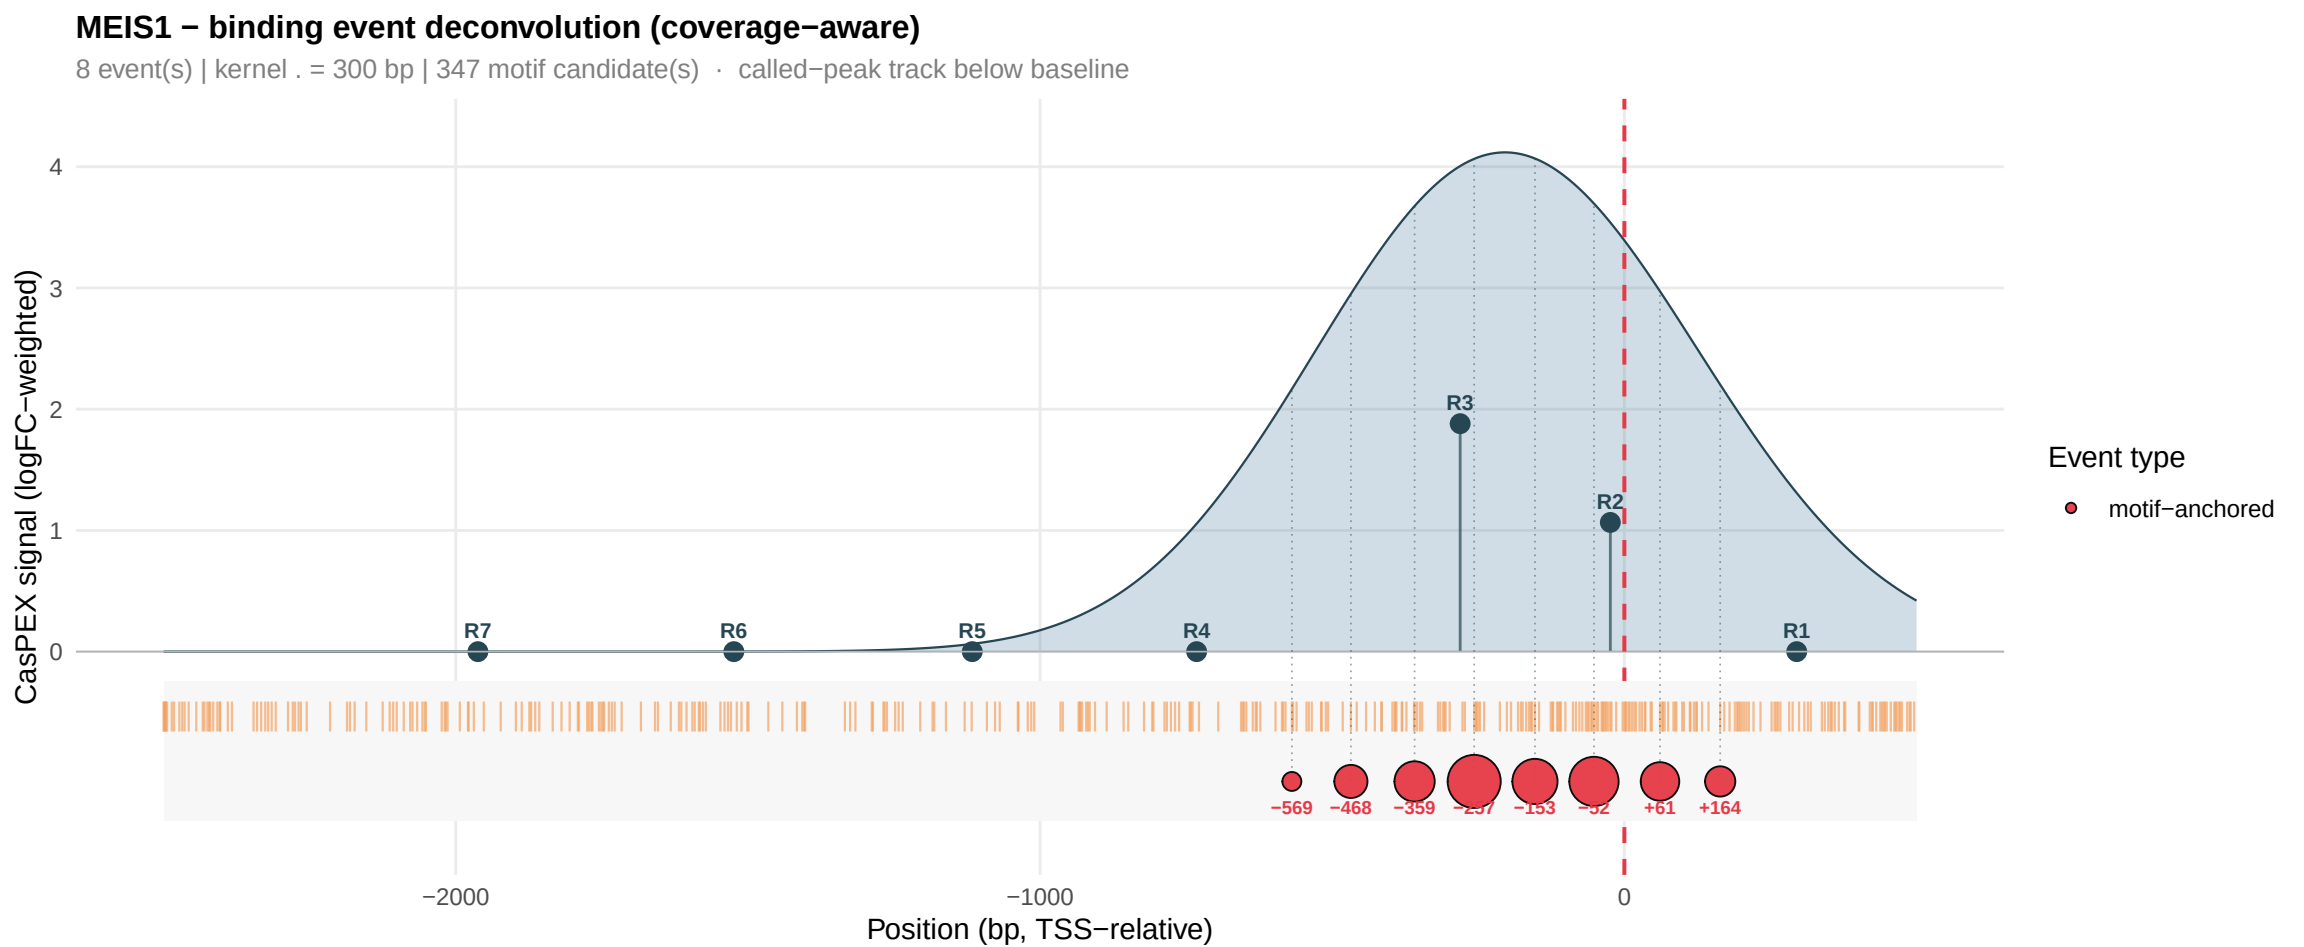
MEIS1 − binding event deconvolution (coverage−aware)
8 event(s) | kernel . = 300 bp | 347 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−569
−468
−359
−257
−153
−52
+61
+164
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

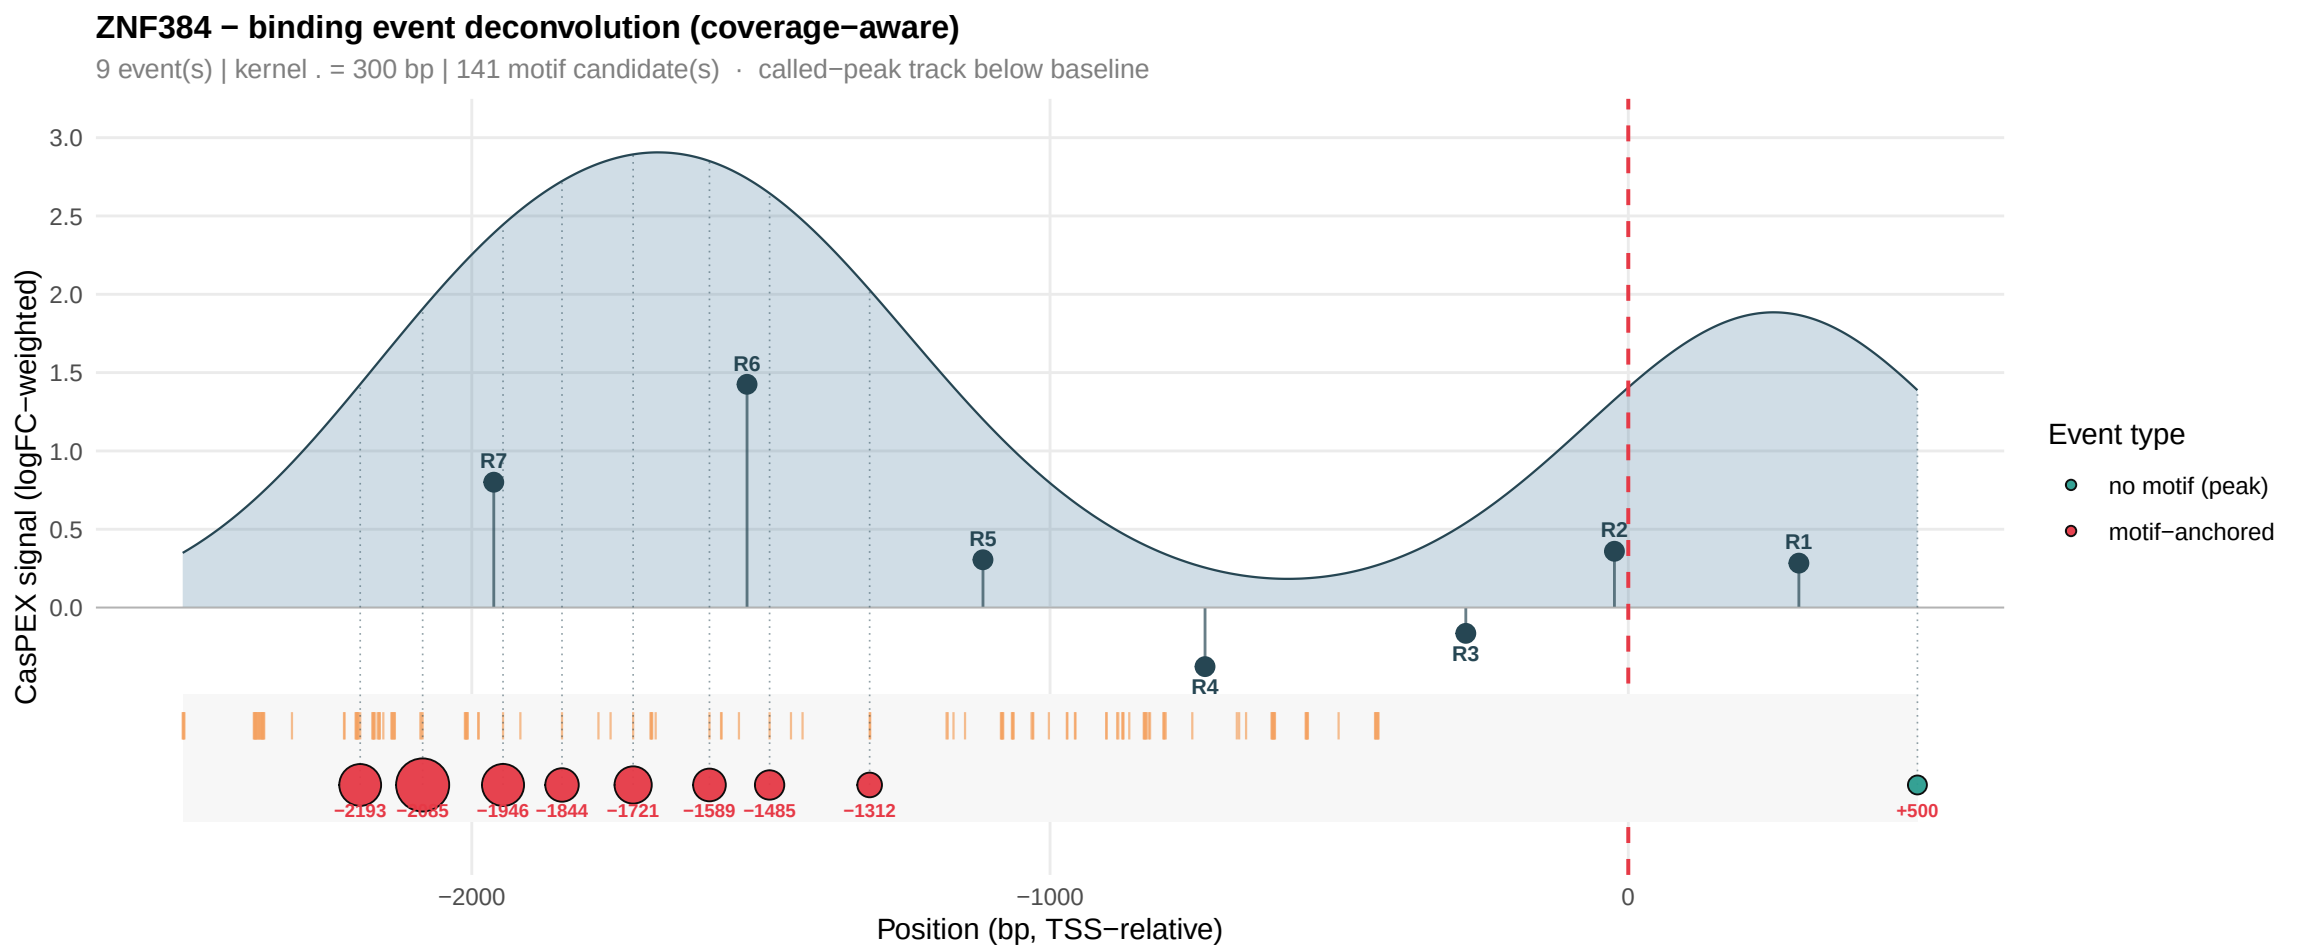
ZNF384 − binding event deconvolution (coverage−aware)
9 event(s) | kernel . = 300 bp | 141 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R6
R7
R5
R4
R3
R2
R1
−2193
−2085
−1946
−1844
−1721
−1589
−1485
−1312
+500
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)
motif−anchored

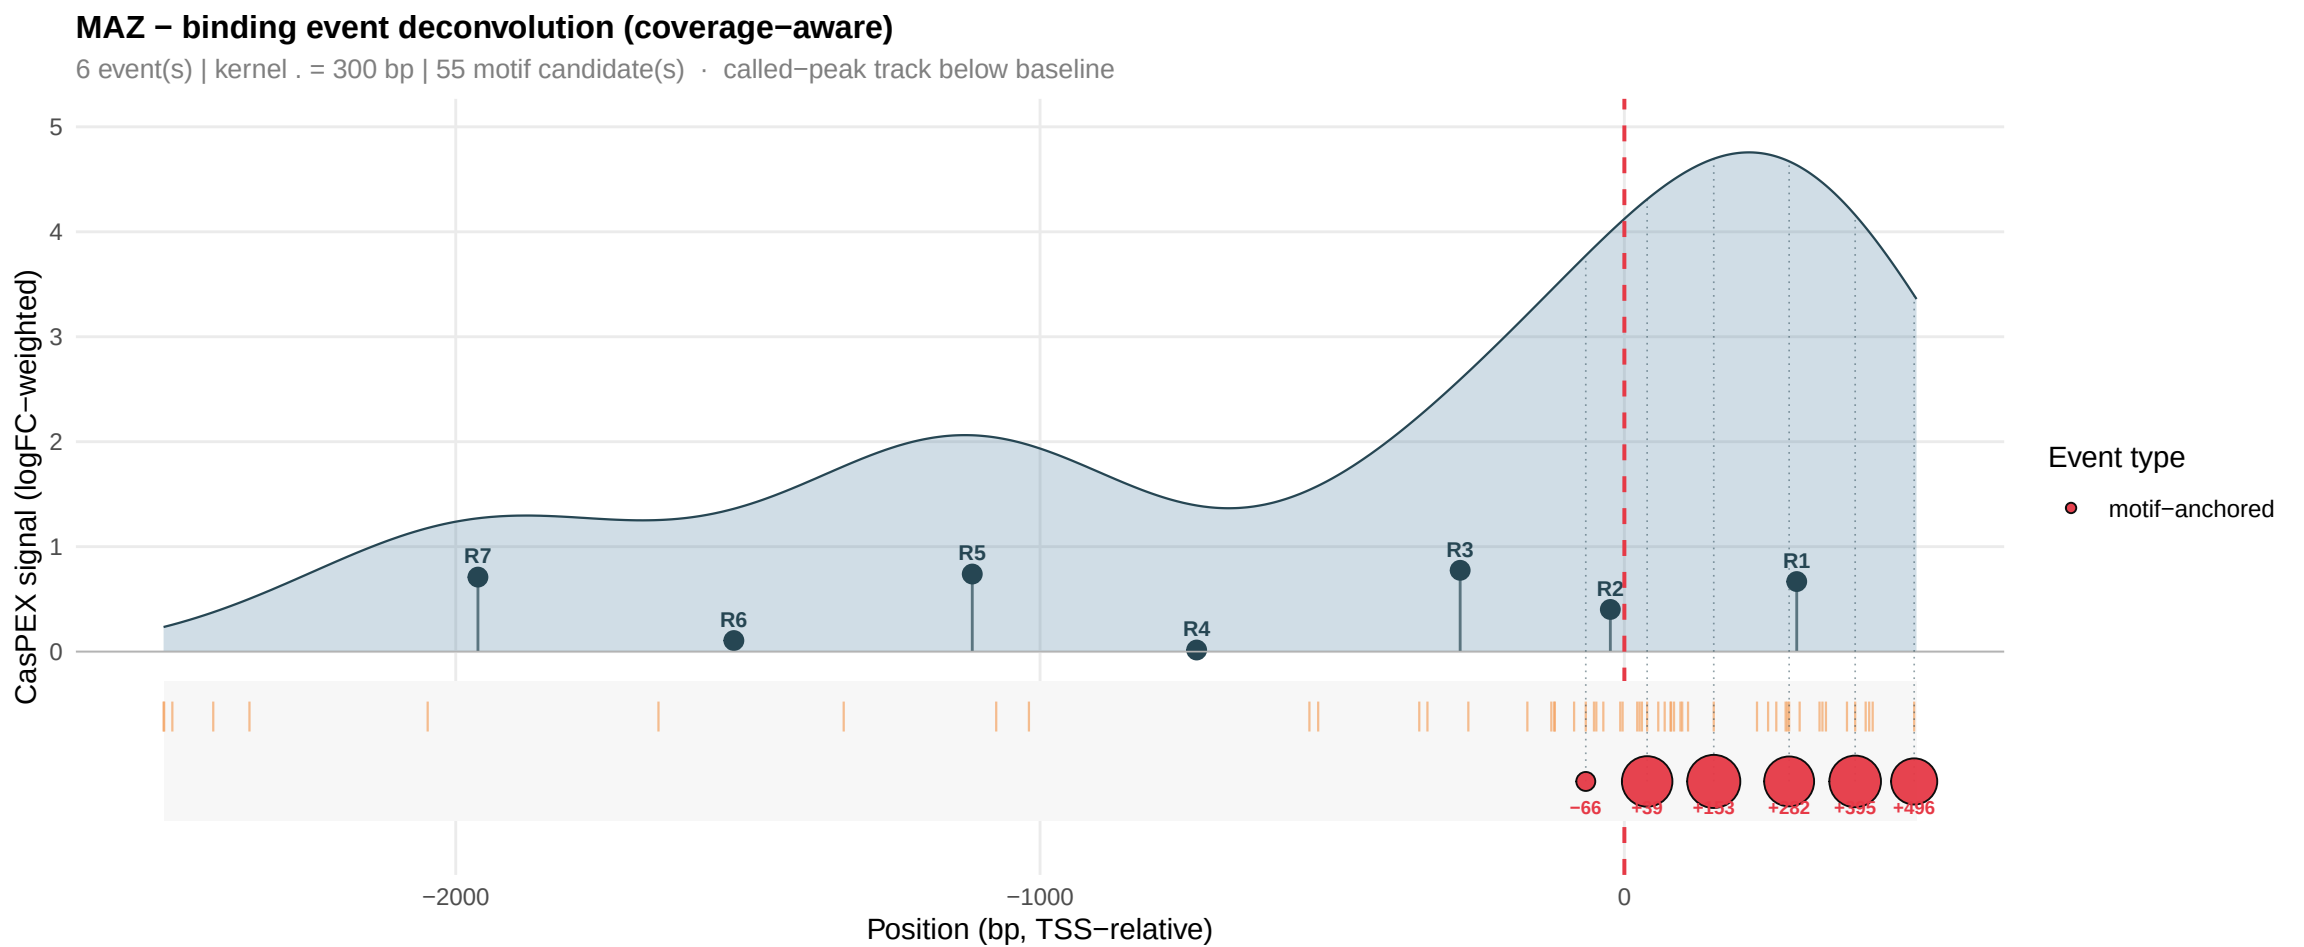
MAZ − binding event deconvolution (coverage−aware)
6 event(s) | kernel . = 300 bp | 55 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−66
+39
+133
+262
+395
+496
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

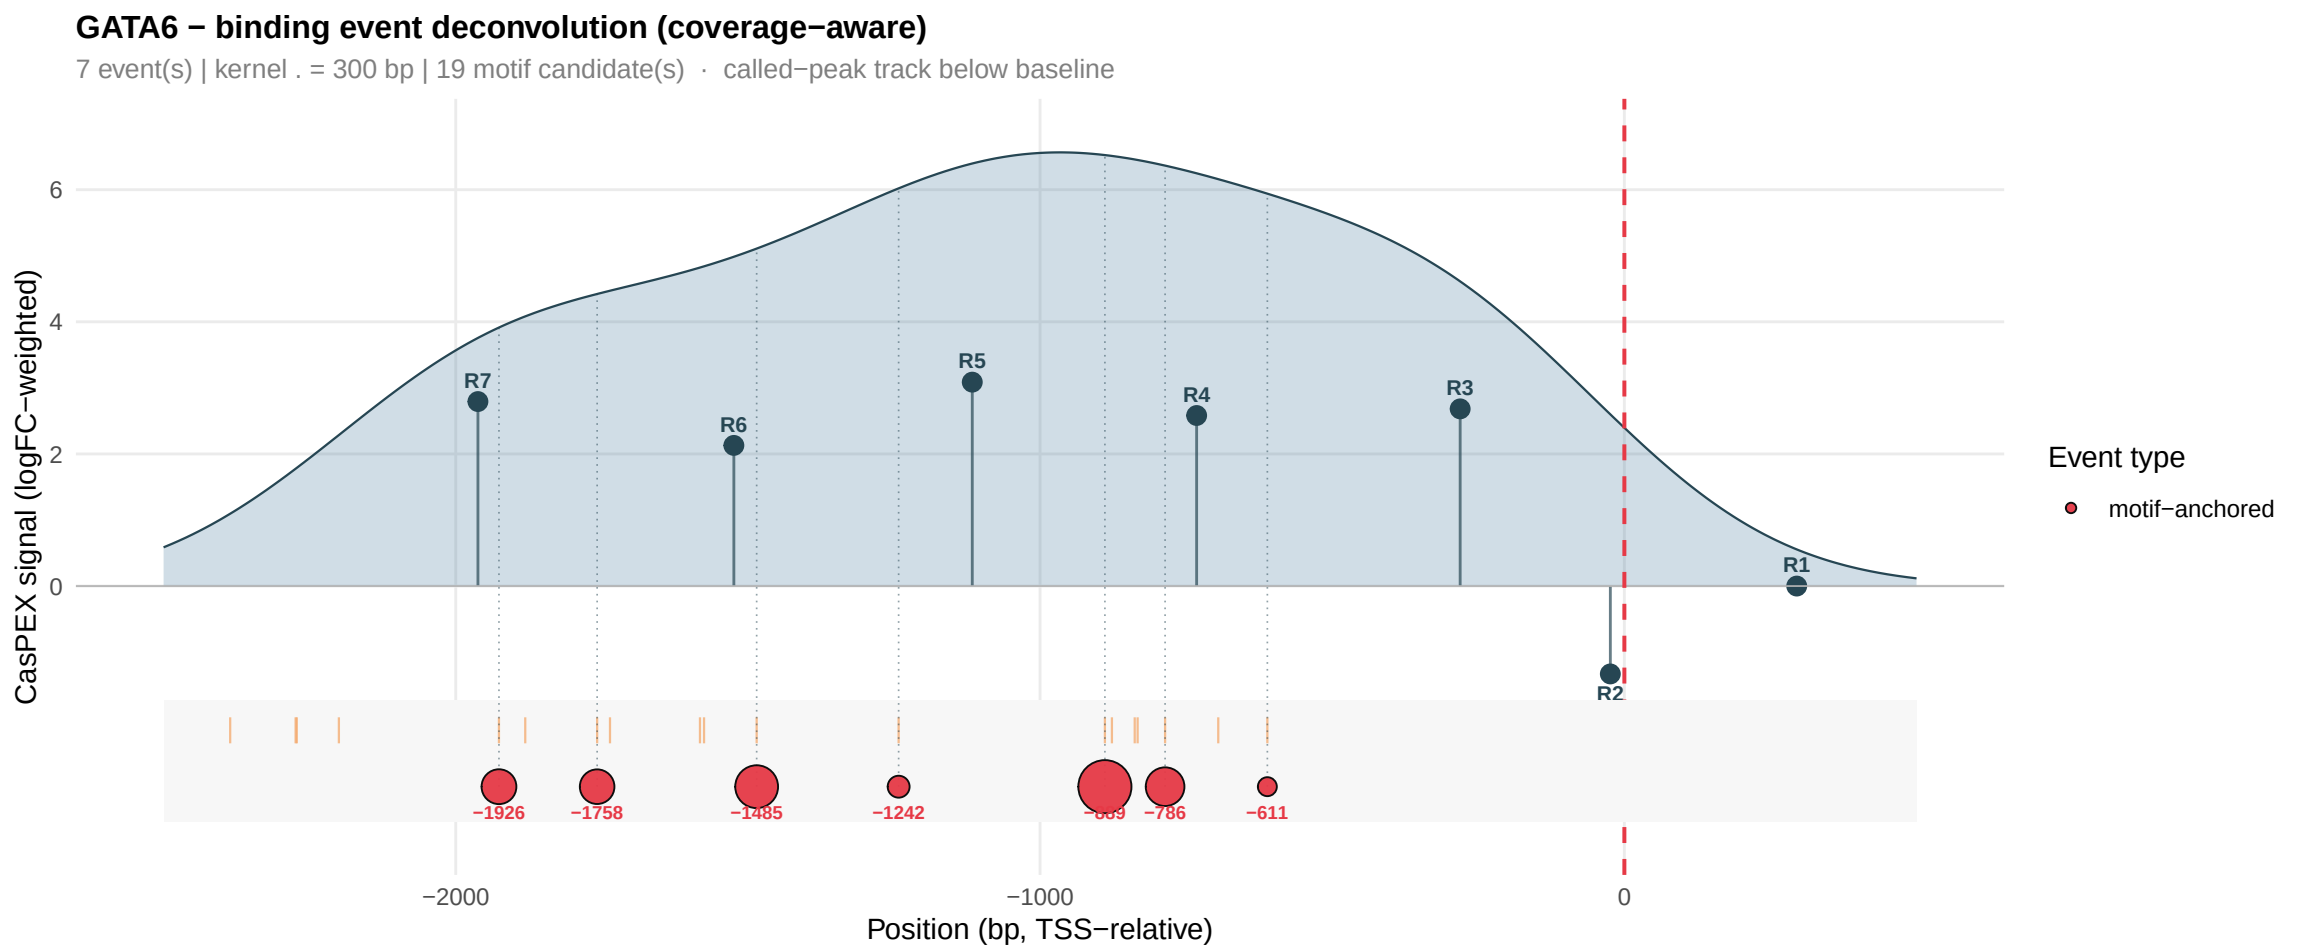
GATA6 − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 300 bp | 19 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
4
2
0
R7
R6
R5
R4
R3
R2
R1
−1926
−1758
−1485
−1242
−786
−611
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

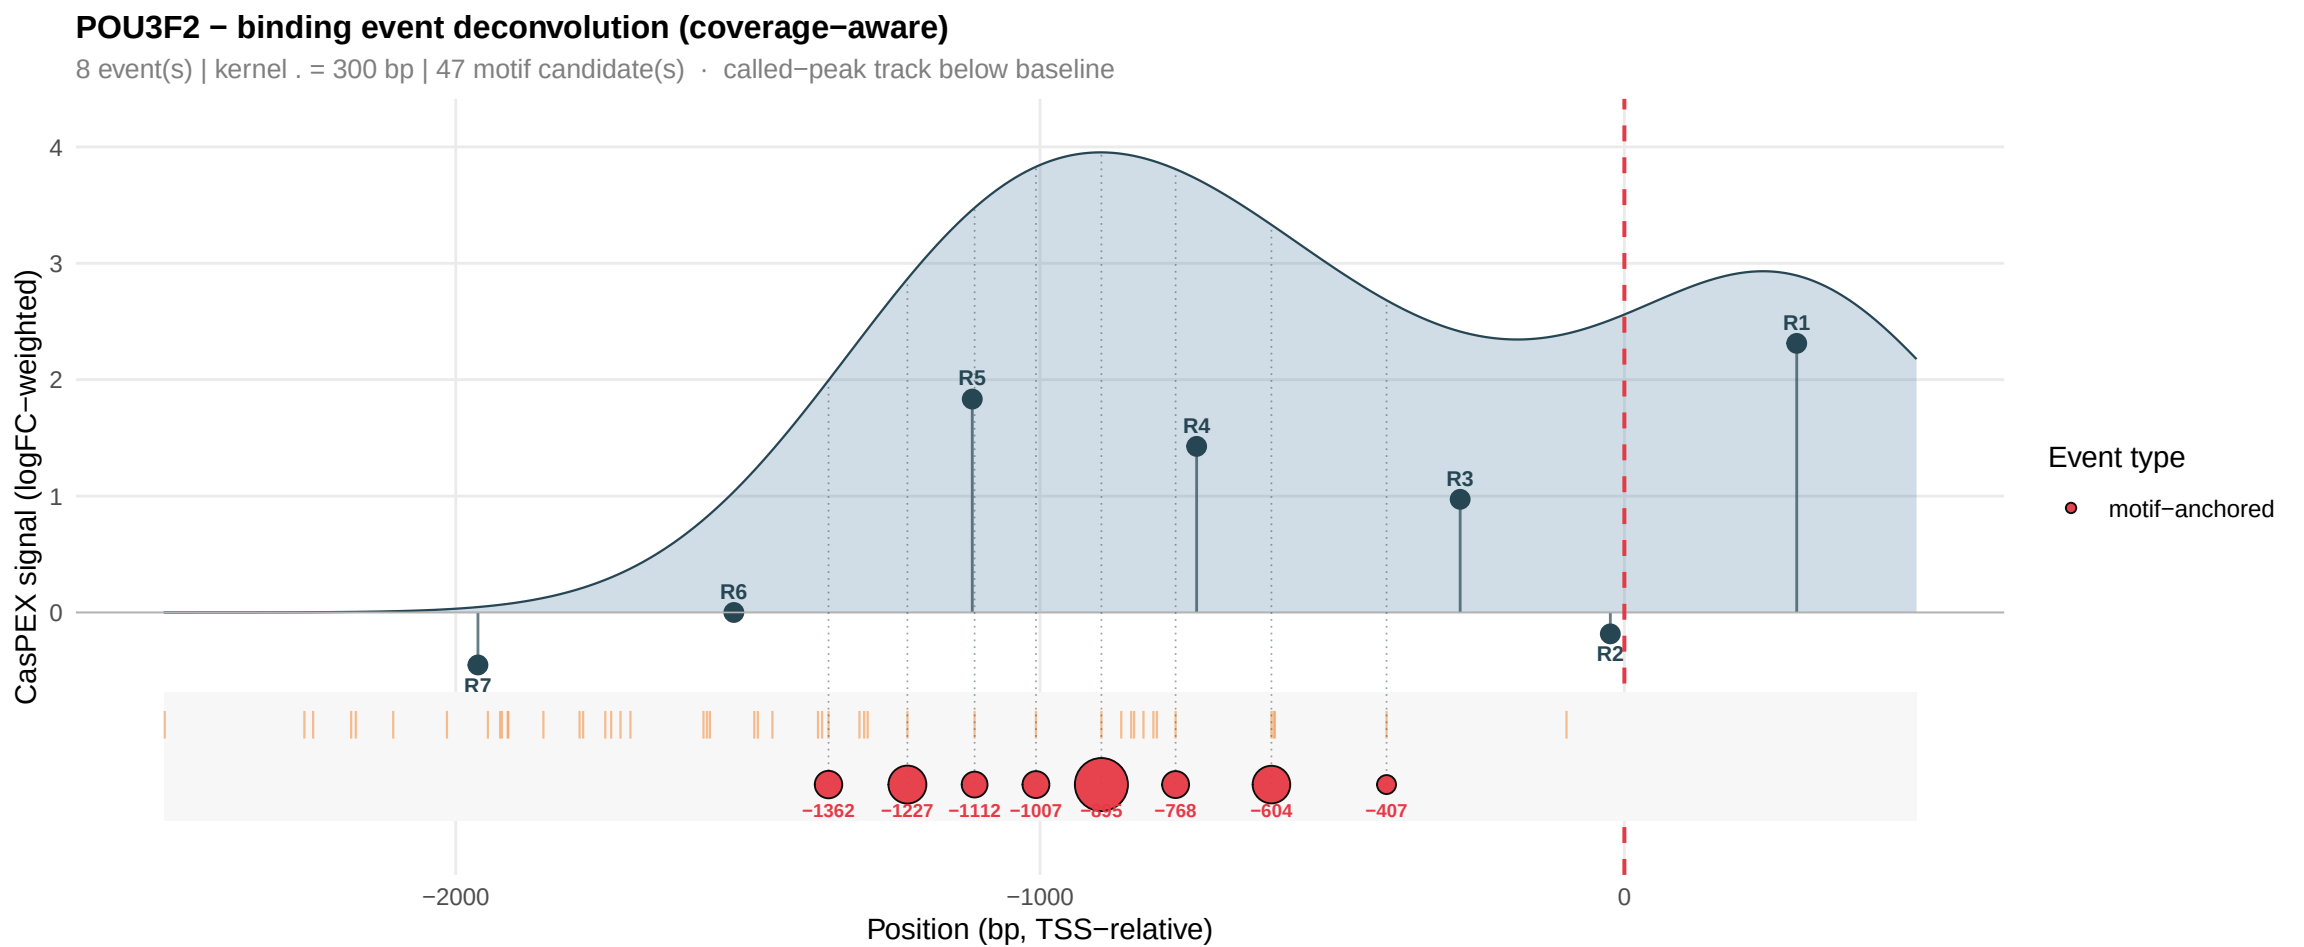
POU3F2 − binding event deconvolution (coverage−aware)
8 event(s) | kernel . = 300 bp | 47 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1362
−1227
−1112
−1007
−768
−604
−407
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

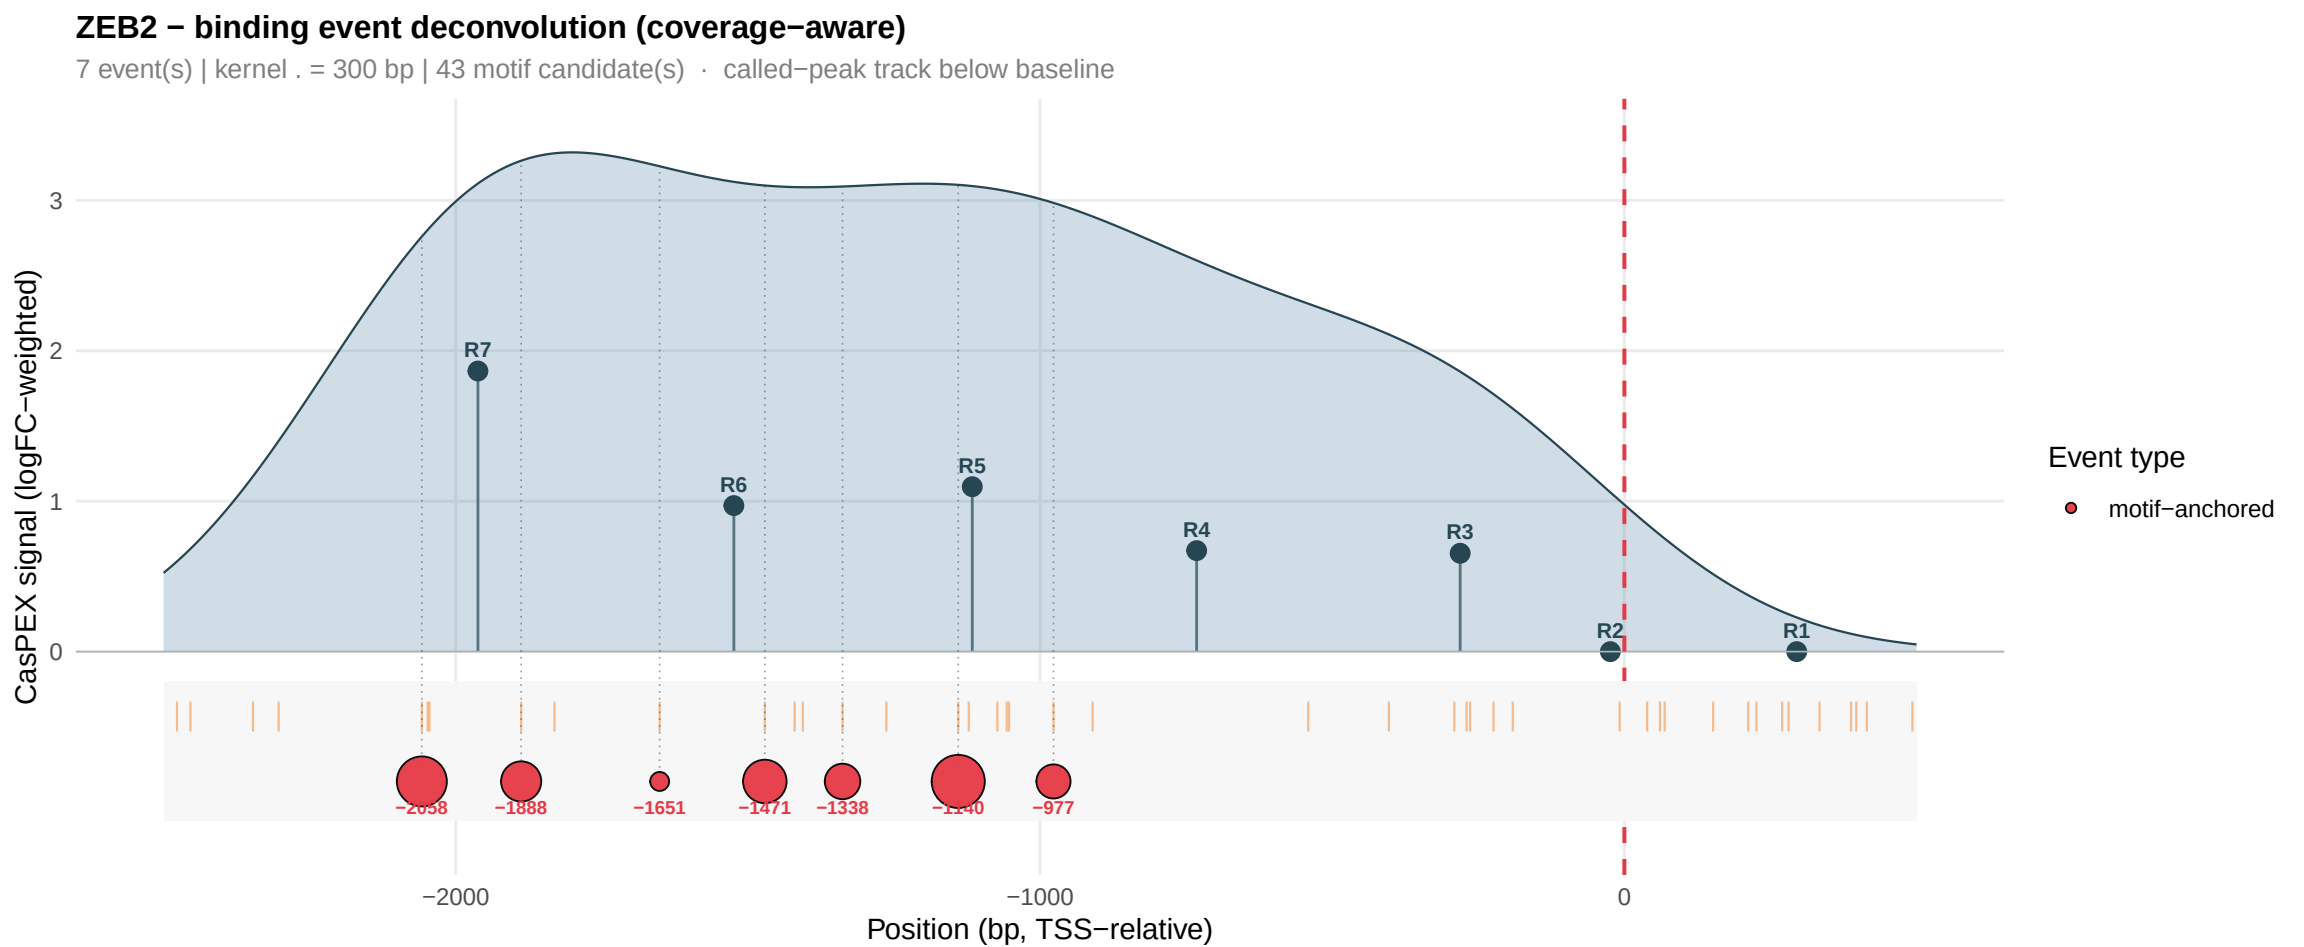
ZEB2 − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 300 bp | 43 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−2058
−1888
−1651
−1471
−1338
−1140
−977
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

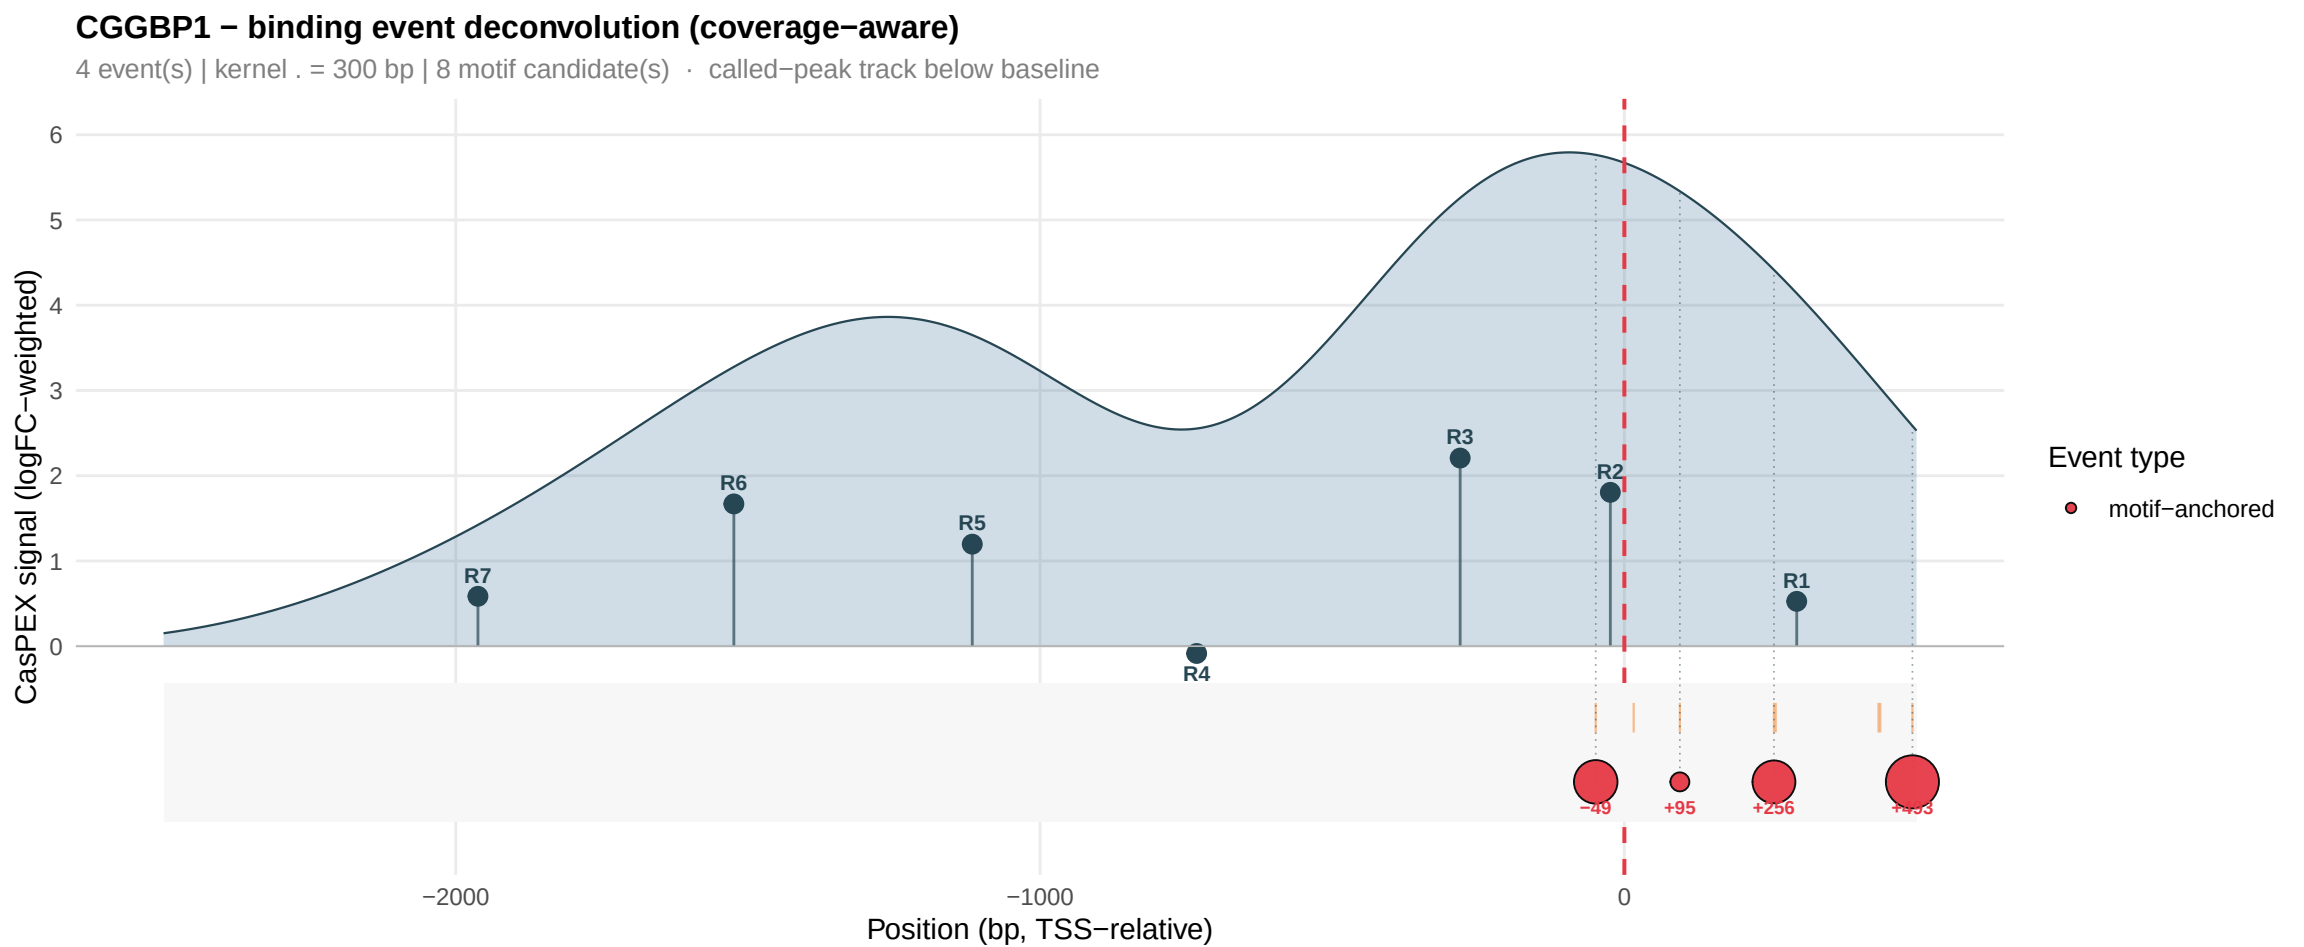
CGGBP1 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 8 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−49
+95
+256
+453
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

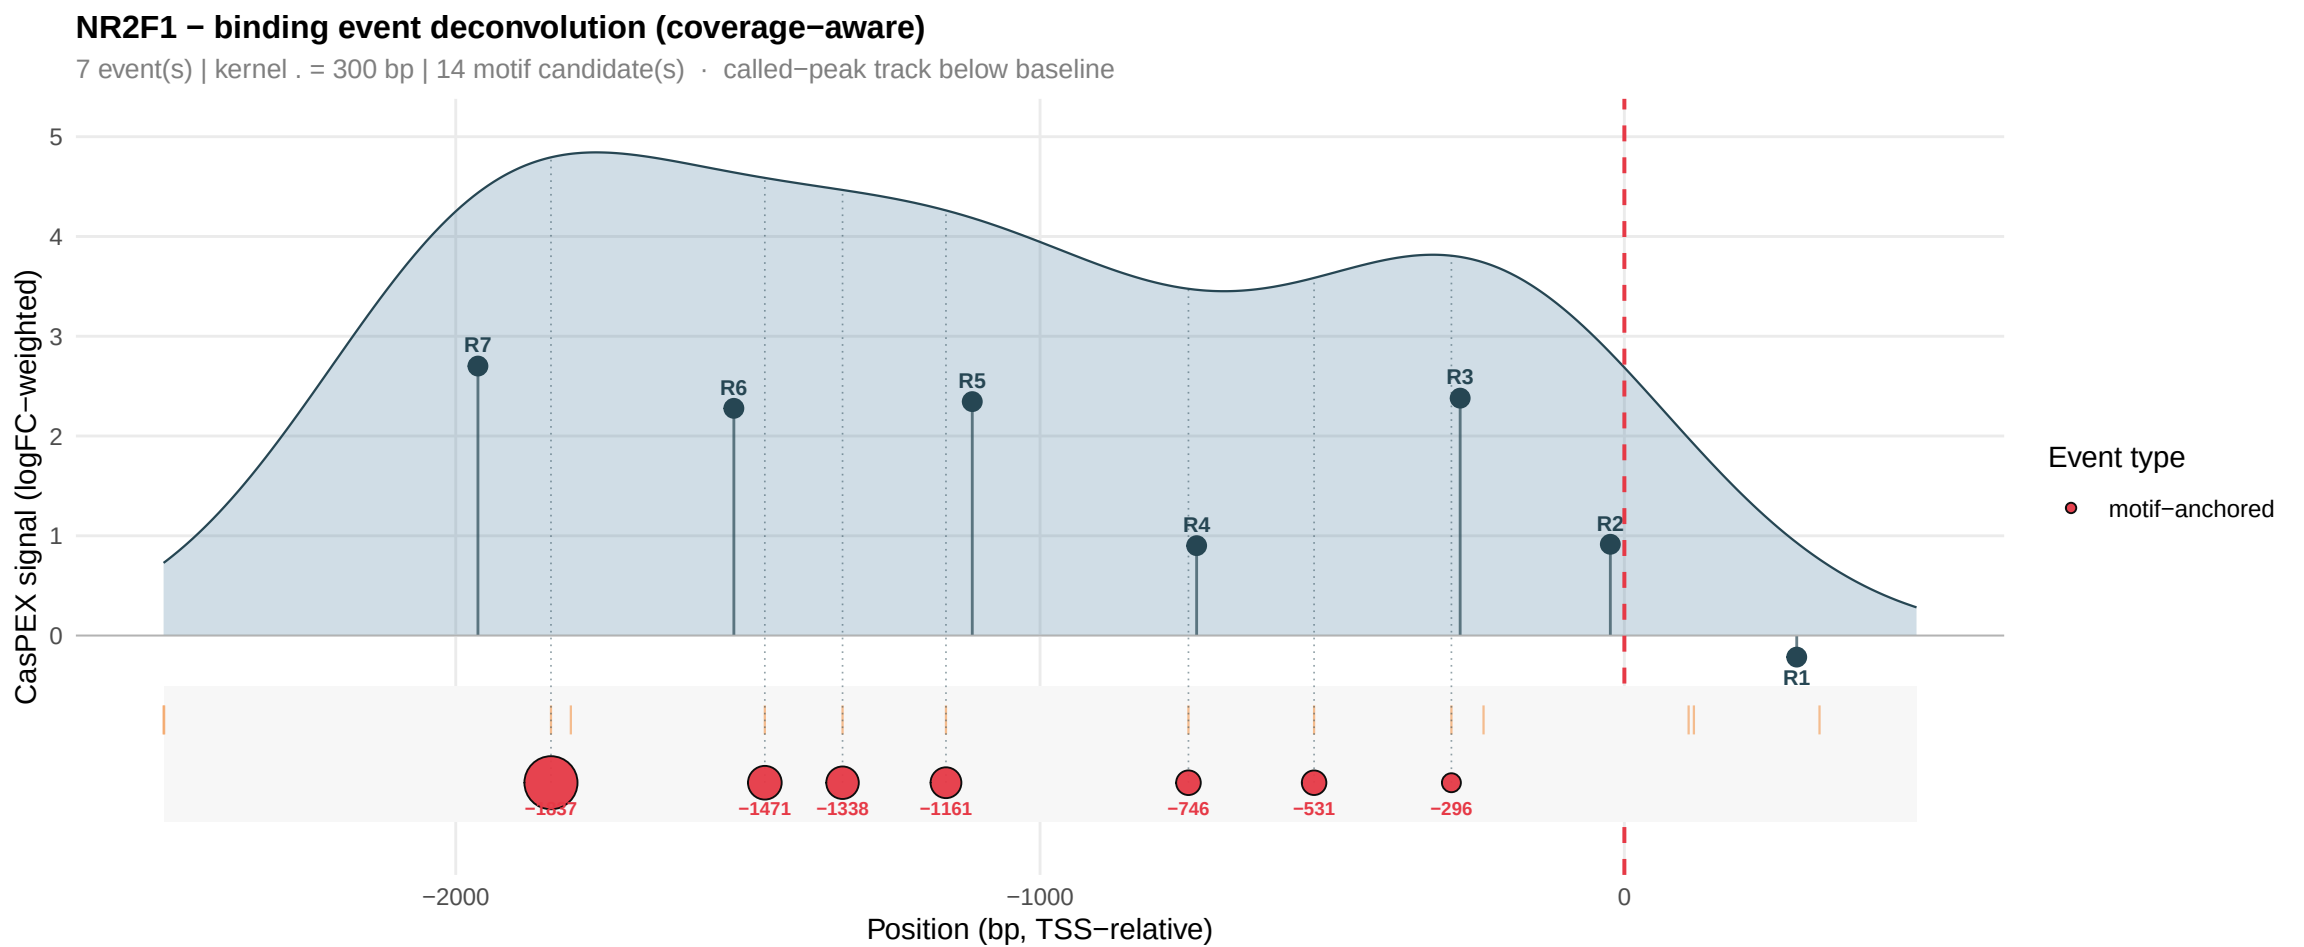
NR2F1 − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 300 bp | 14 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1837
−1471
−1338
−1161
−746
−531
−296
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

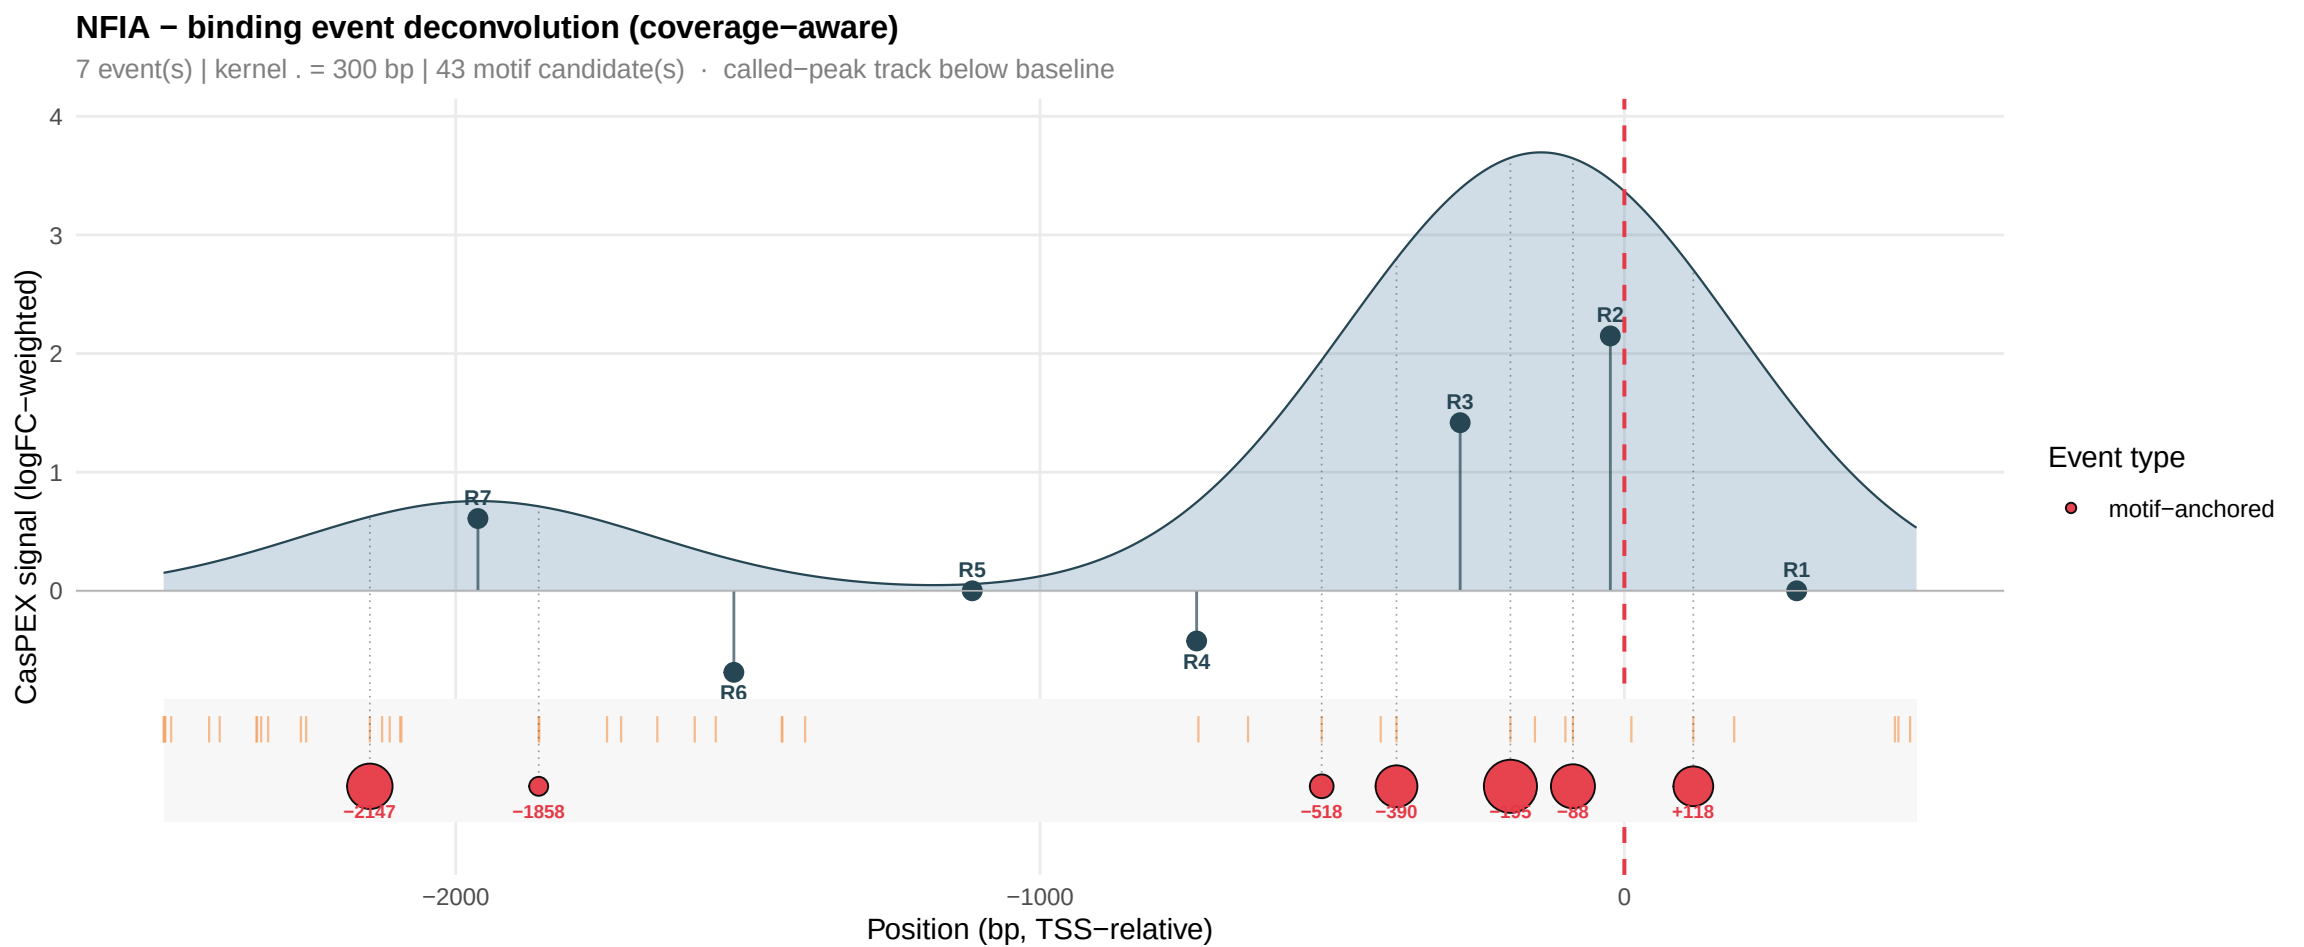
NFIA − binding event deconvolution (coverage−aware)
7 event(s) | kernel . = 300 bp | 43 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−2147
−1858
−518
−390
−195
−88
+118
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

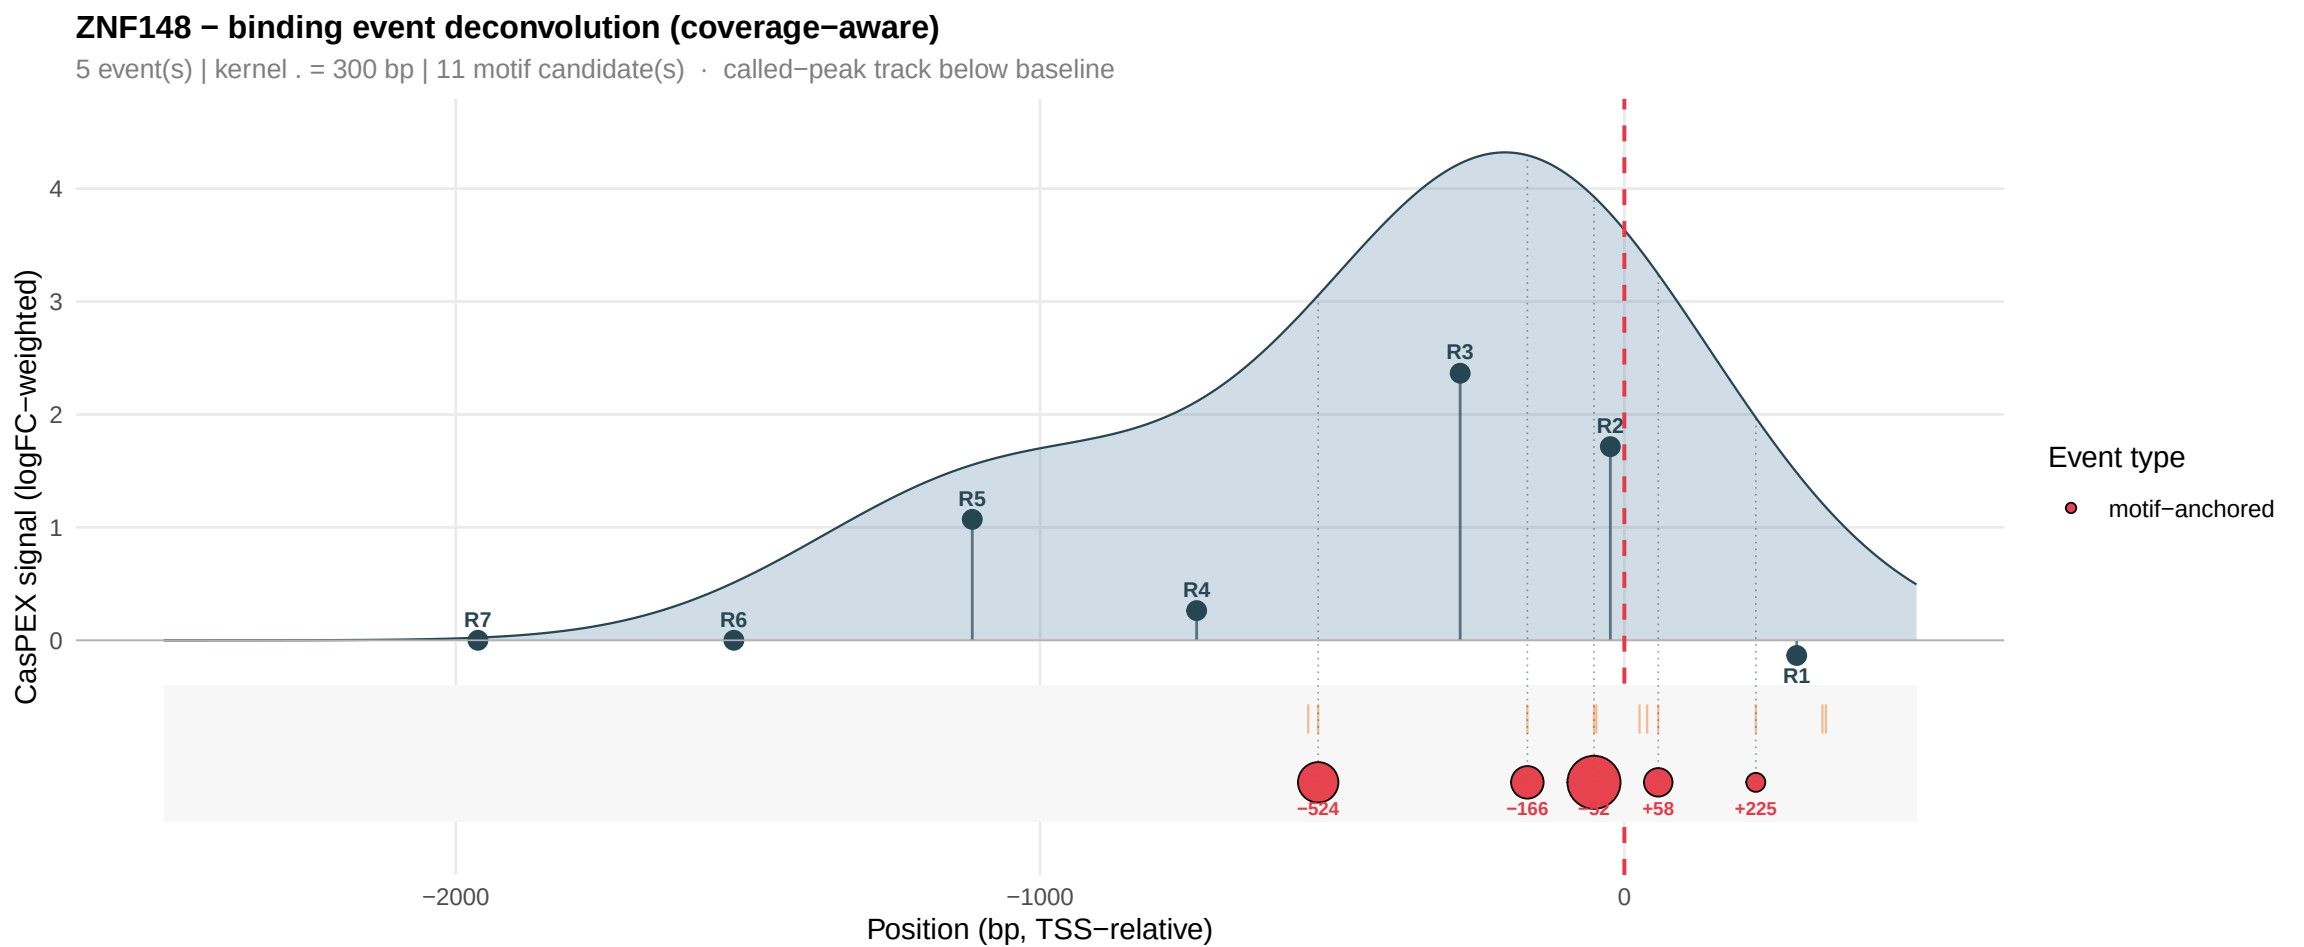
ZNF148 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 300 bp | 11 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−524
−166
−32
+58
+225
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

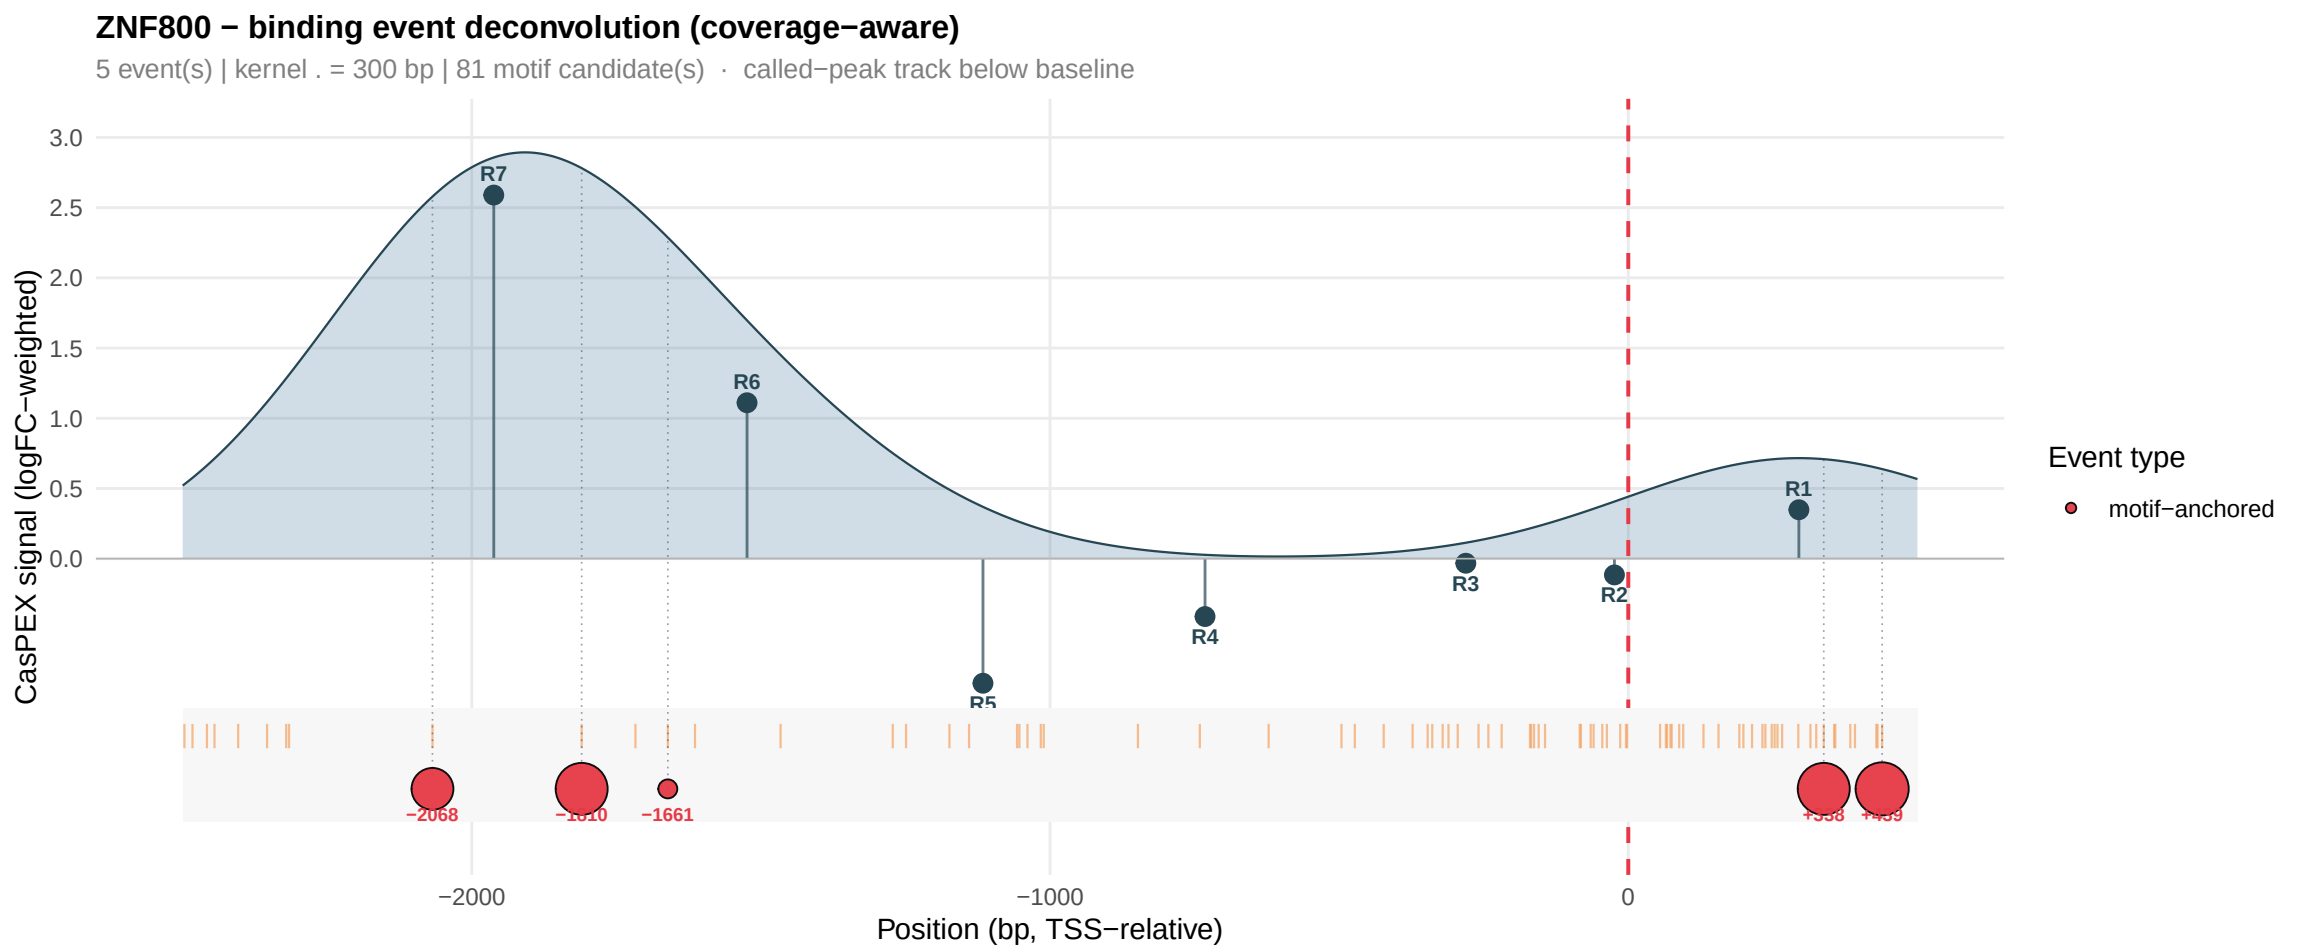
ZNF800 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 300 bp | 81 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−2068
−1661
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

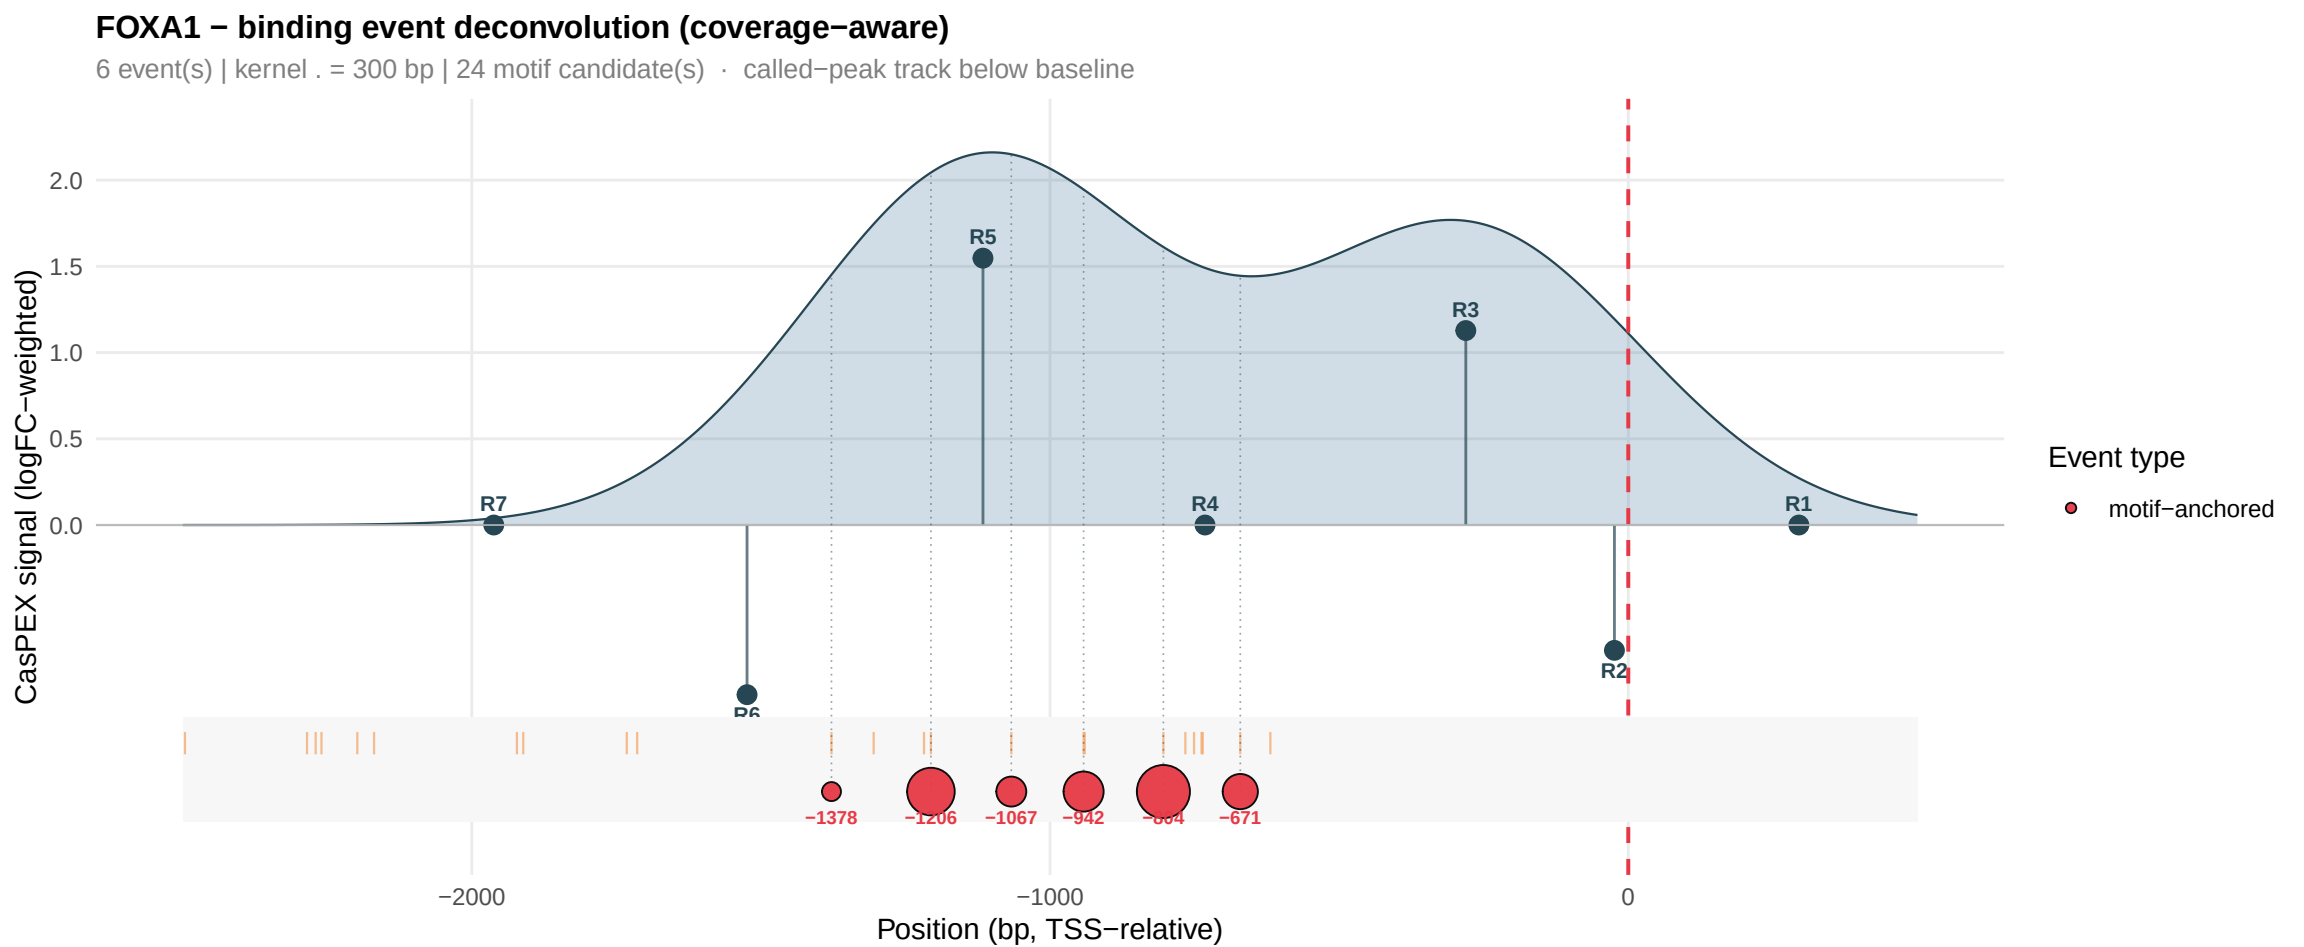
FOXA1 − binding event deconvolution (coverage−aware)
6 event(s) | kernel . = 300 bp | 24 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R5
R3
R7
R4
R1
R6
R2
−1378
−1206
−1067
−942
−884
−671
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

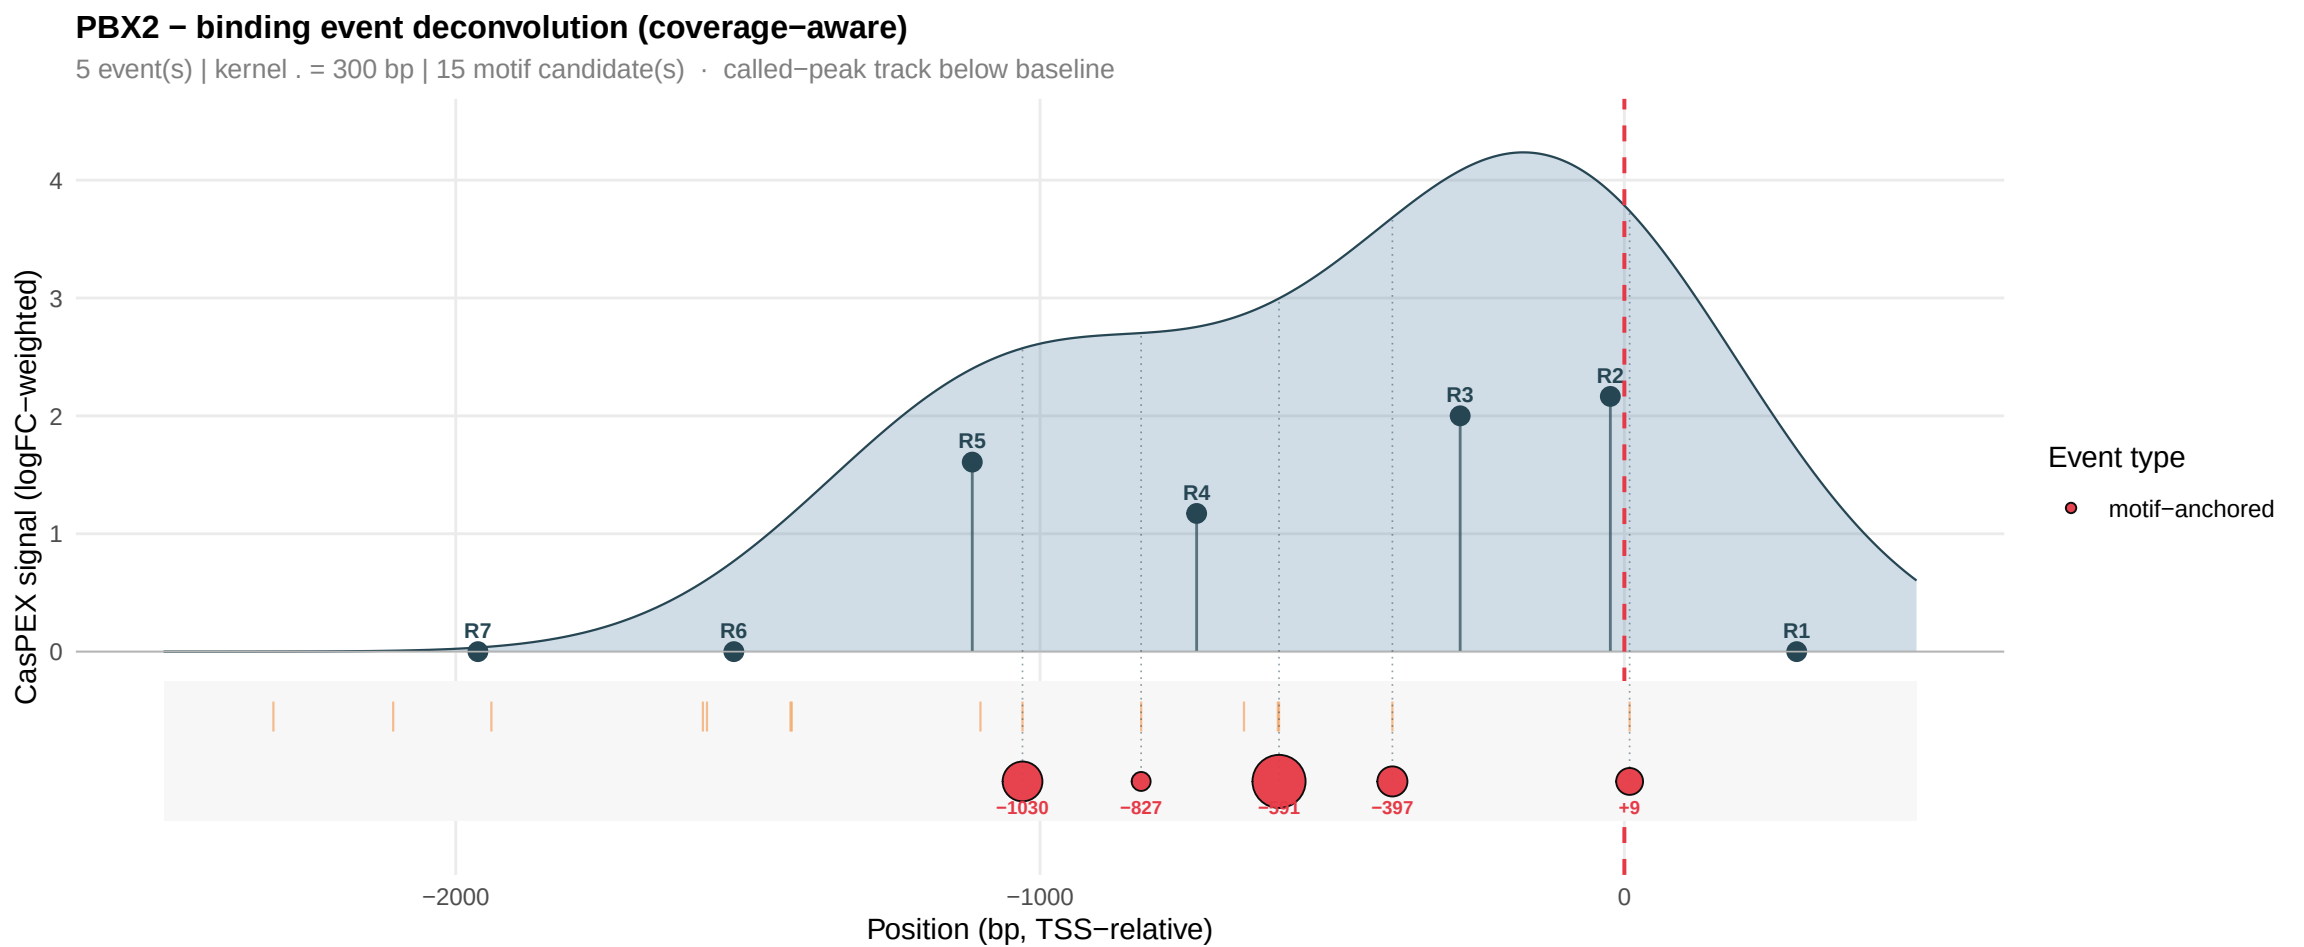
PBX2 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 300 bp | 15 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1030
−827
−397
+9
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

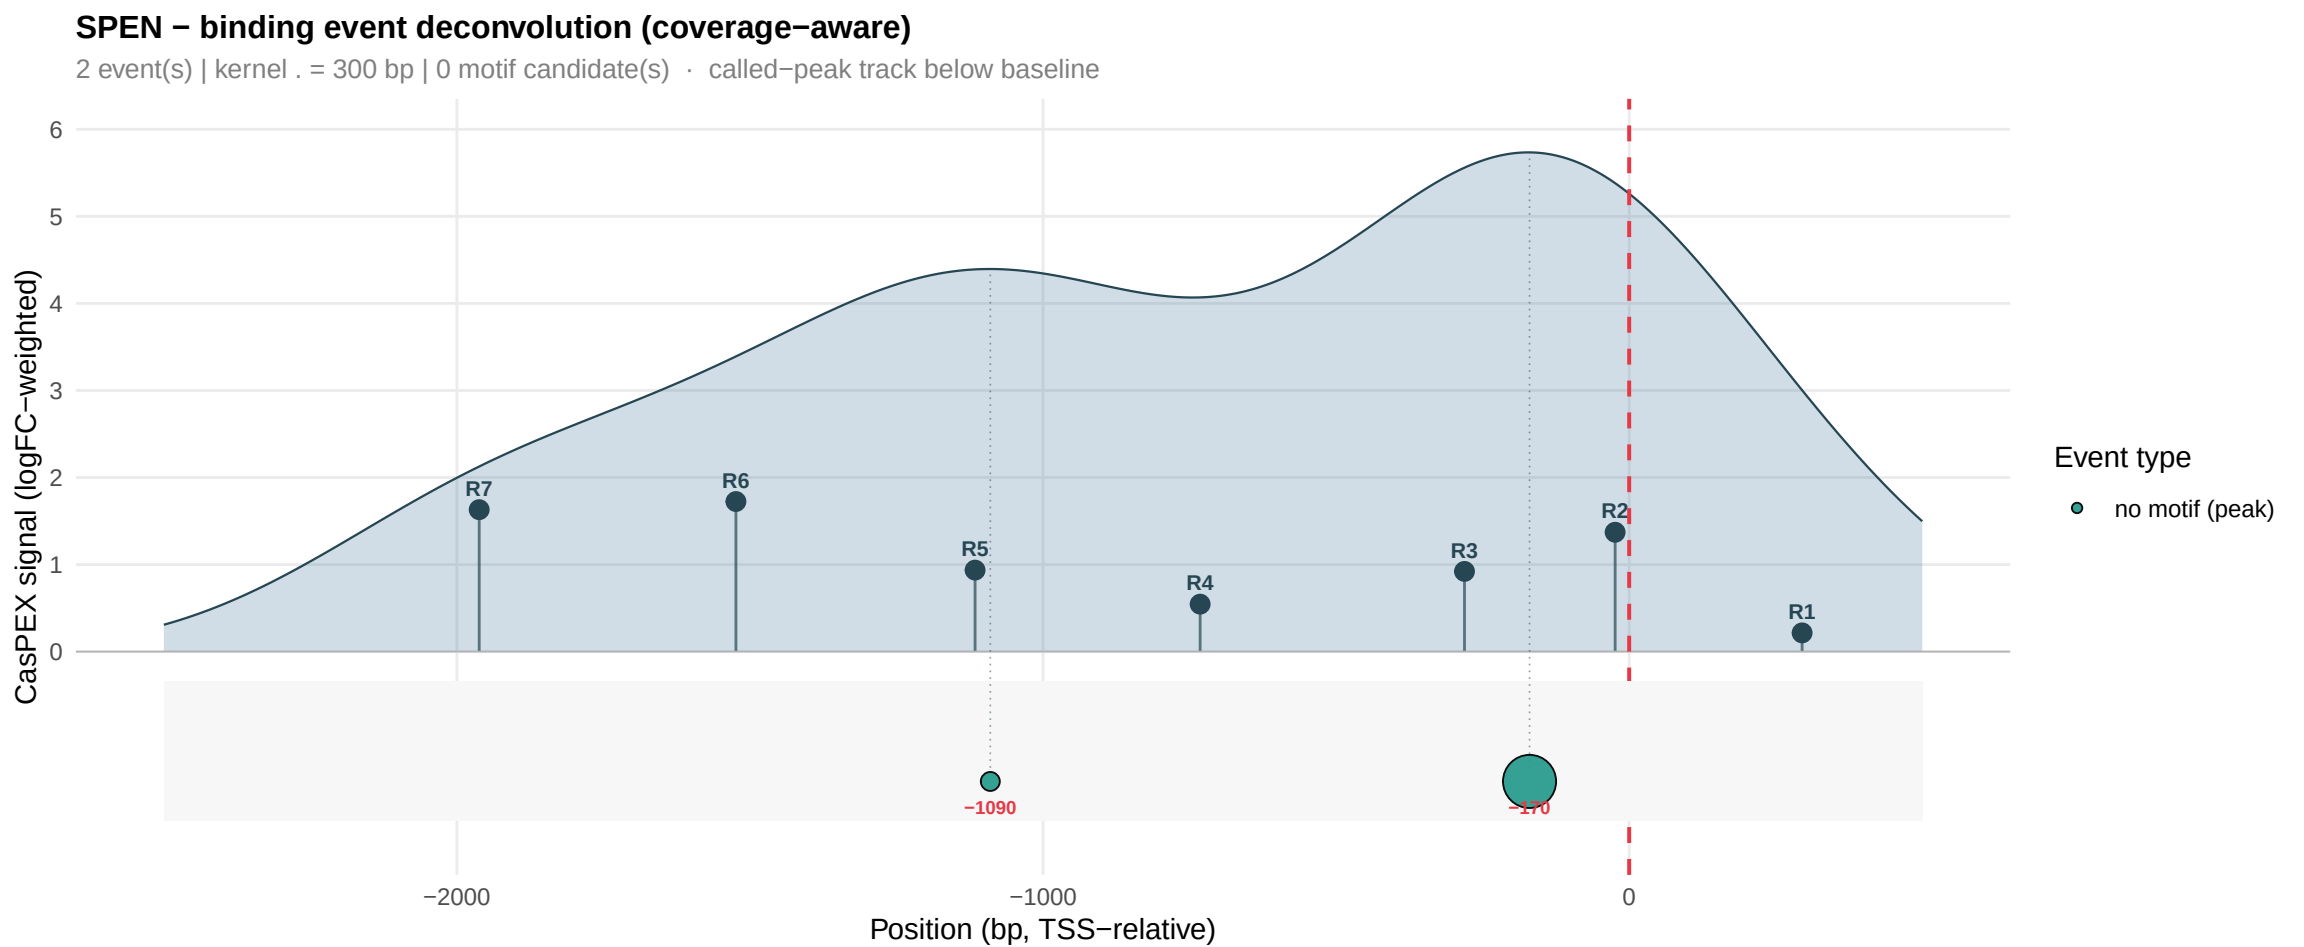
SPEN − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1090
−170
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

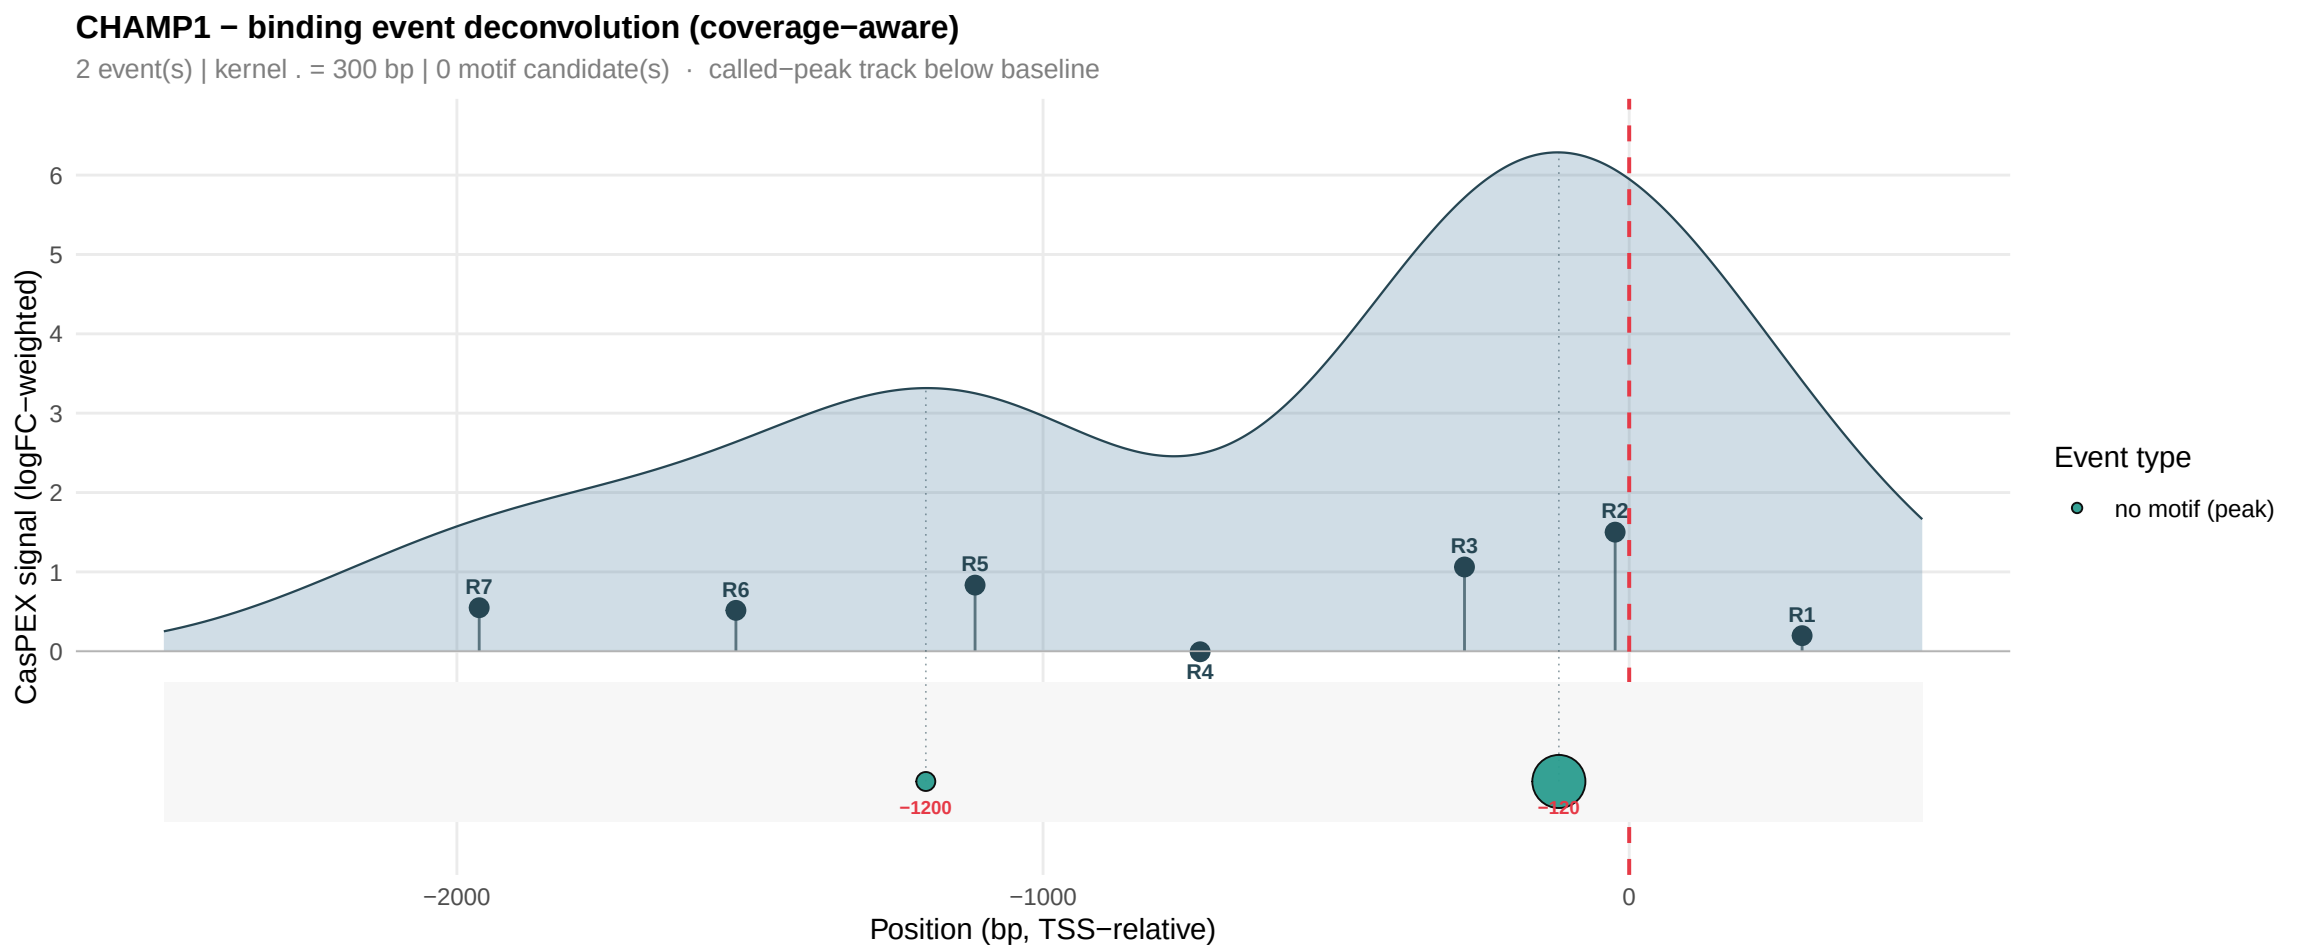
CHAMP1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1200
−120
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

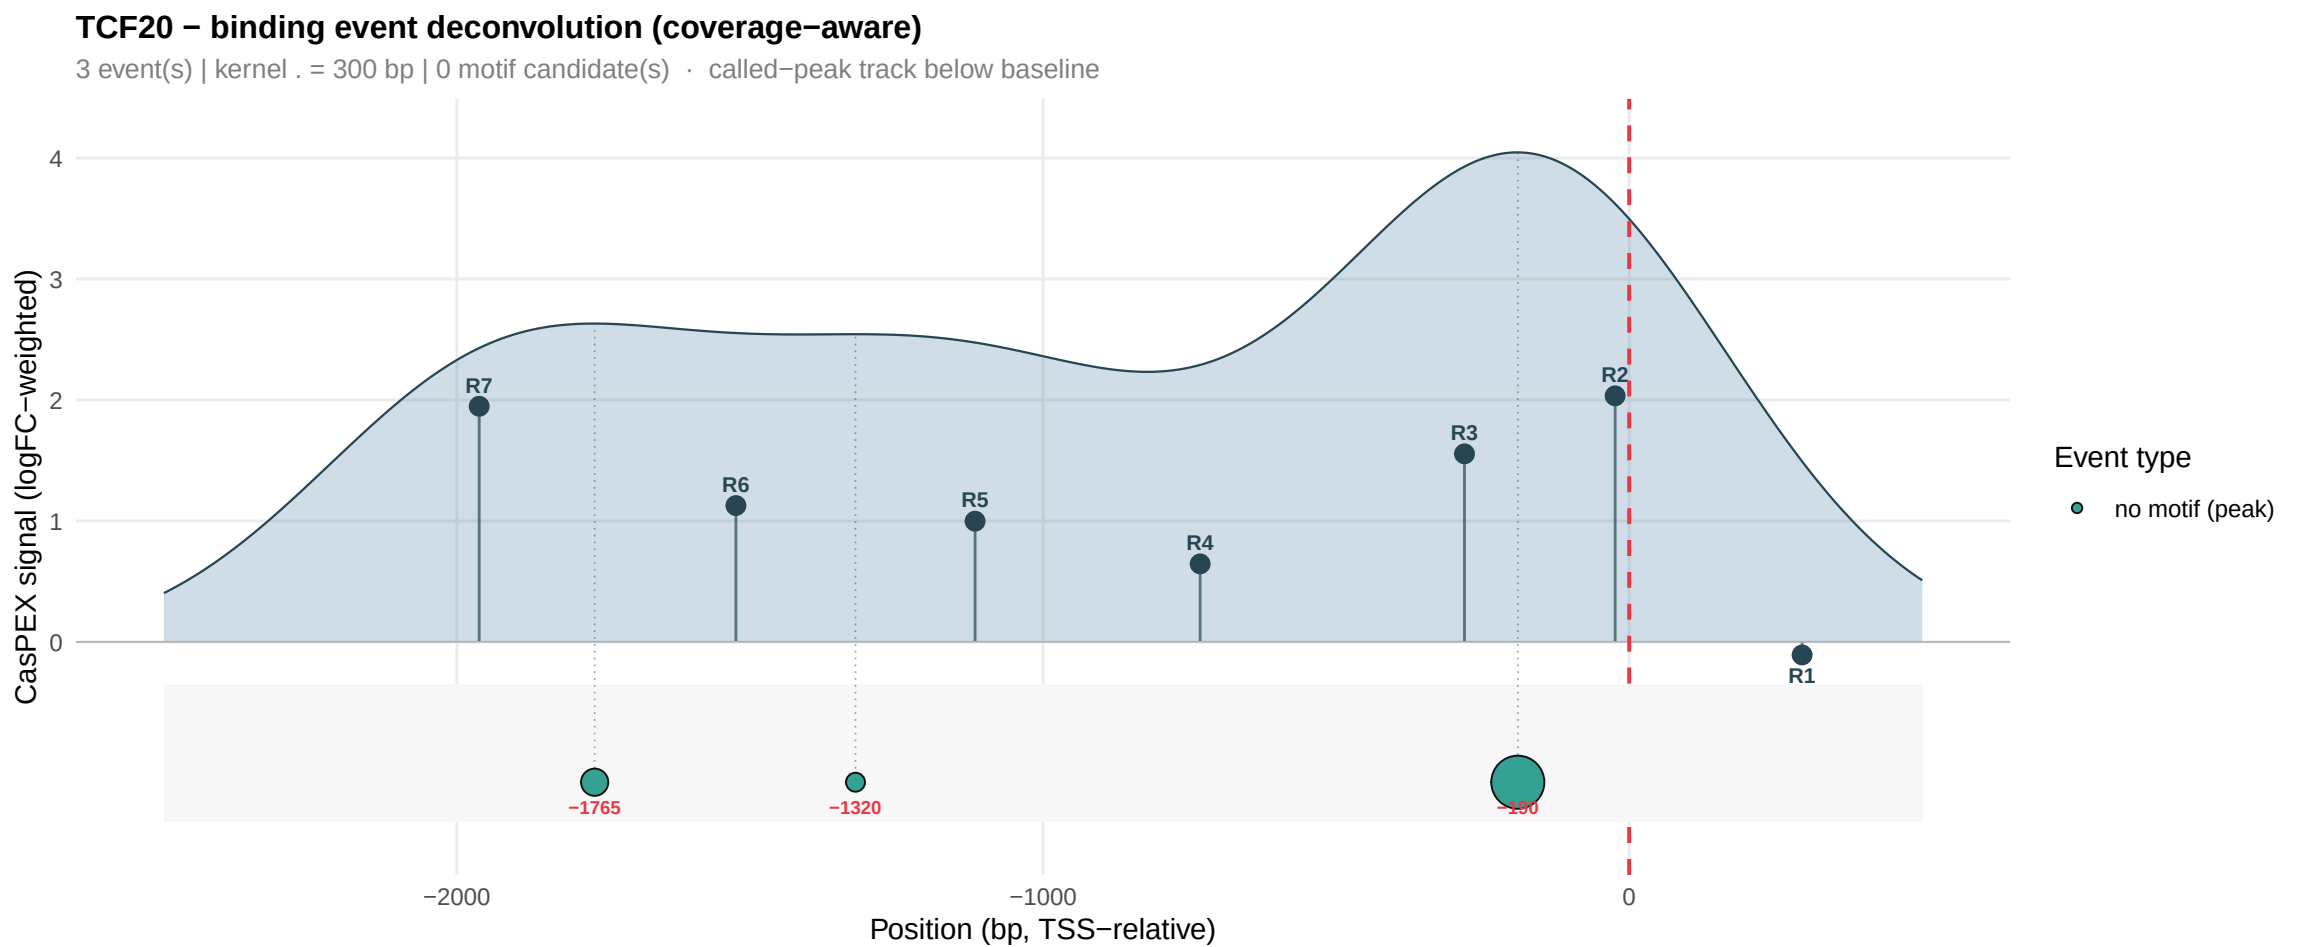
TCF20 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1765
−1320
−190
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

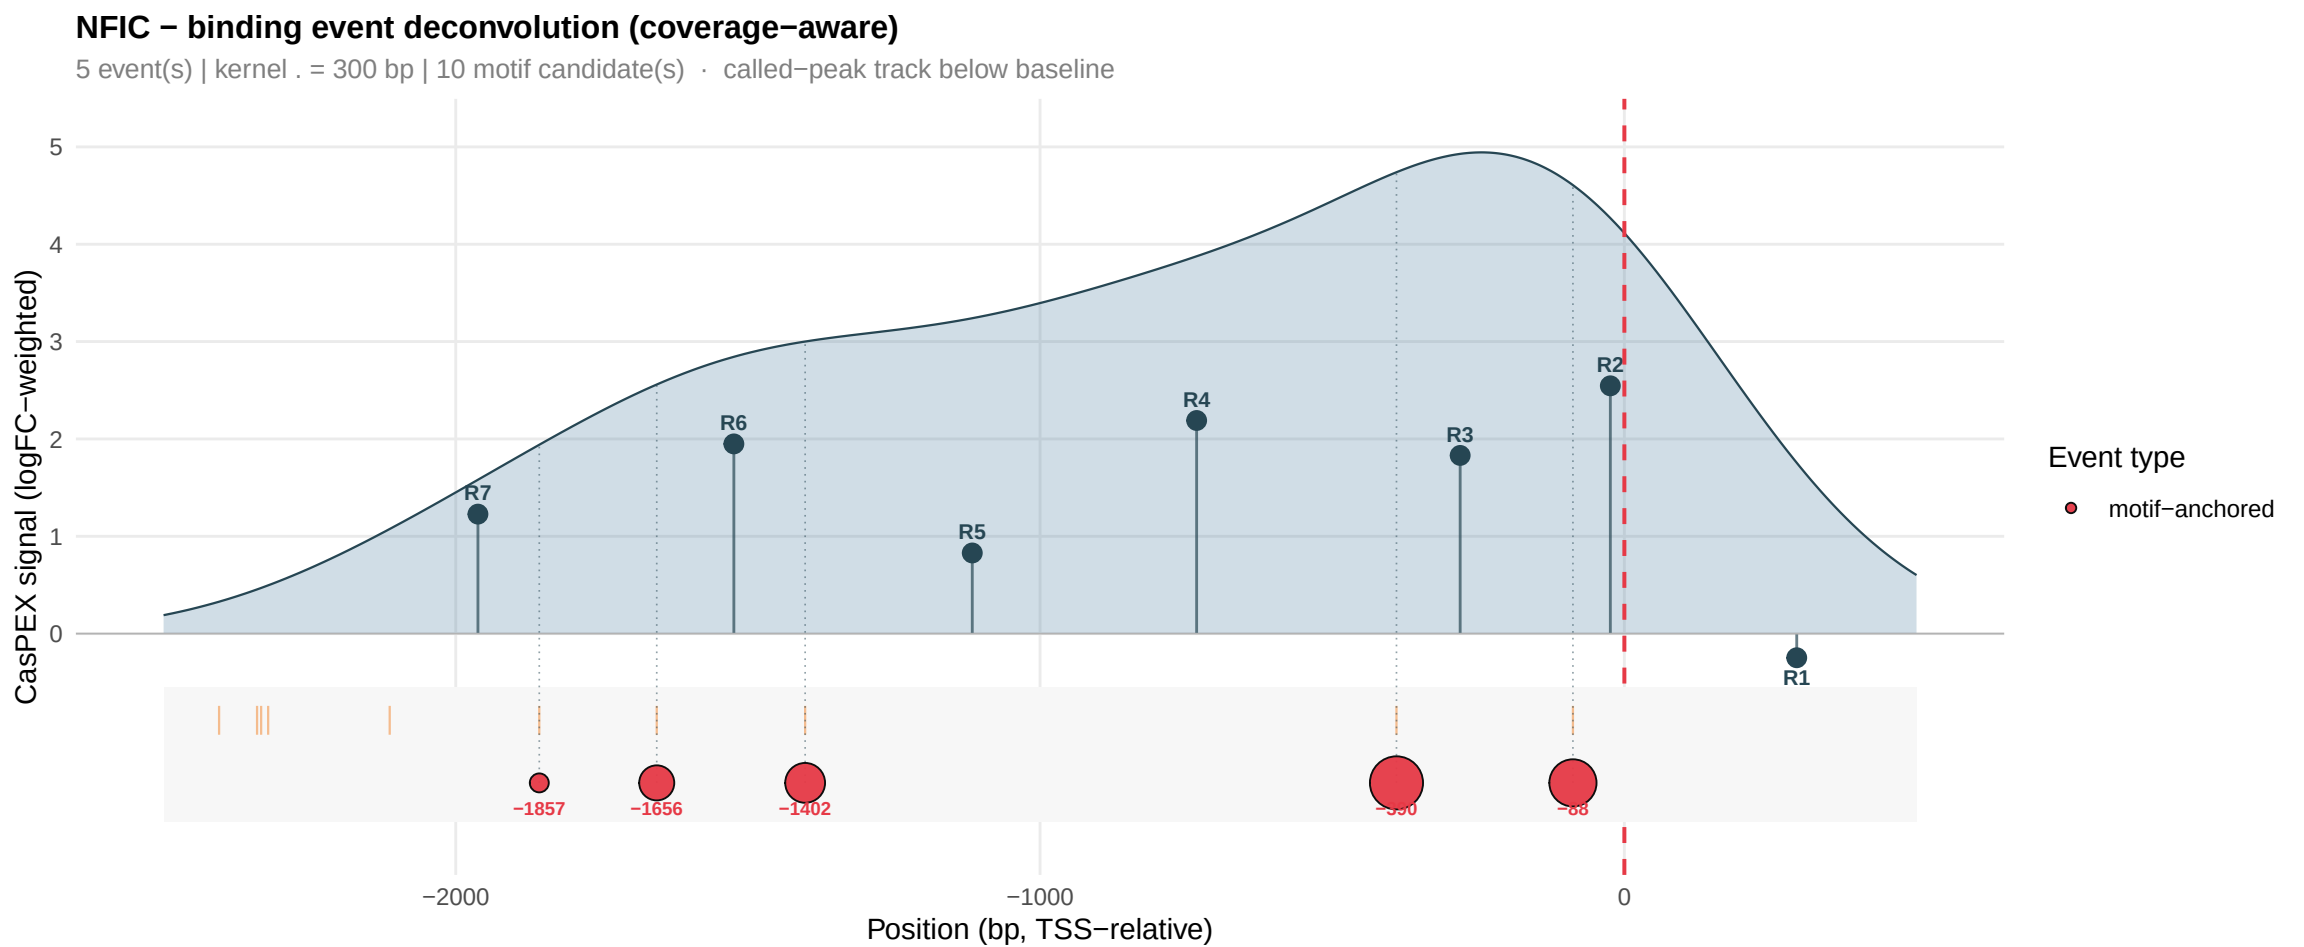
NFIC − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 300 bp | 10 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1857
−1656
−1402
−390
−88
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

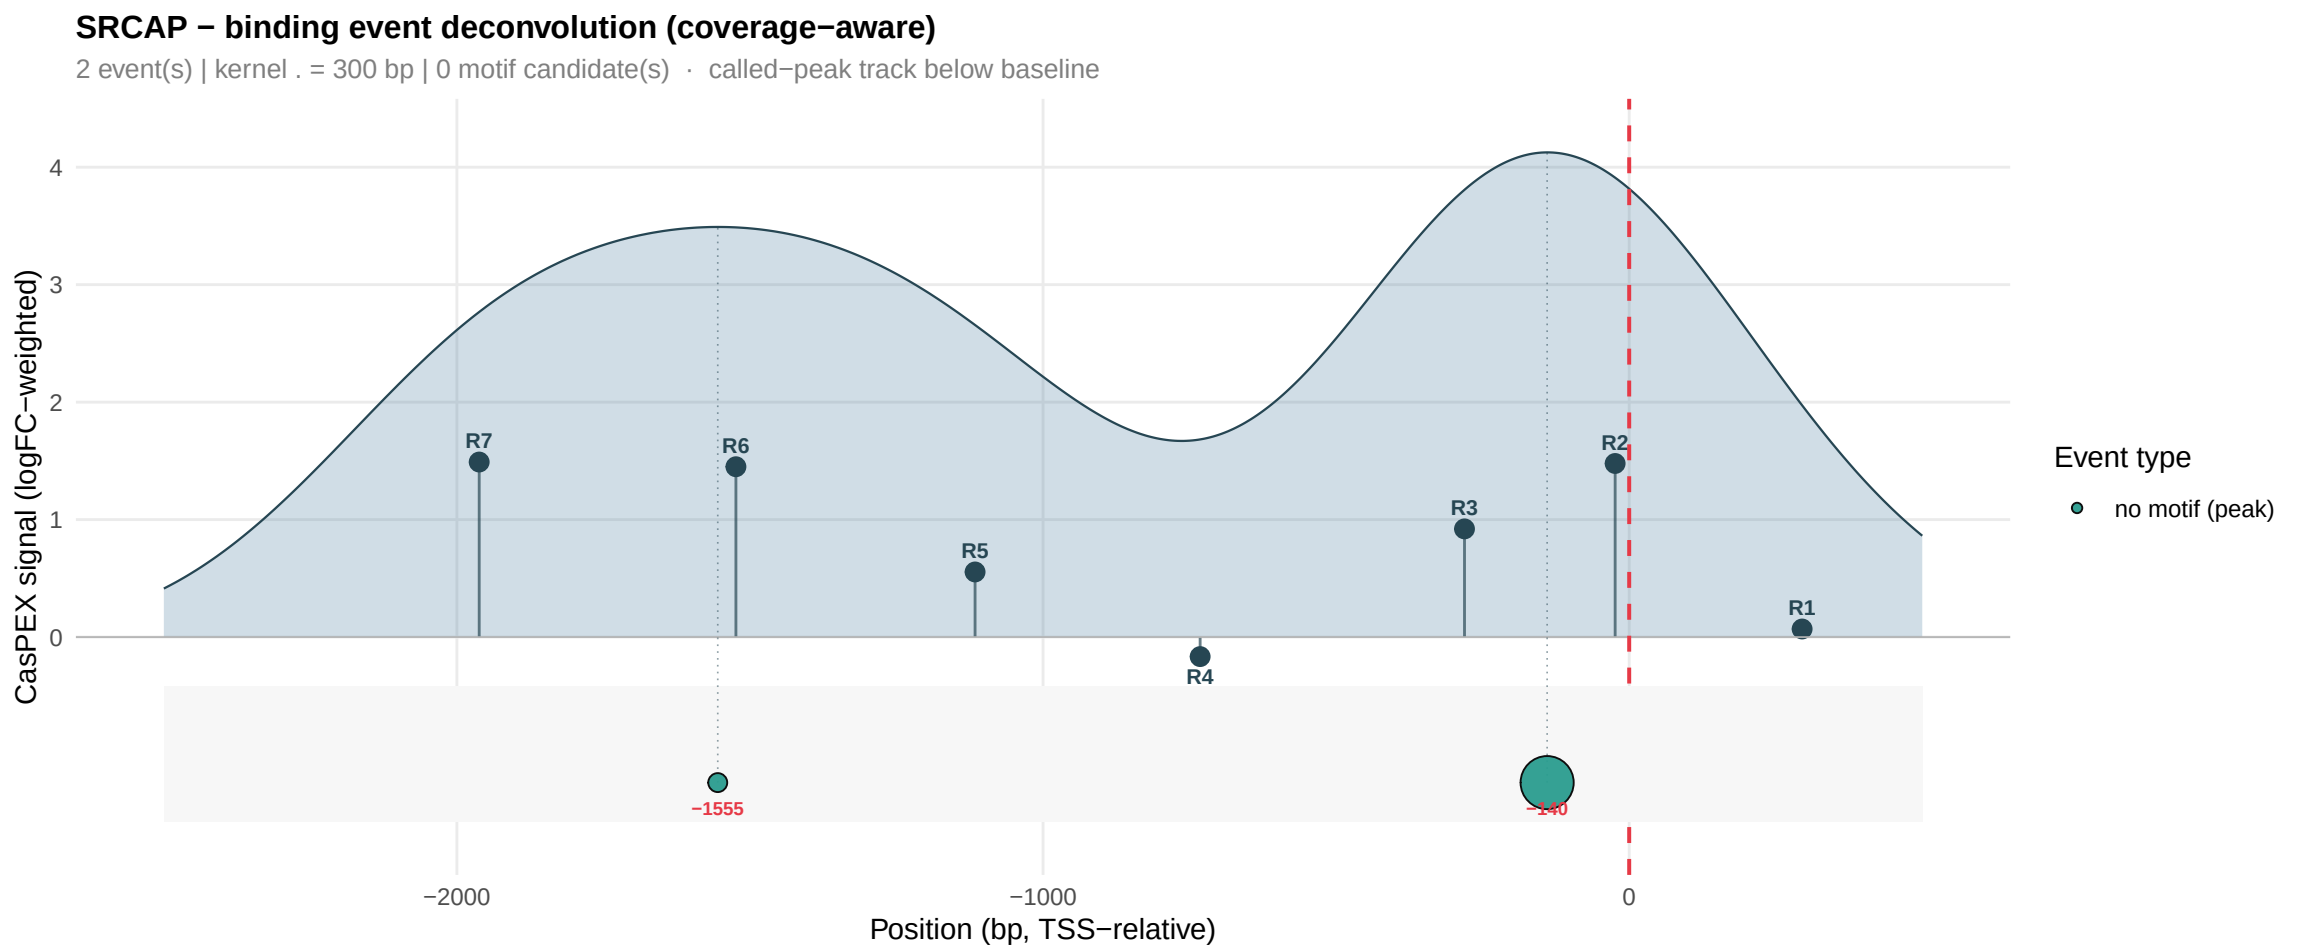
SRCAP − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1555
−140
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

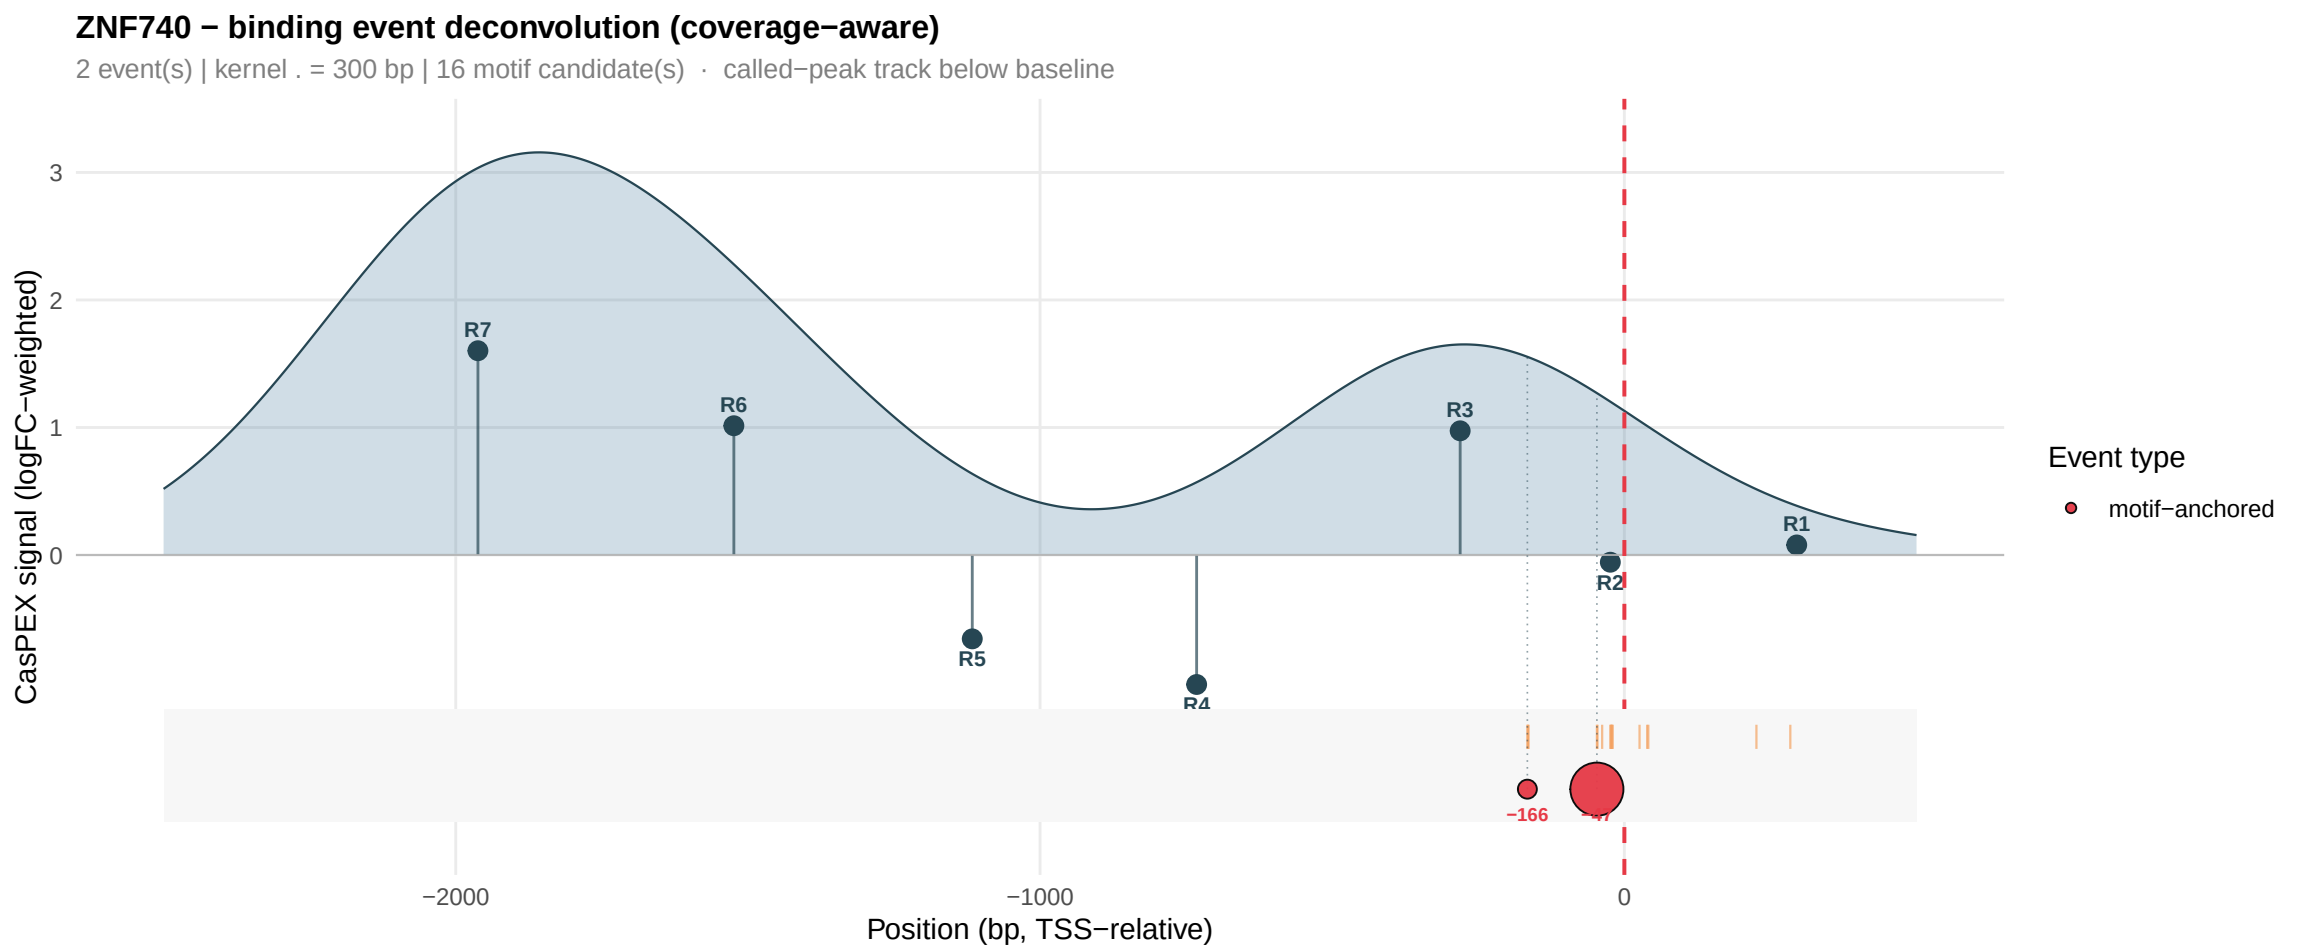
ZNF740 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 16 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−166
−47
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

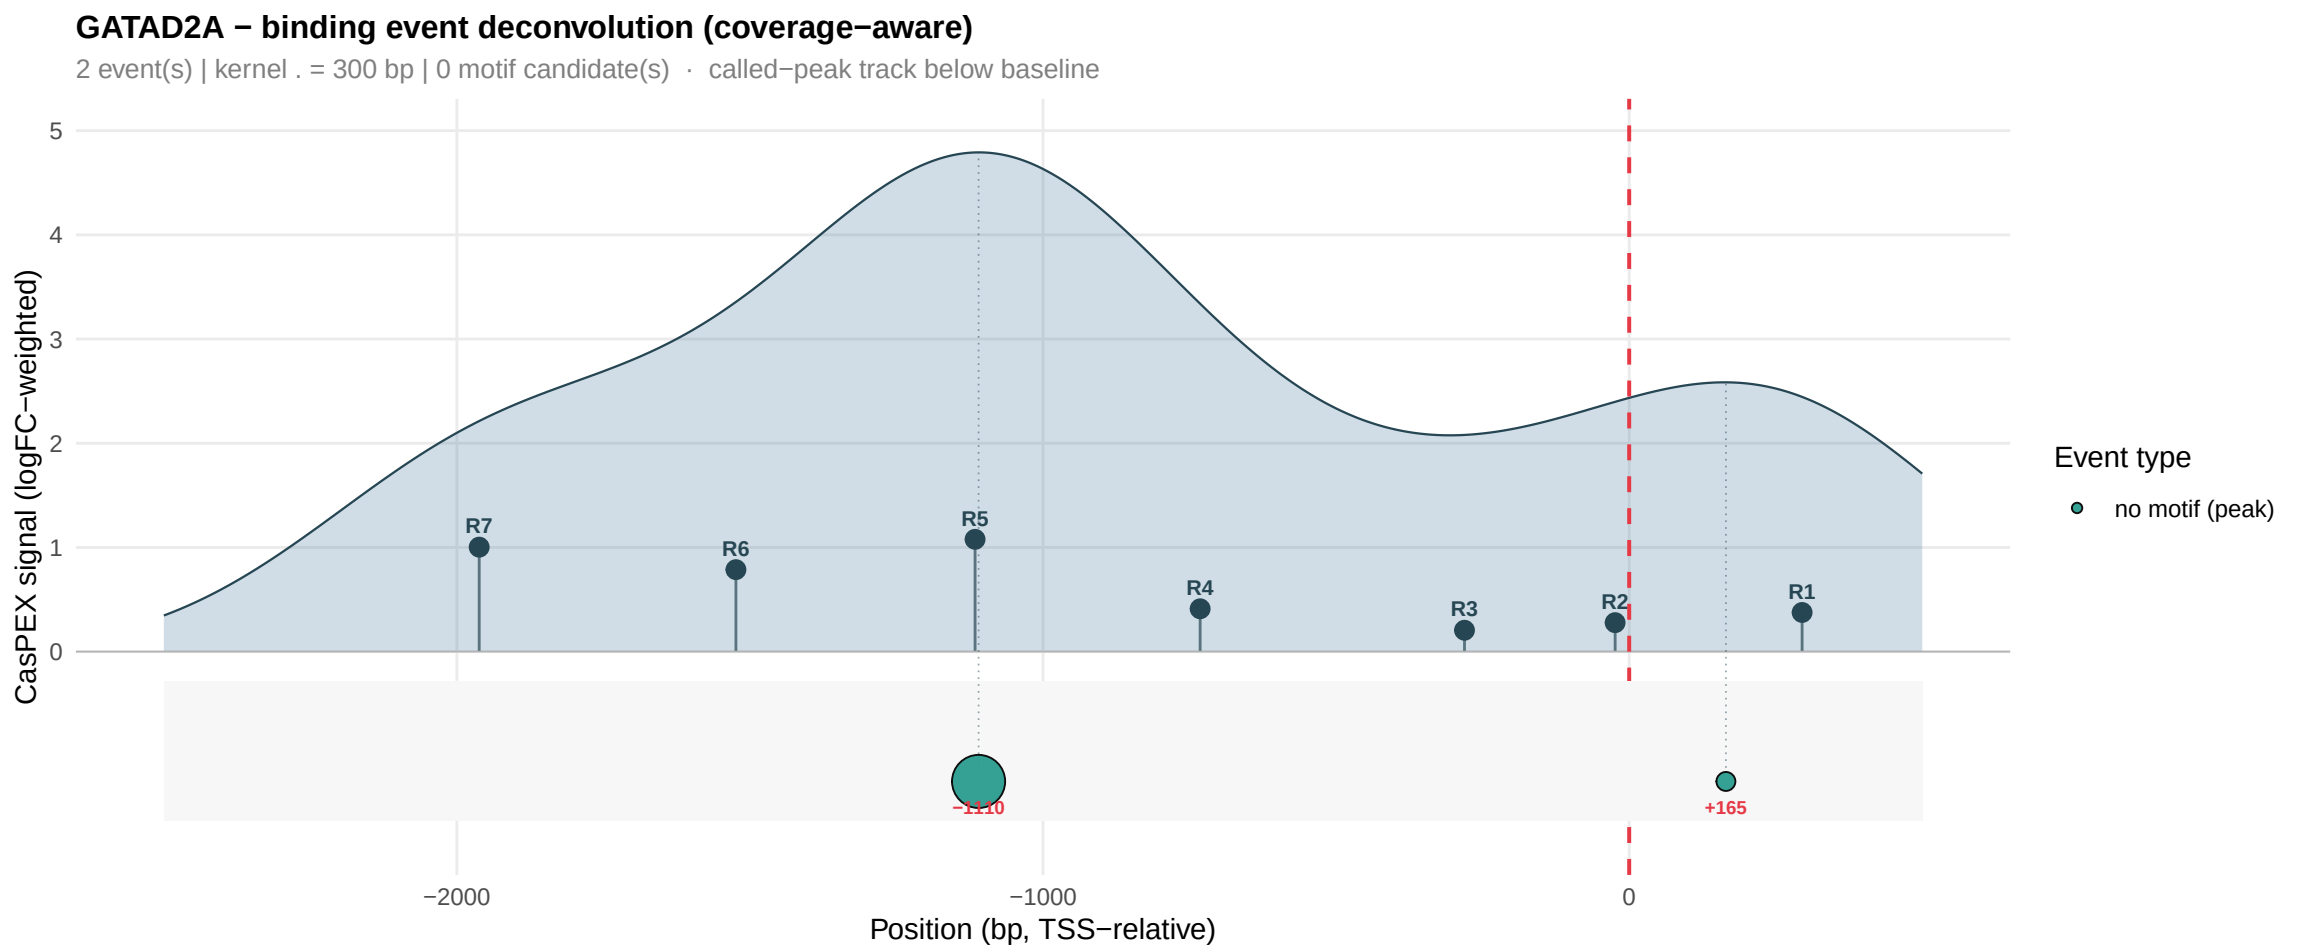
GATAD2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1110
+165
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

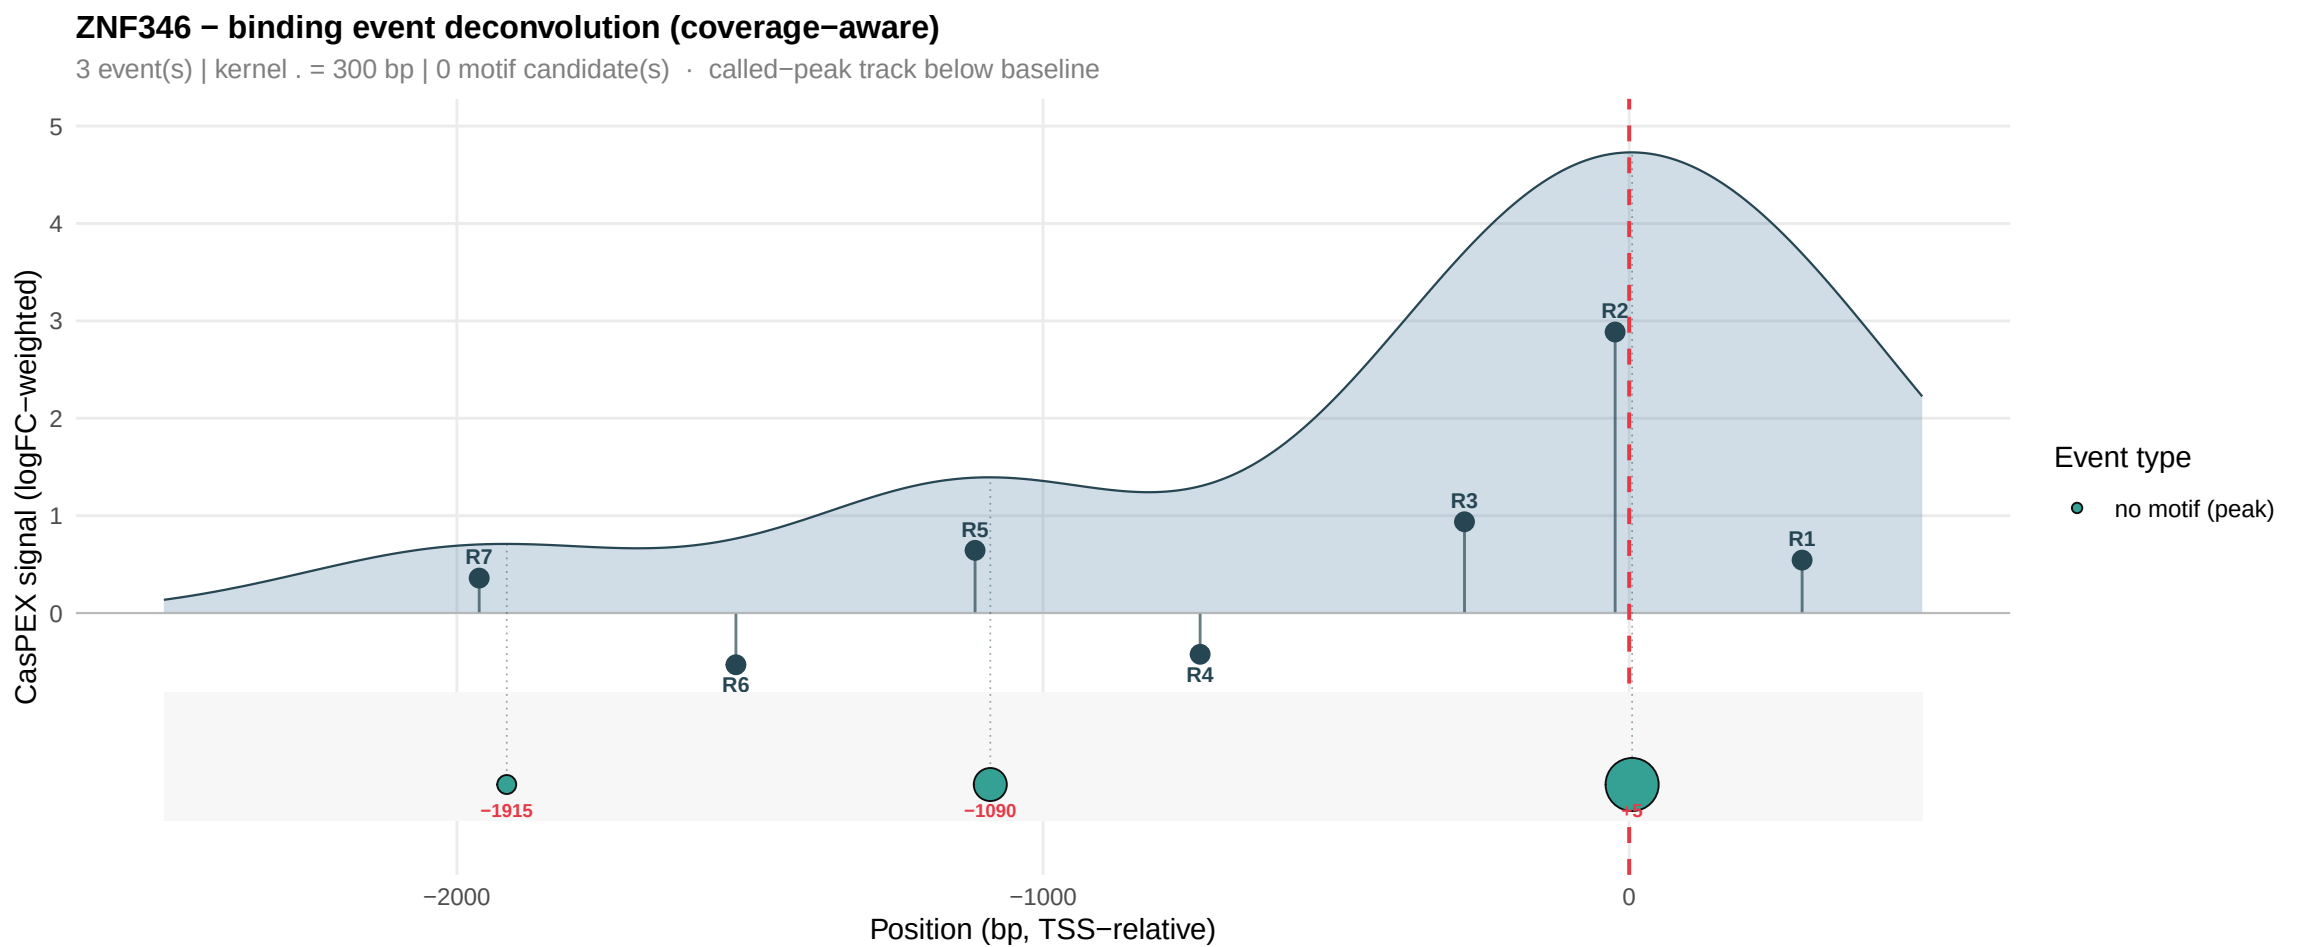
ZNF346 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1915
−1090
+5
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

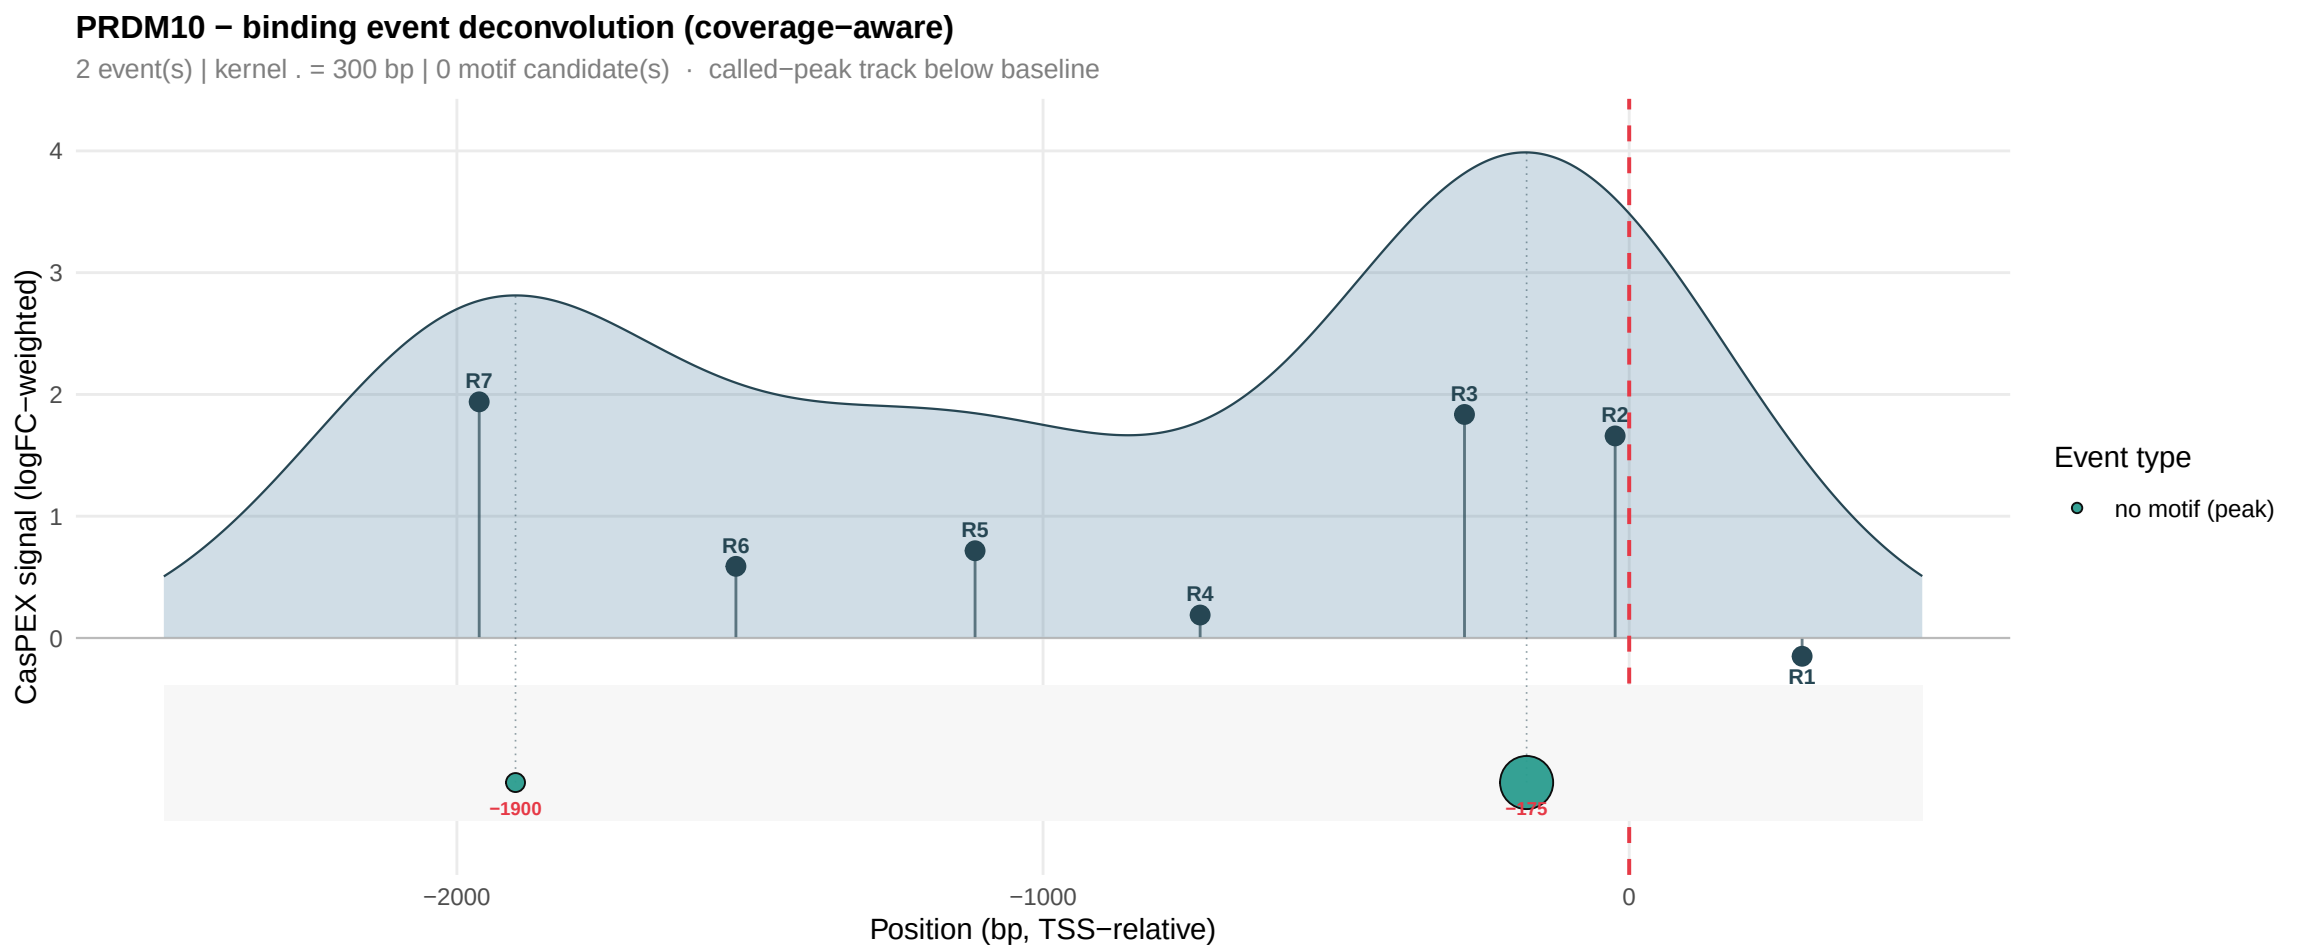
PRDM10 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1900
−175
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

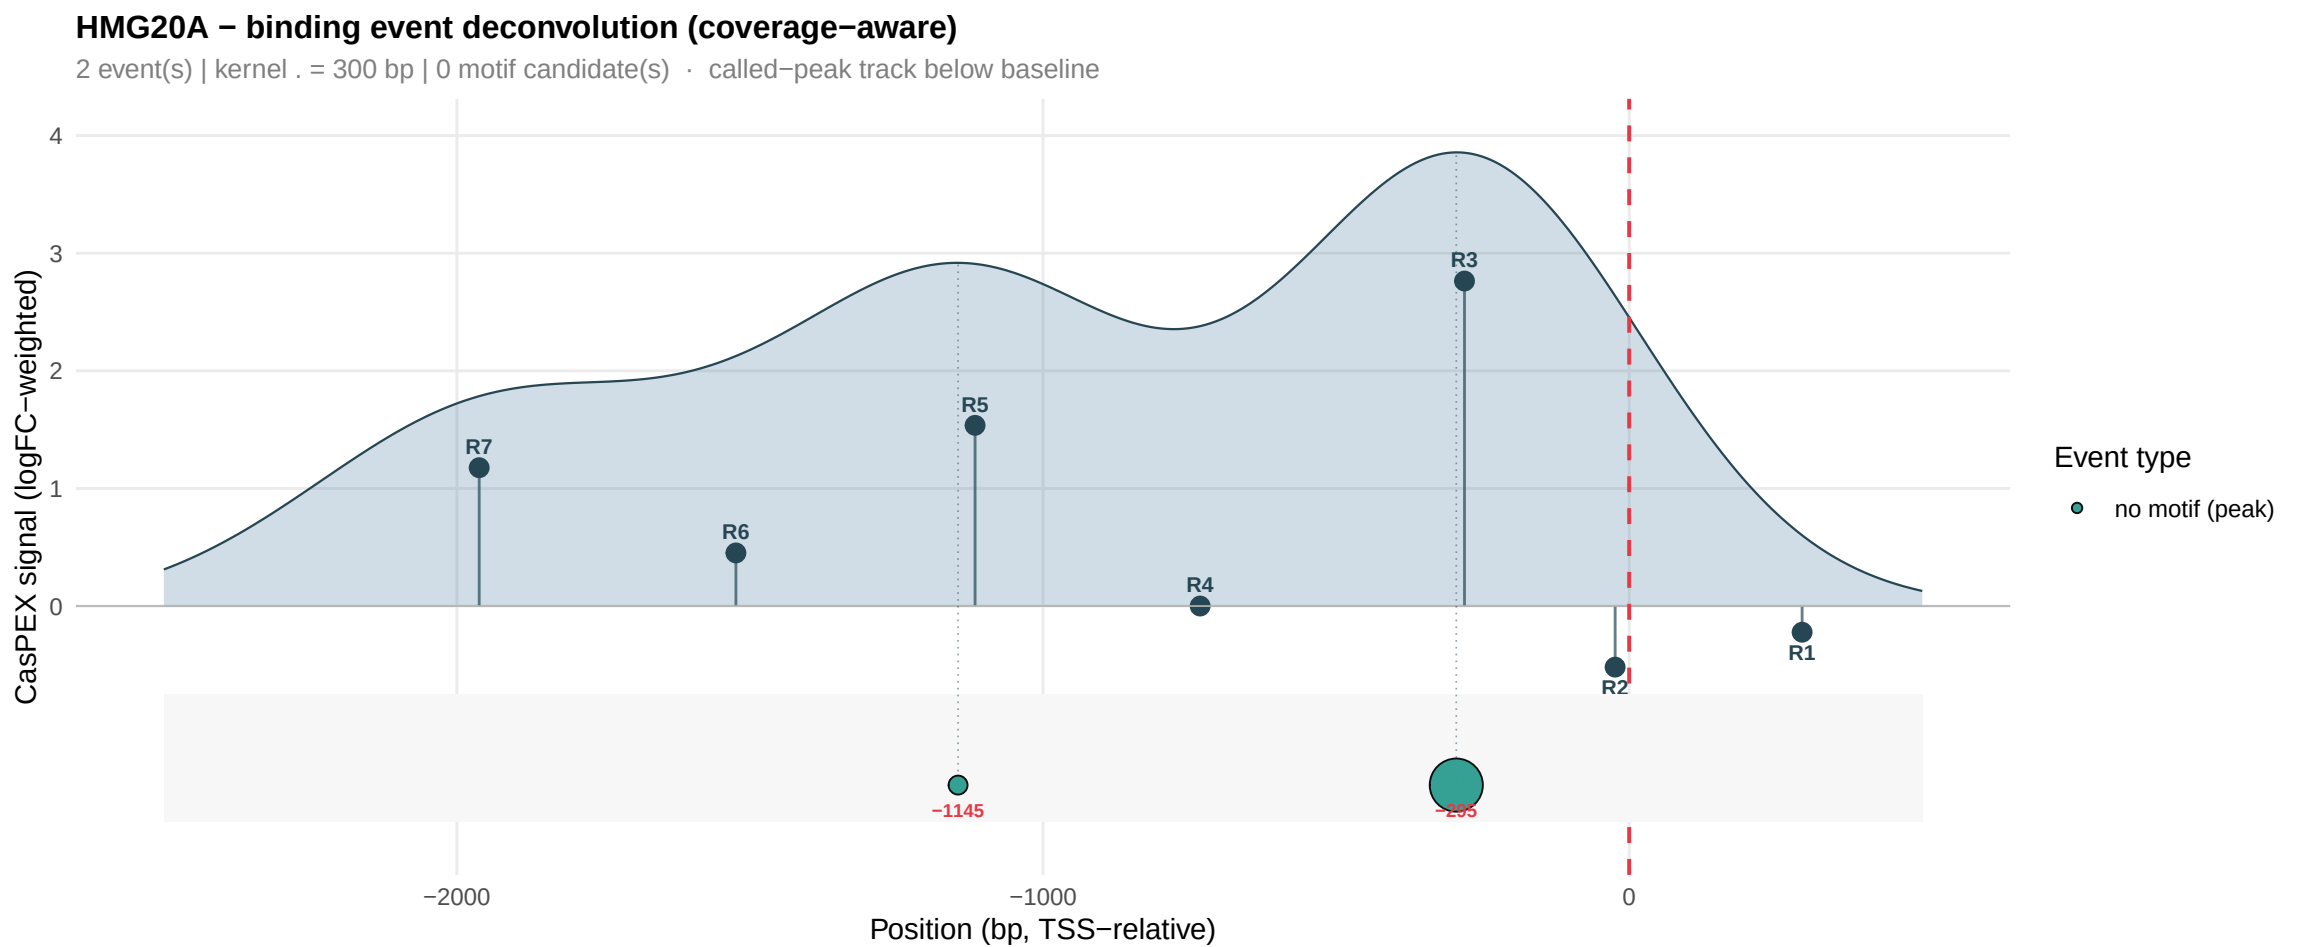
HMG20A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1145
−295
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

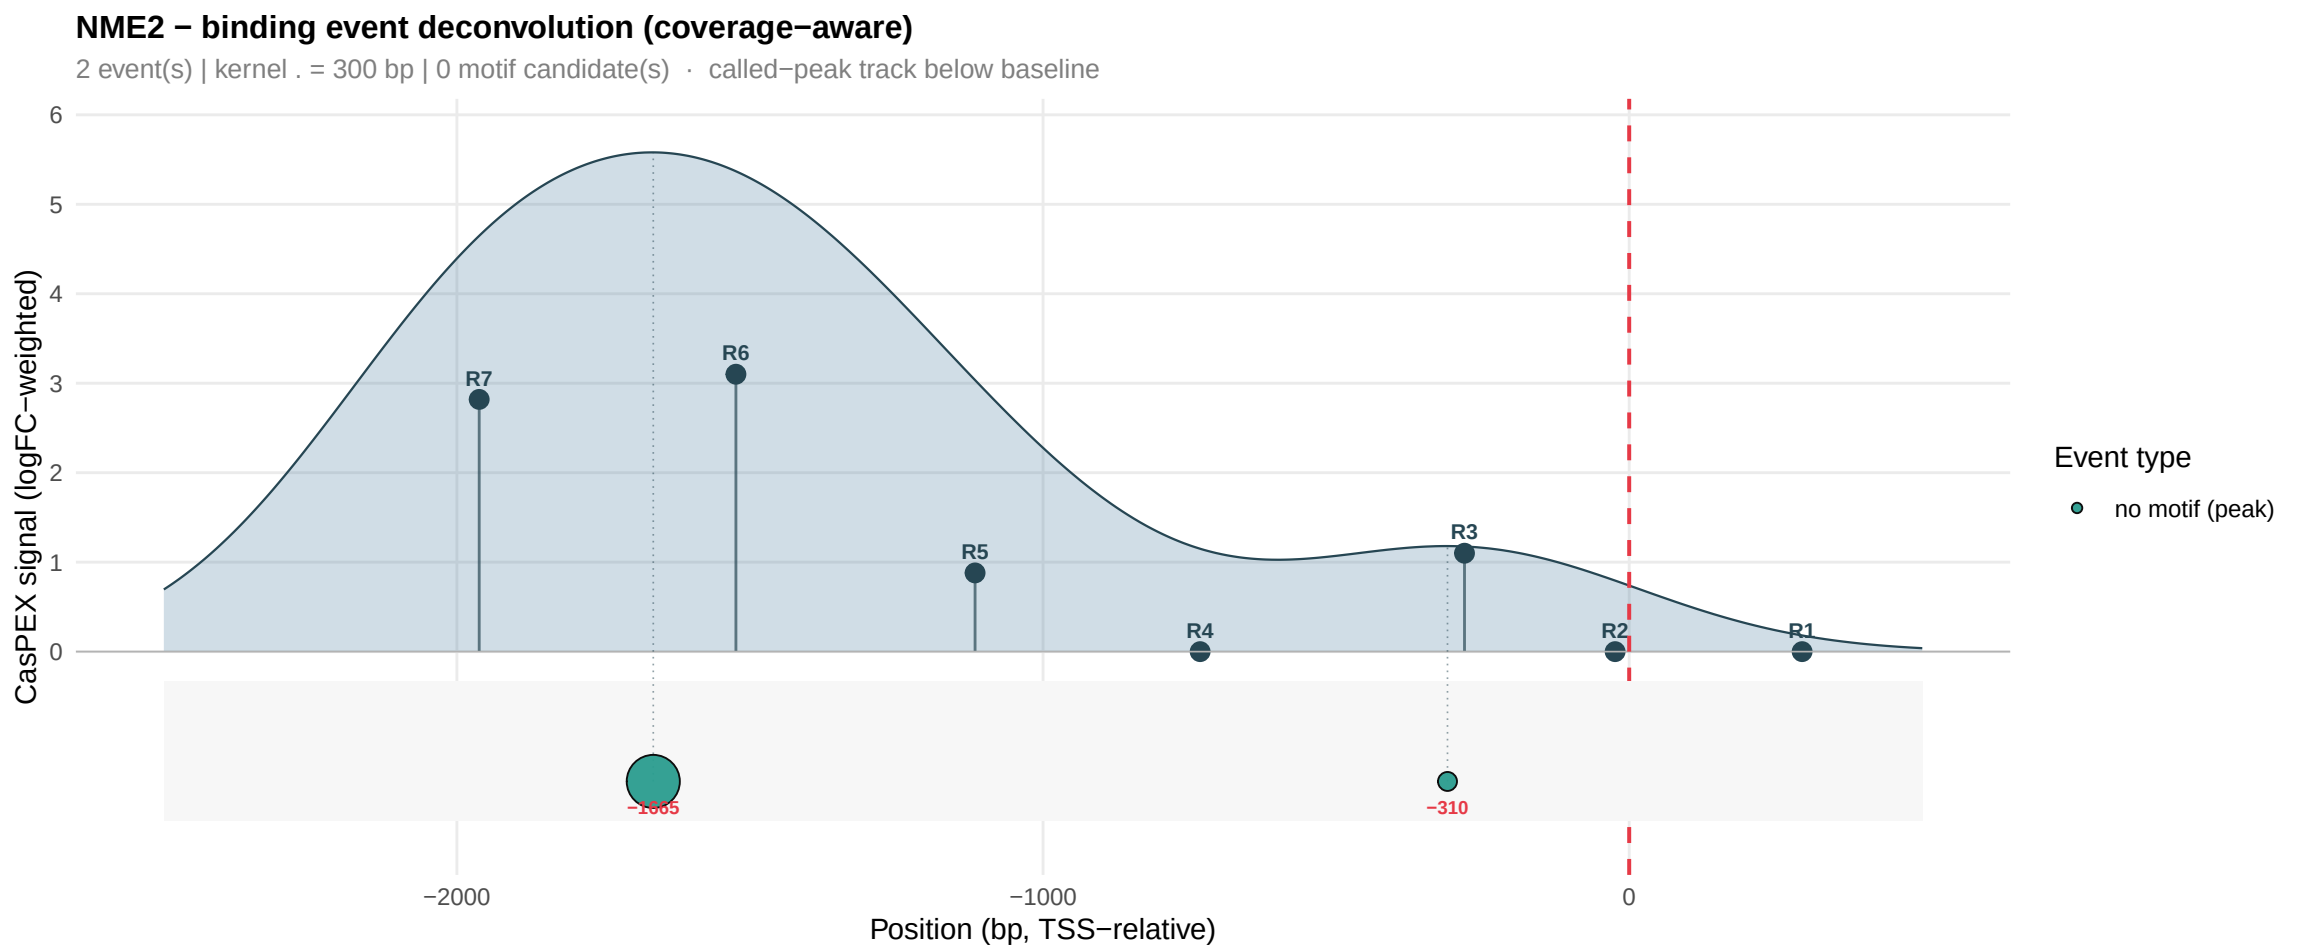
NME2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1665
−310
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

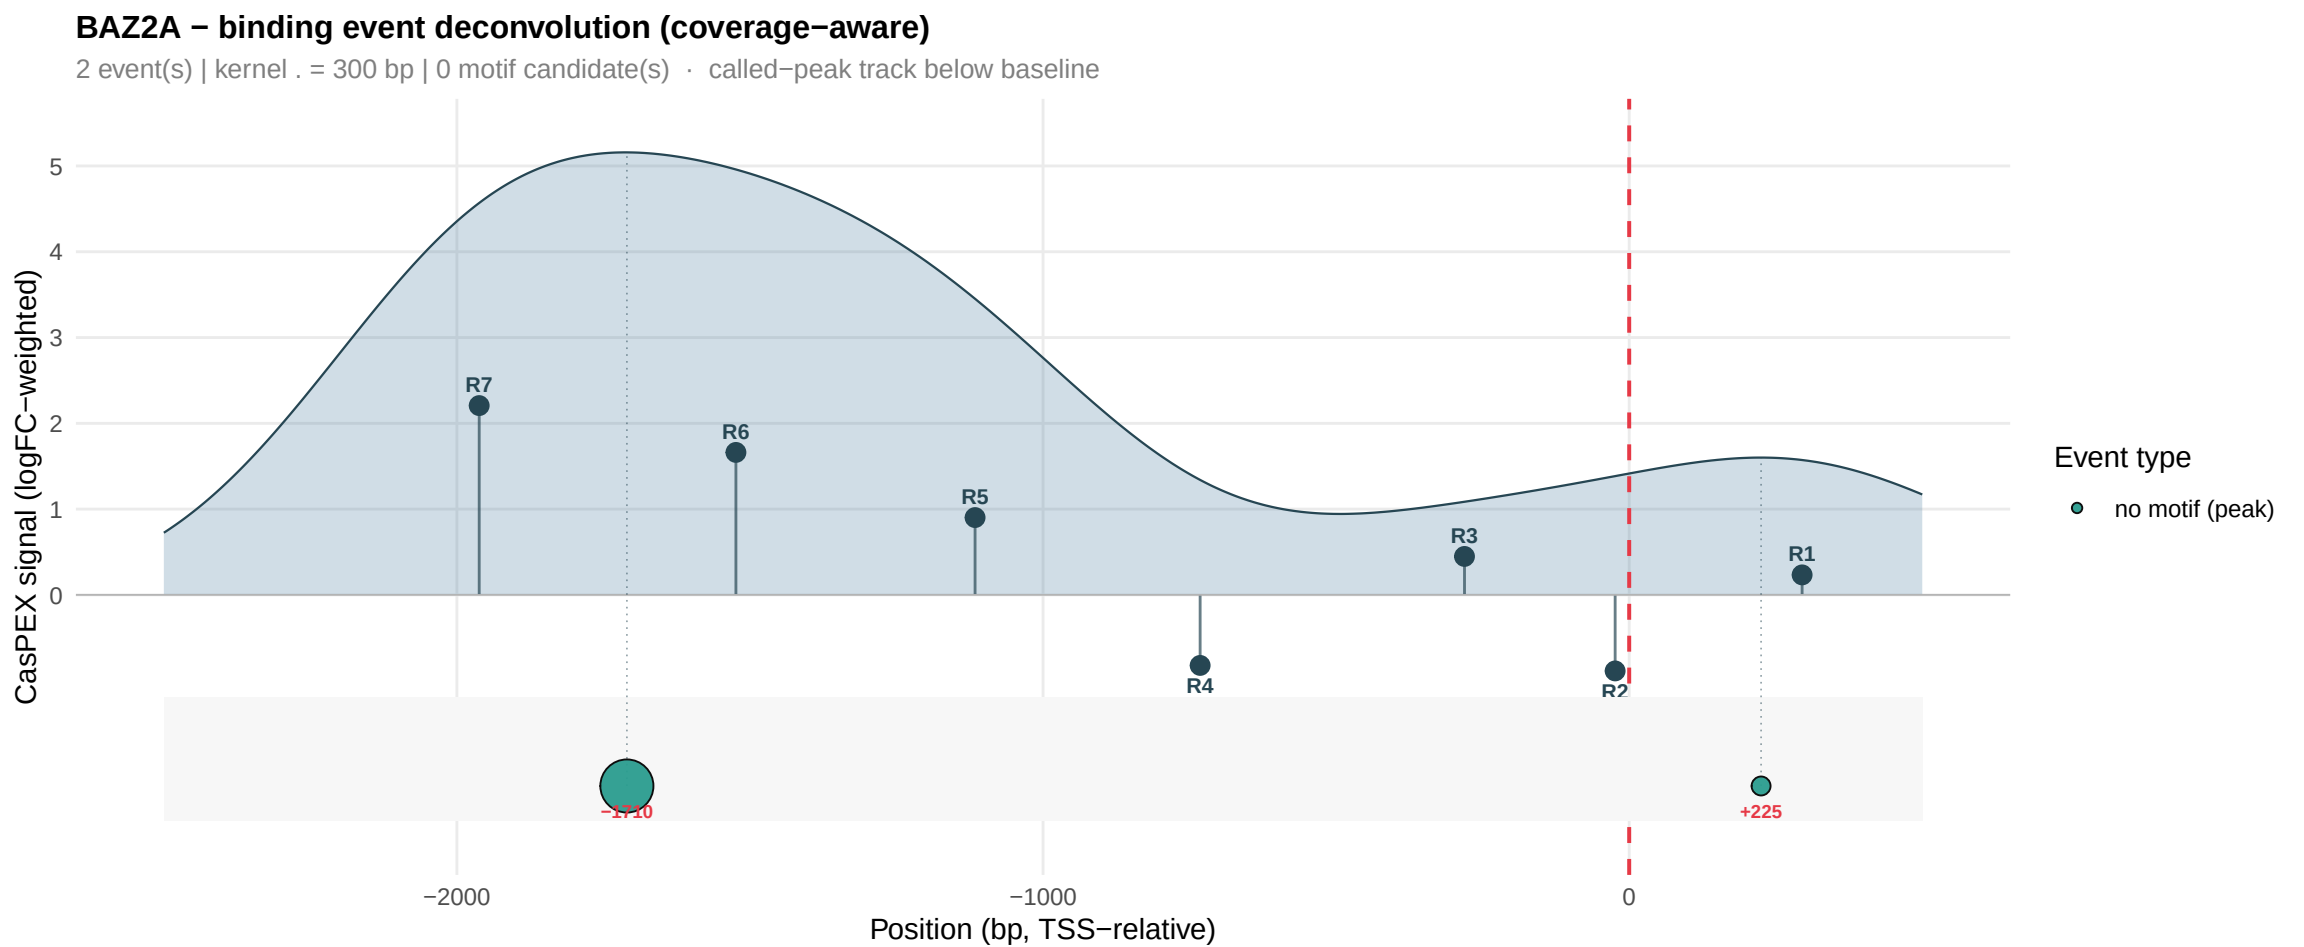
BAZ2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1710
+225
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

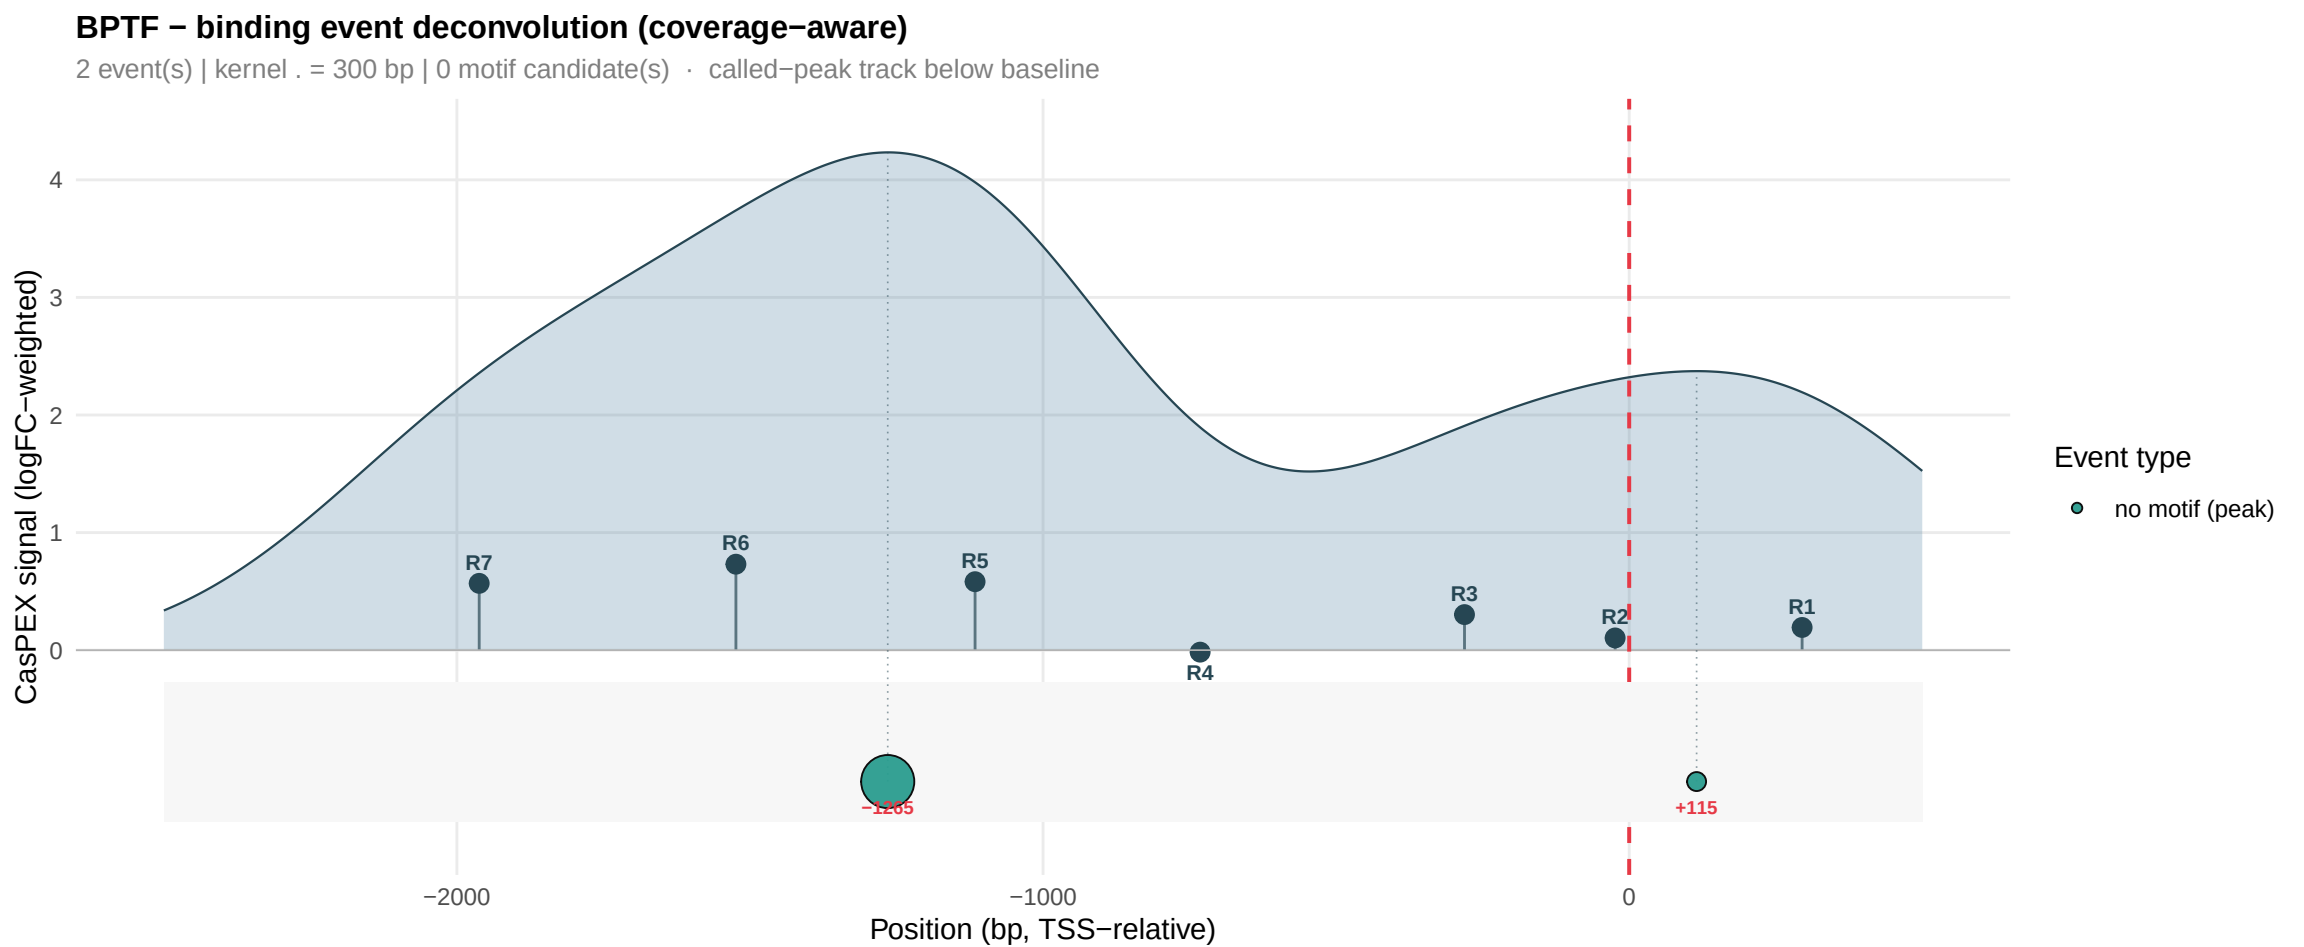
BPTF − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1265
+115
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

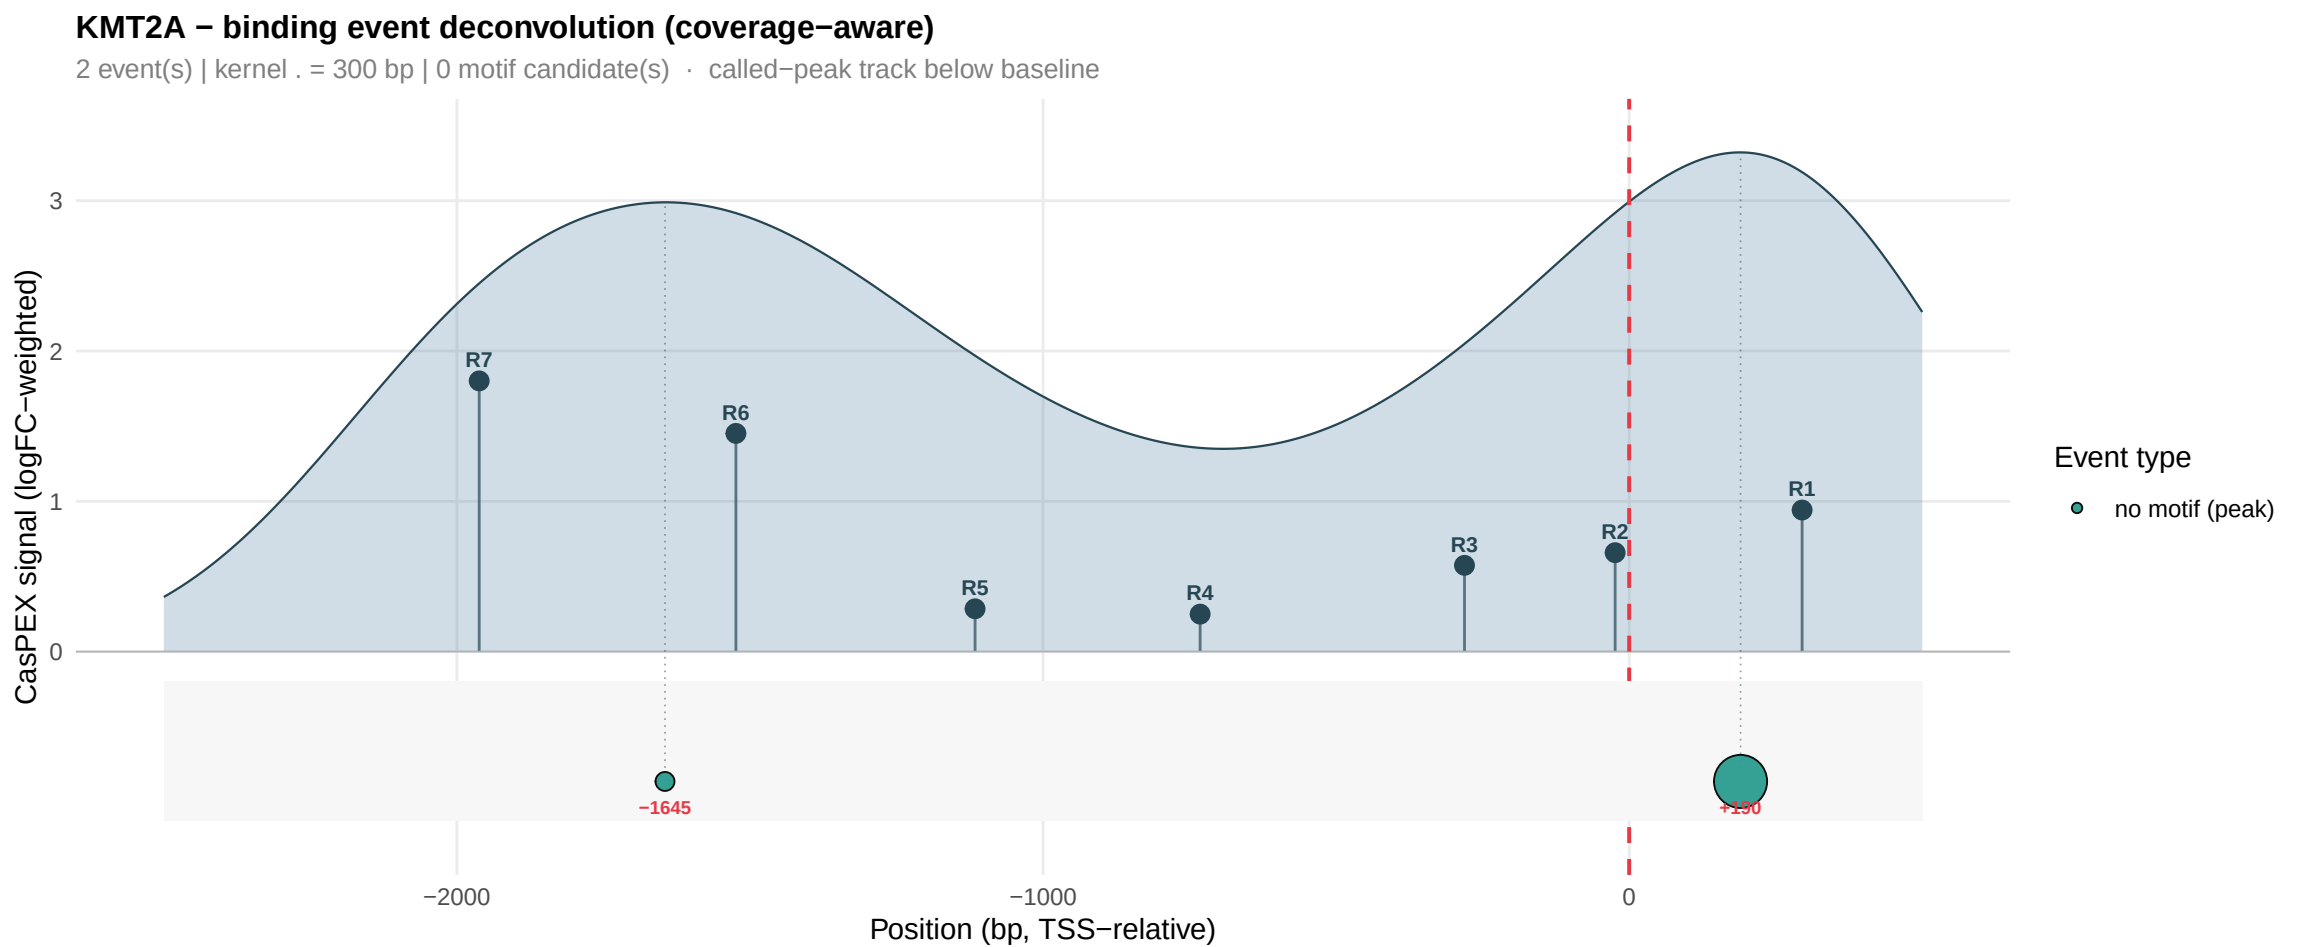
KMT2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1645
+150
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

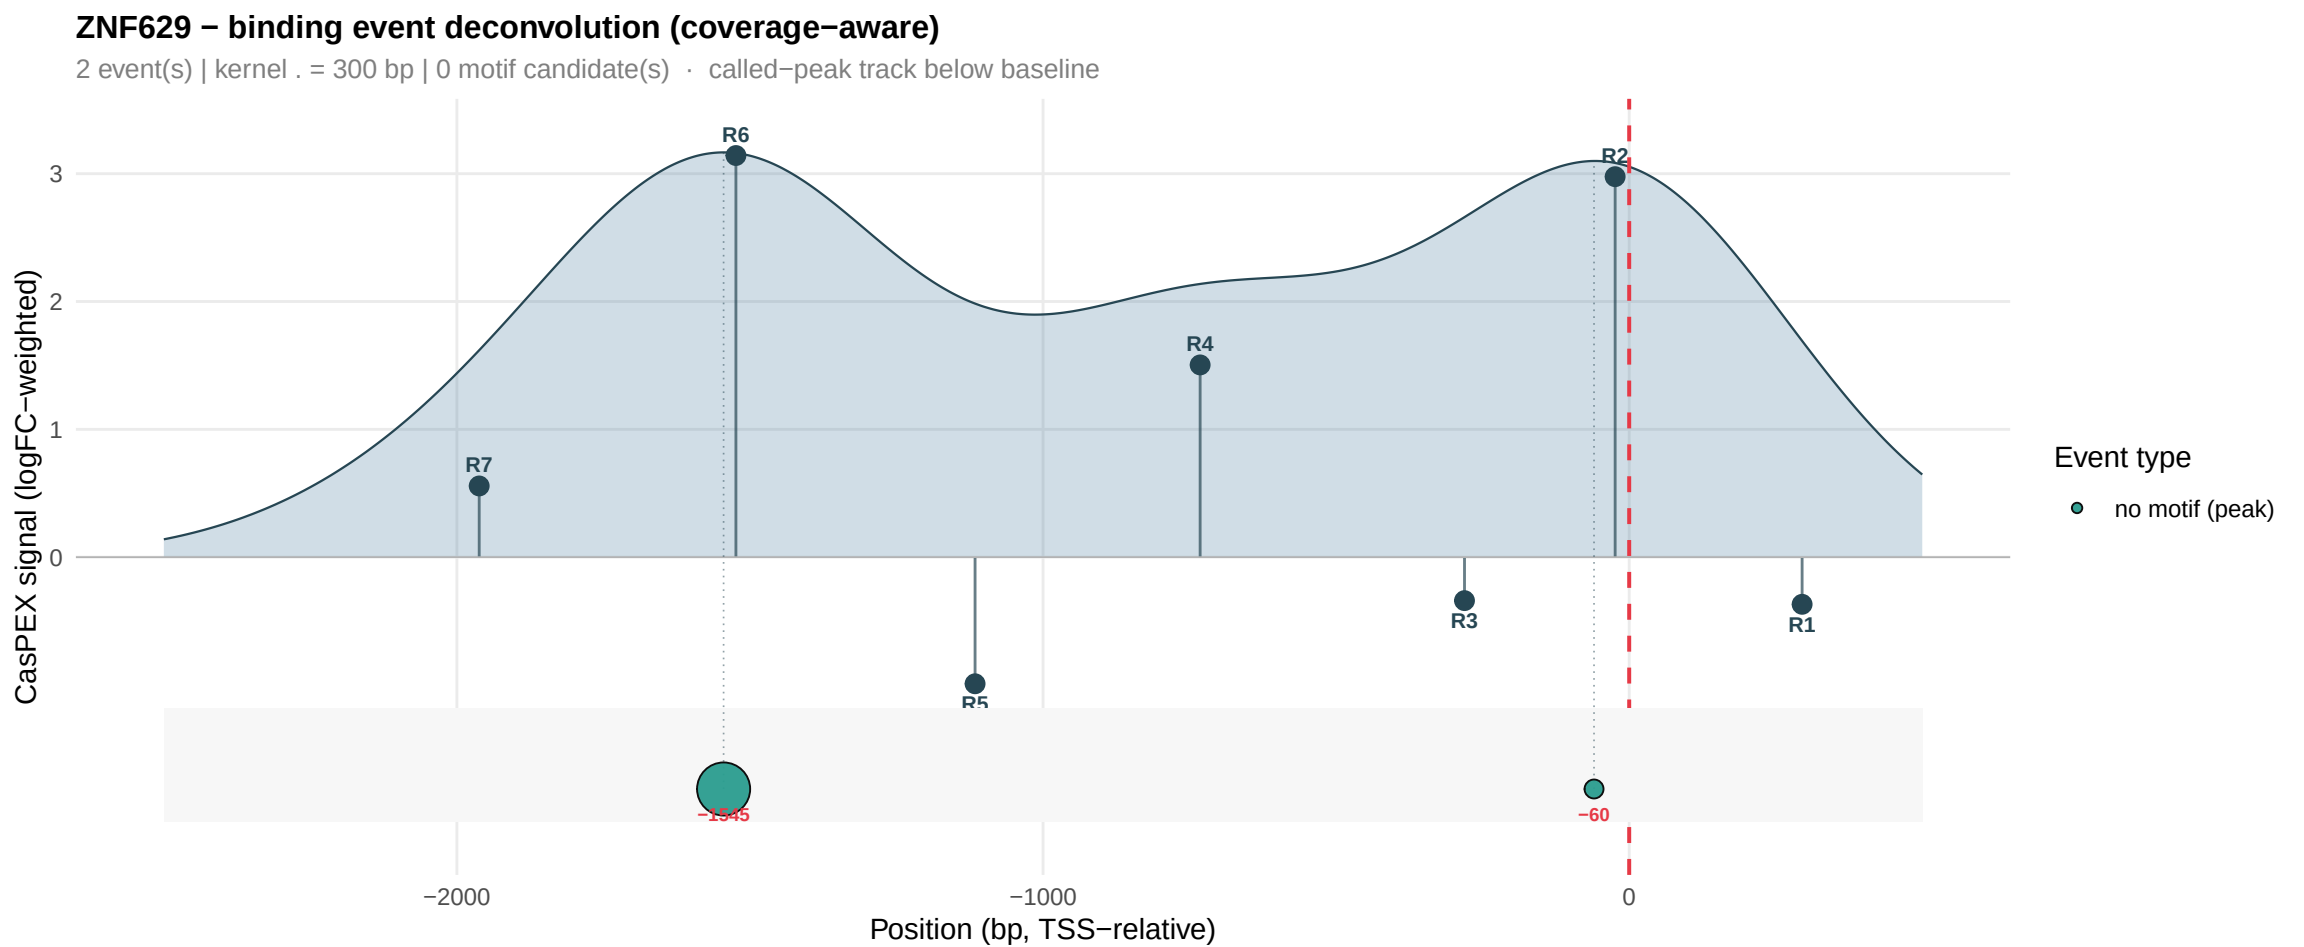
ZNF629 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R6
R2
R4
R7
R3
R1
R5
−1545
−60
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

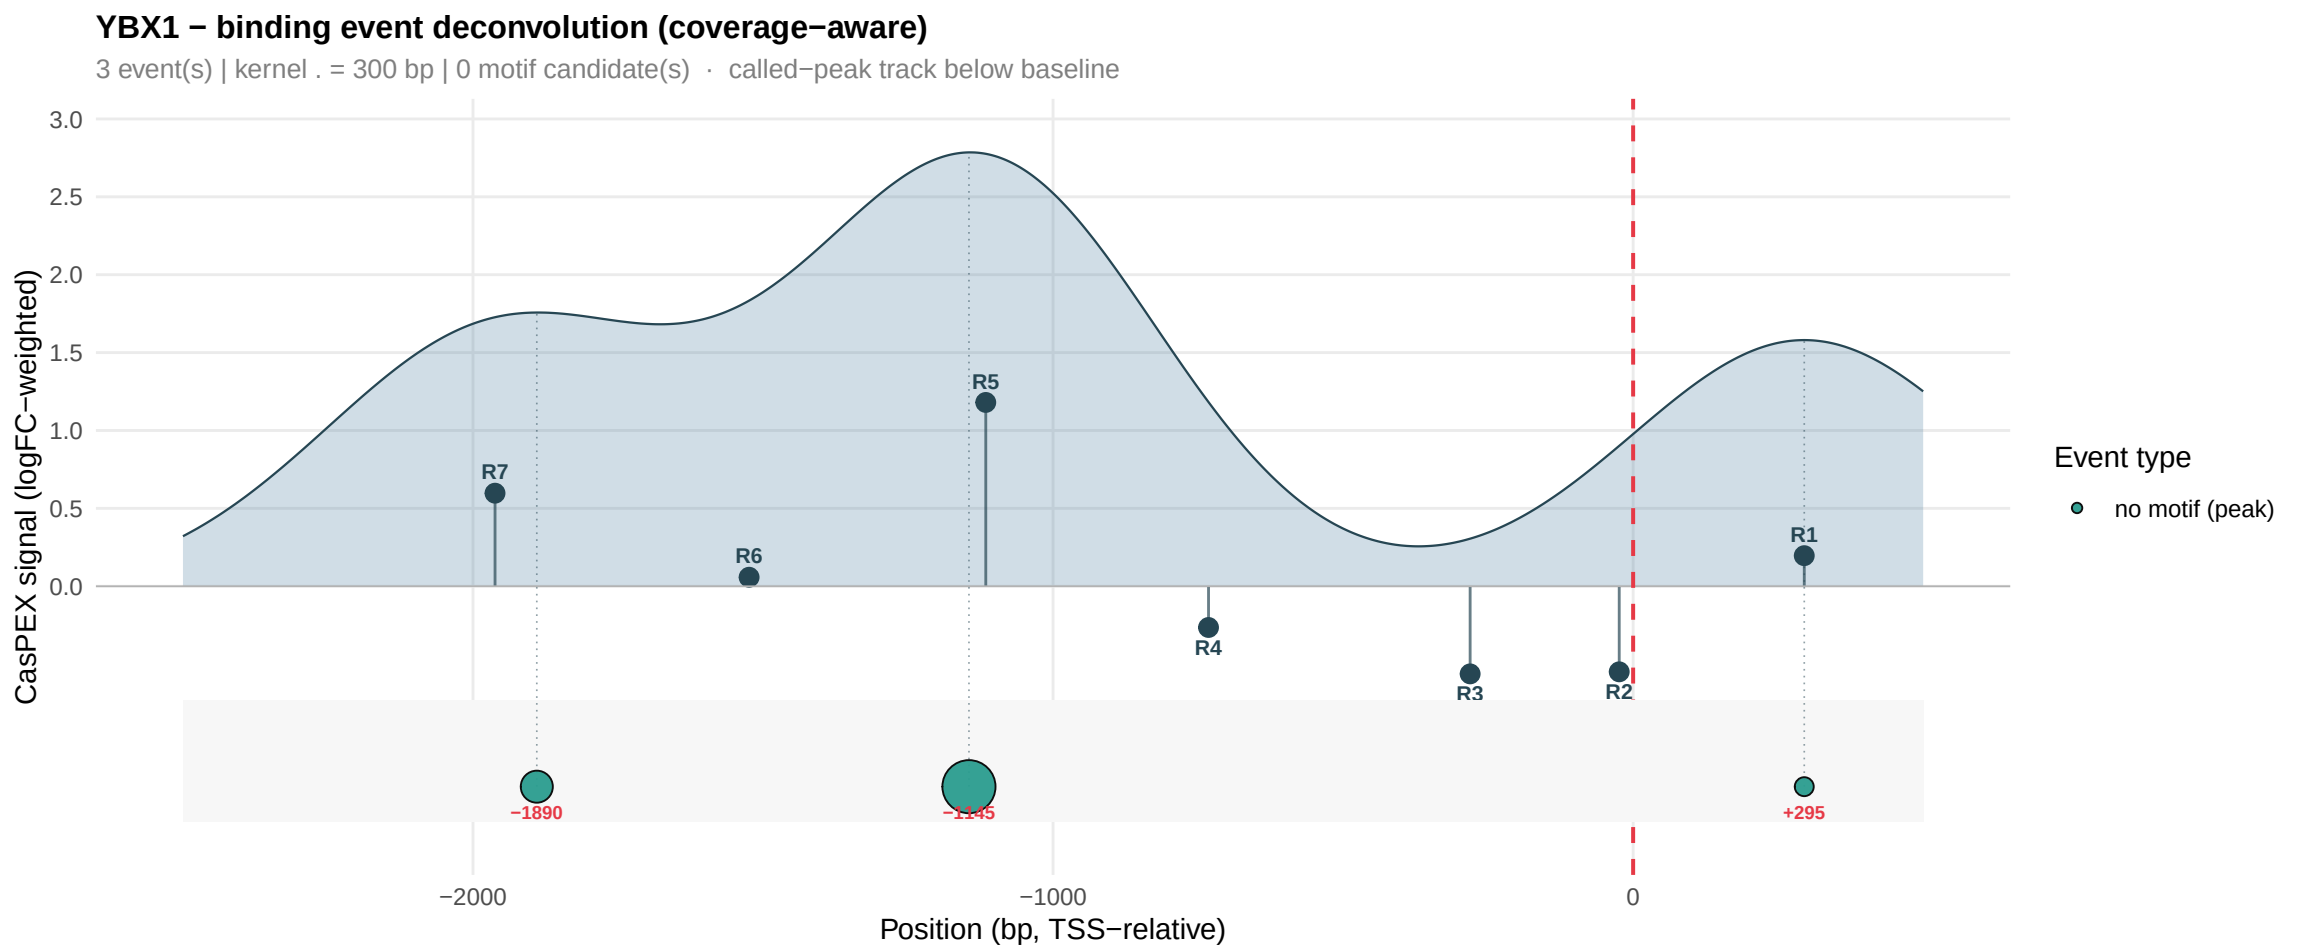
YBX1 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1890
−1145
+295
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

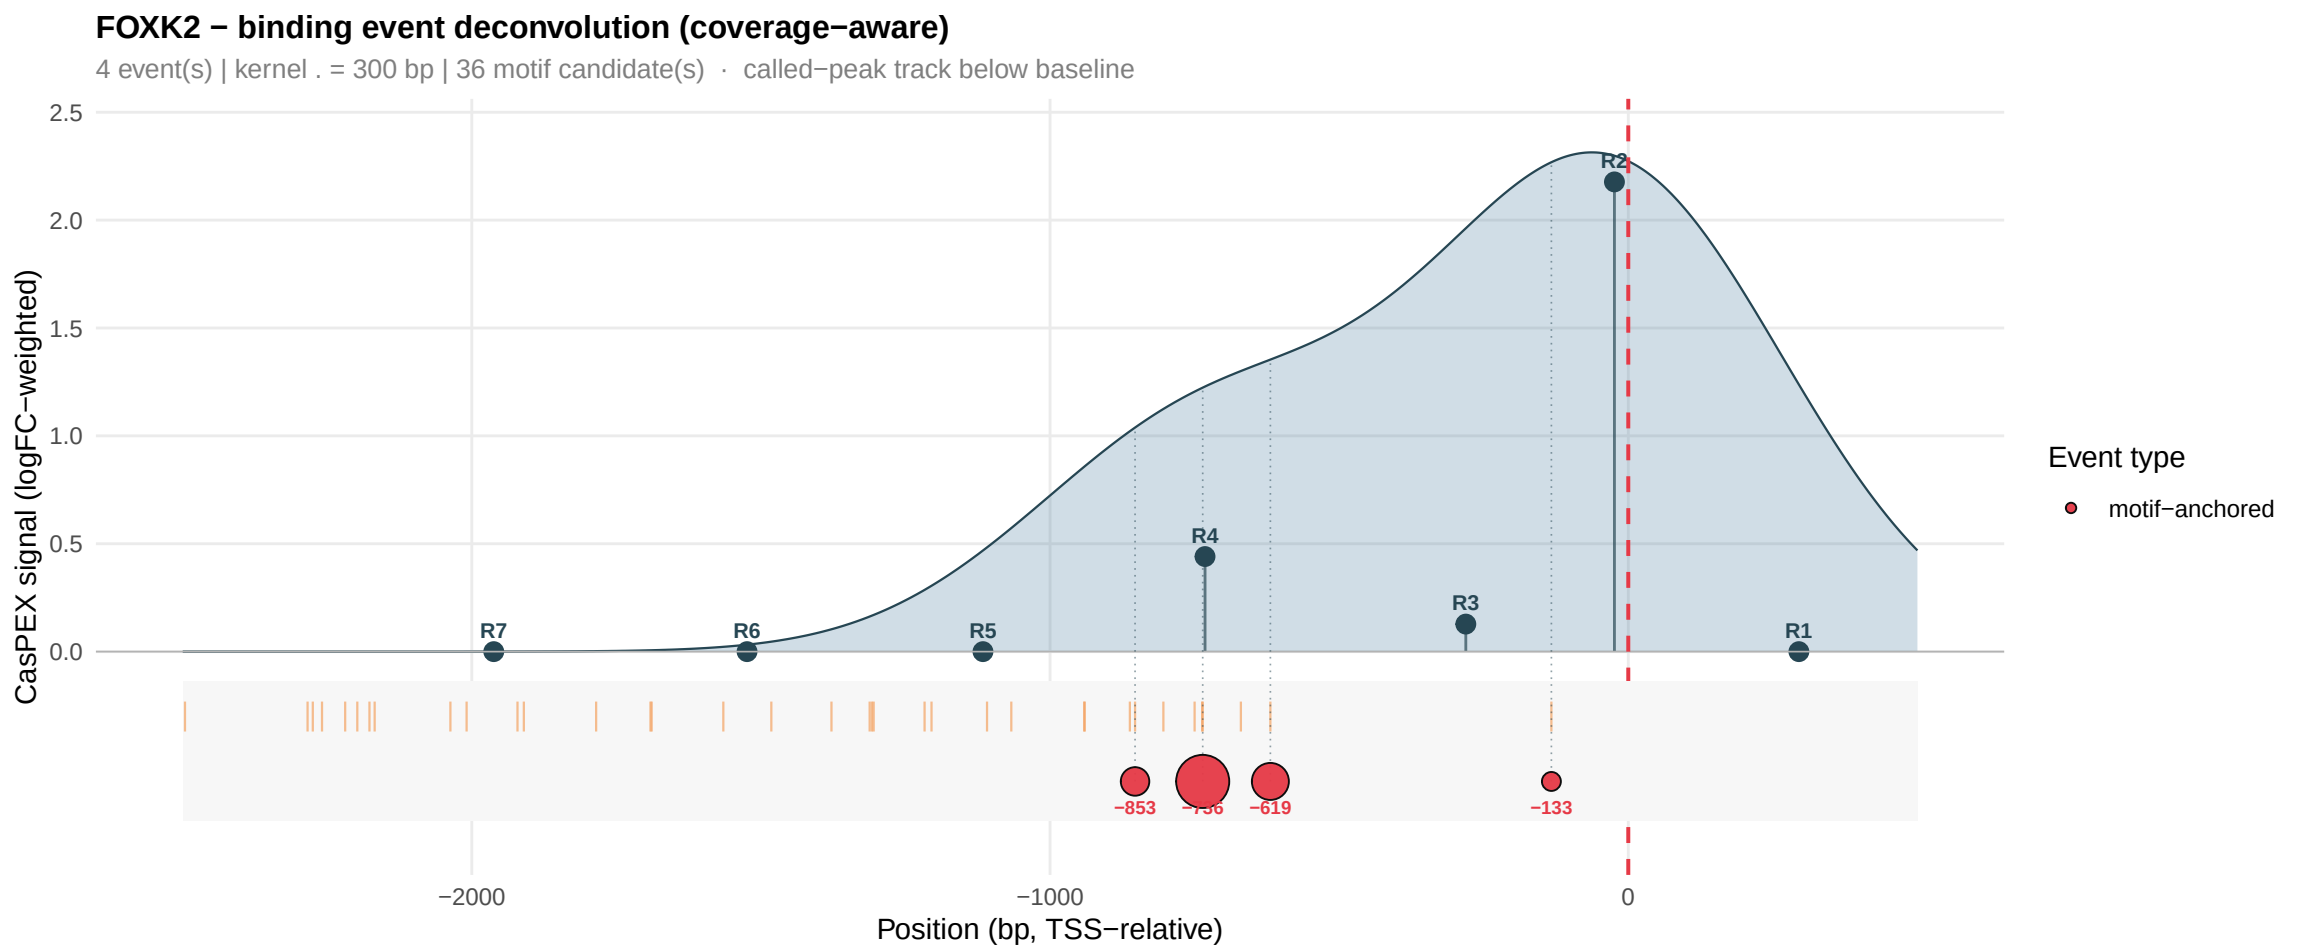
FOXK2 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 36 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−853
−756
−619
−133
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

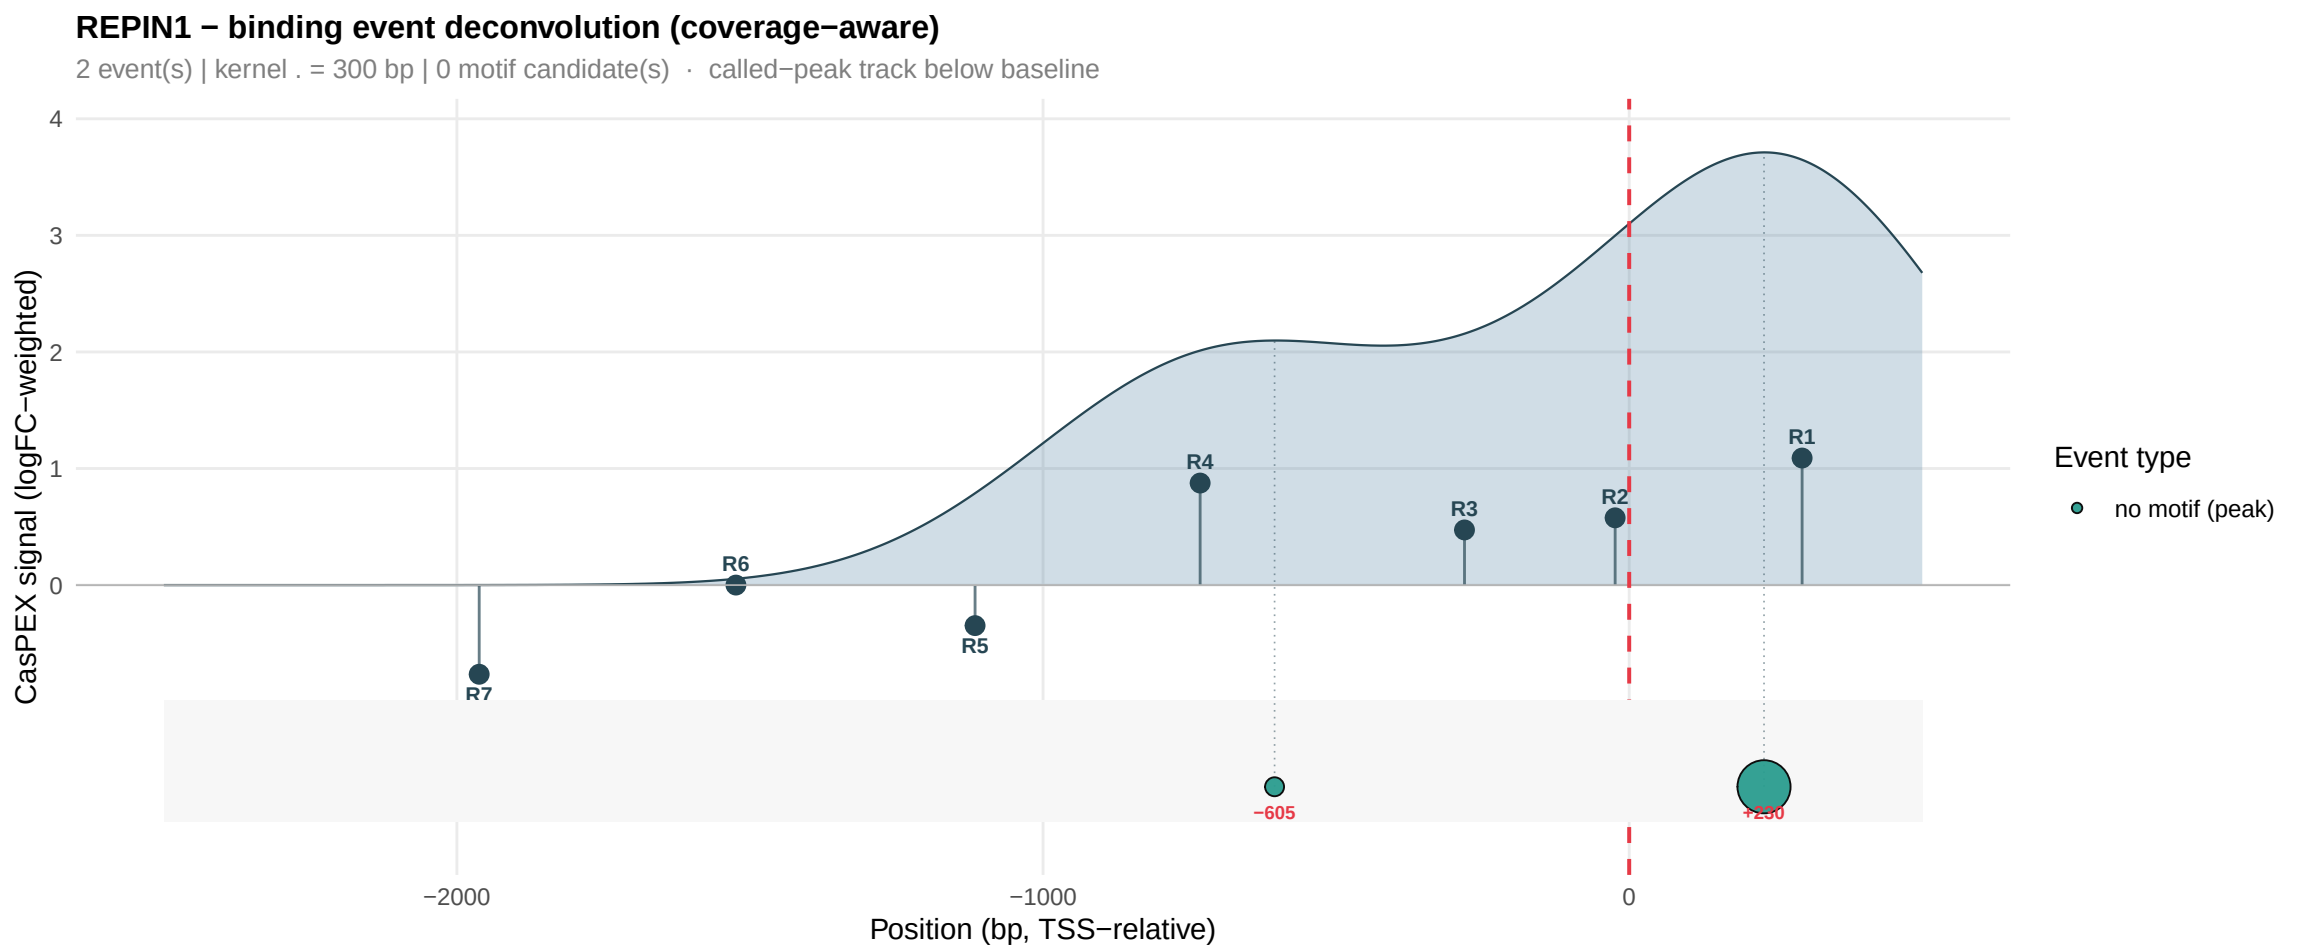
REPIN1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−605
+230
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

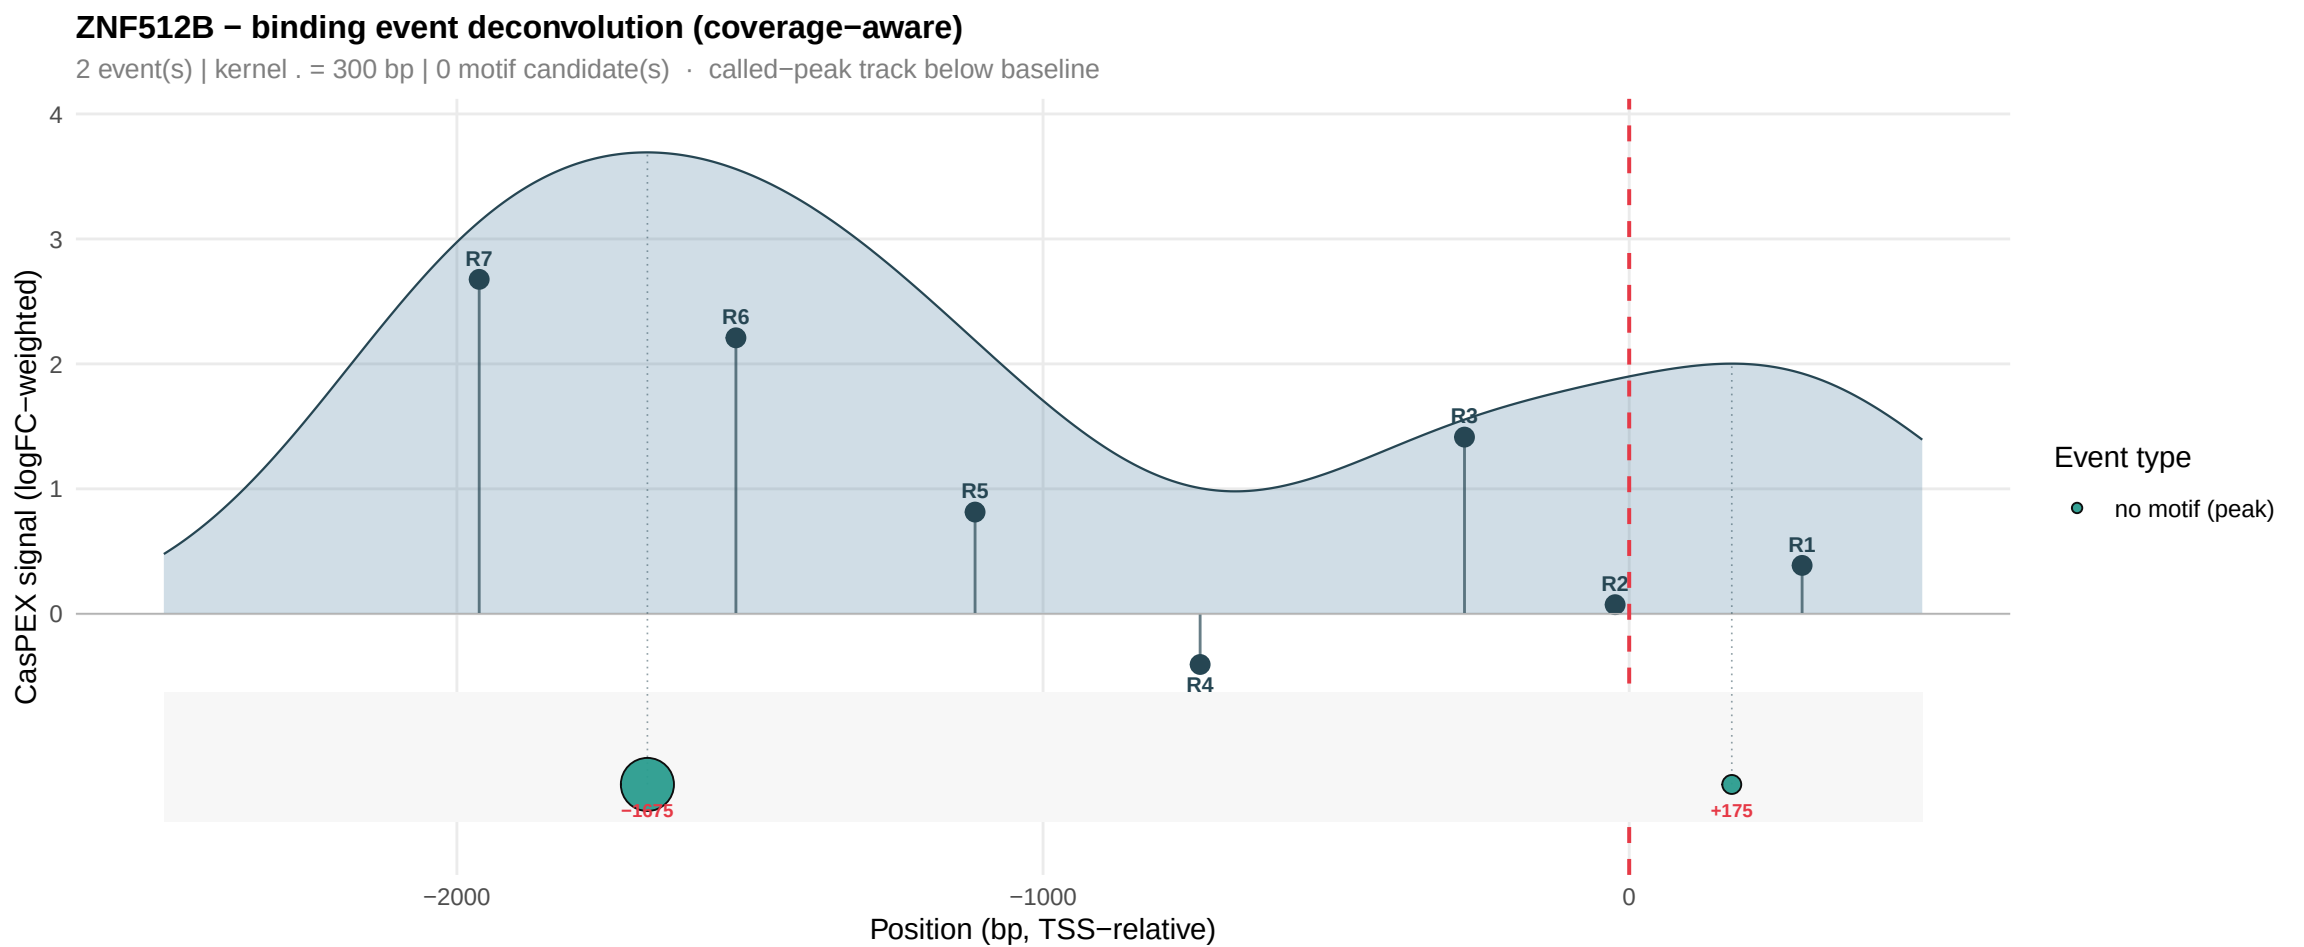
ZNF512B − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1875
+175
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

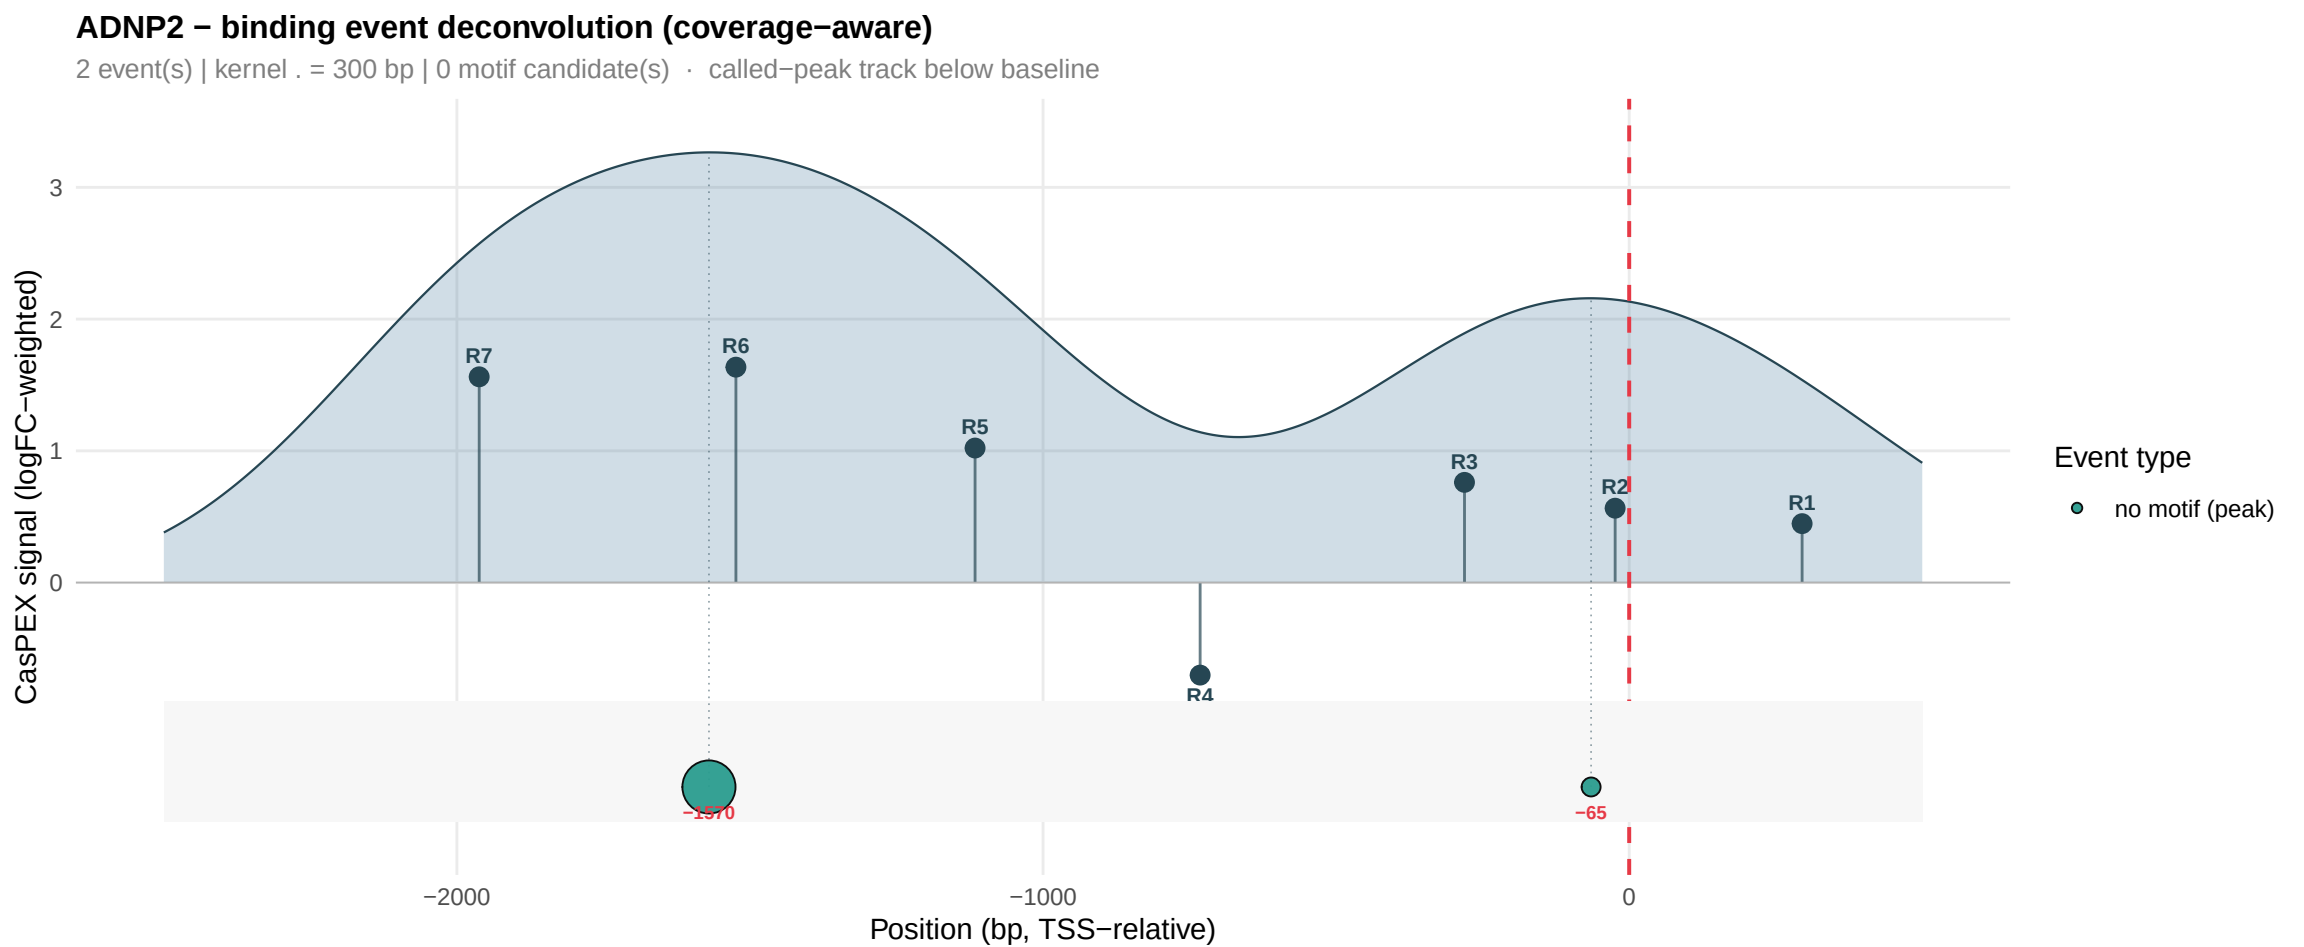
ADNP2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1570
−65
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

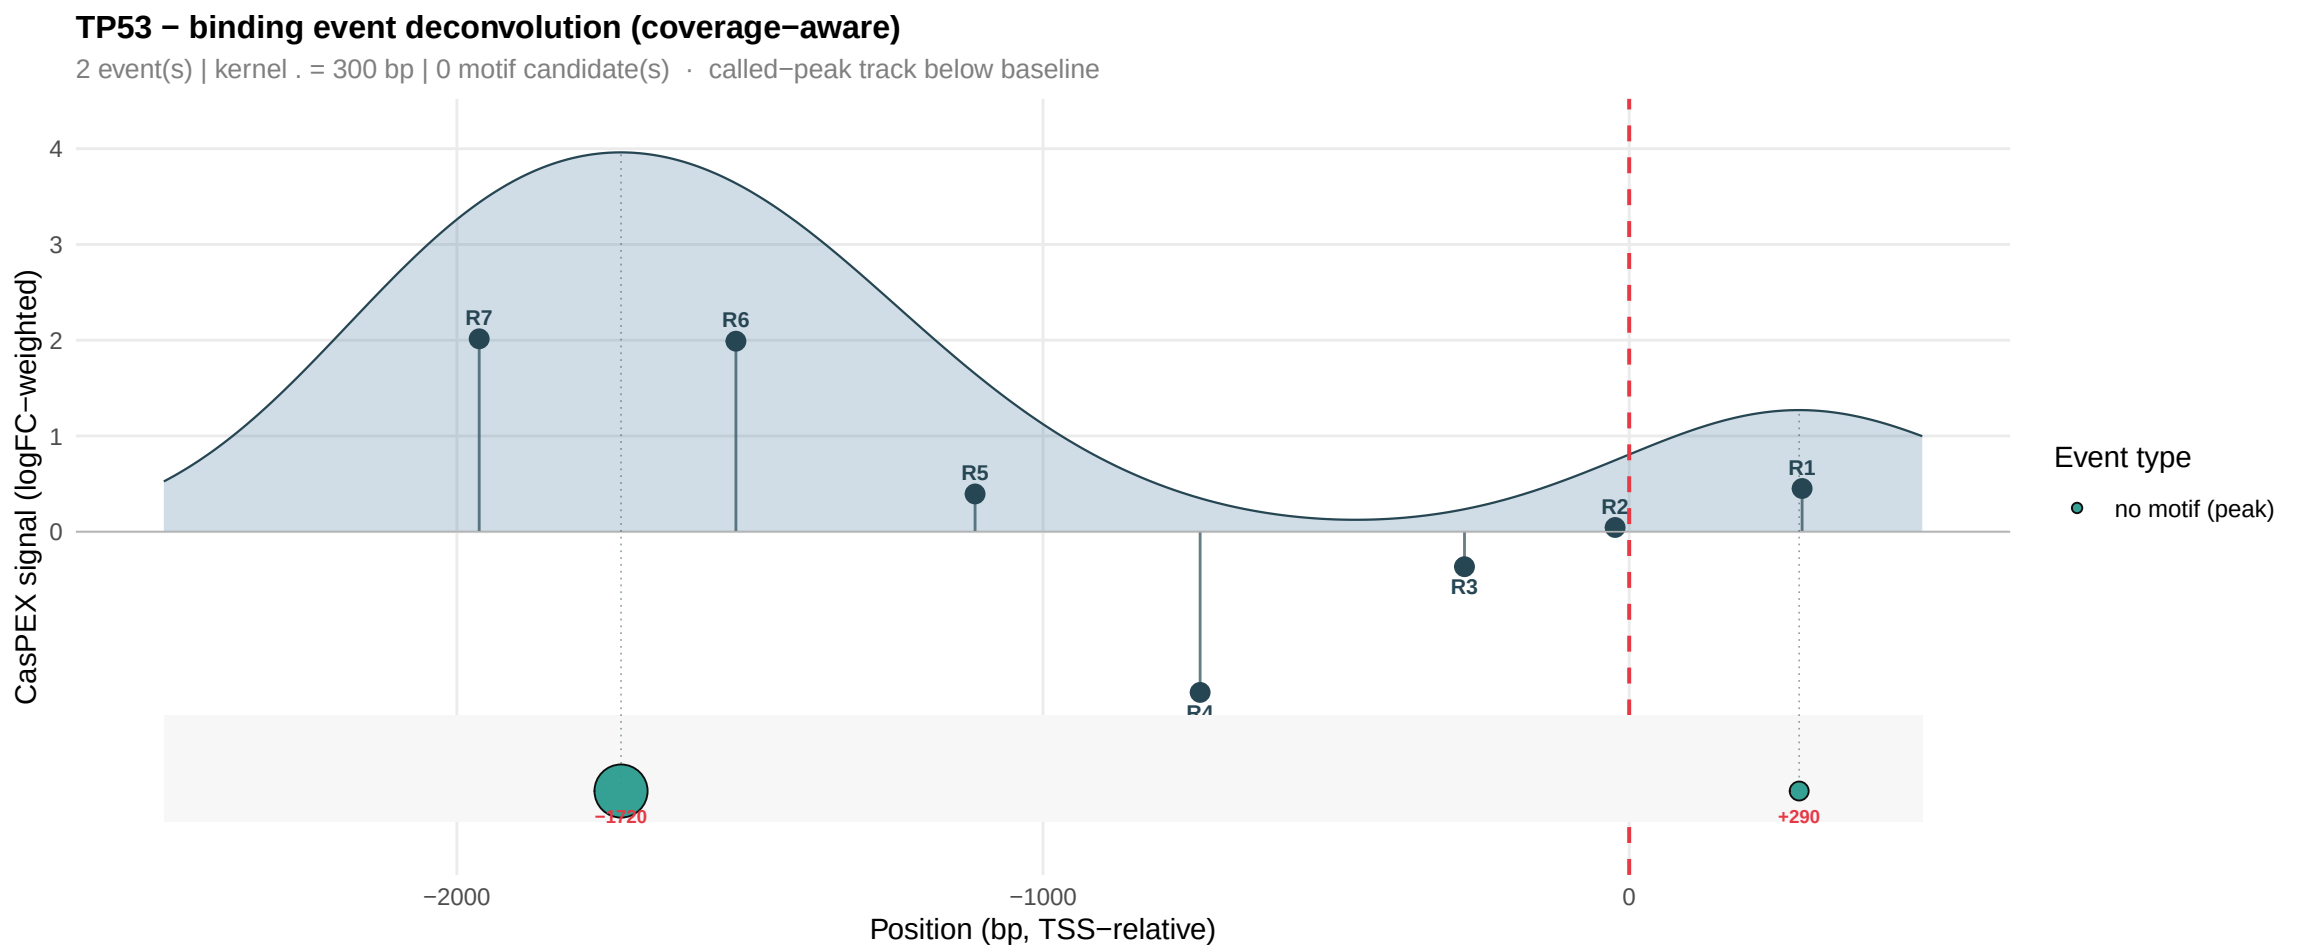
TP53 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1720
+290
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

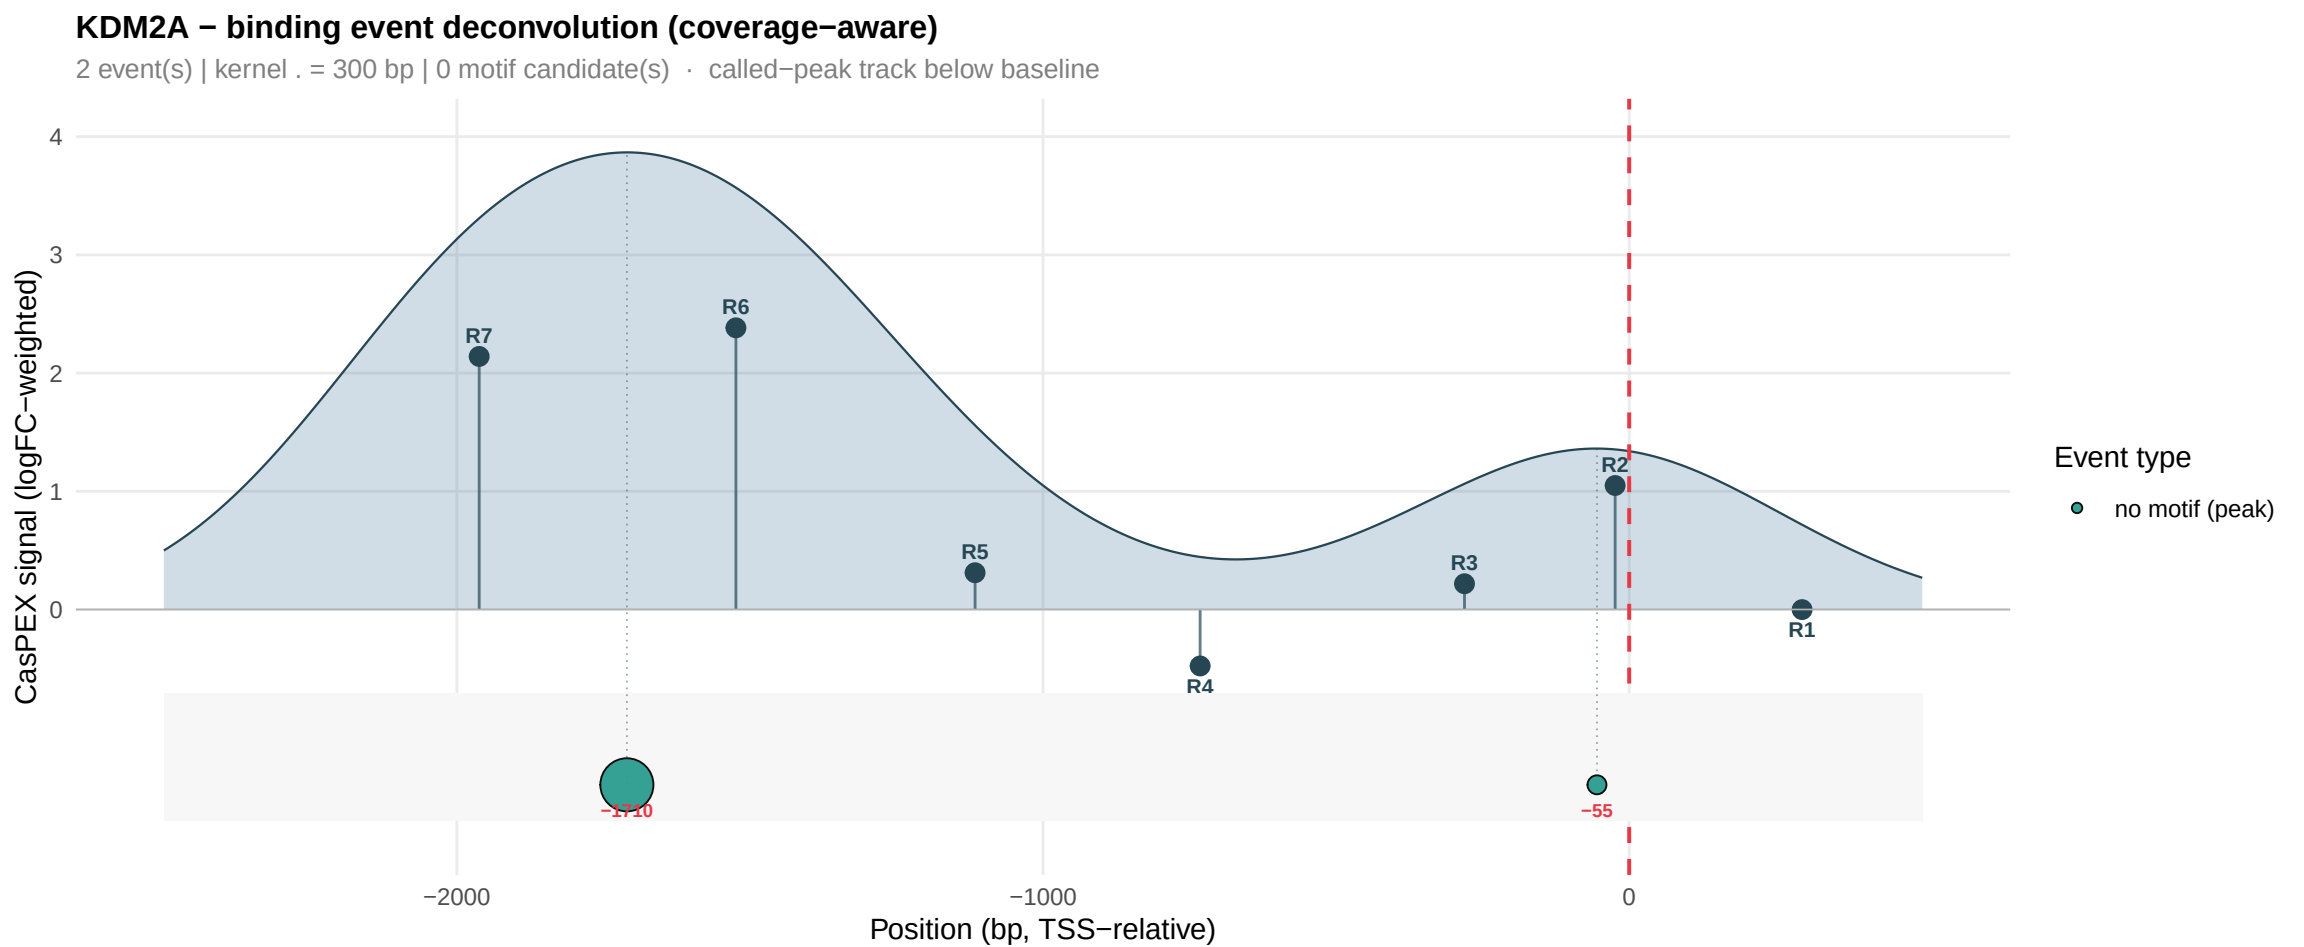
KDM2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1710
−55
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

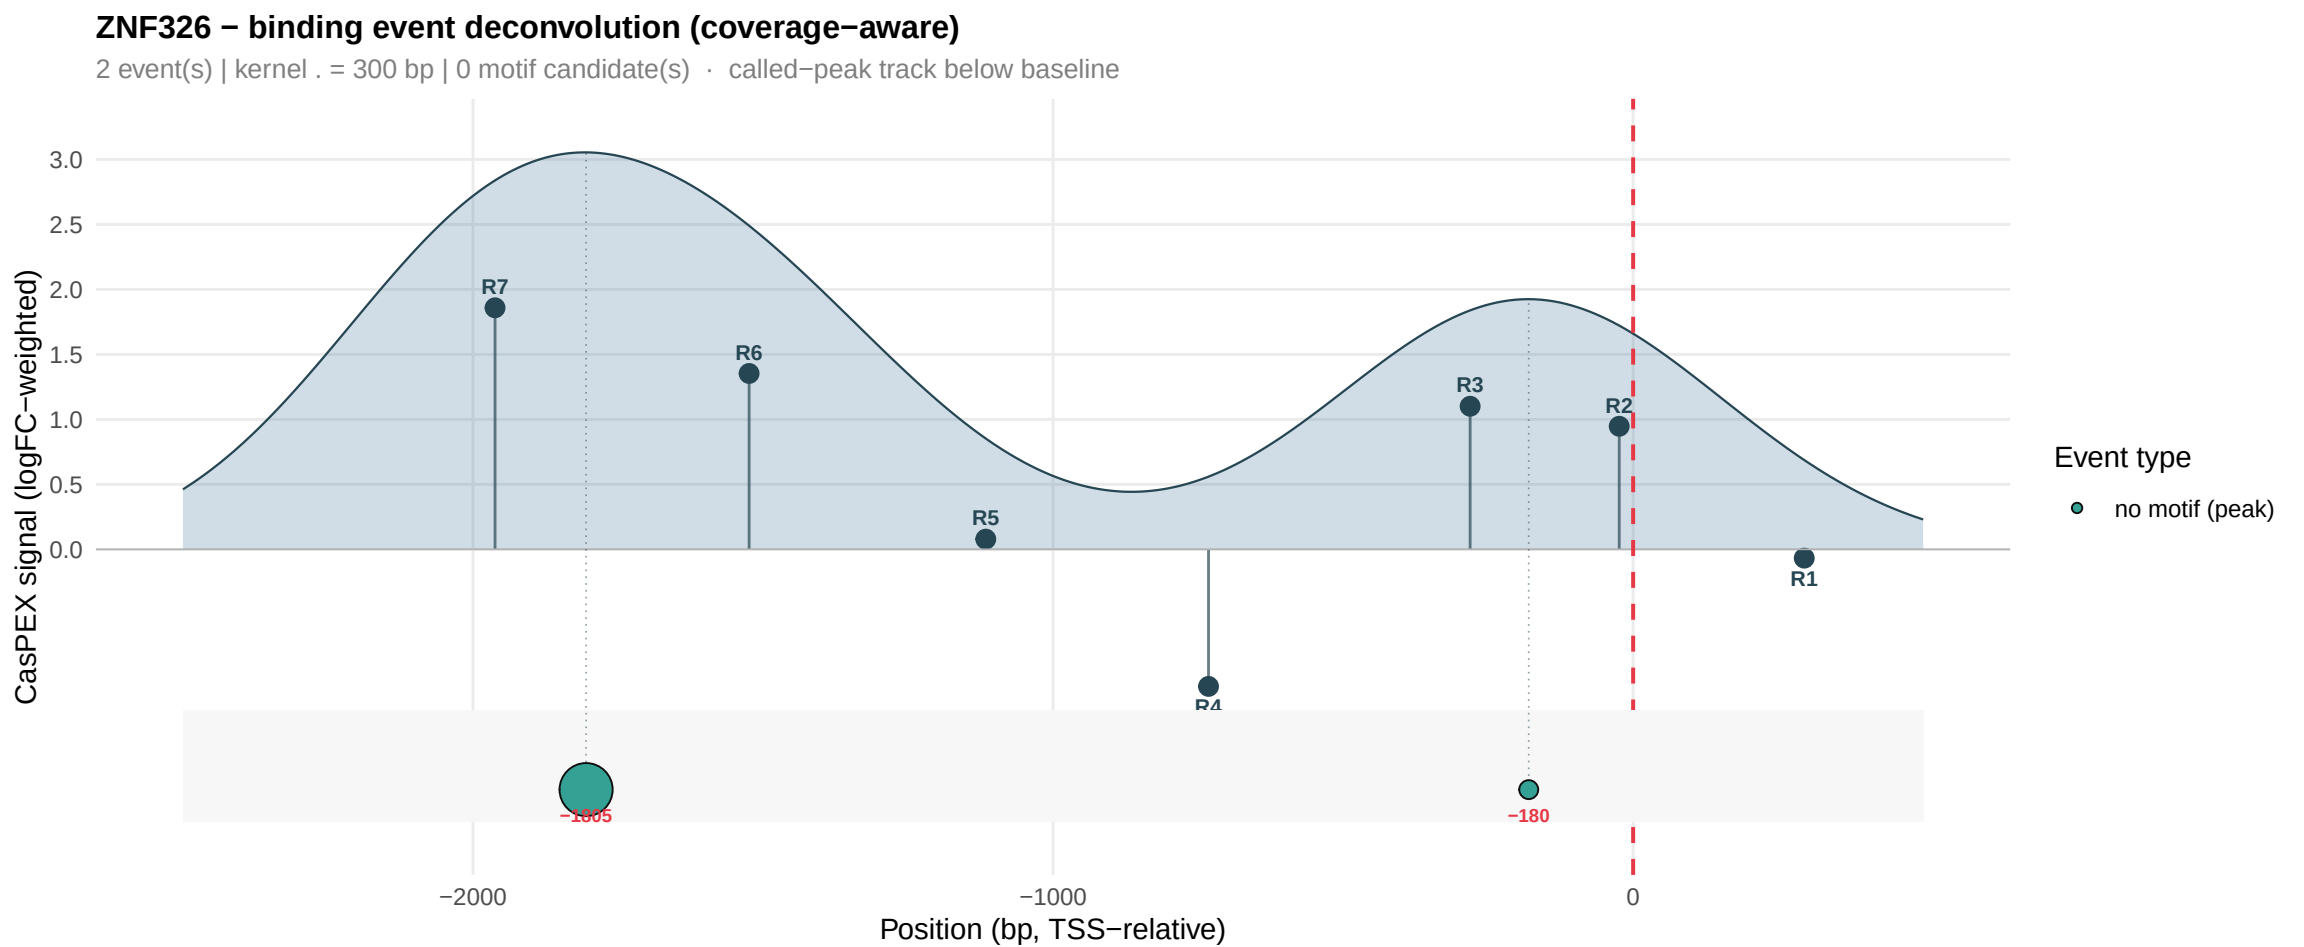
ZNF326 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1805
−180
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

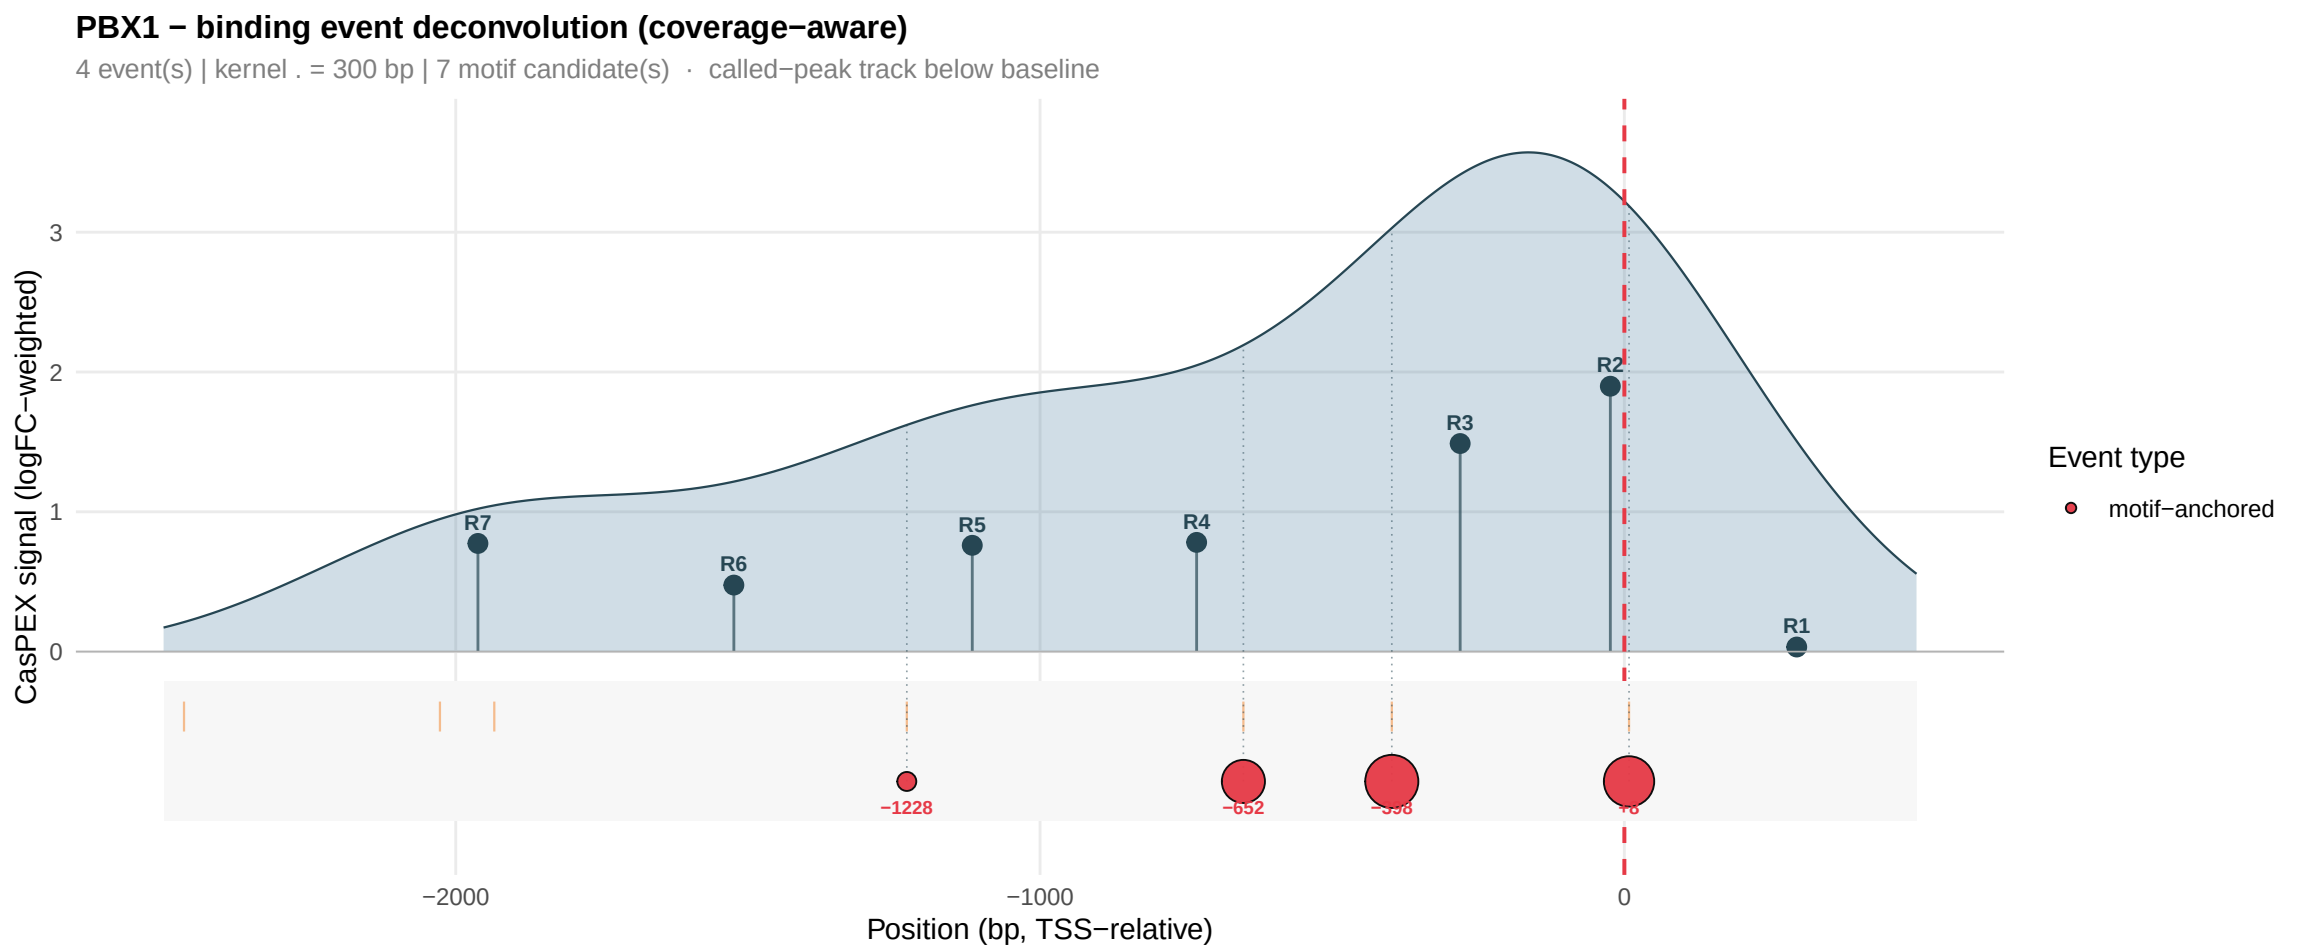
PBX1 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 7 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1228
−652
−398
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

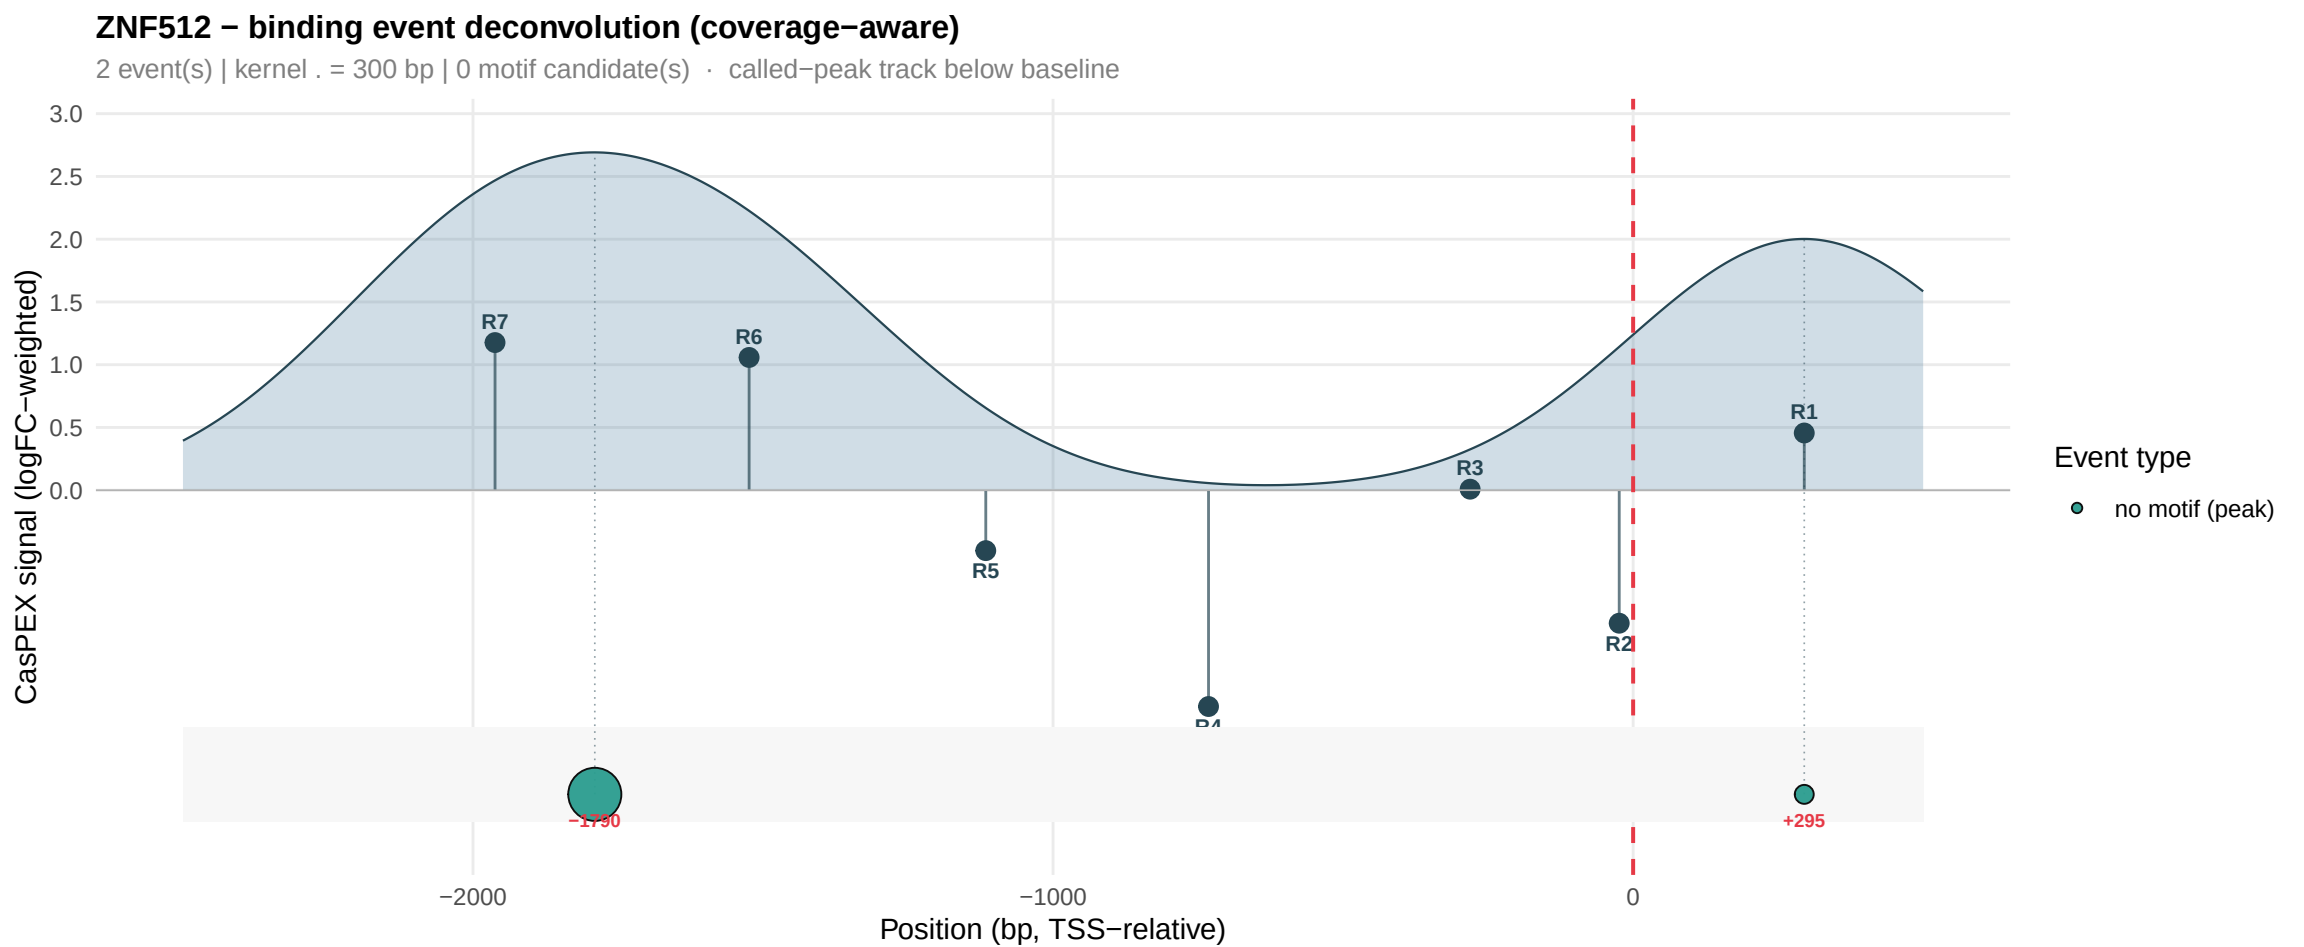
ZNF512 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1790
+295
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

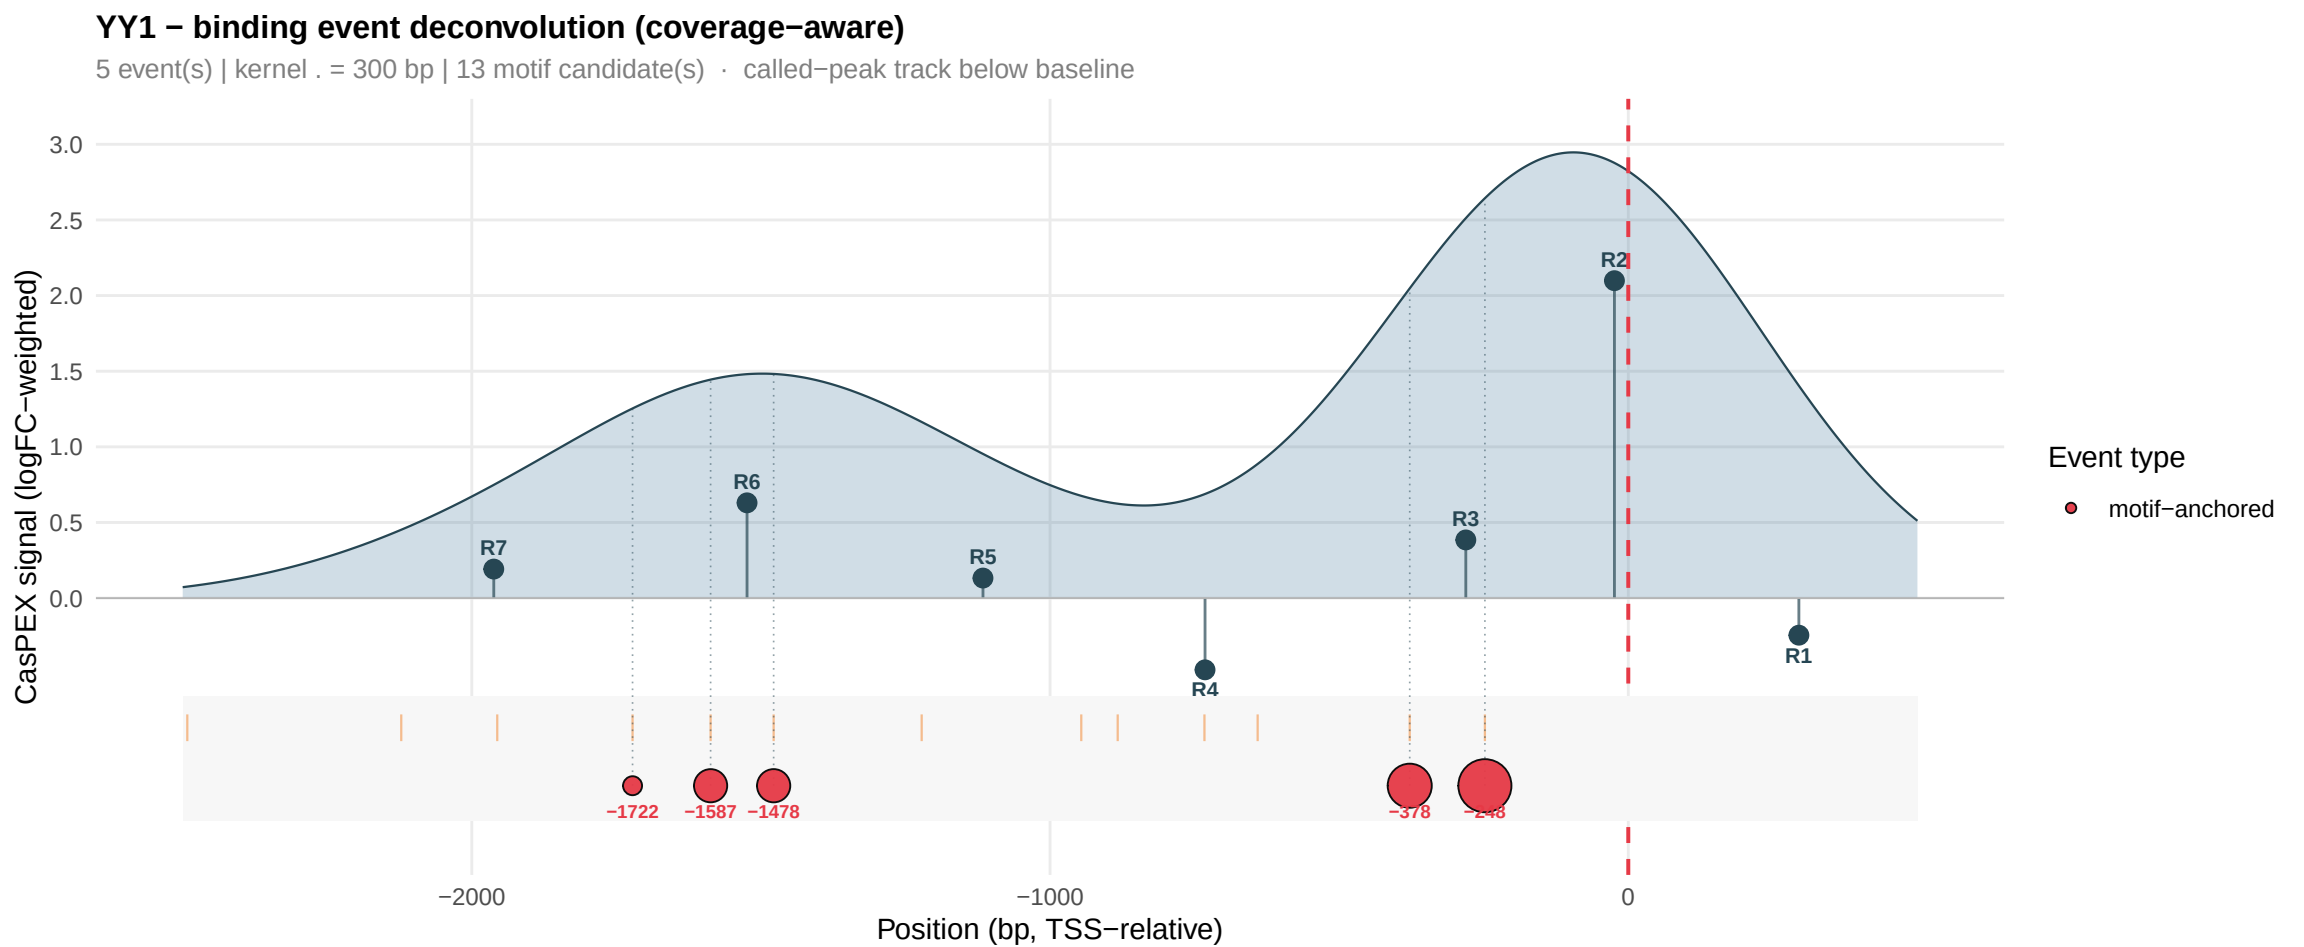
YY1 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 300 bp | 13 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−1722
−1587
−1478
−378
−248
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

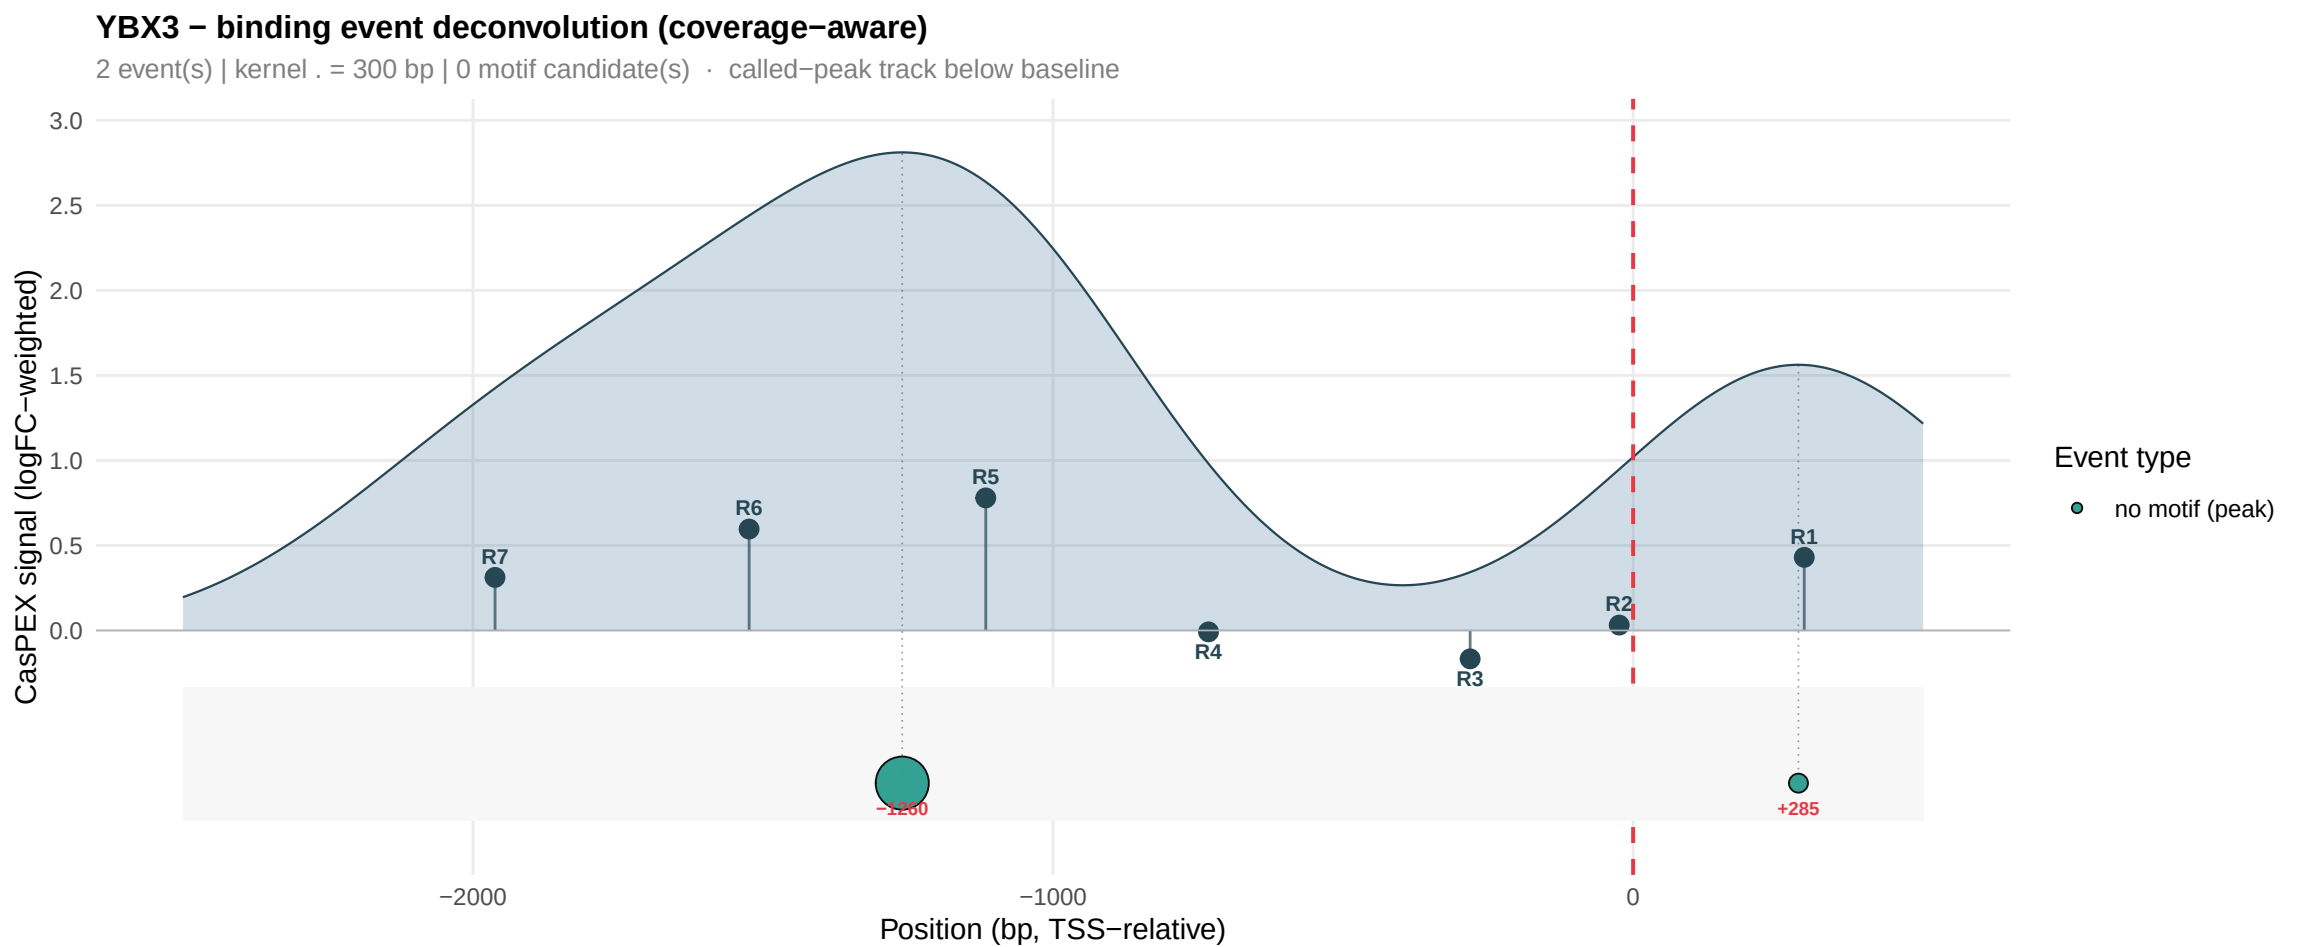
YBX3 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1260
+285
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

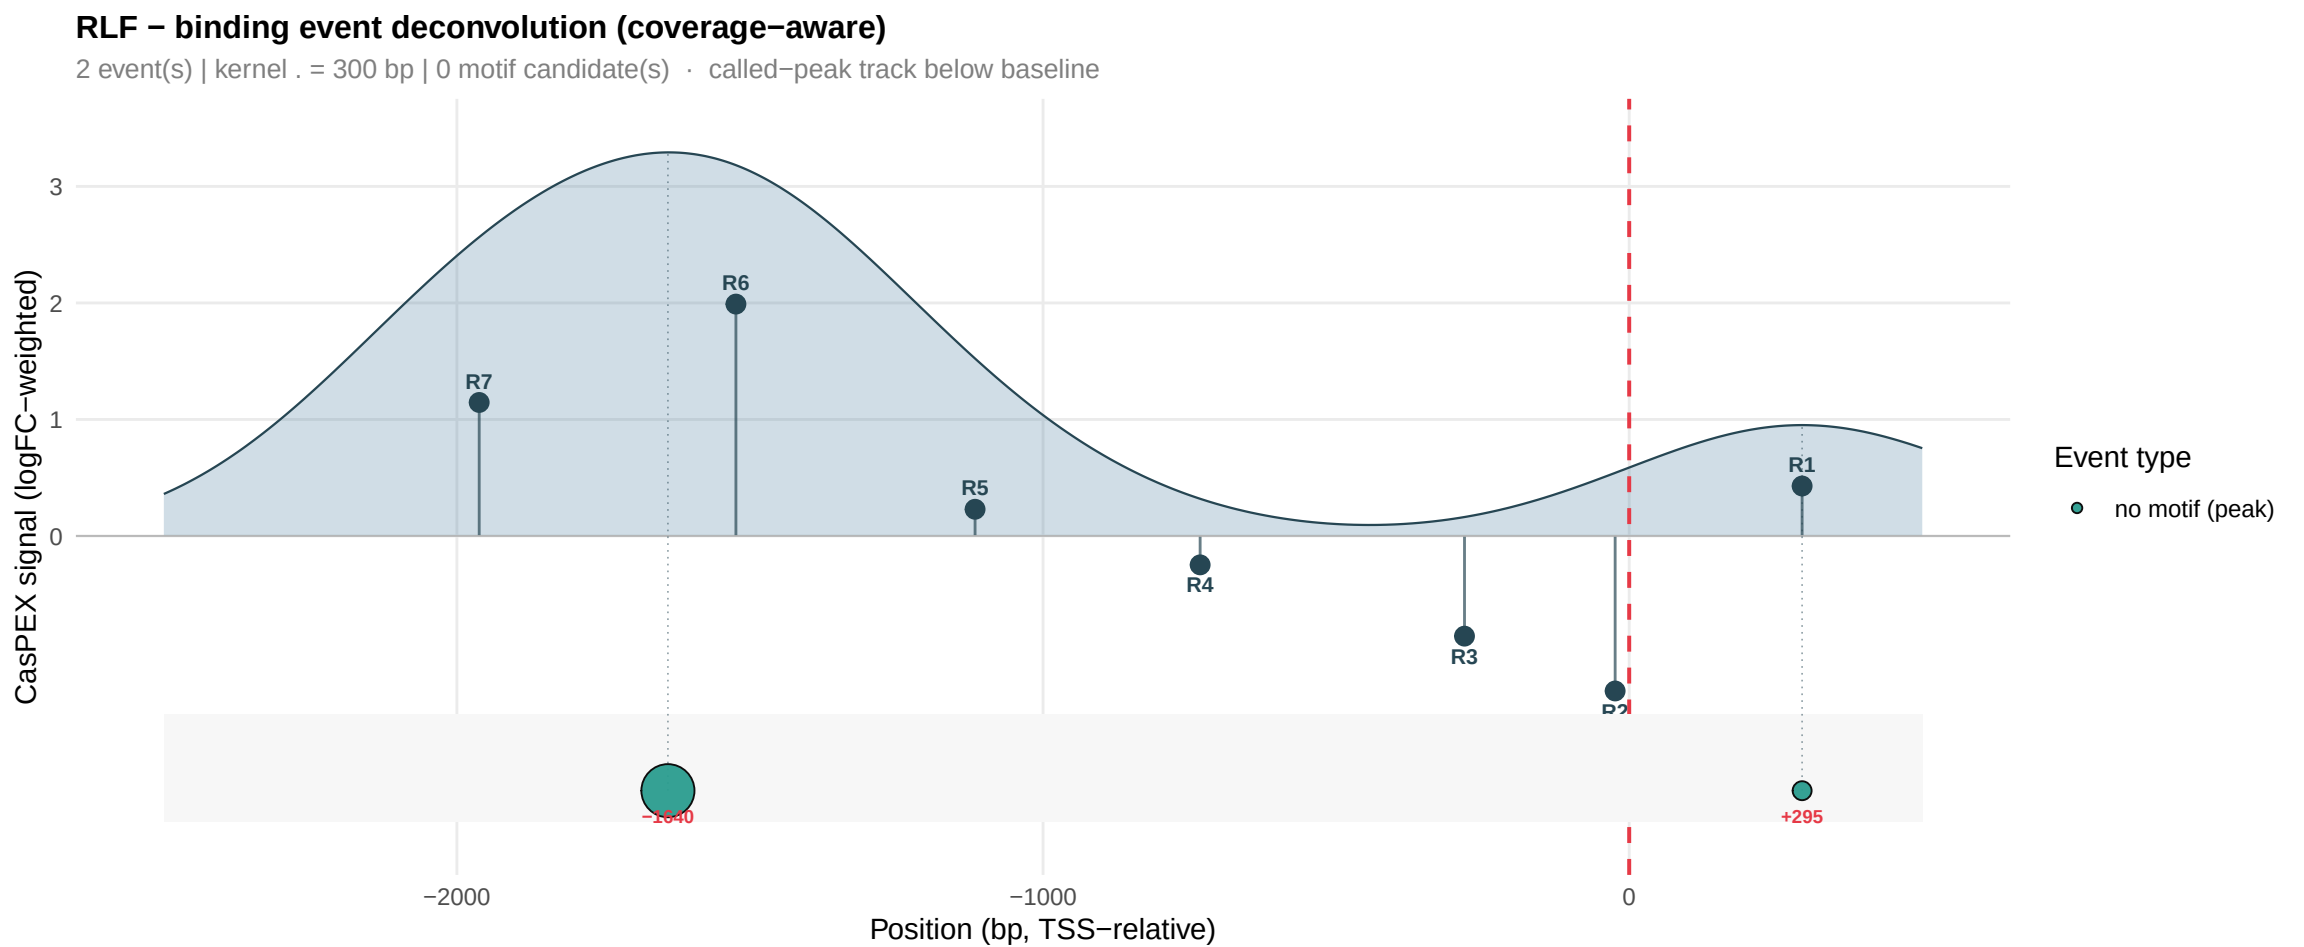
RLF − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1640
+295
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

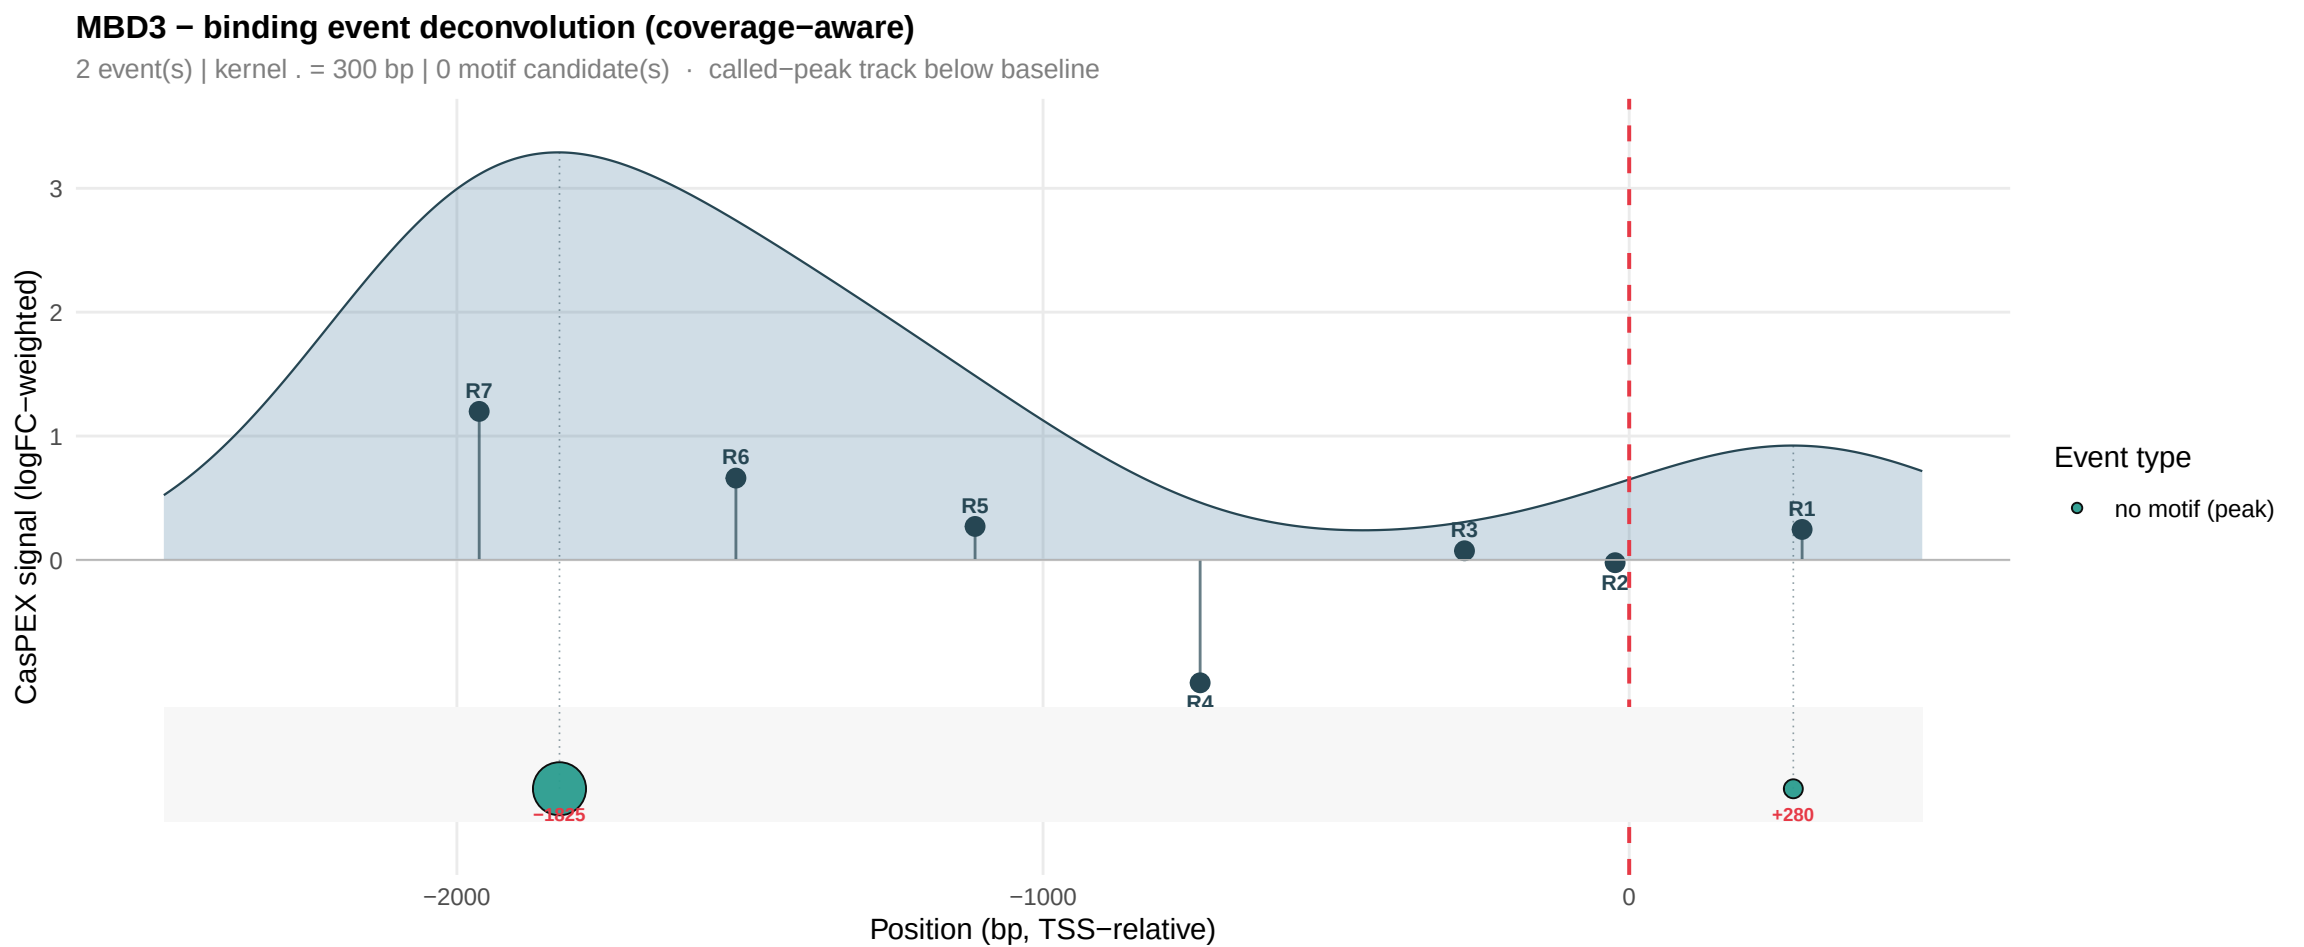
MBD3 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1625
+280
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

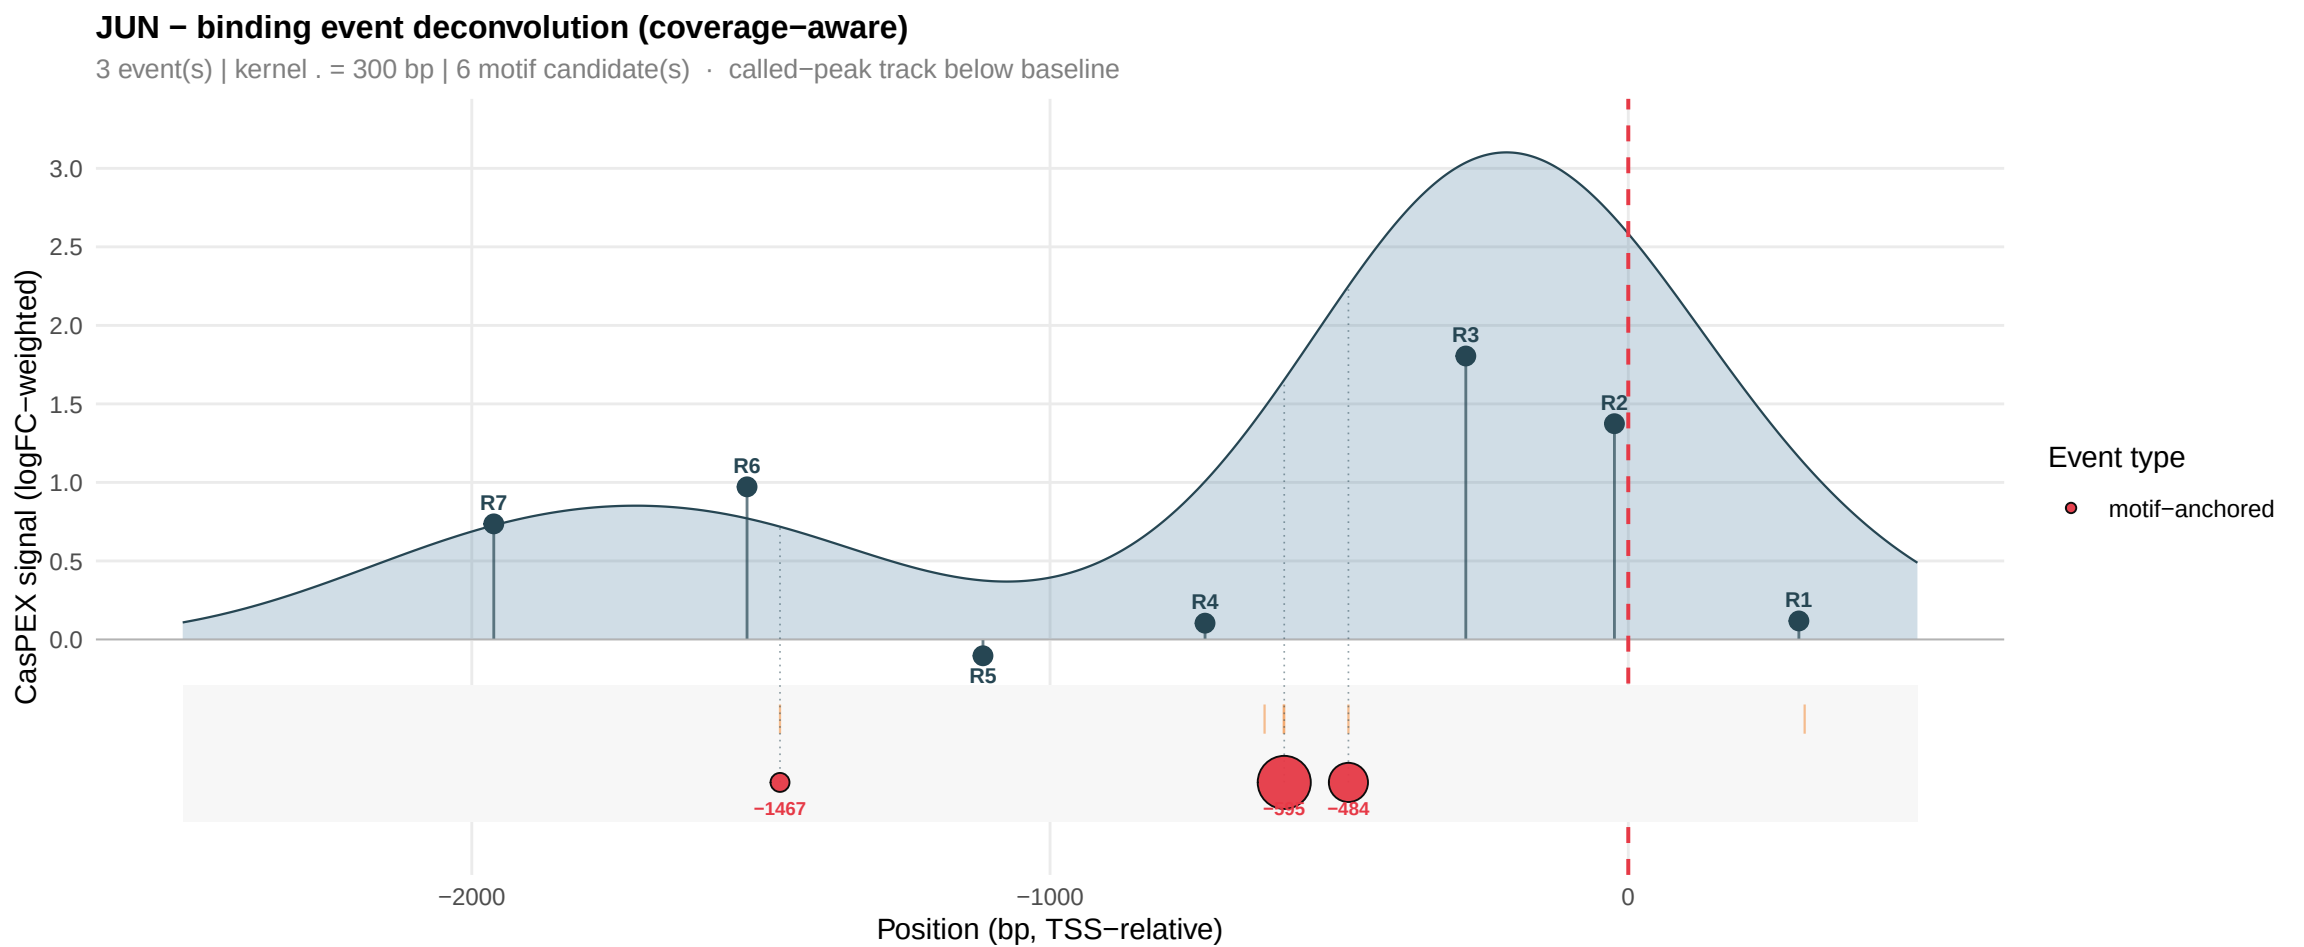
JUN − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−1467
−484
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

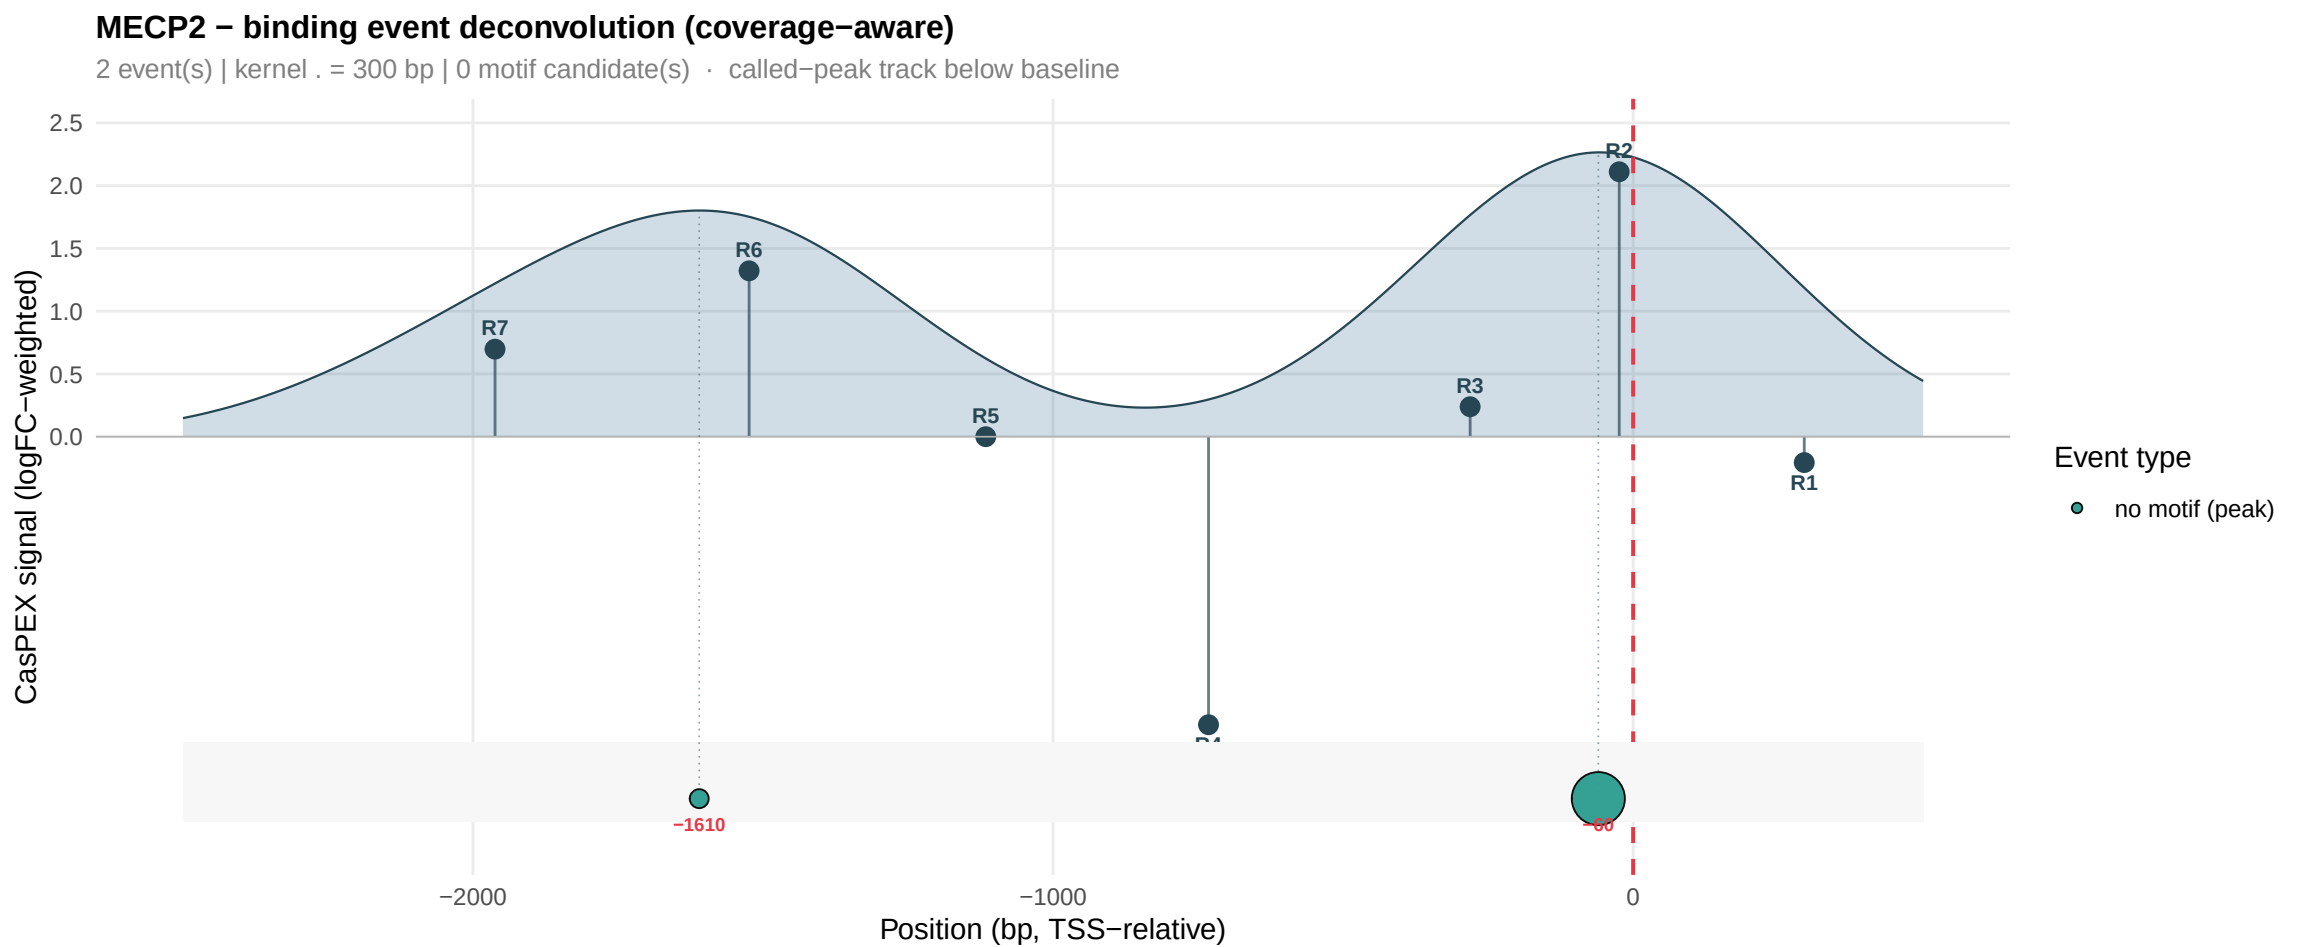
MECP2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R3
R2
R1
−1610
−60
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

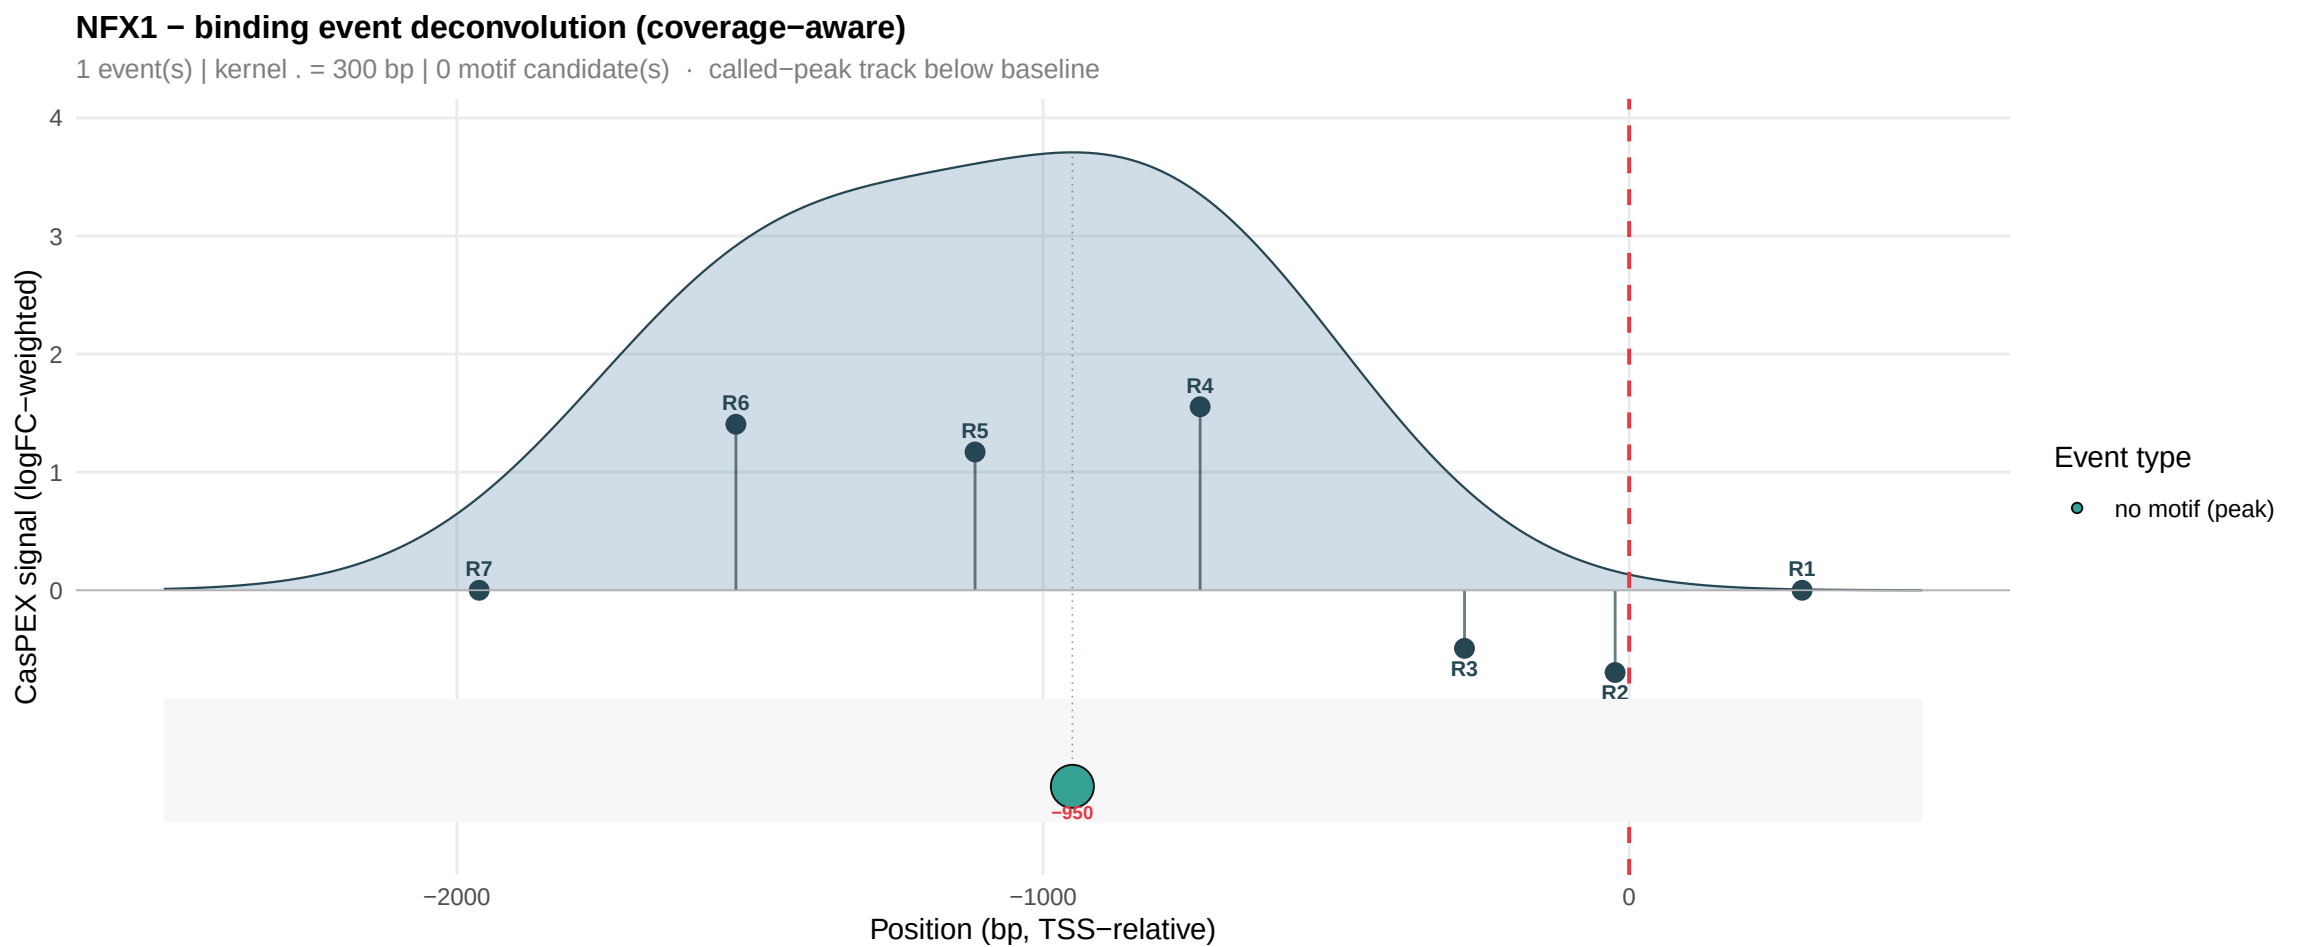
NFX1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−950
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

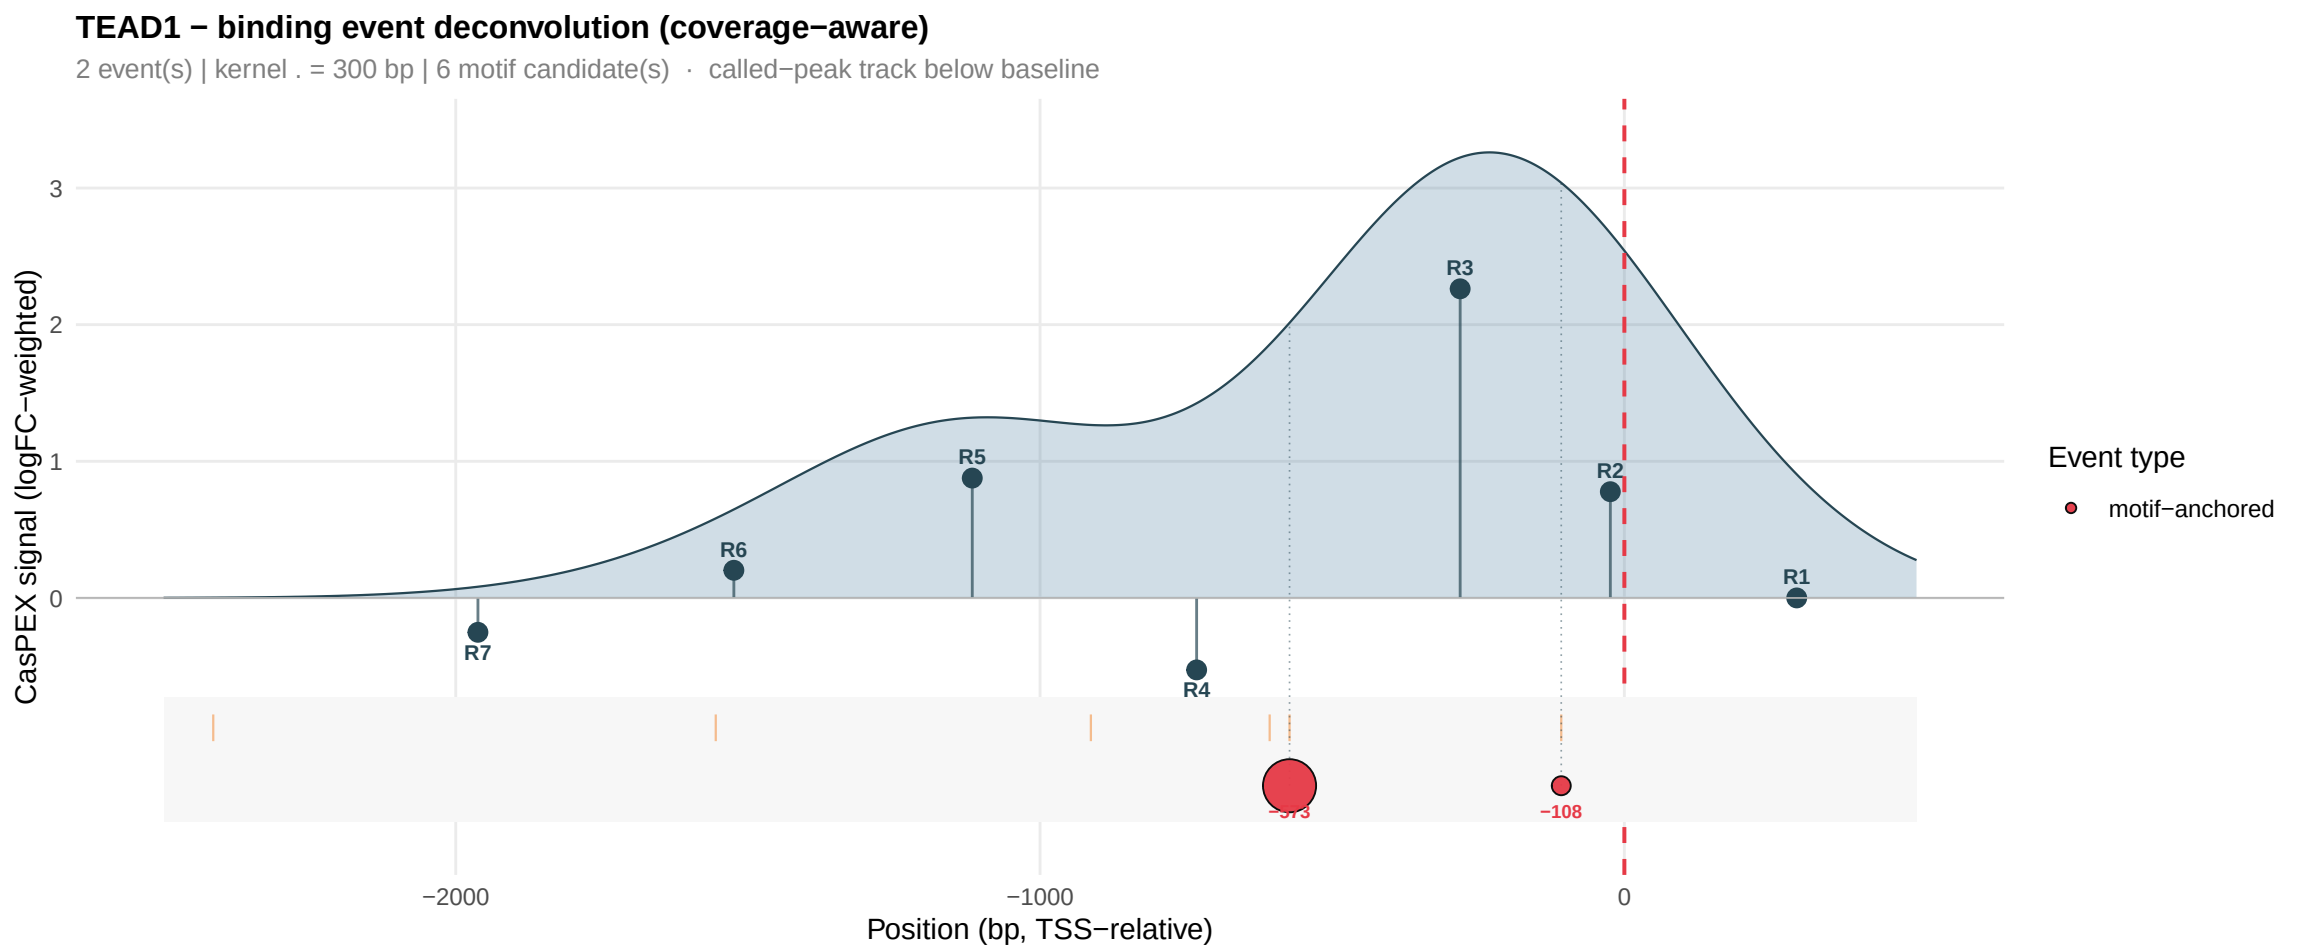
TEAD1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−373
−108
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

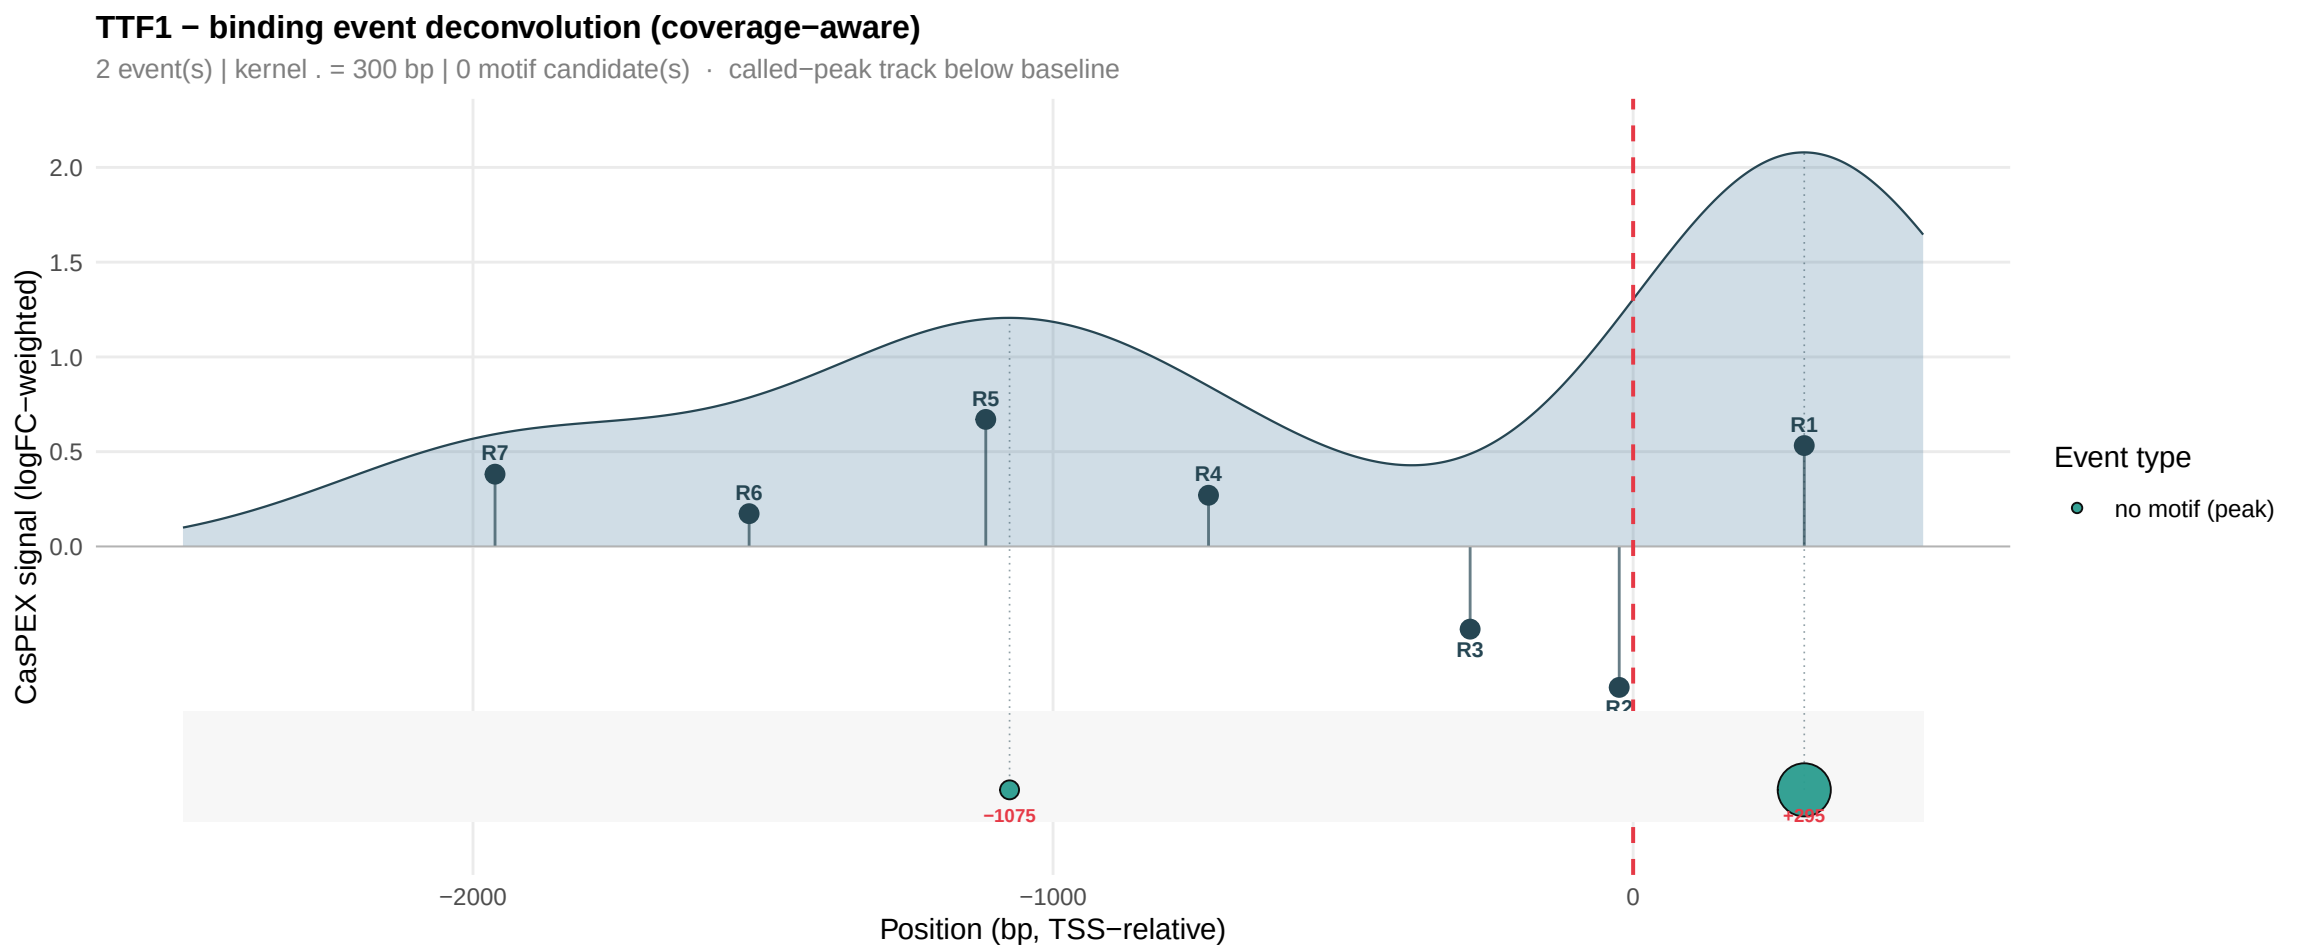
TTF1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1075
+295
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

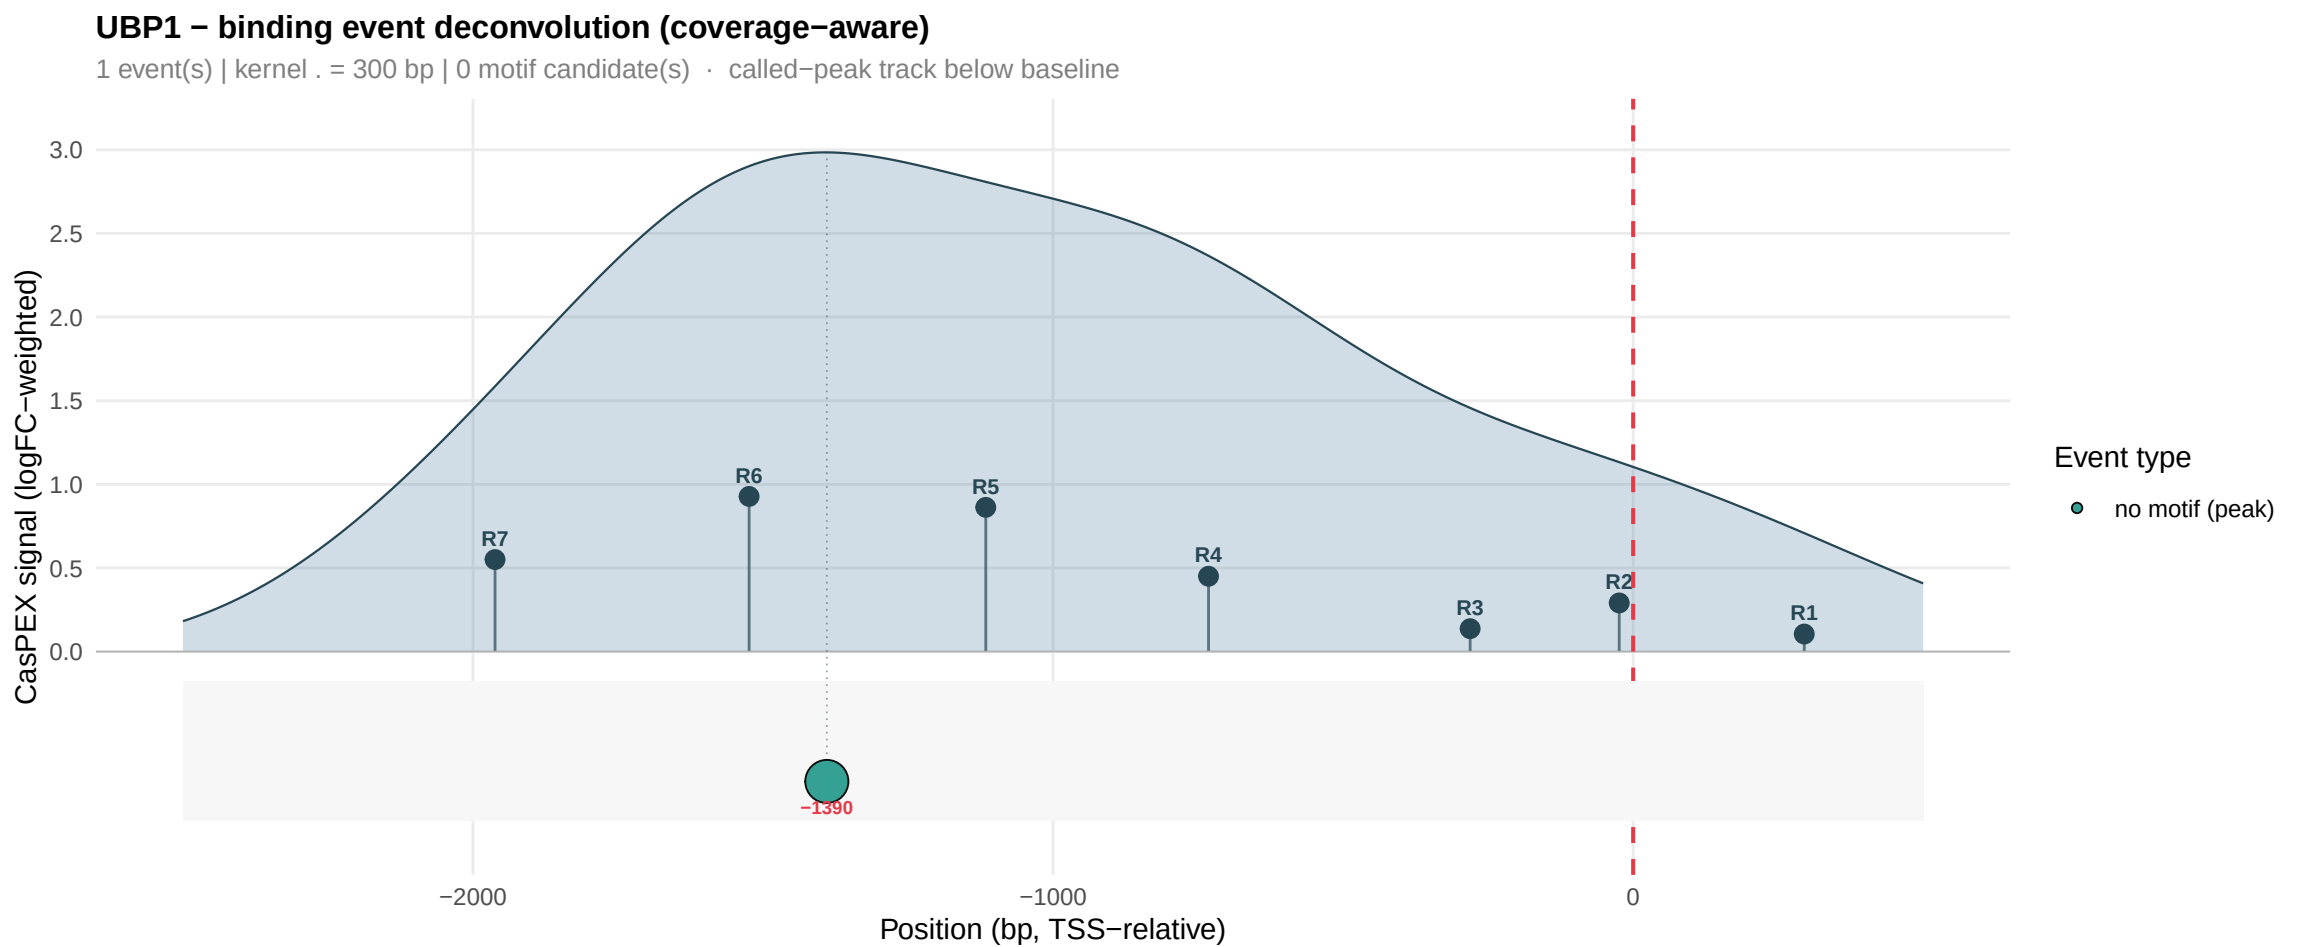
UBP1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1390
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

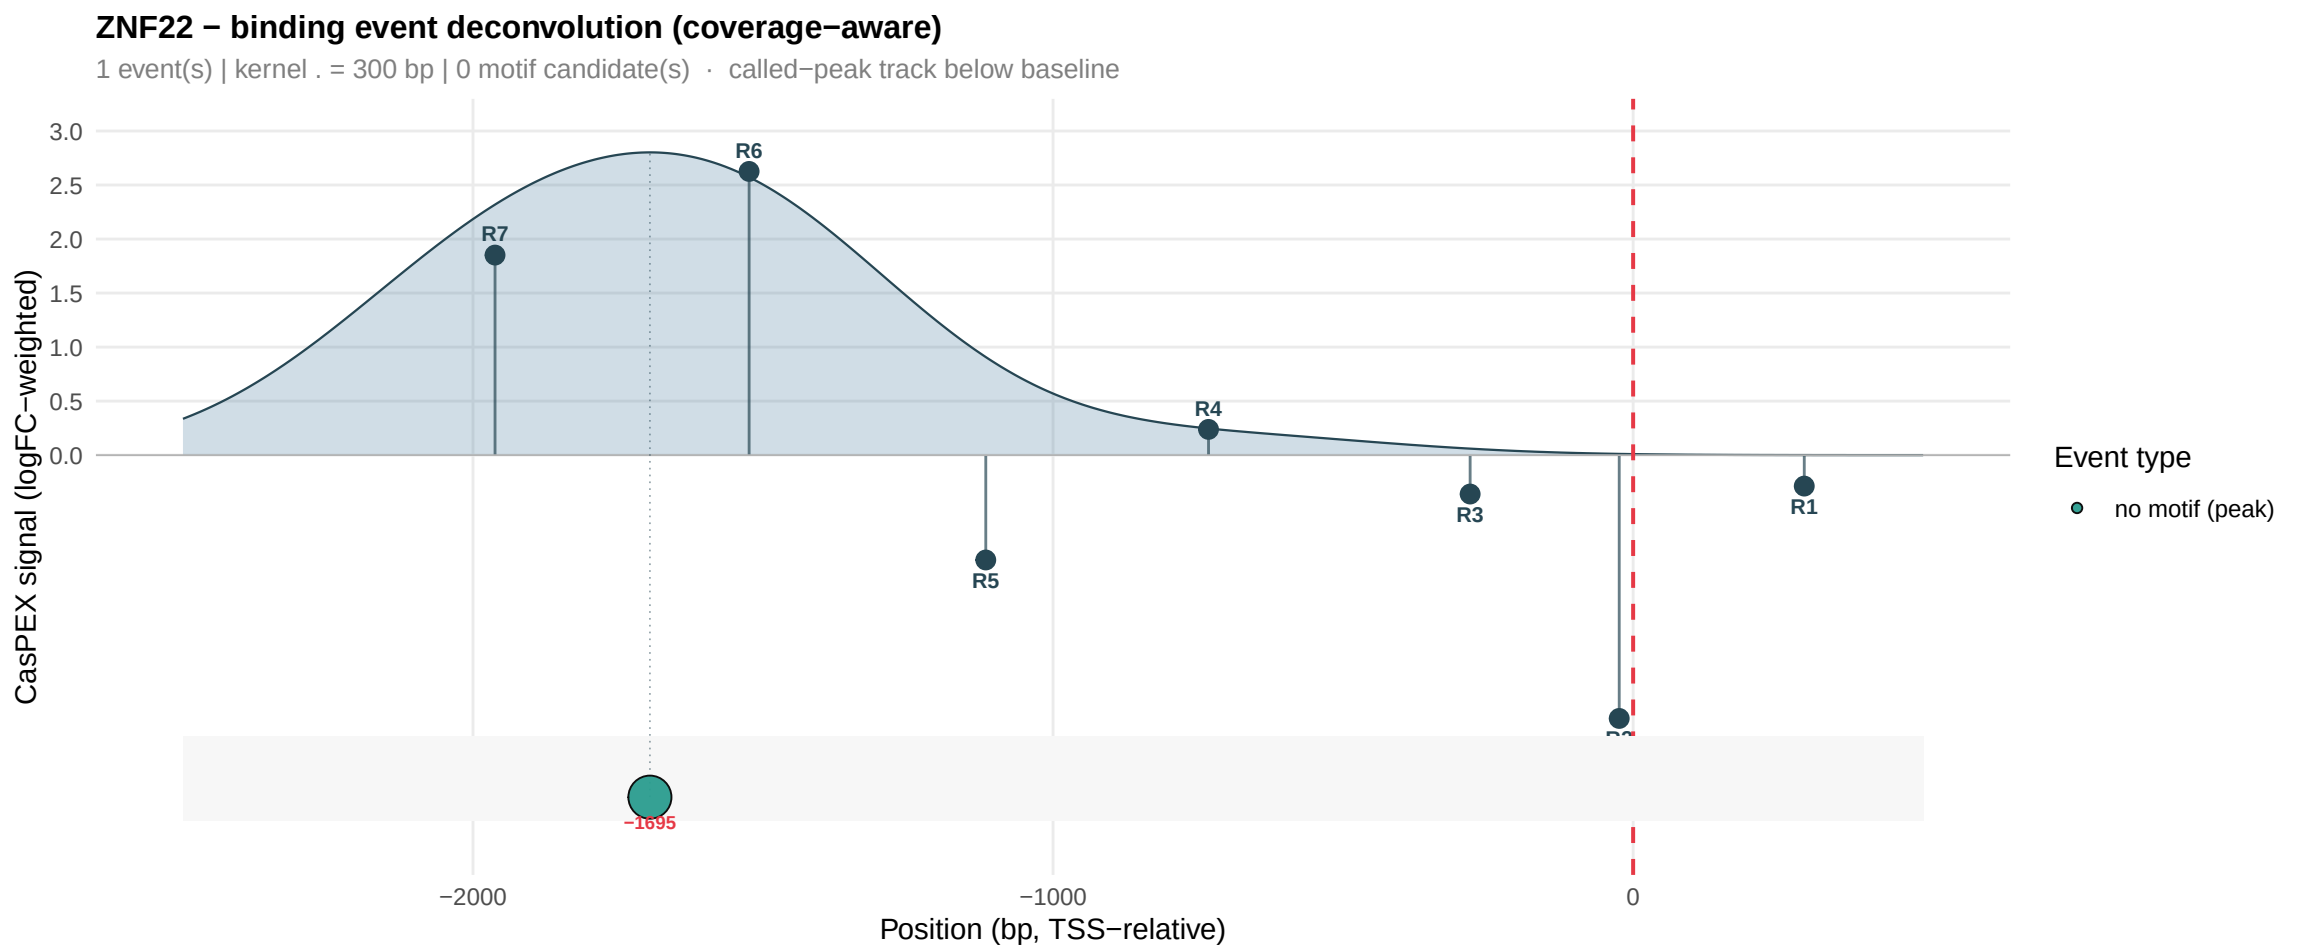
ZNF22 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R6
R7
R4
R5
R3
R1
−1695
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

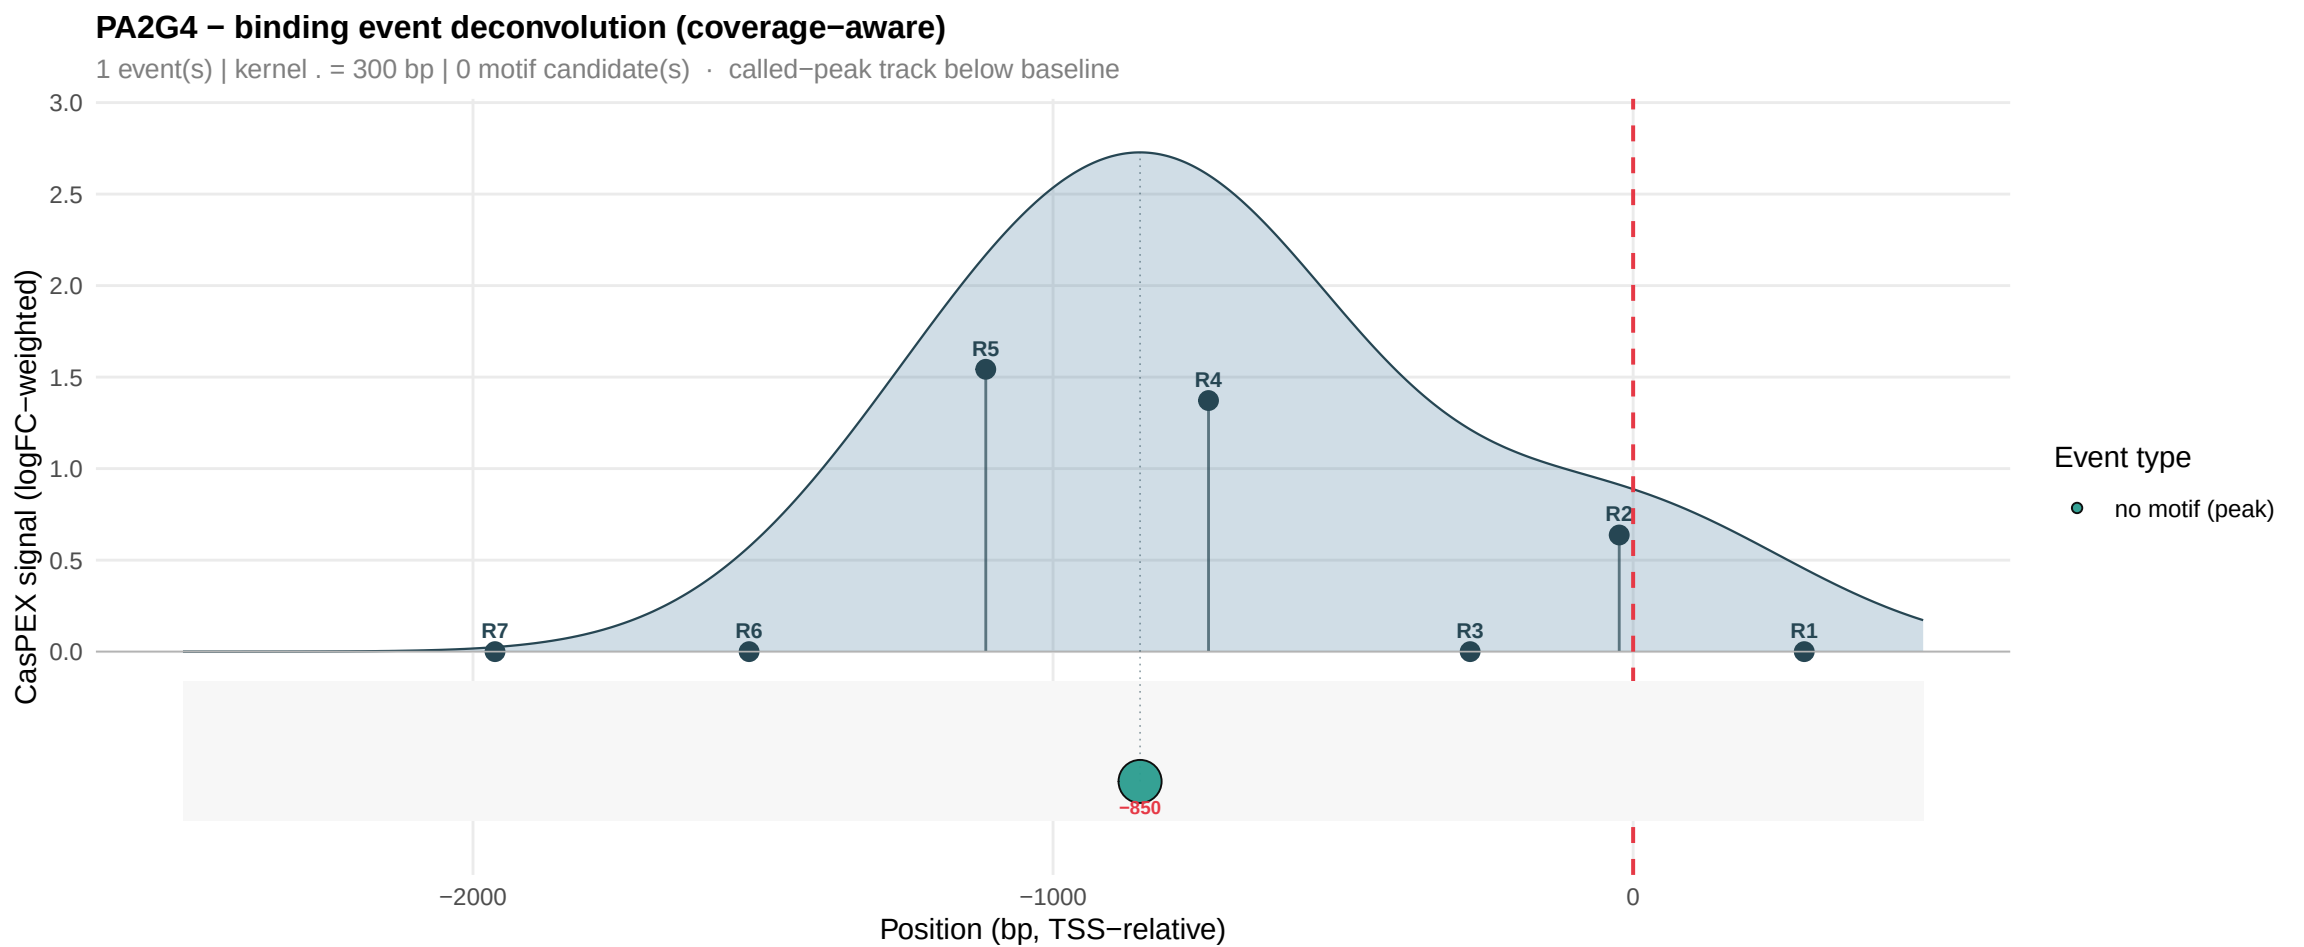
PA2G4 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R5
R4
R2
R7
R6
R3
R1
−850
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

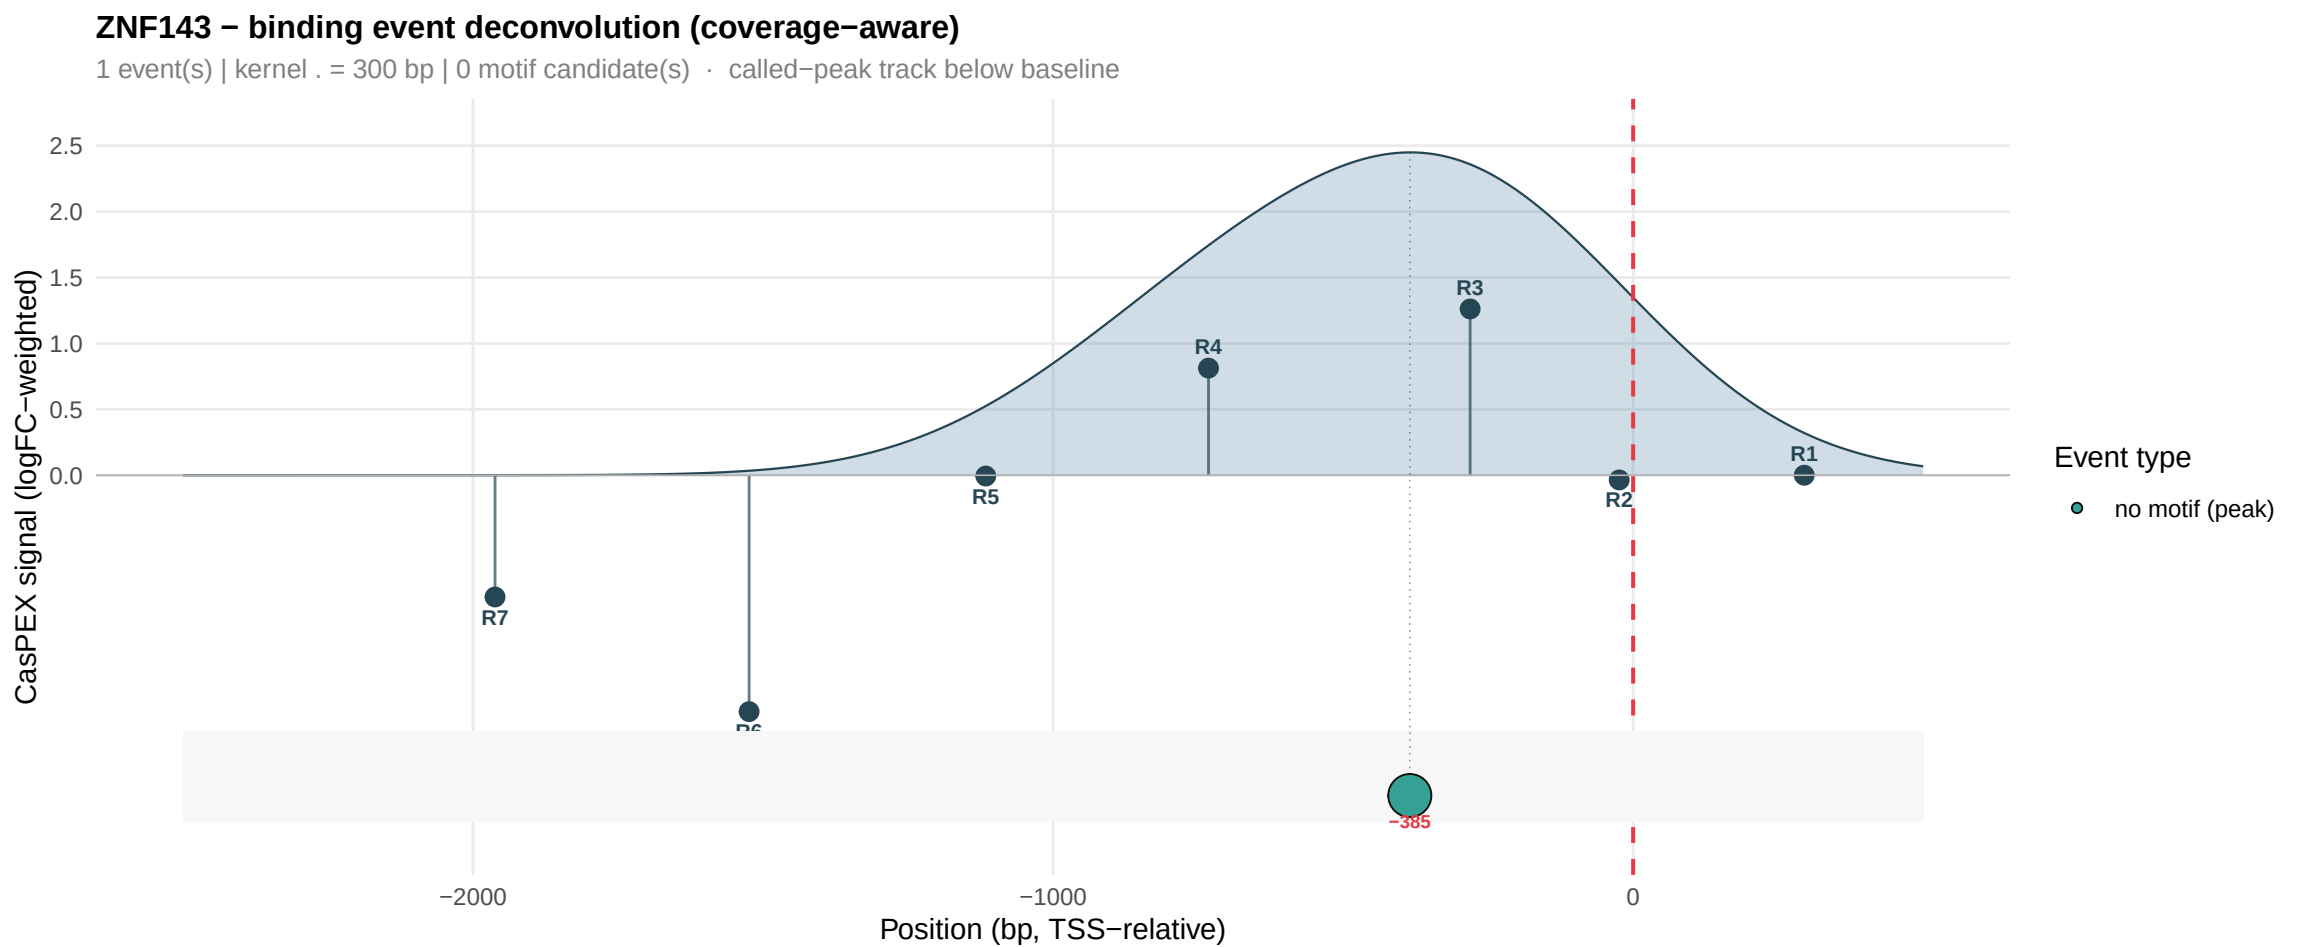
ZNF143 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−385
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

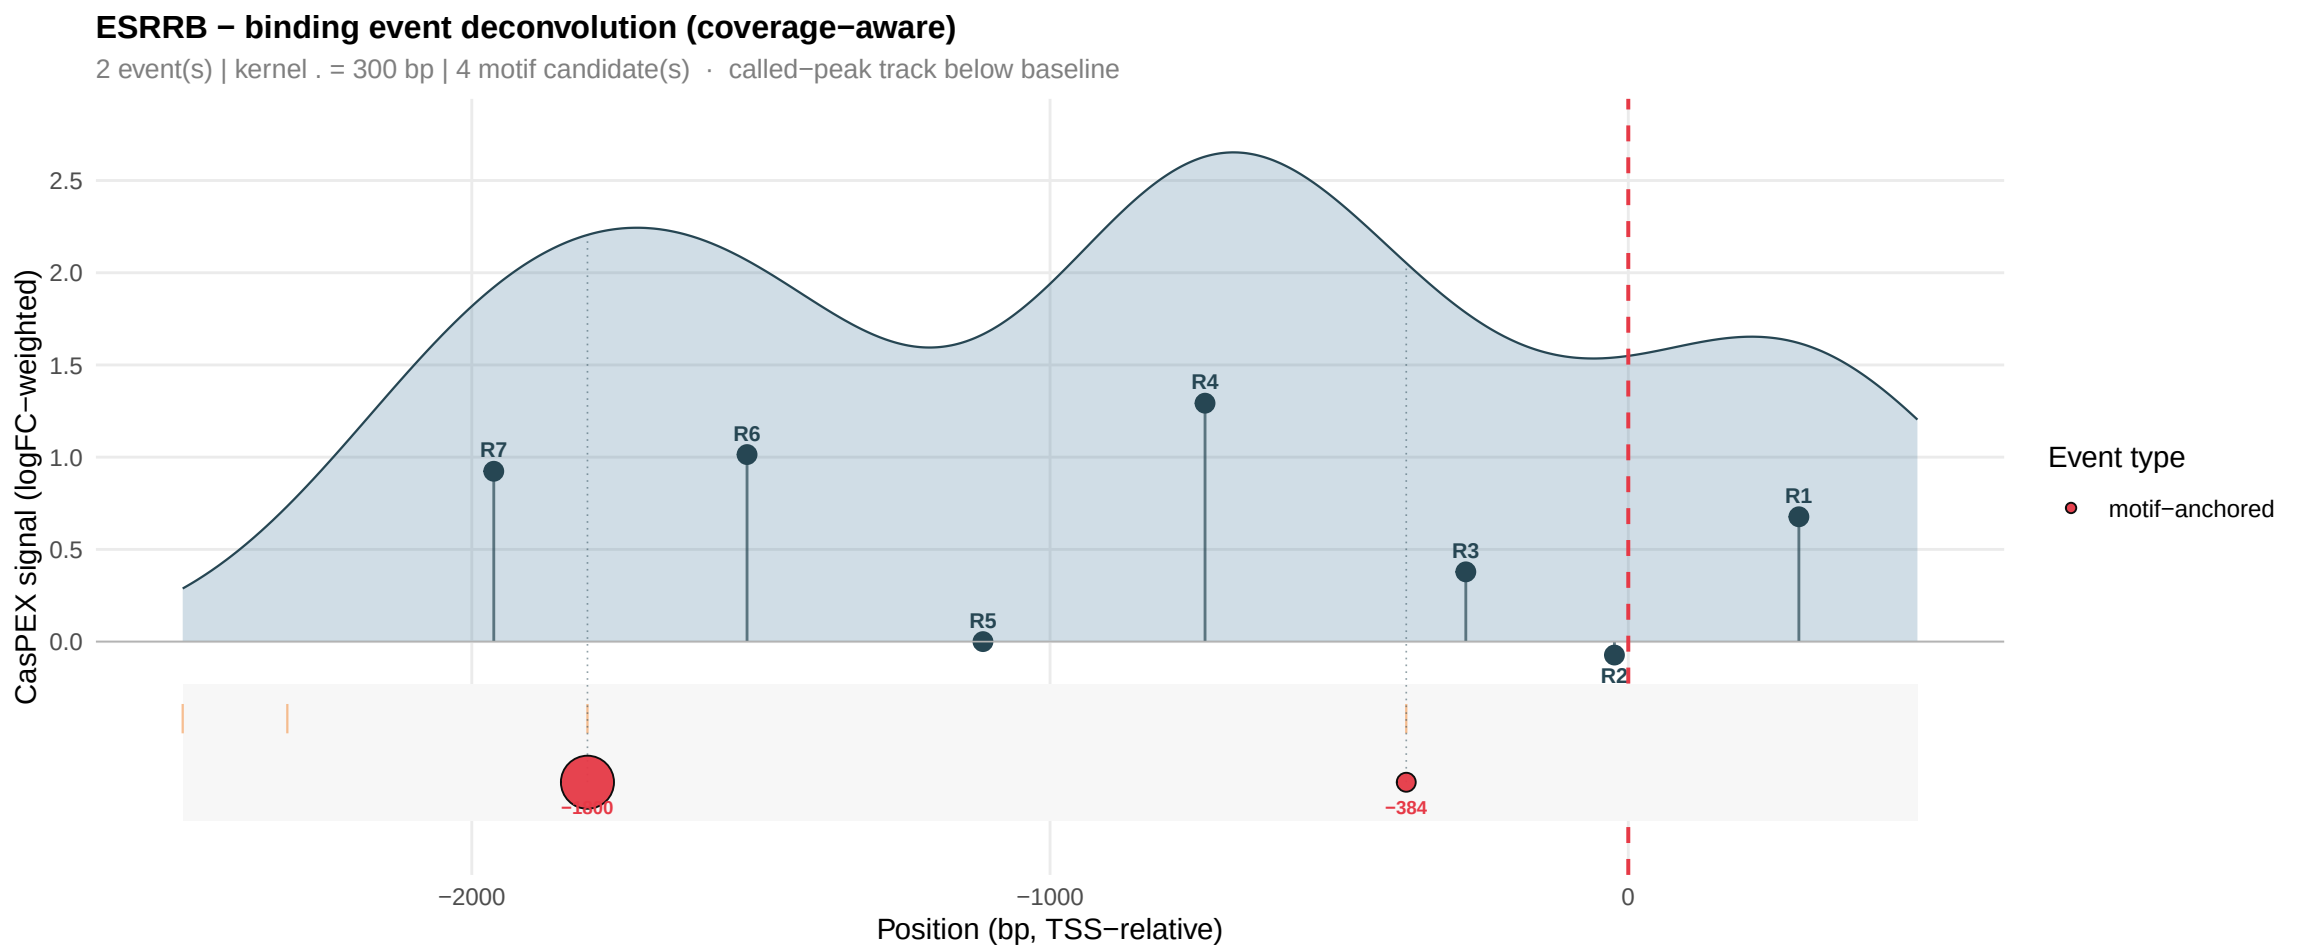
ESRRB − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 4 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1800
−384
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

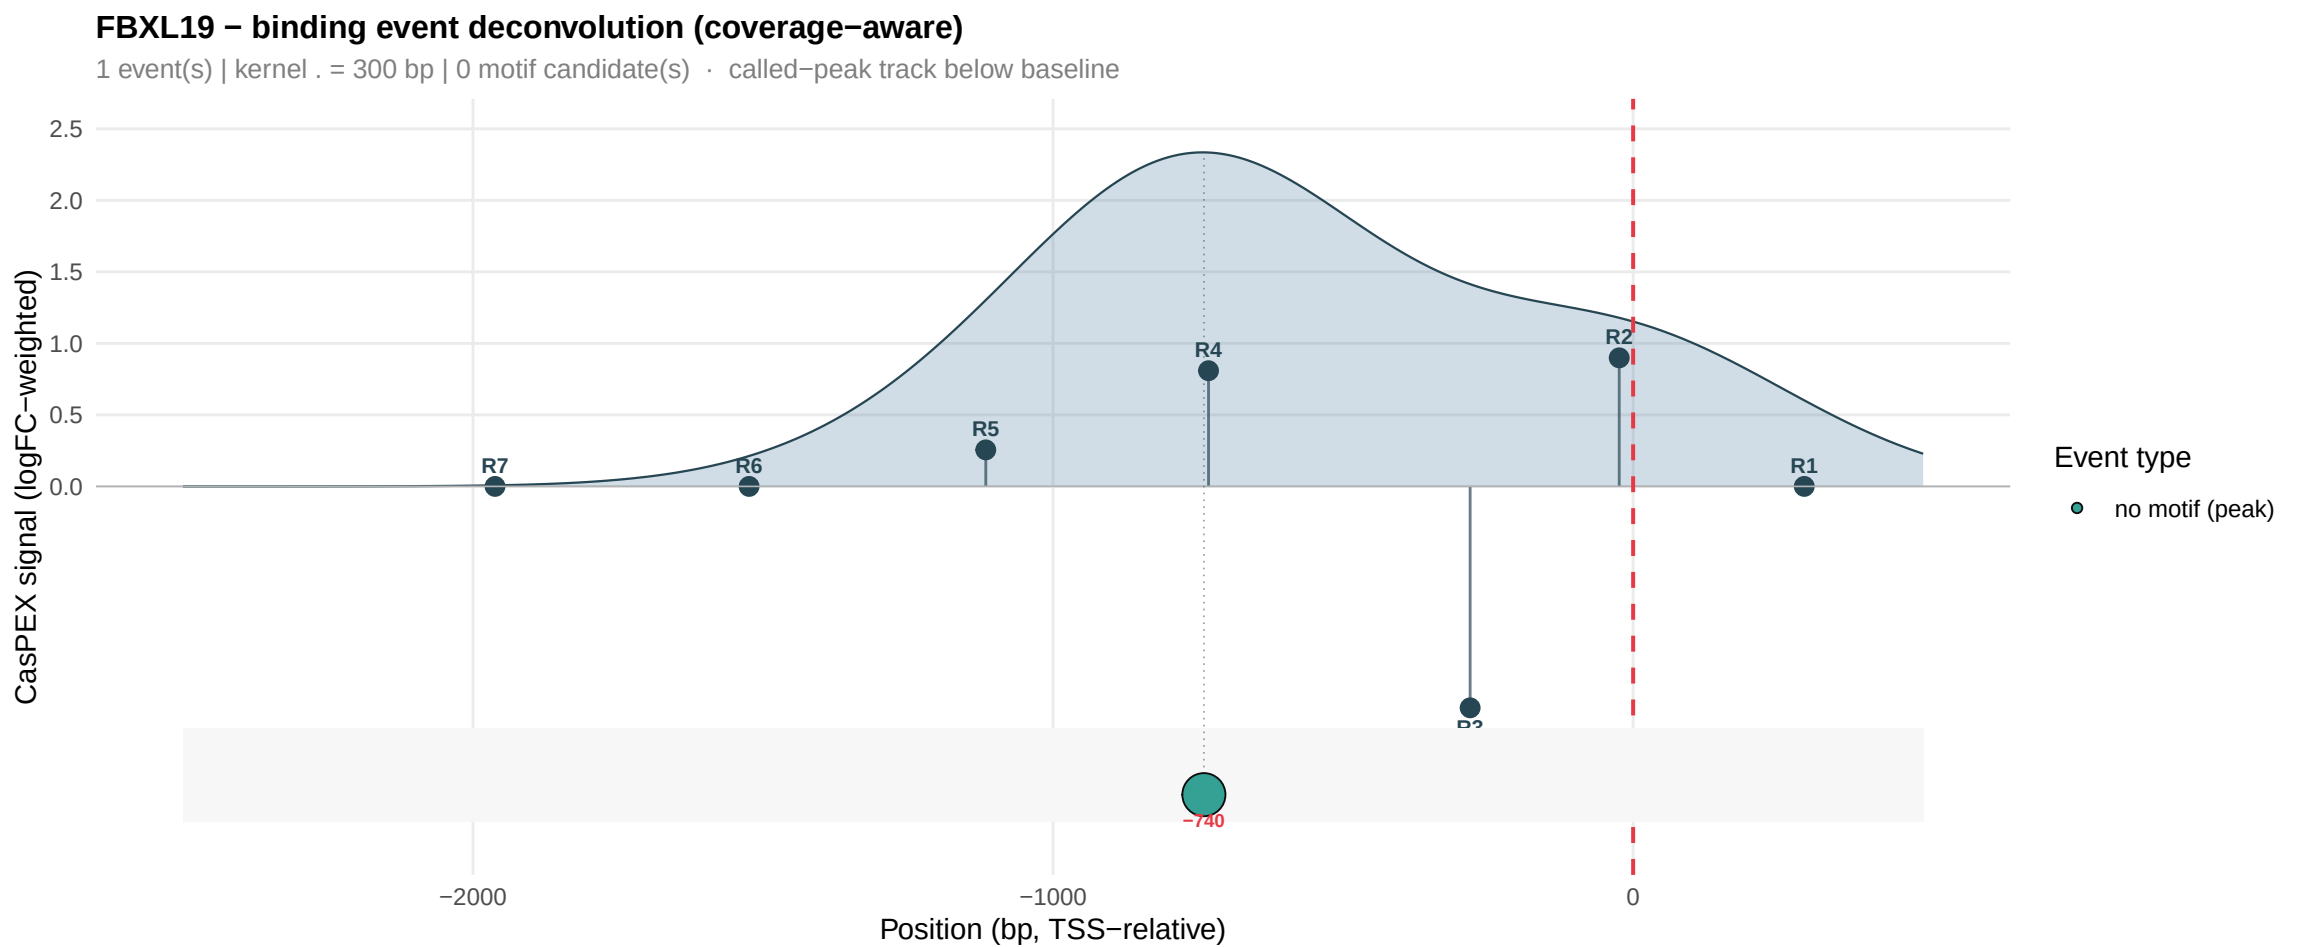
FBXL19 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−740
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

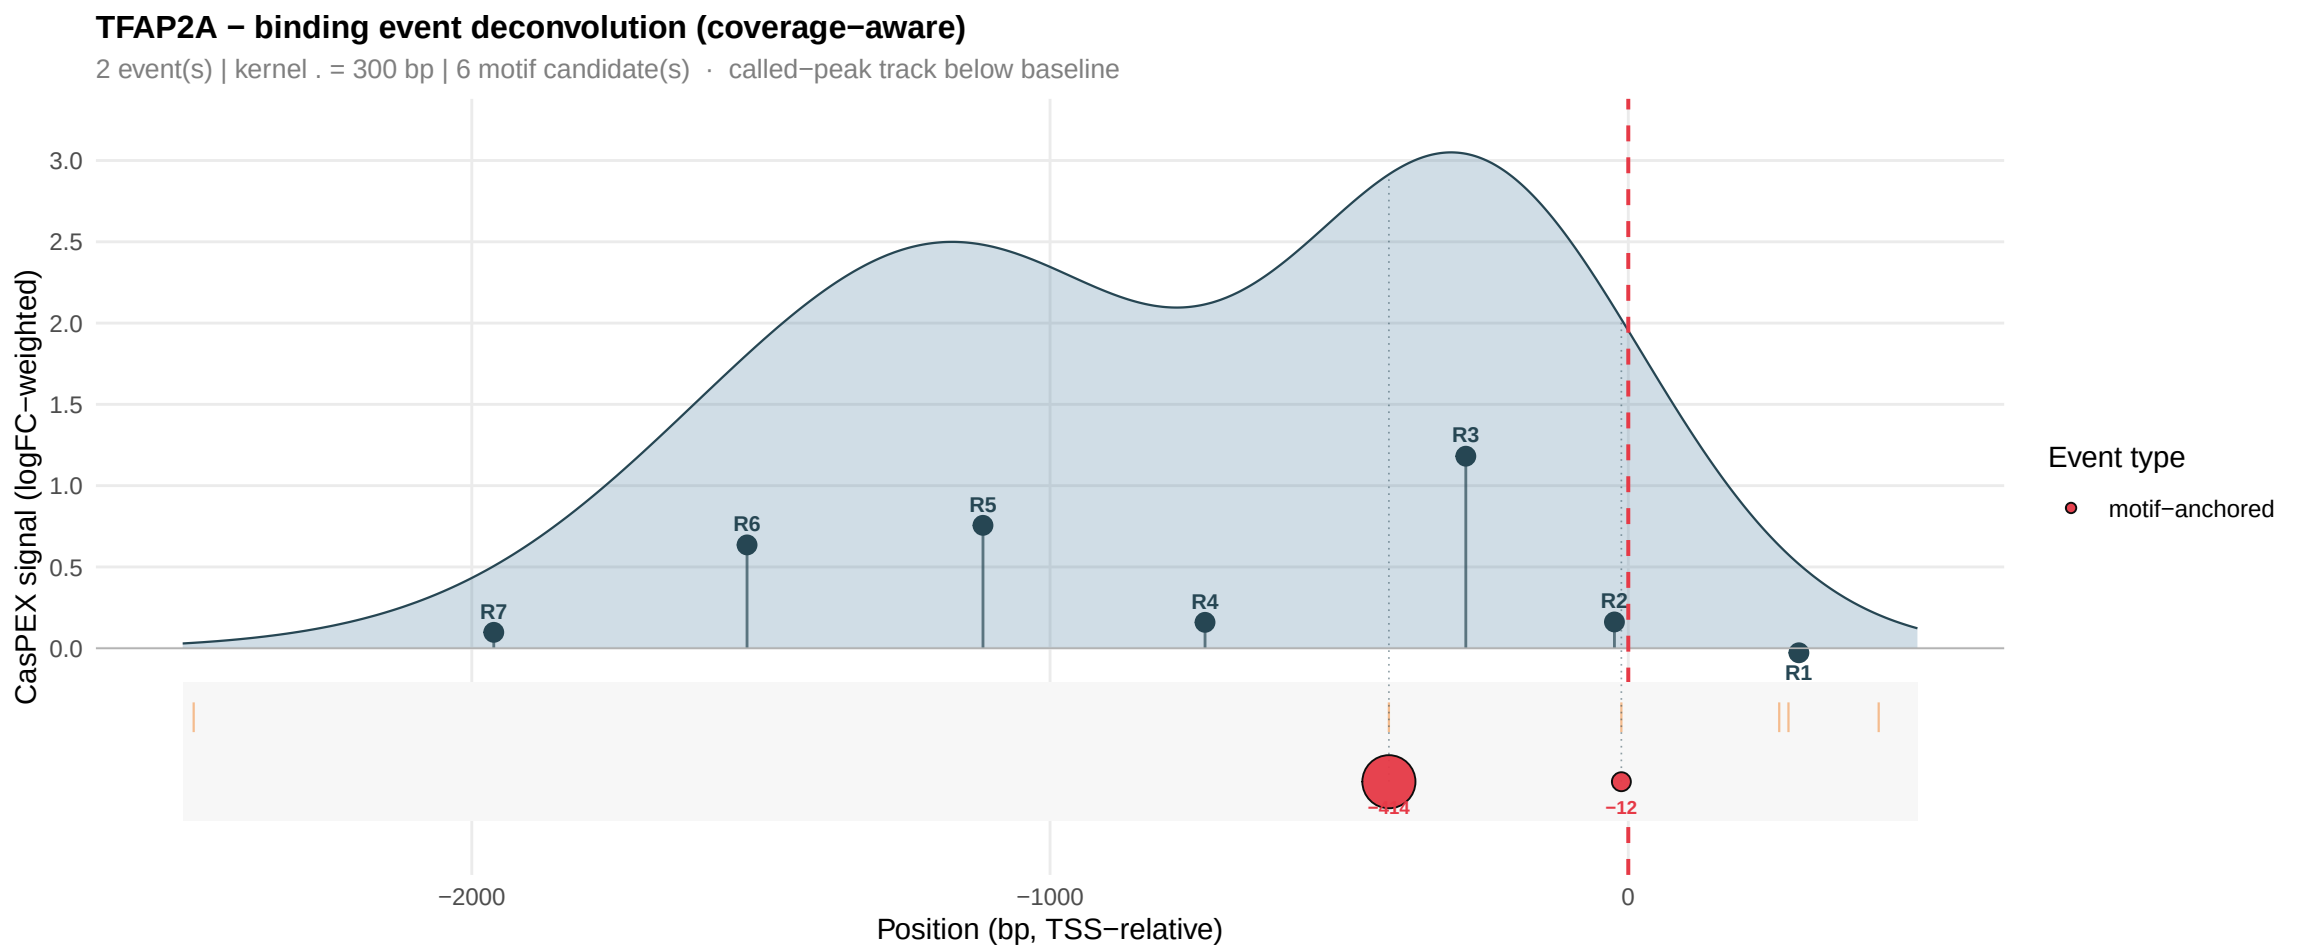
TFAP2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−414
−12
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

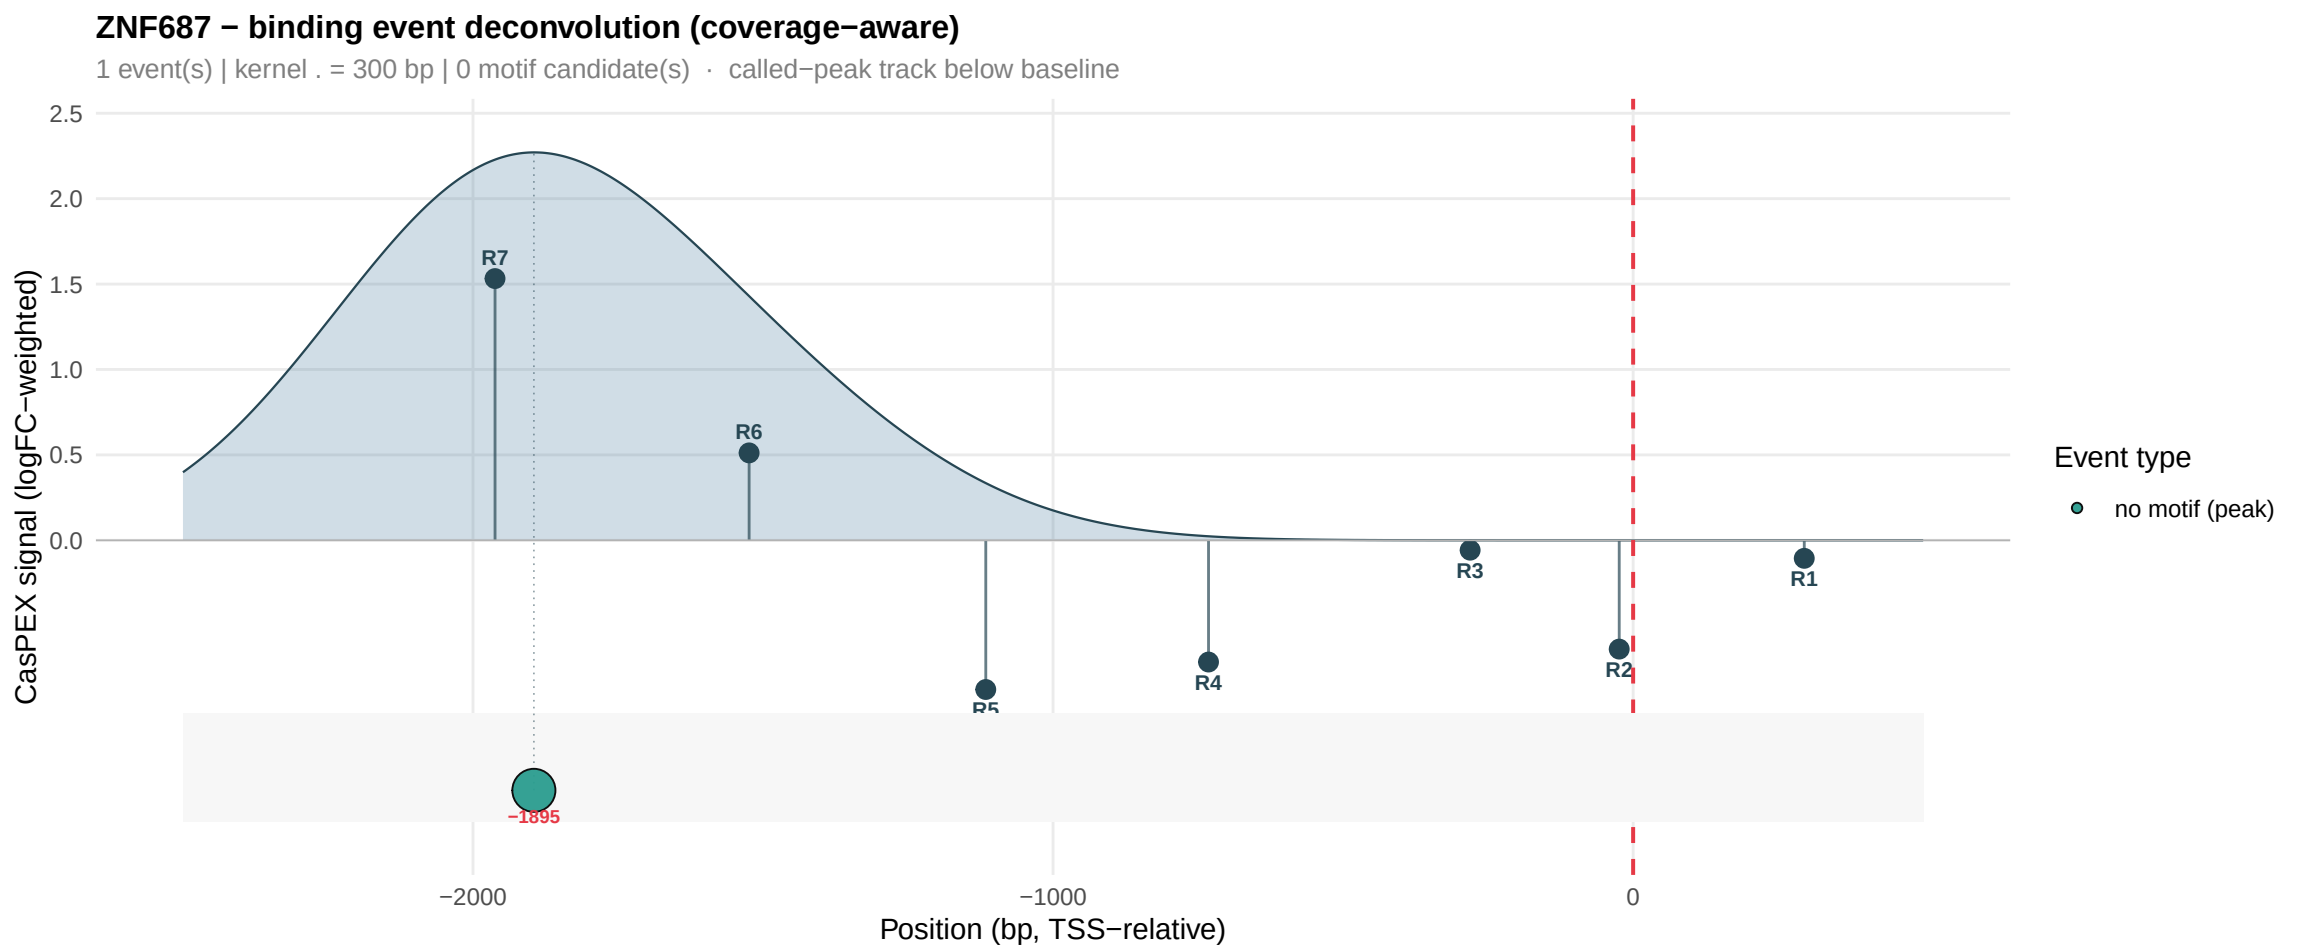
ZNF687 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1895
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

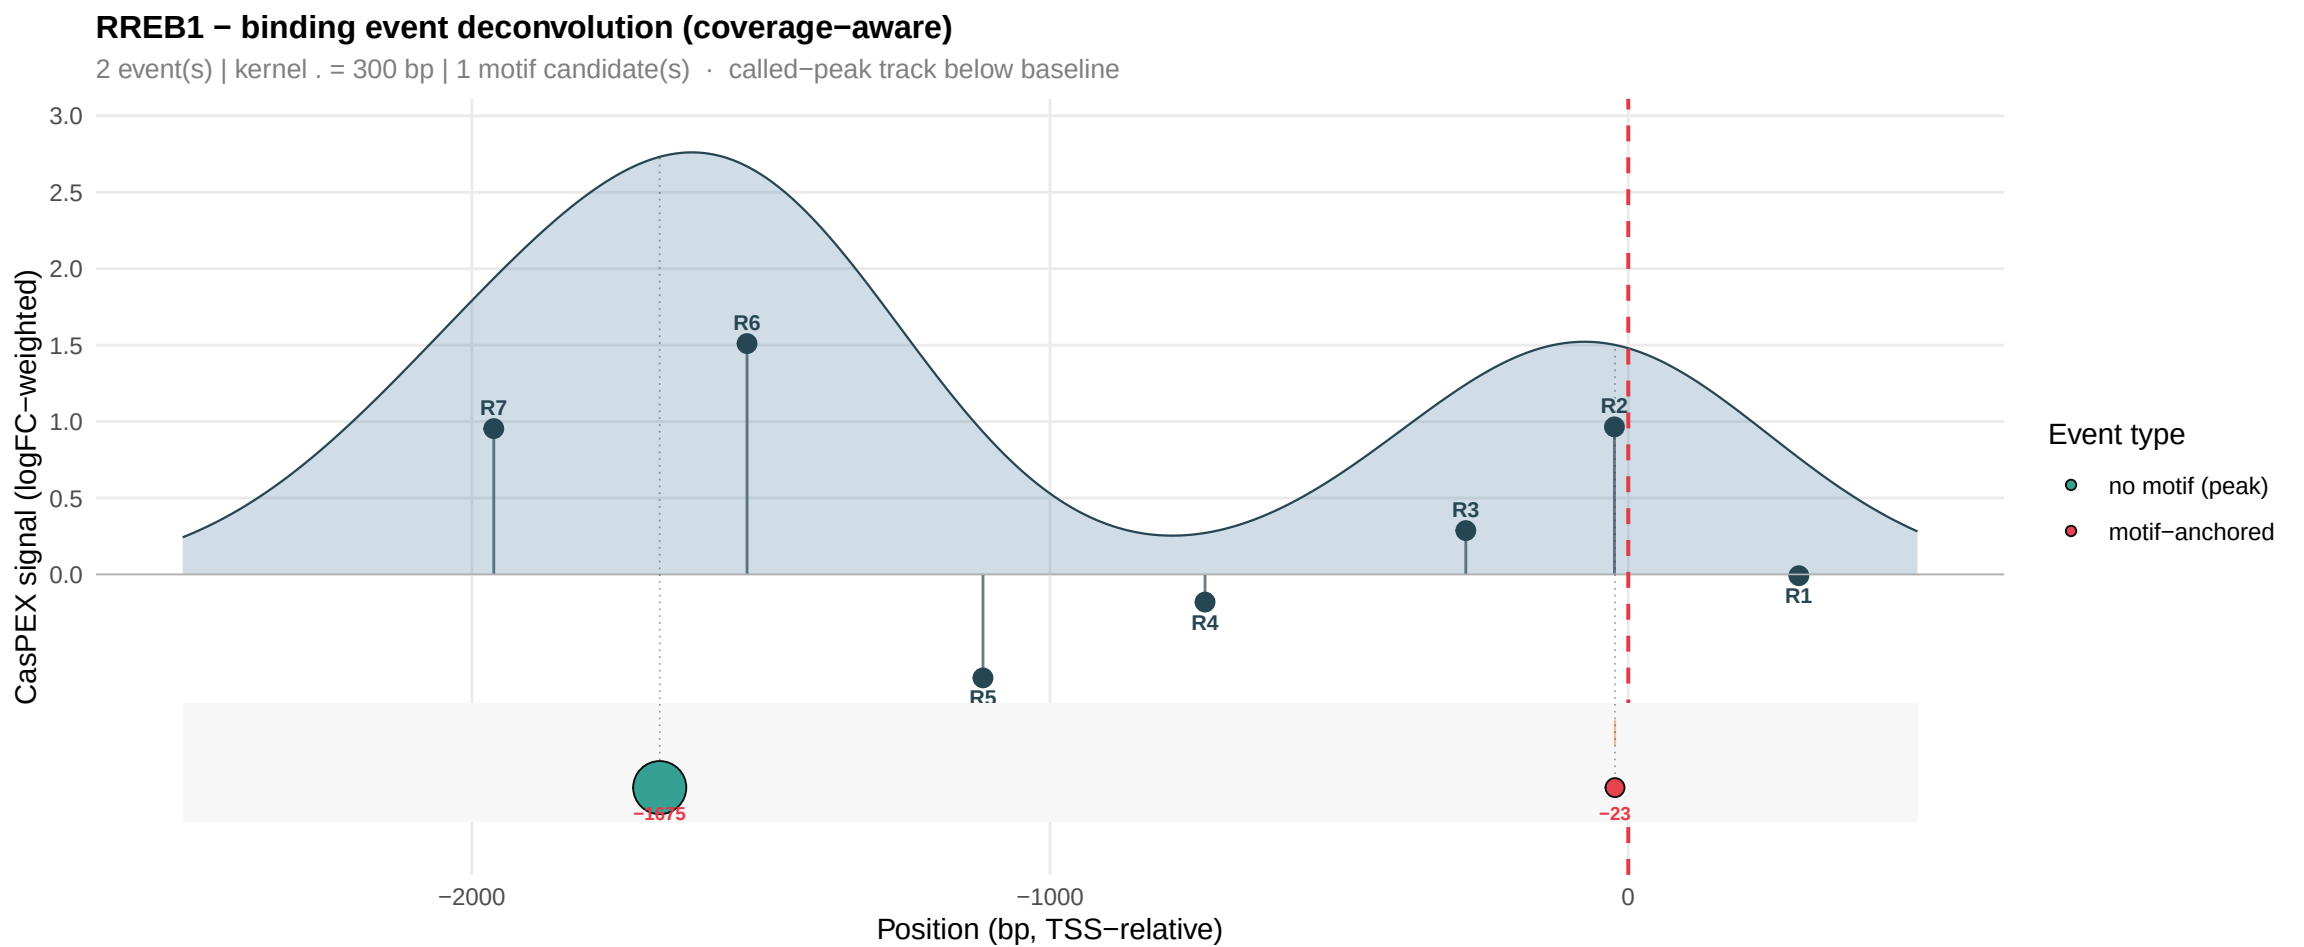
RREB1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 1 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R6
R7
R2
R3
R4
R5
R1
−1575
−23
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)
motif−anchored

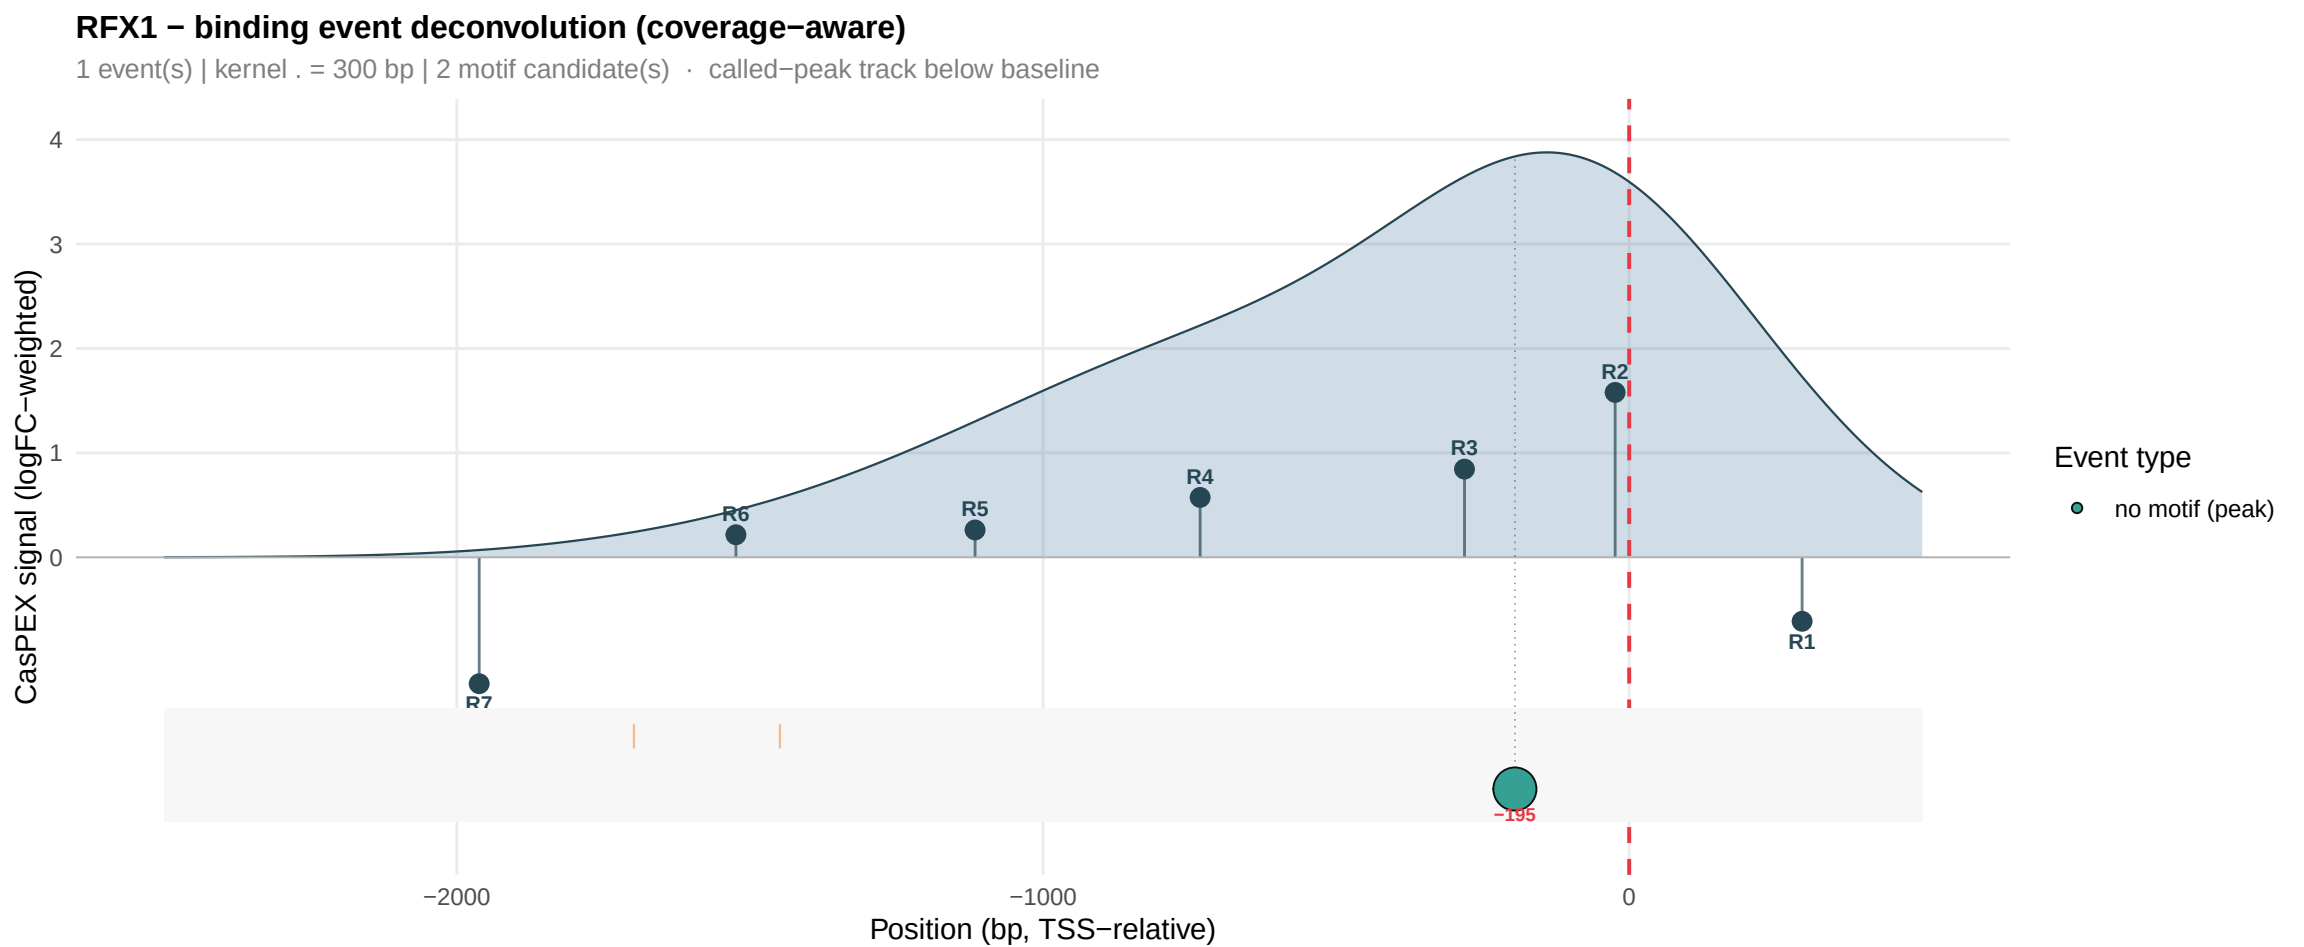
RFX1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 2 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−195
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

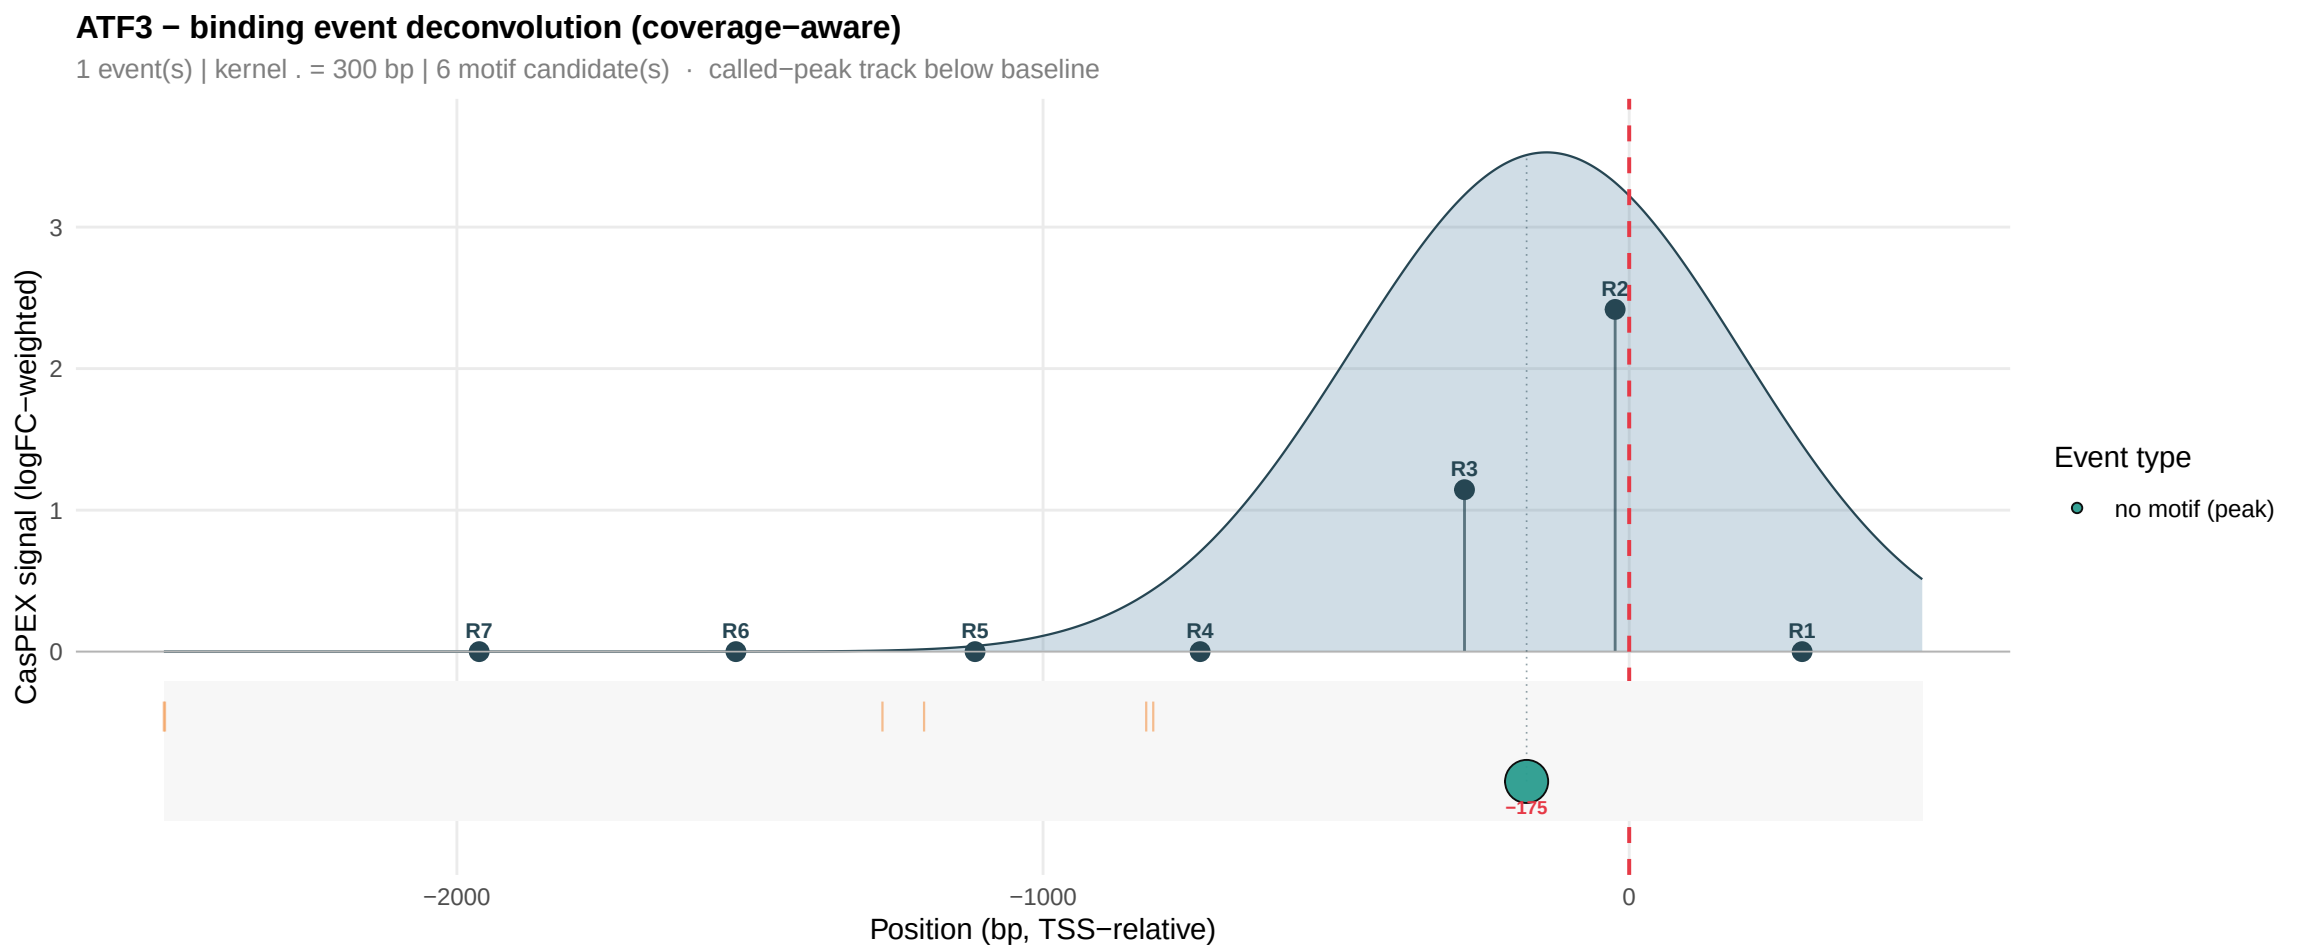
ATF3 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−175
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

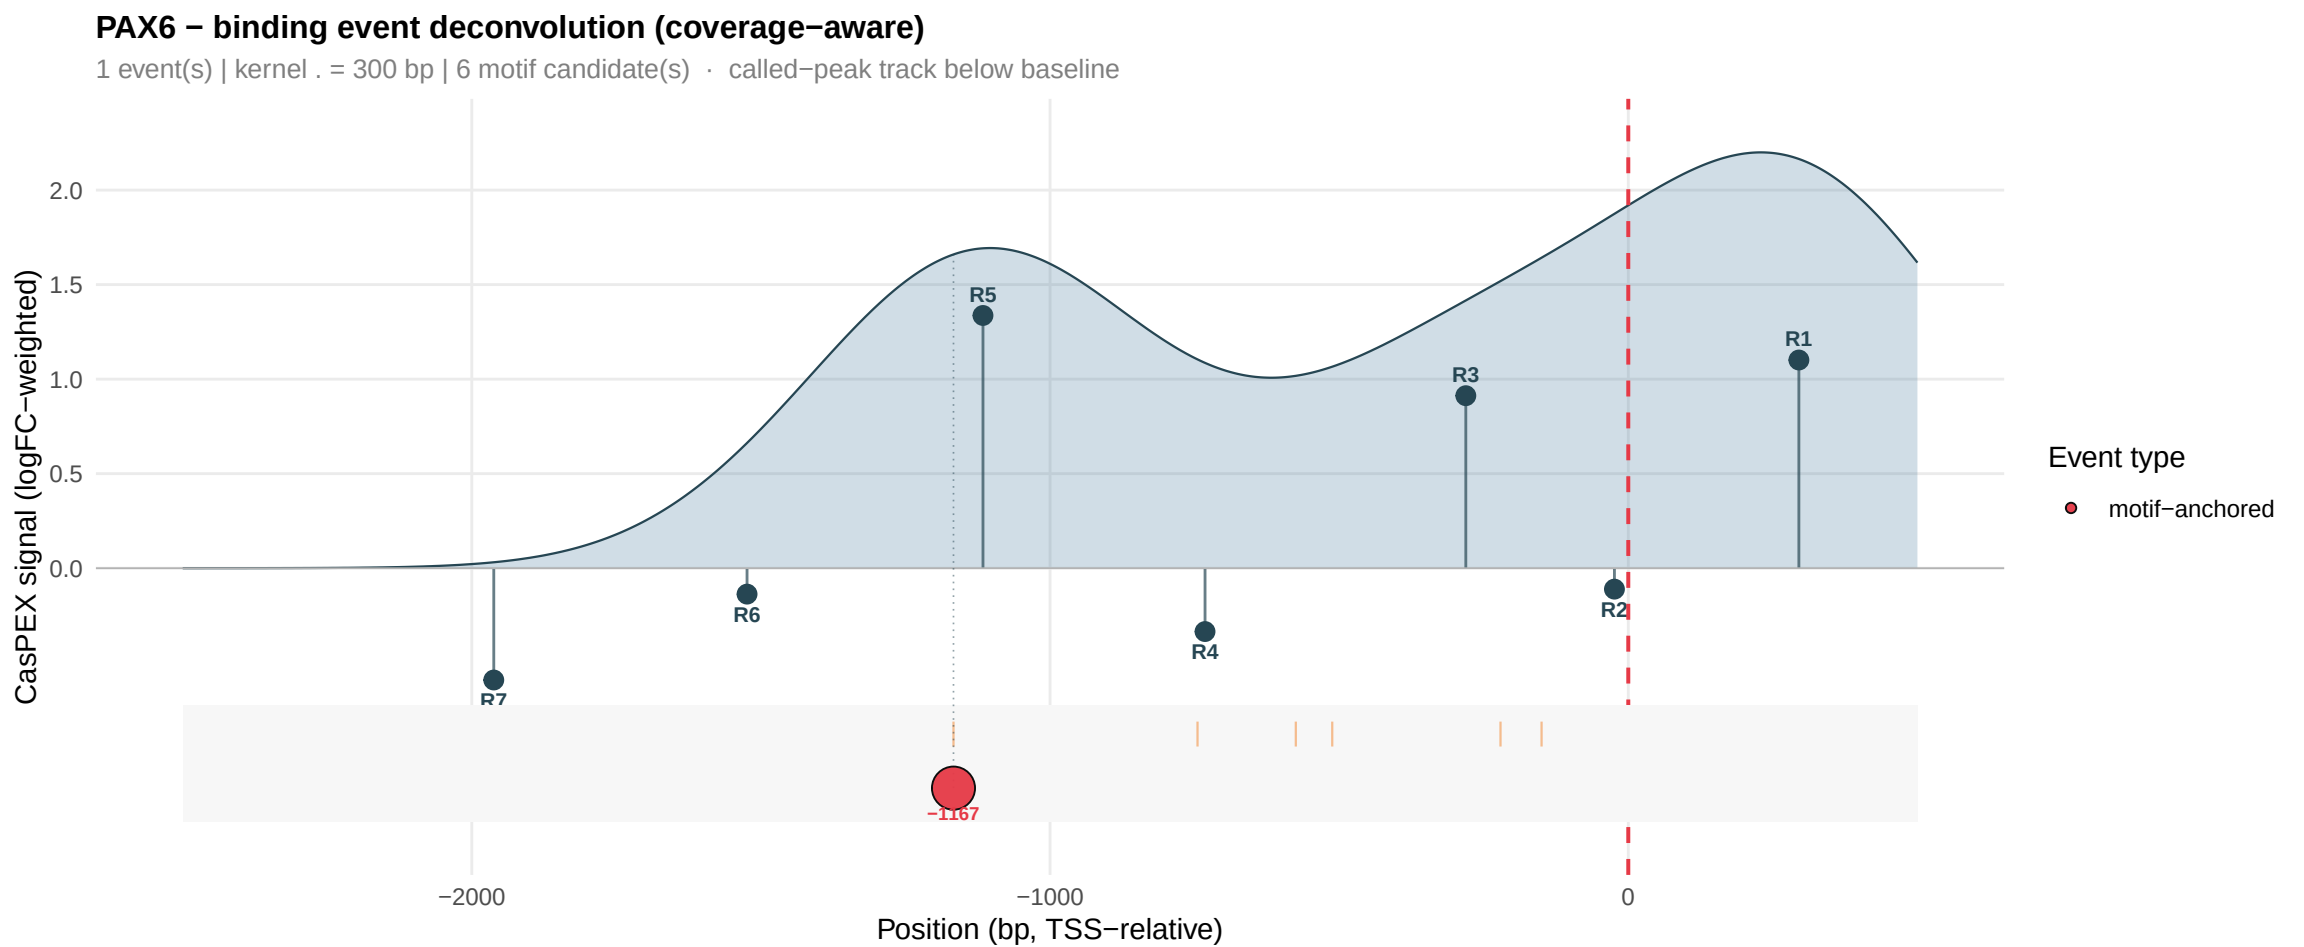
PAX6 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R5
R1
R3
R6
R4
R2
R7
−1167
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored