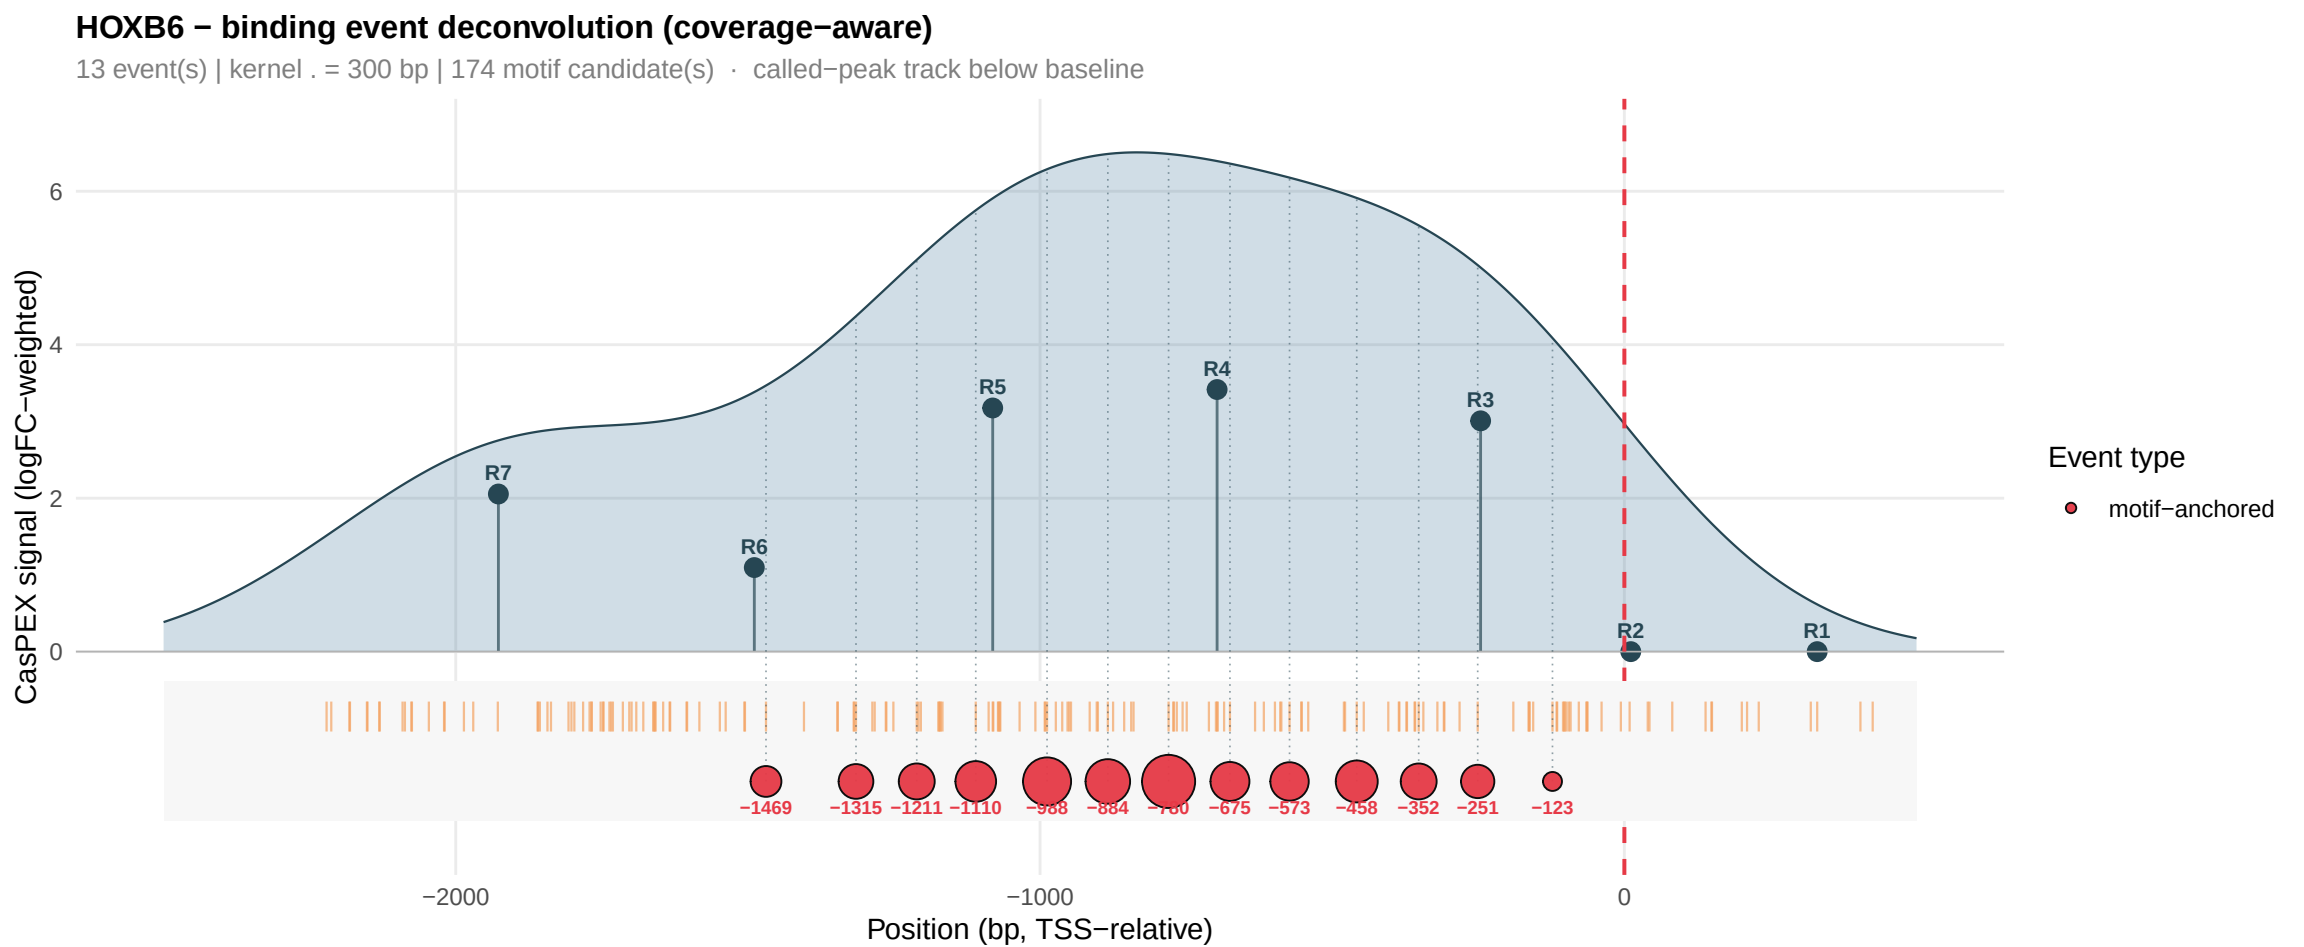
HOXB6 − binding event deconvolution (coverage−aware)
13 event(s) | kernel . = 300 bp | 174 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
4
2
0
R7
R6
R5
R4
R3
R2
R1
−1469
−1315
−1211
−1110
−968
−884
−780
−675
−573
−458
−352
−251
−123
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

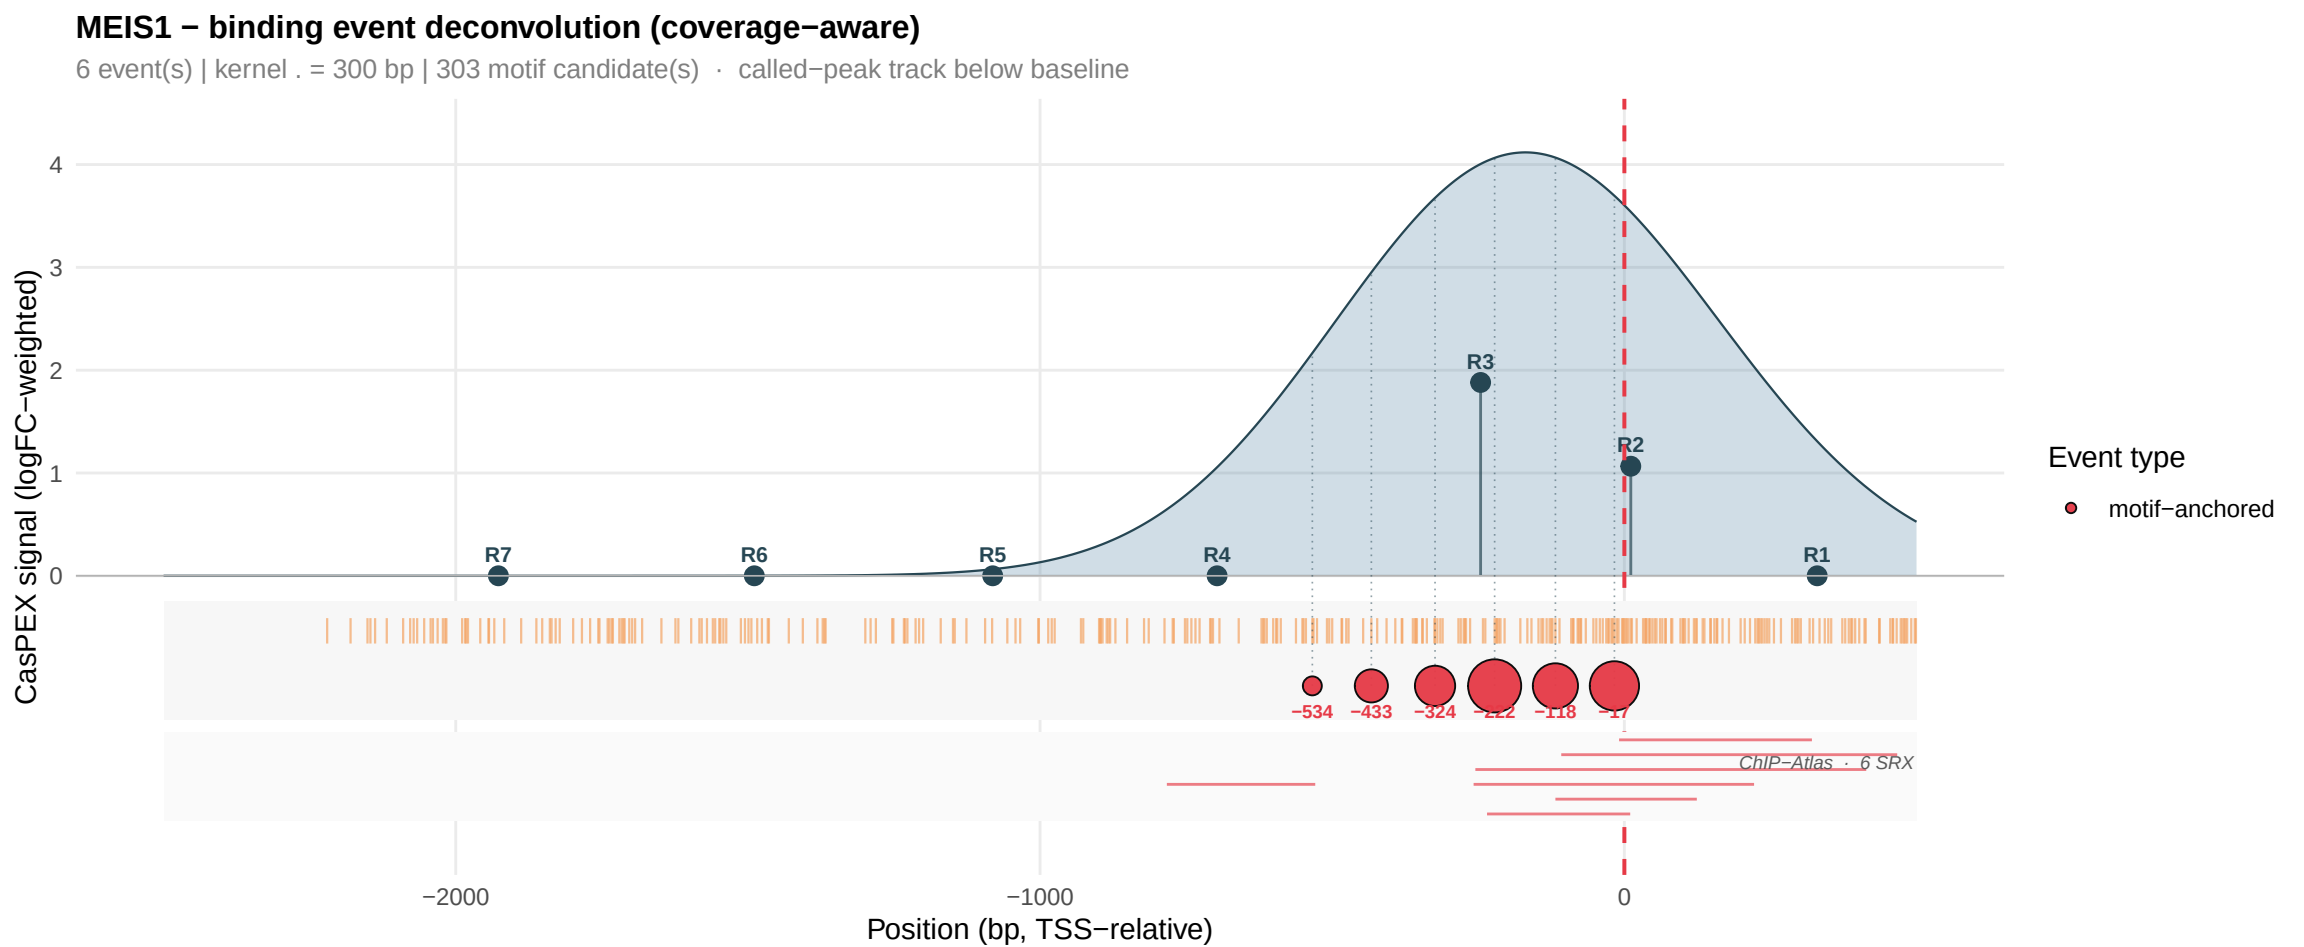
MEIS1 − binding event deconvolution (coverage−aware)
6 event(s) | kernel . = 300 bp | 303 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−534
−433
−324
−222
−118
−17
ChIP−Atlas · 6 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

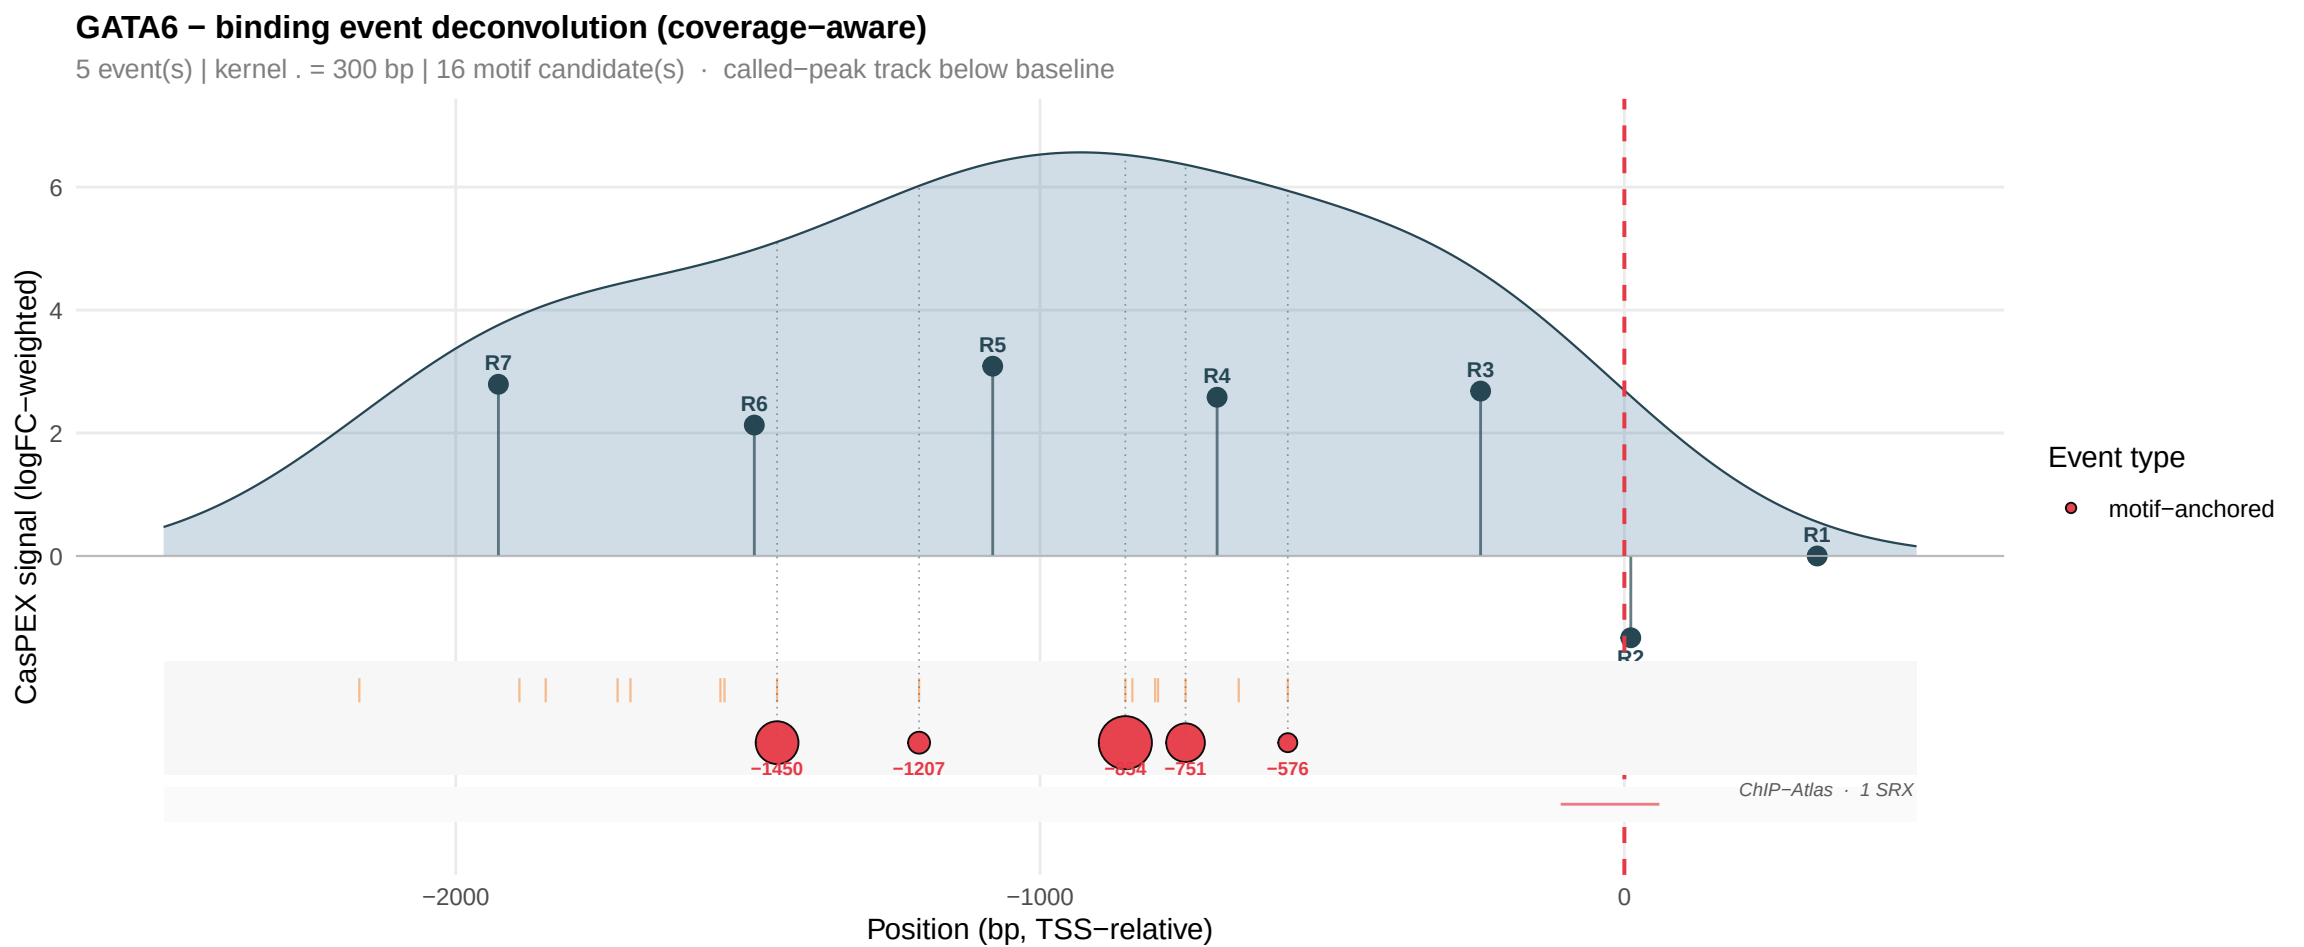
GATA6 − binding event deconvolution (coverage−aware)
5 event(s) | kernel . = 300 bp | 16 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
4
2
0
R7
R6
R5
R4
R3
R1
R2
−1450
−1207
−751
−576
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

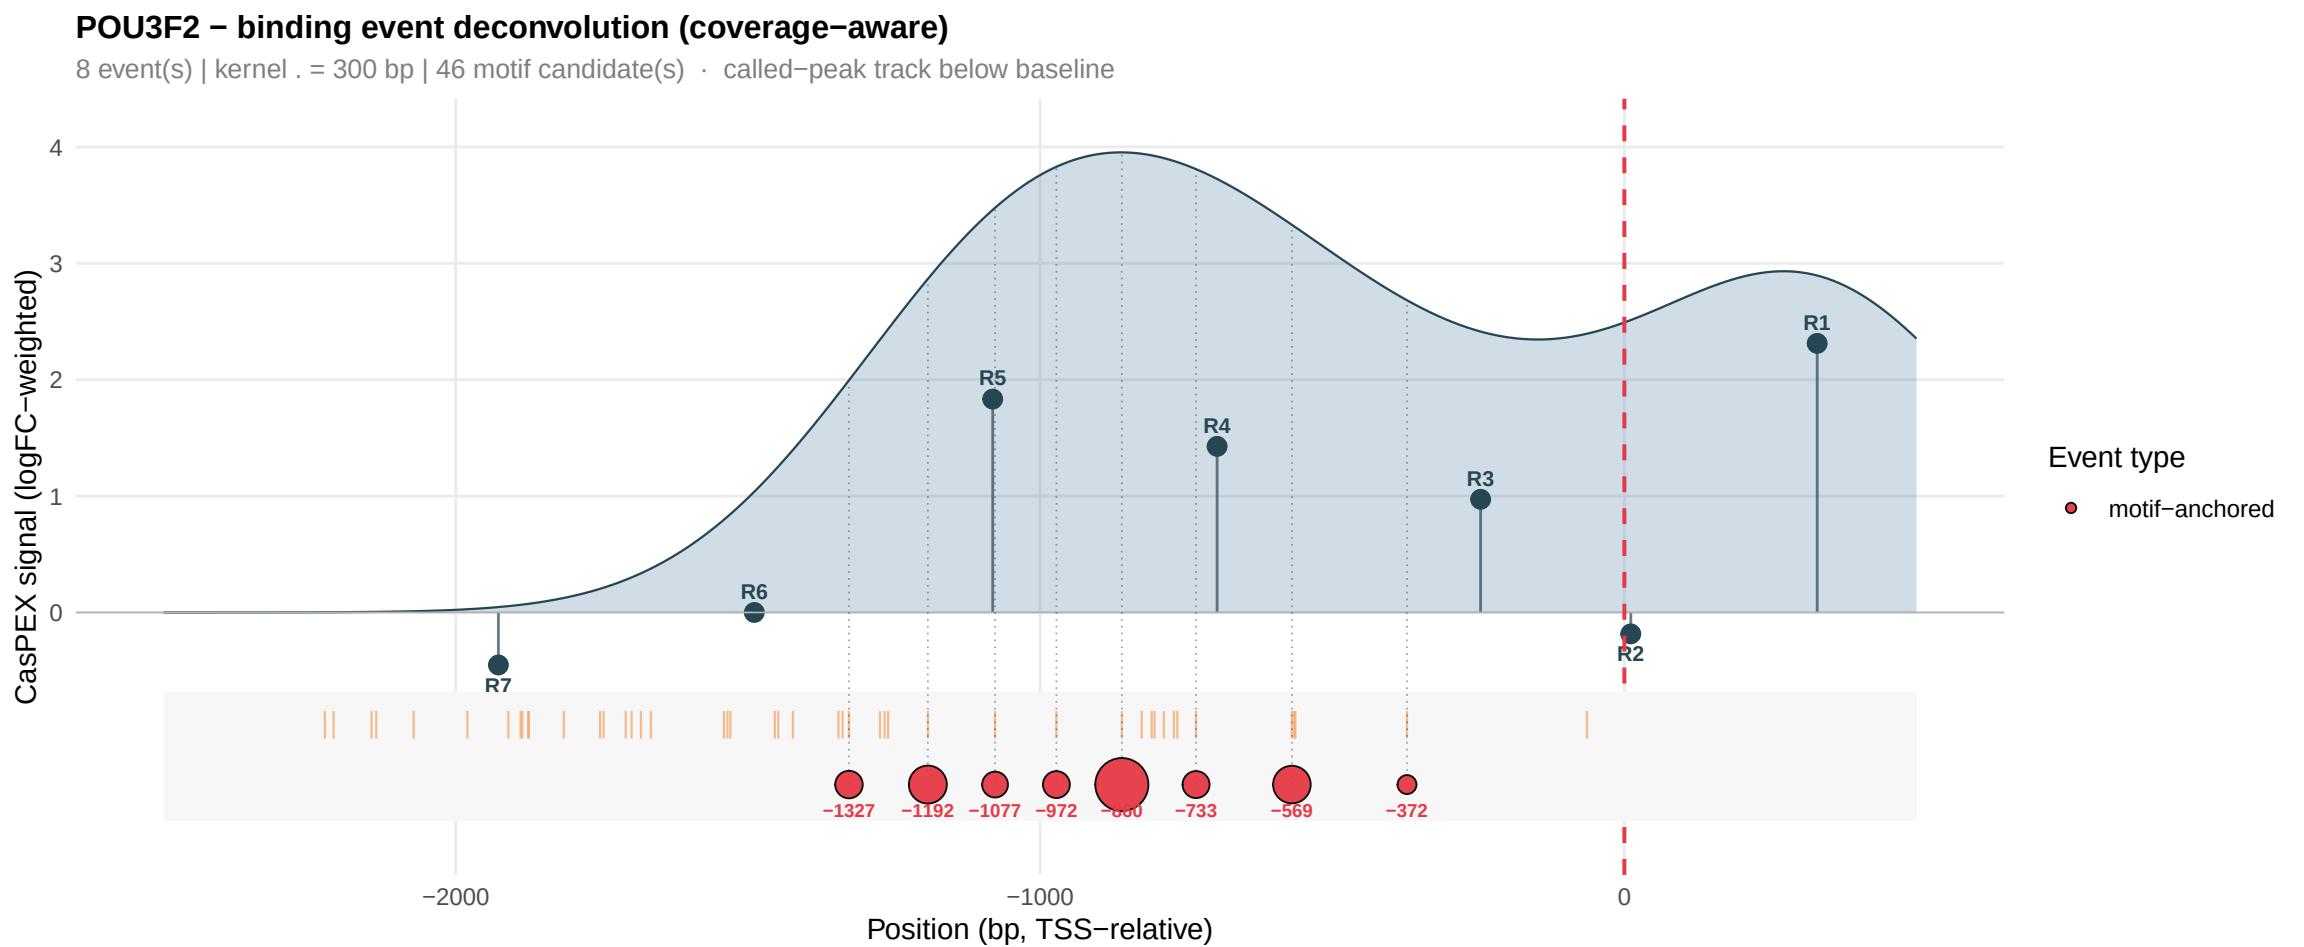
POU3F2 − binding event deconvolution (coverage−aware)
8 event(s) | kernel . = 300 bp | 46 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1327
−1192
−1077
−972
−733
−569
−372
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

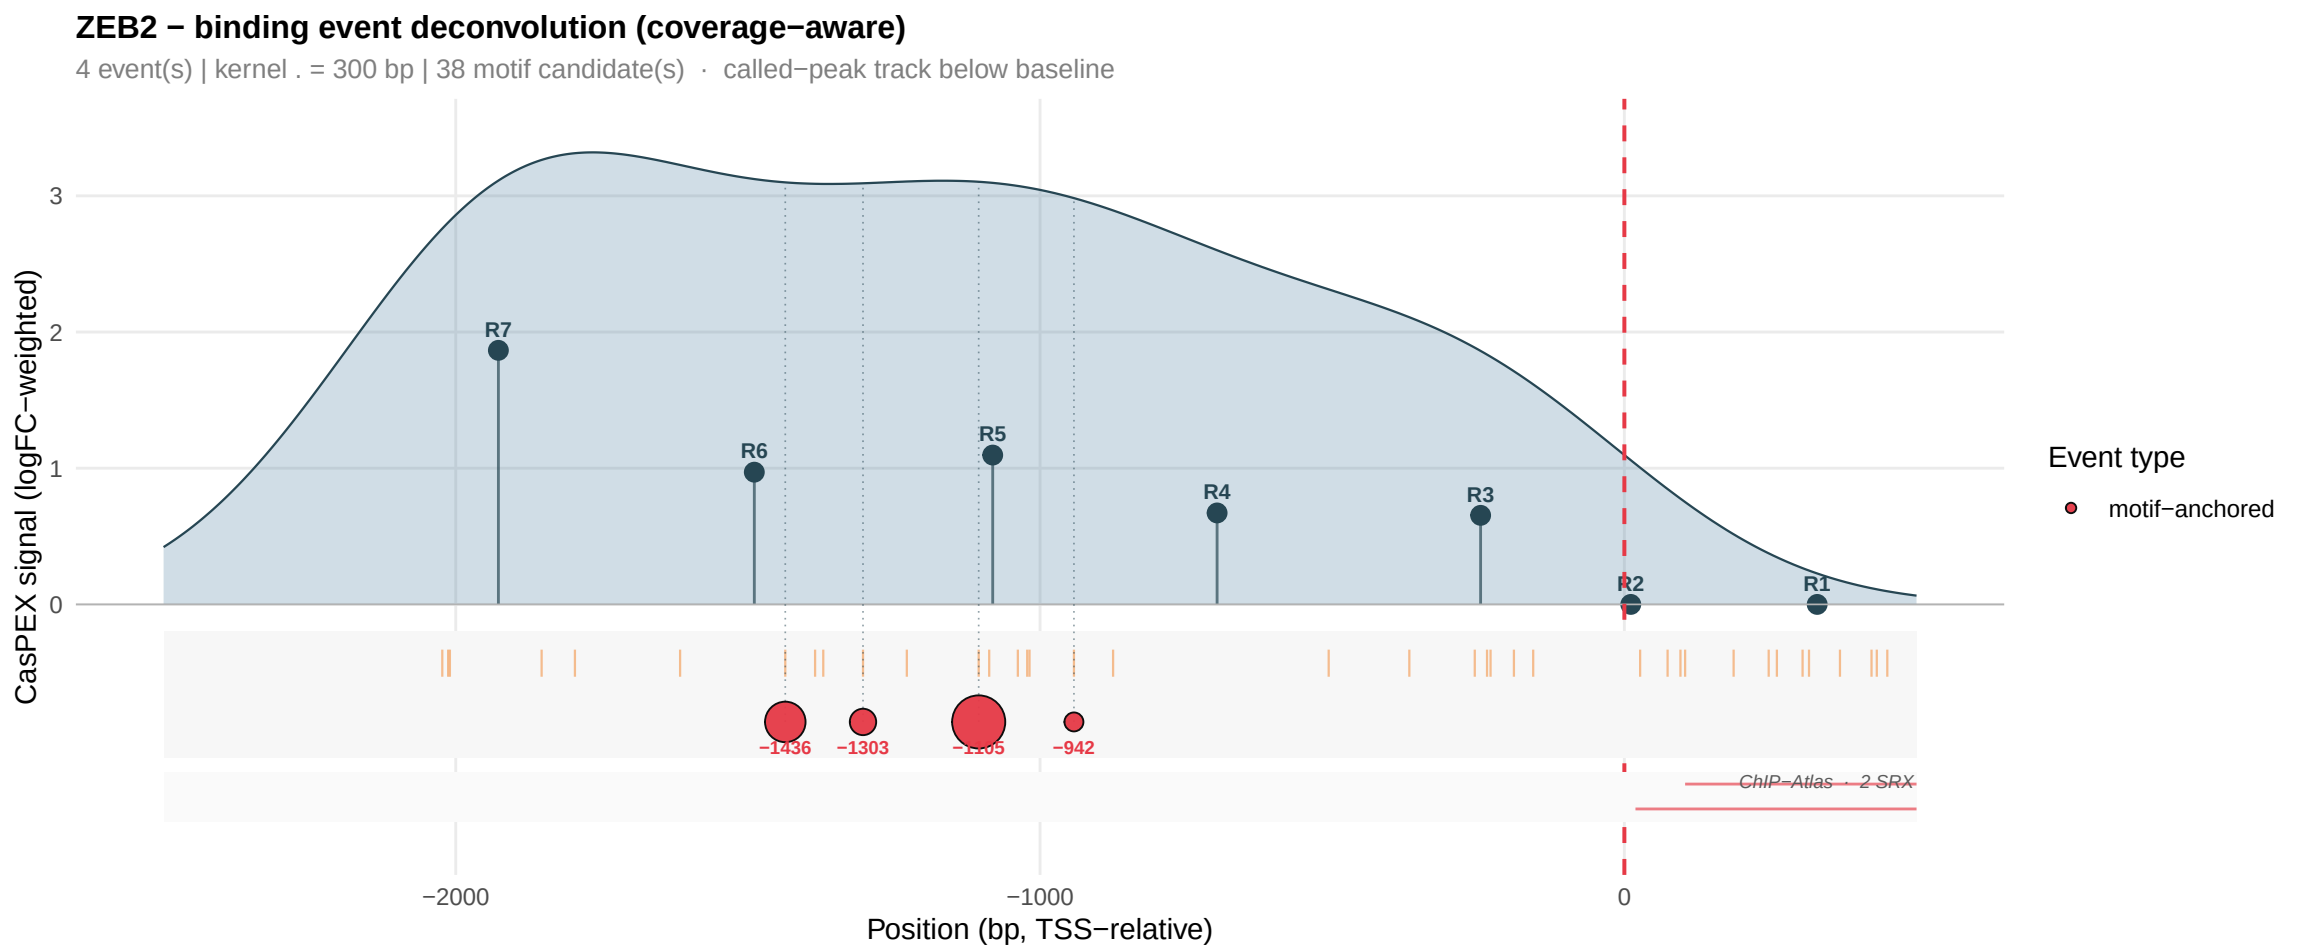
ZEB2 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 38 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1436
−1303
−1105
−942
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

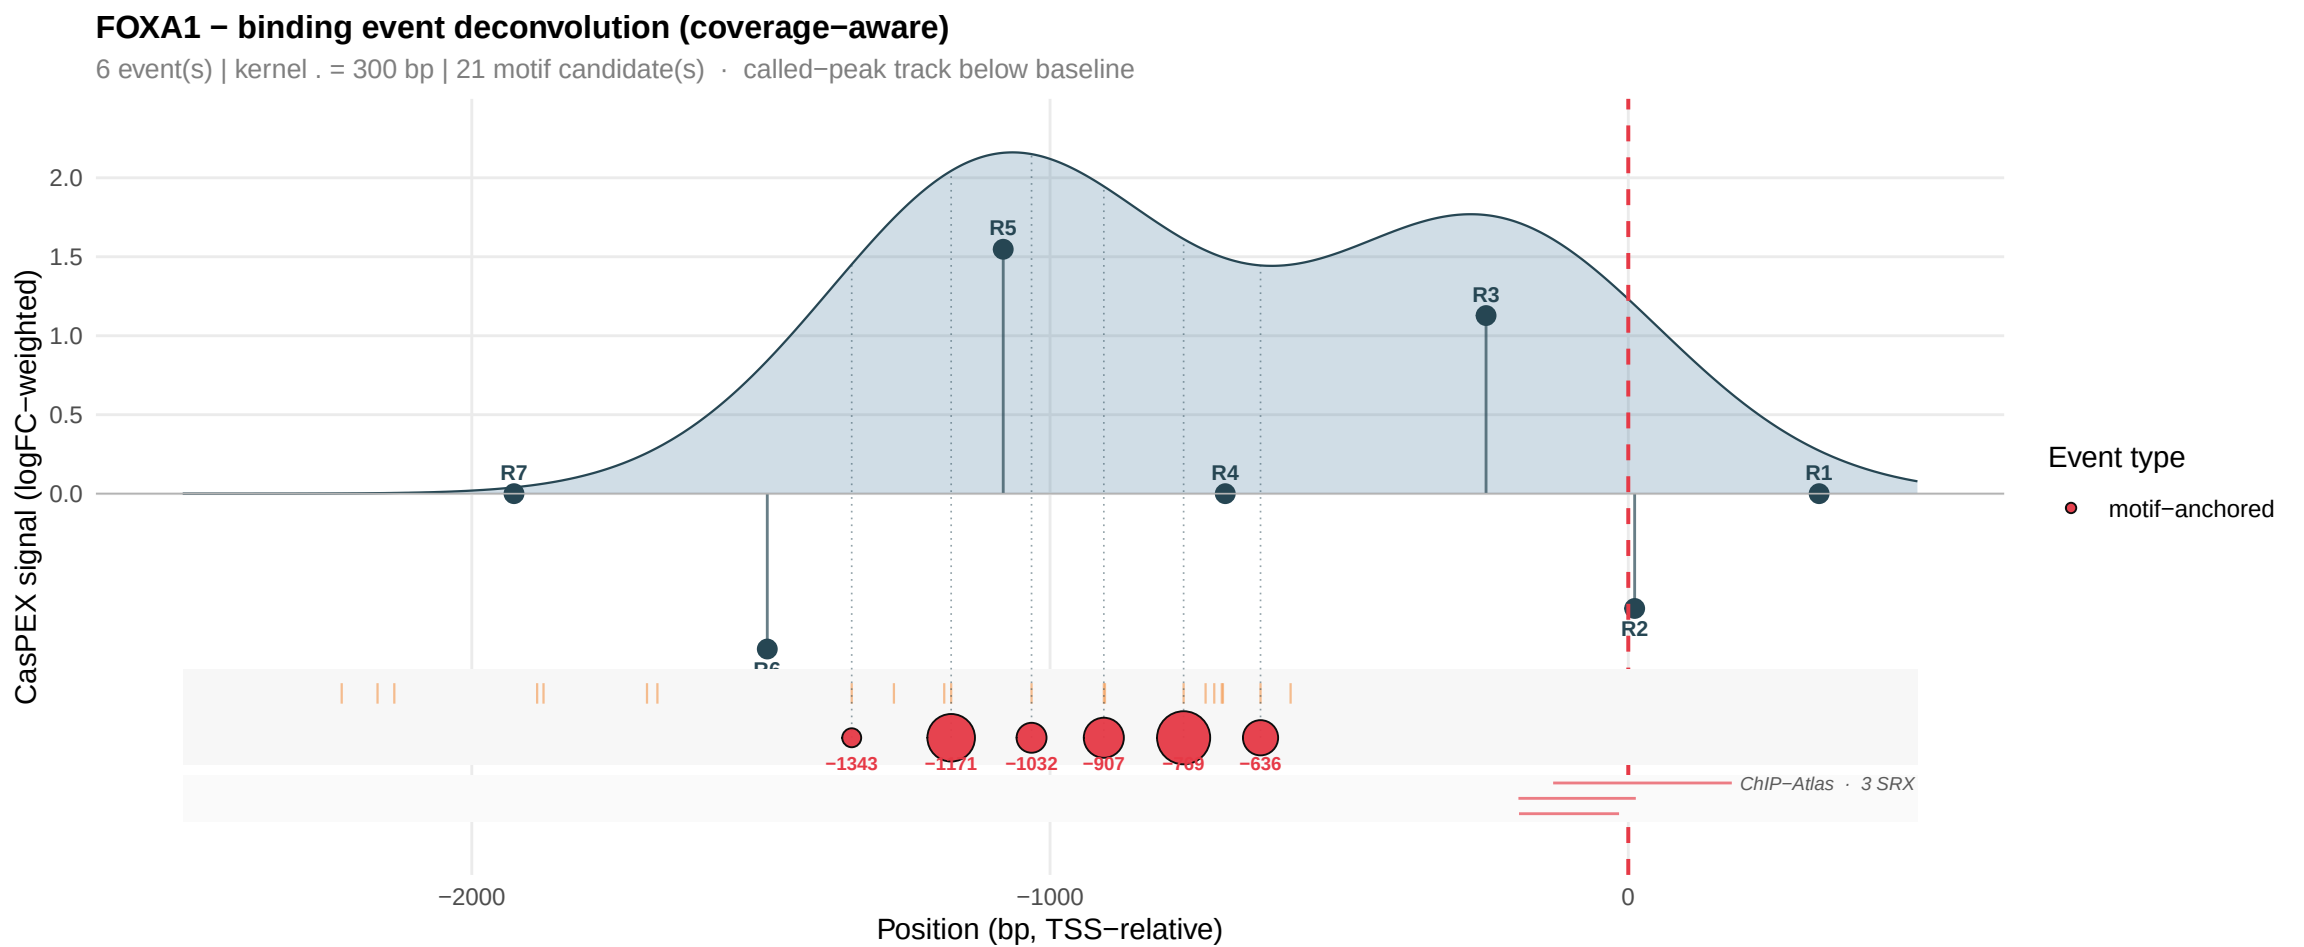
FOXA1 − binding event deconvolution (coverage−aware)
6 event(s) | kernel . = 300 bp | 21 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R5
R3
R7
R4
R1
R2
R6
−1343
−1171
−1032
−907
−636
ChIP−Atlas · 3 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

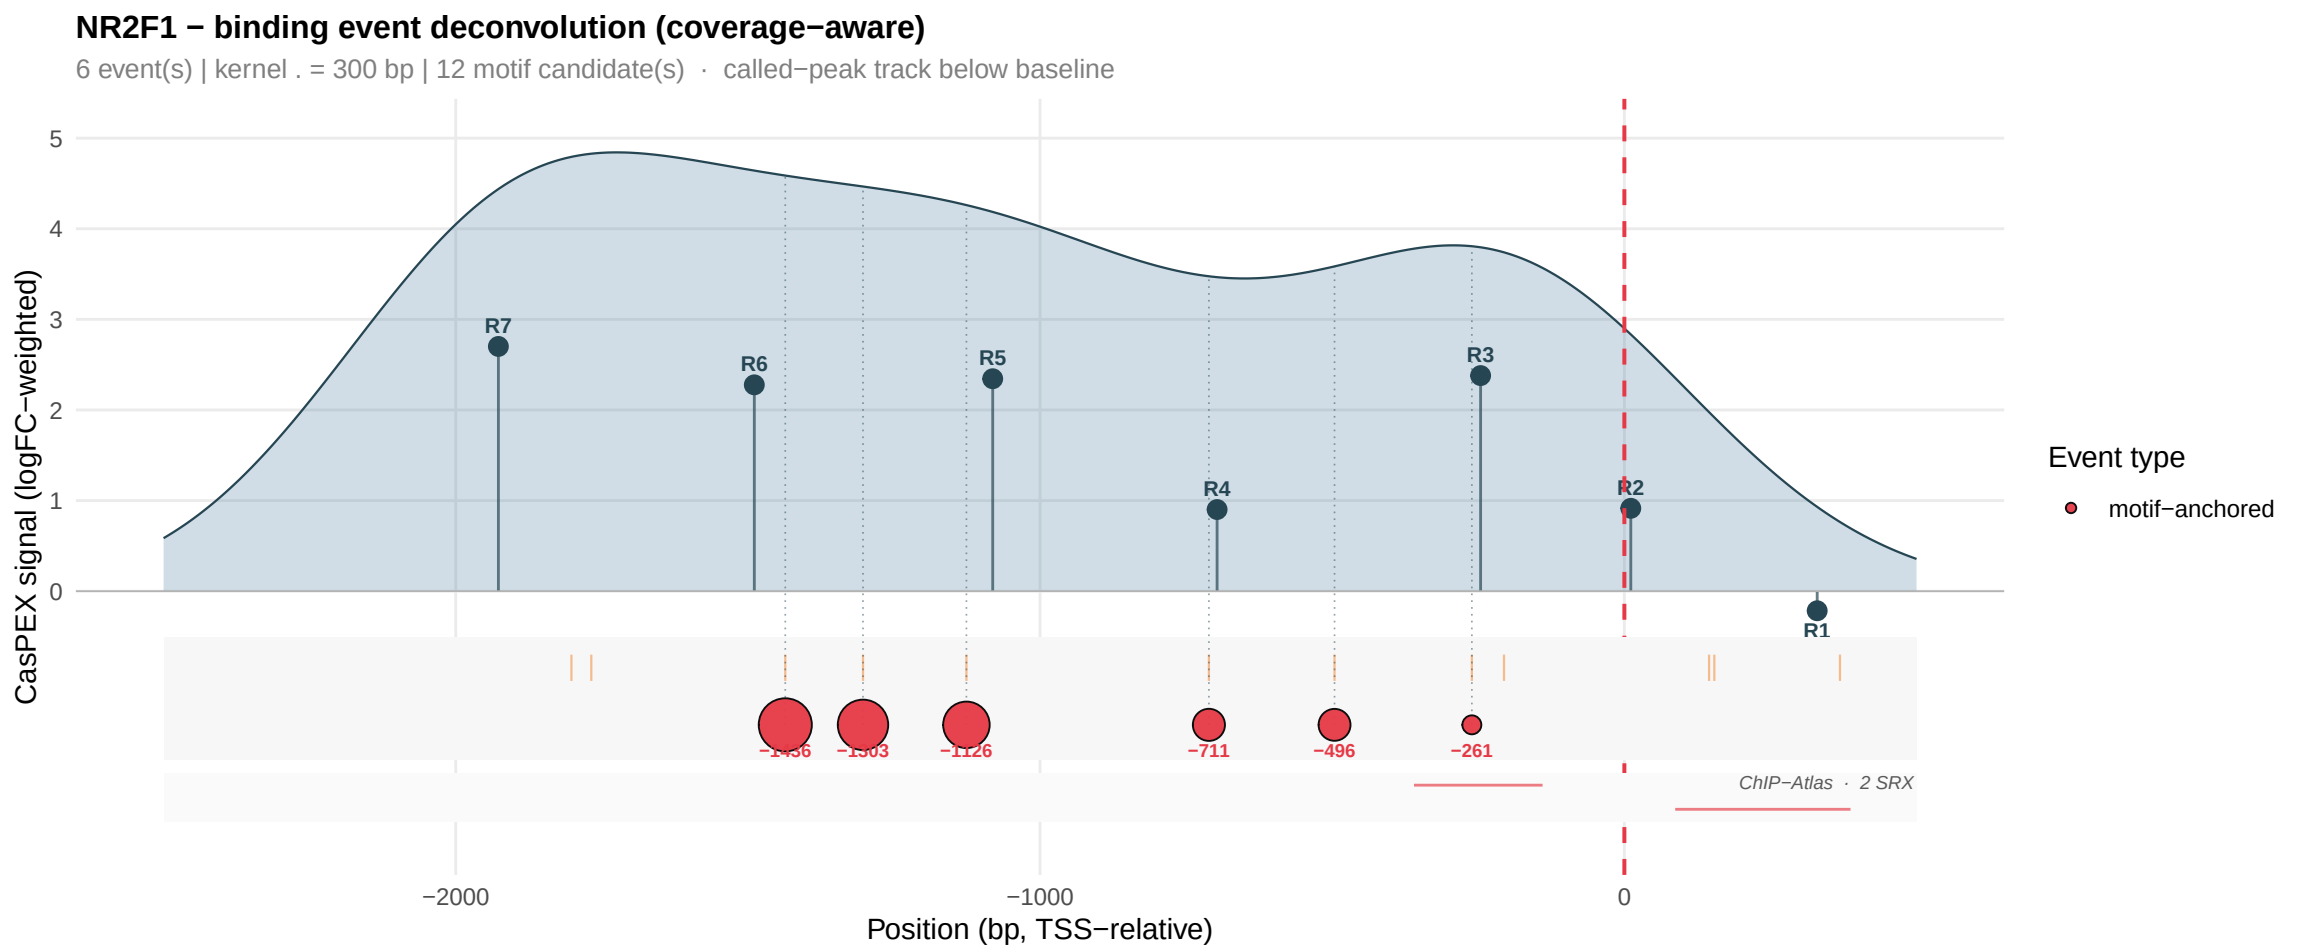
NR2F1 − binding event deconvolution (coverage−aware)
6 event(s) | kernel . = 300 bp | 12 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1436
−1303
−1126
−711
−496
−261
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

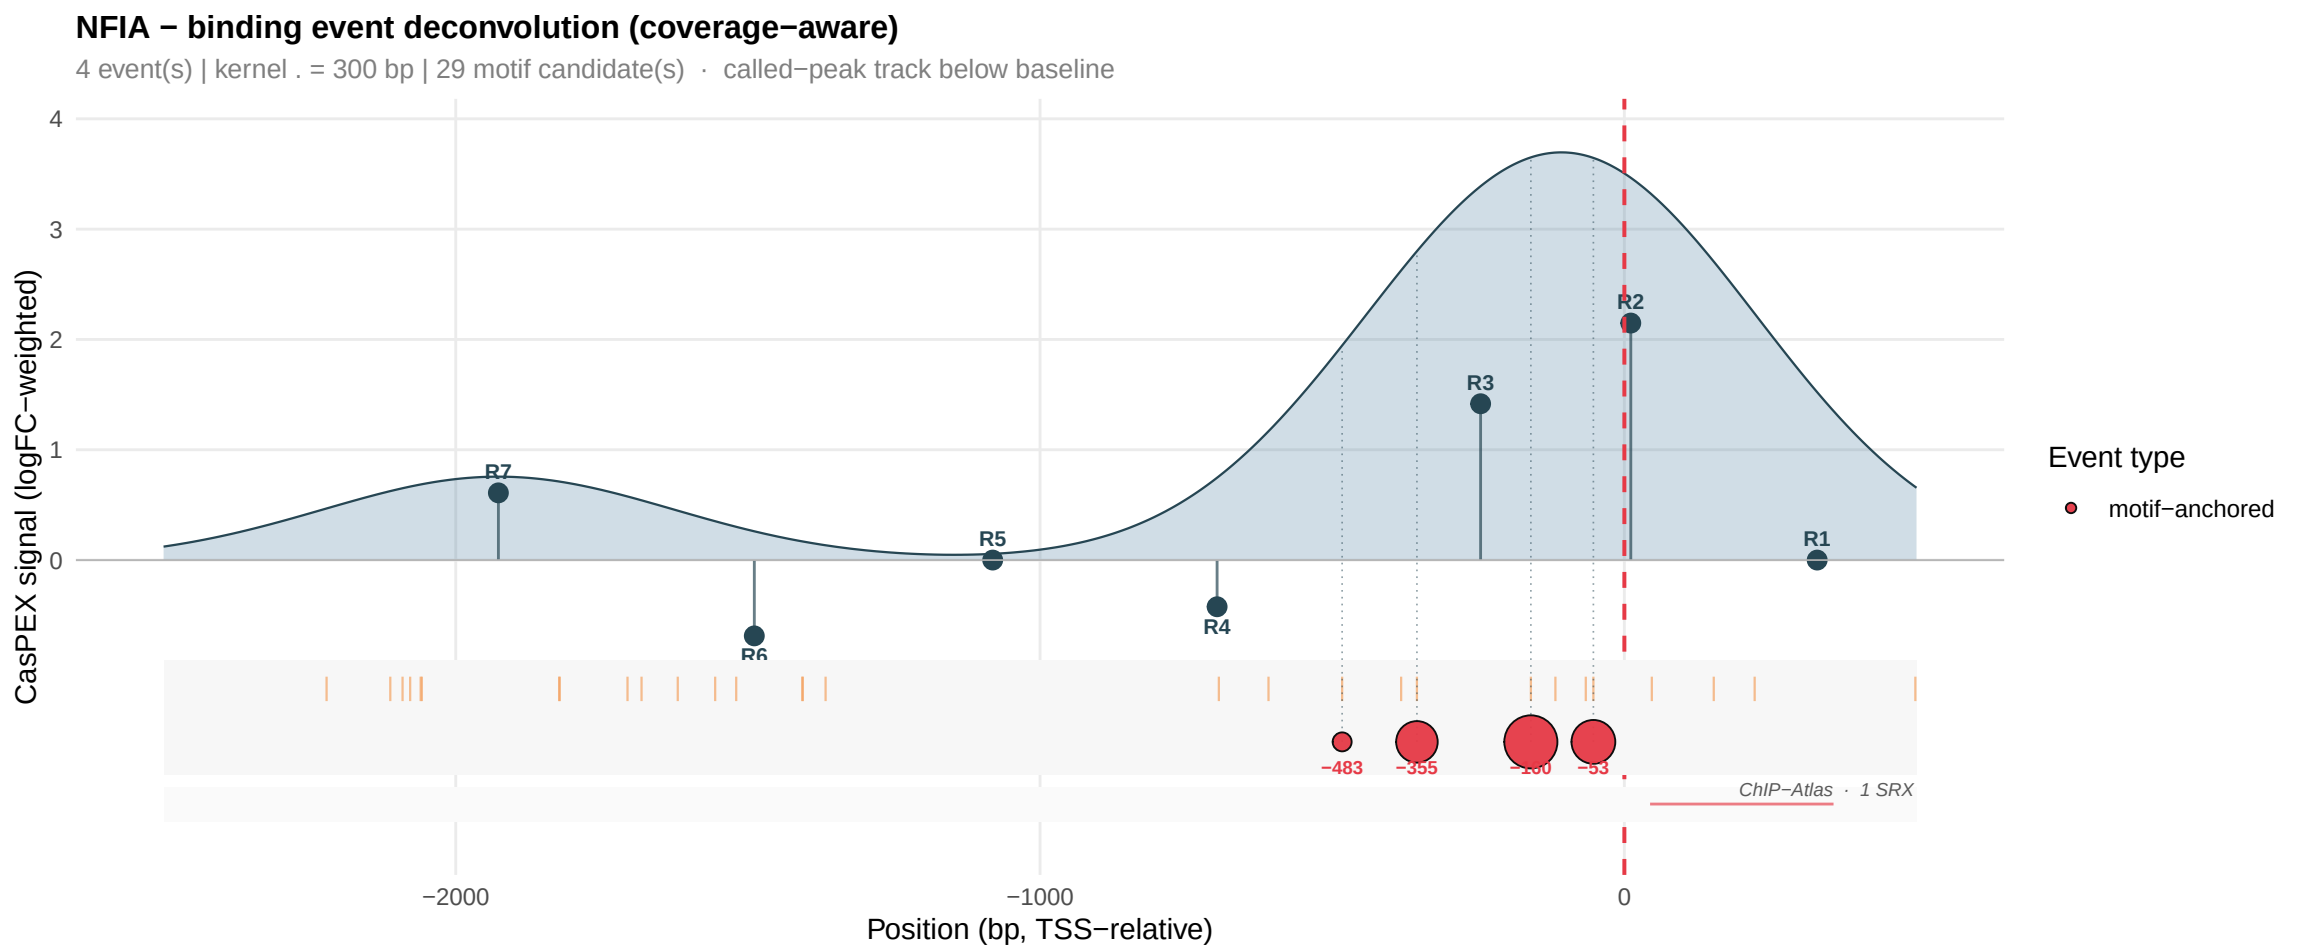
NFIA − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 29 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−483
−355
−180
−53
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

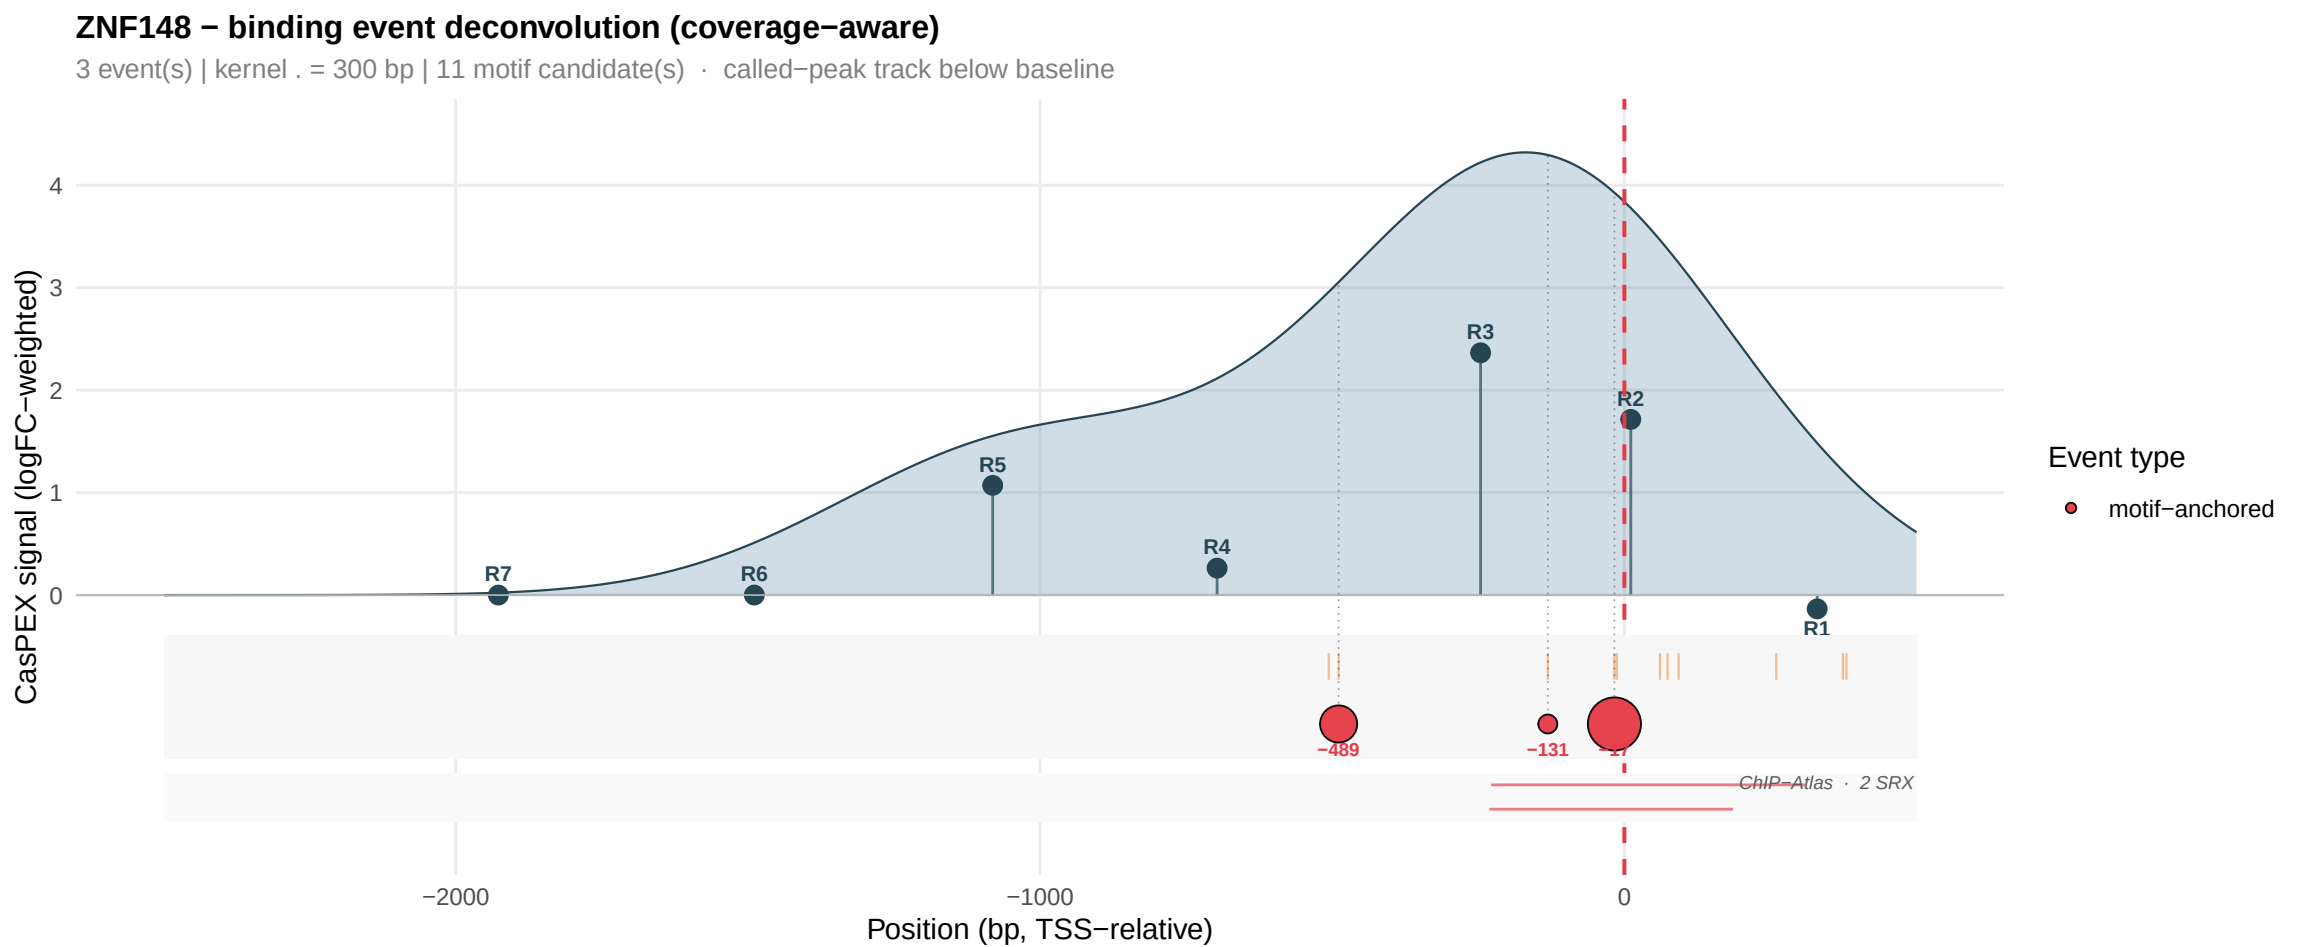
ZNF148 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 11 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−489
−131
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

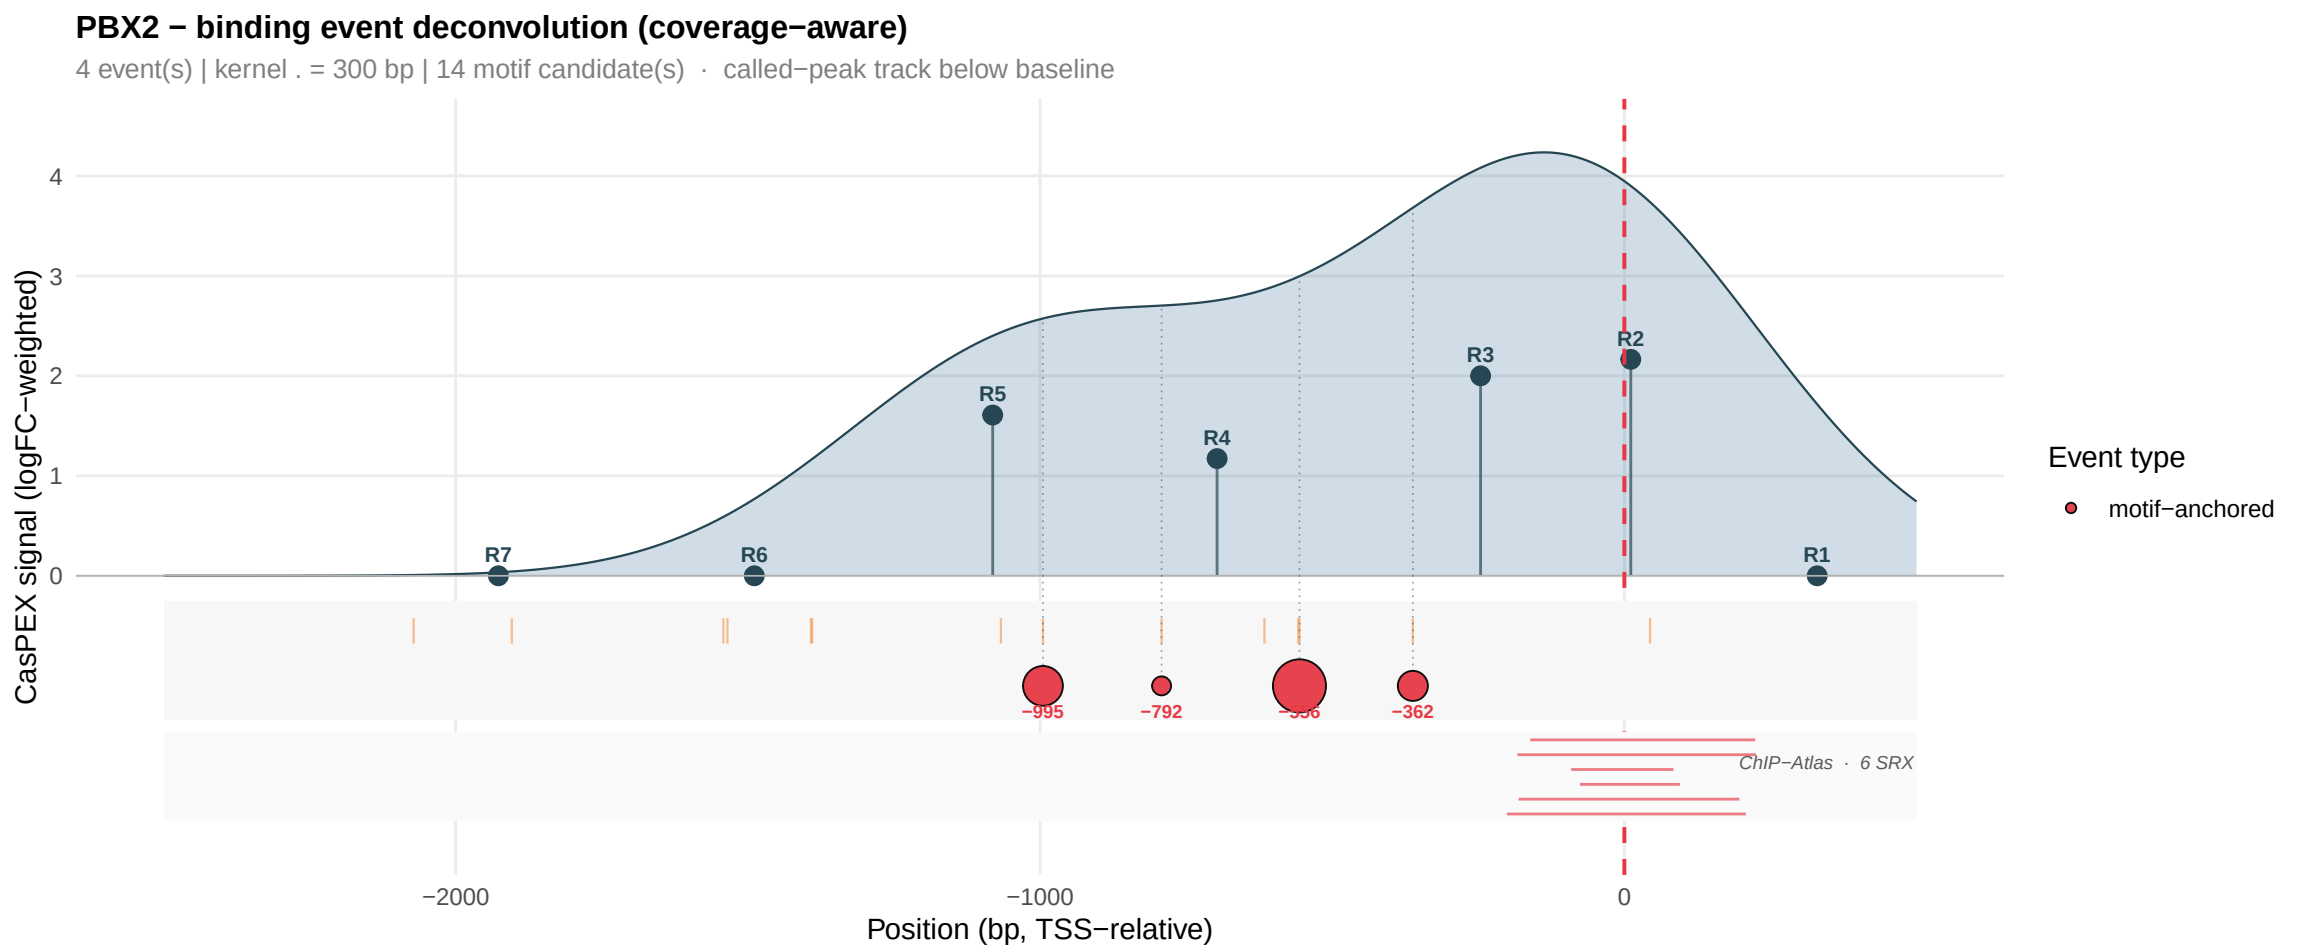
PBX2 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 14 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−995
−792
−362
ChIP−Atlas · 6 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

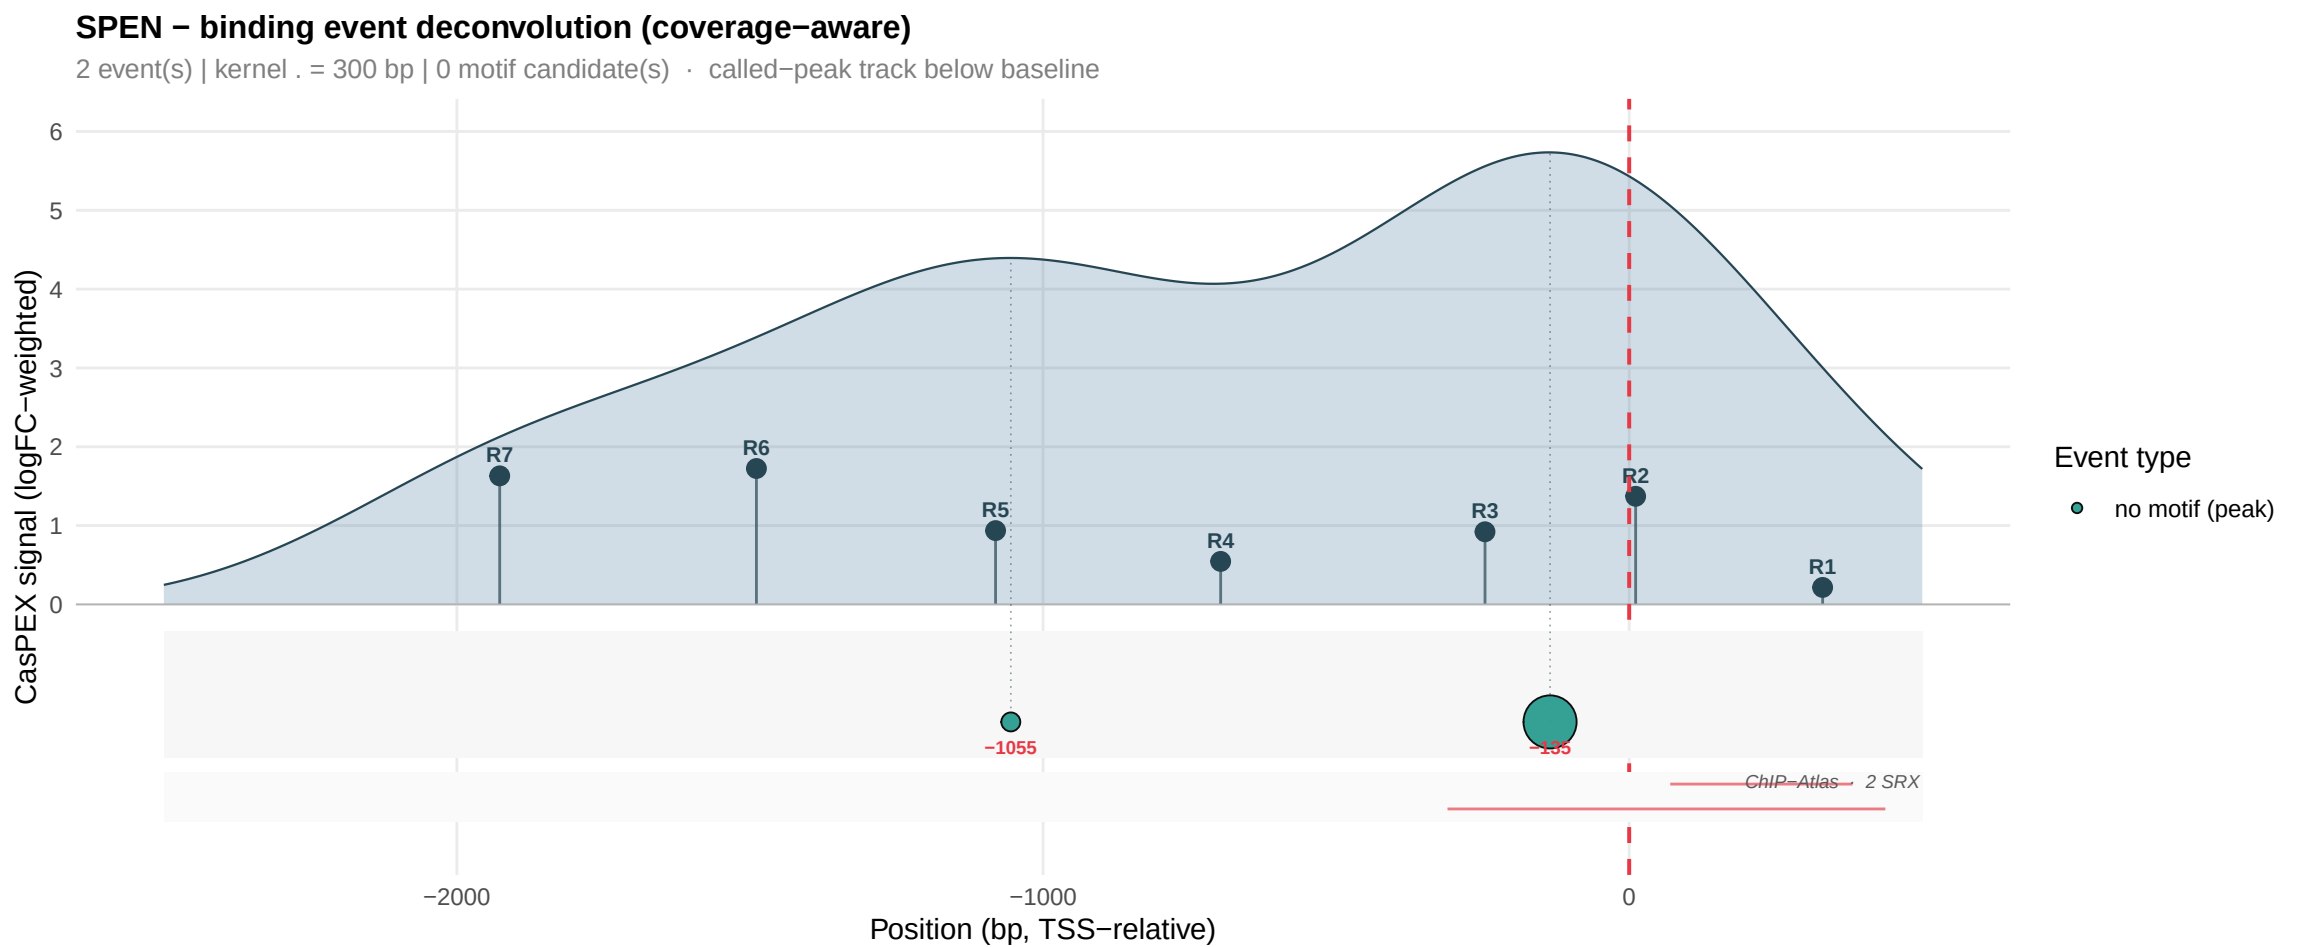
SPEN − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1055
−135
ChIP−Atlas
2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

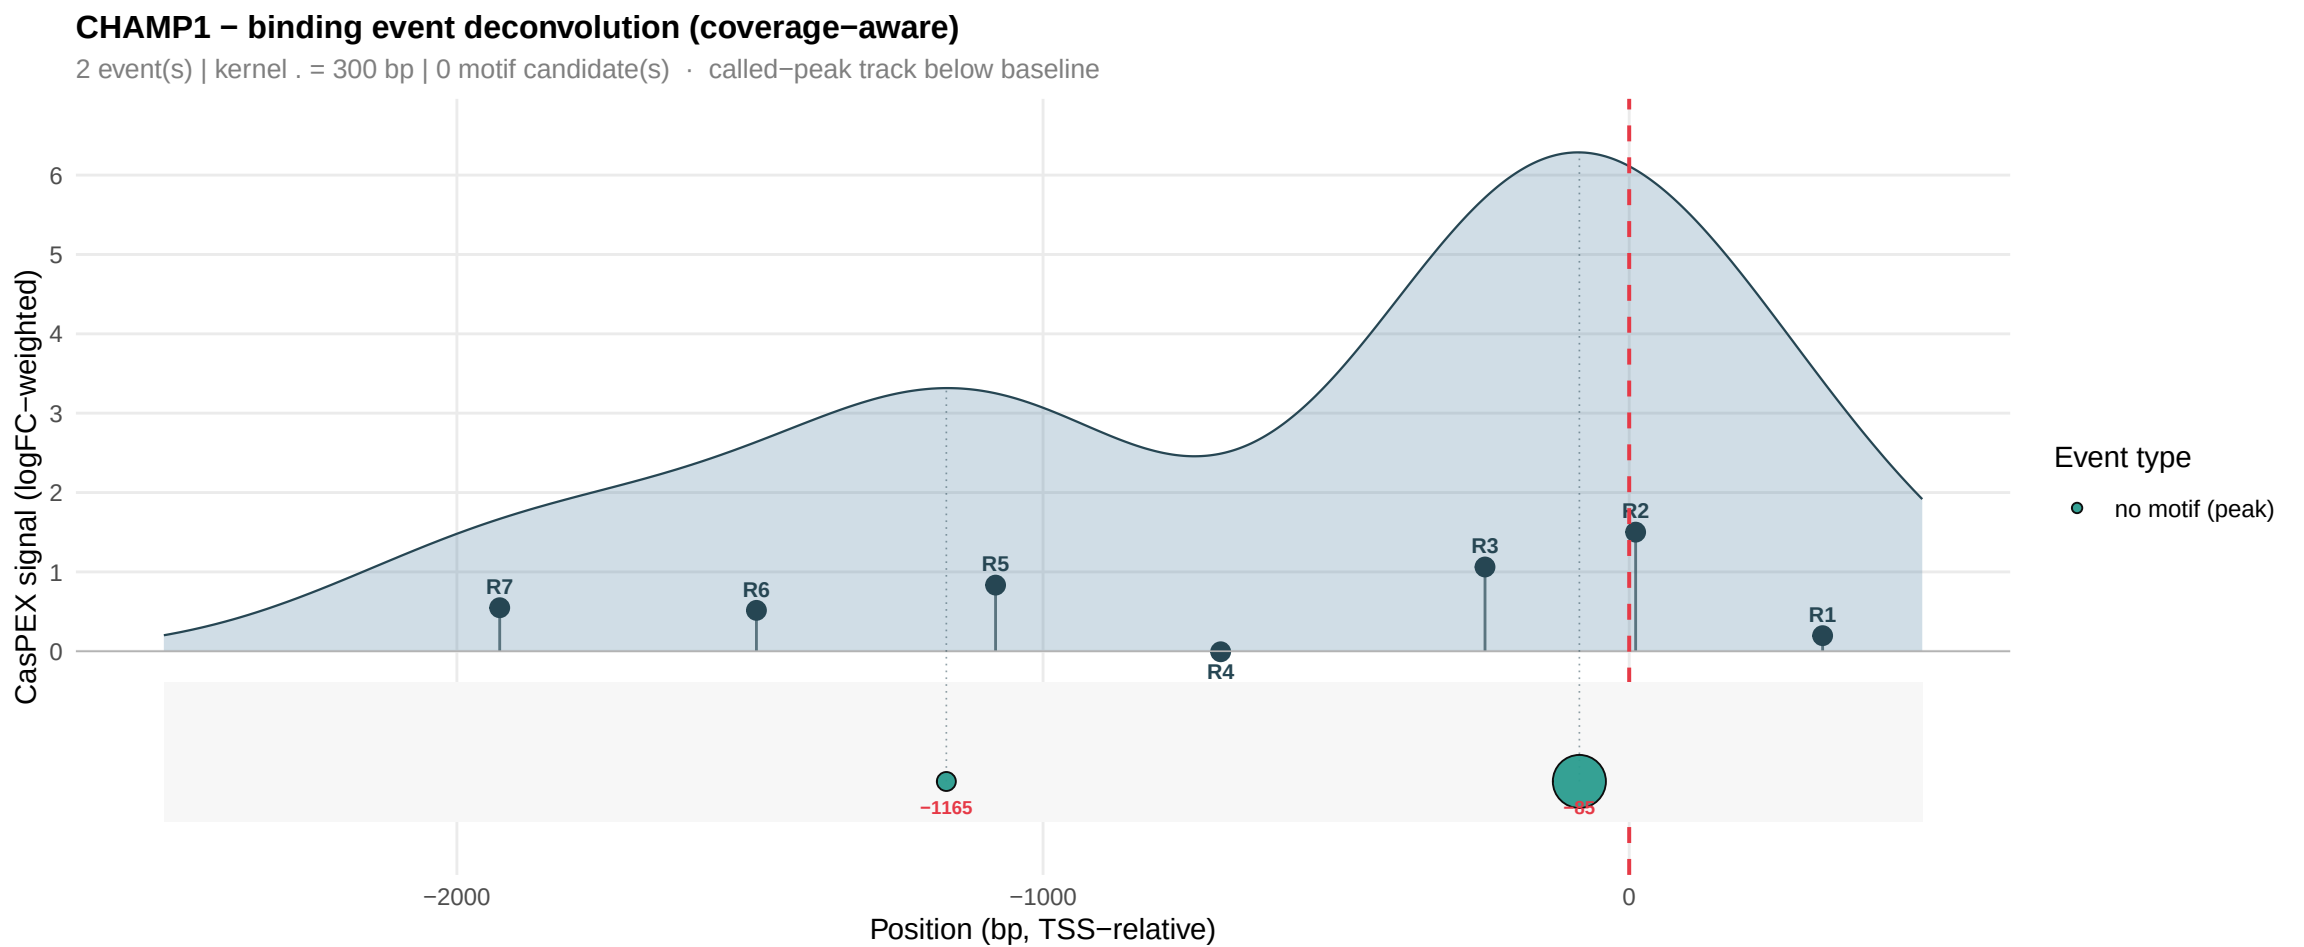
CHAMP1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1165
−85
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

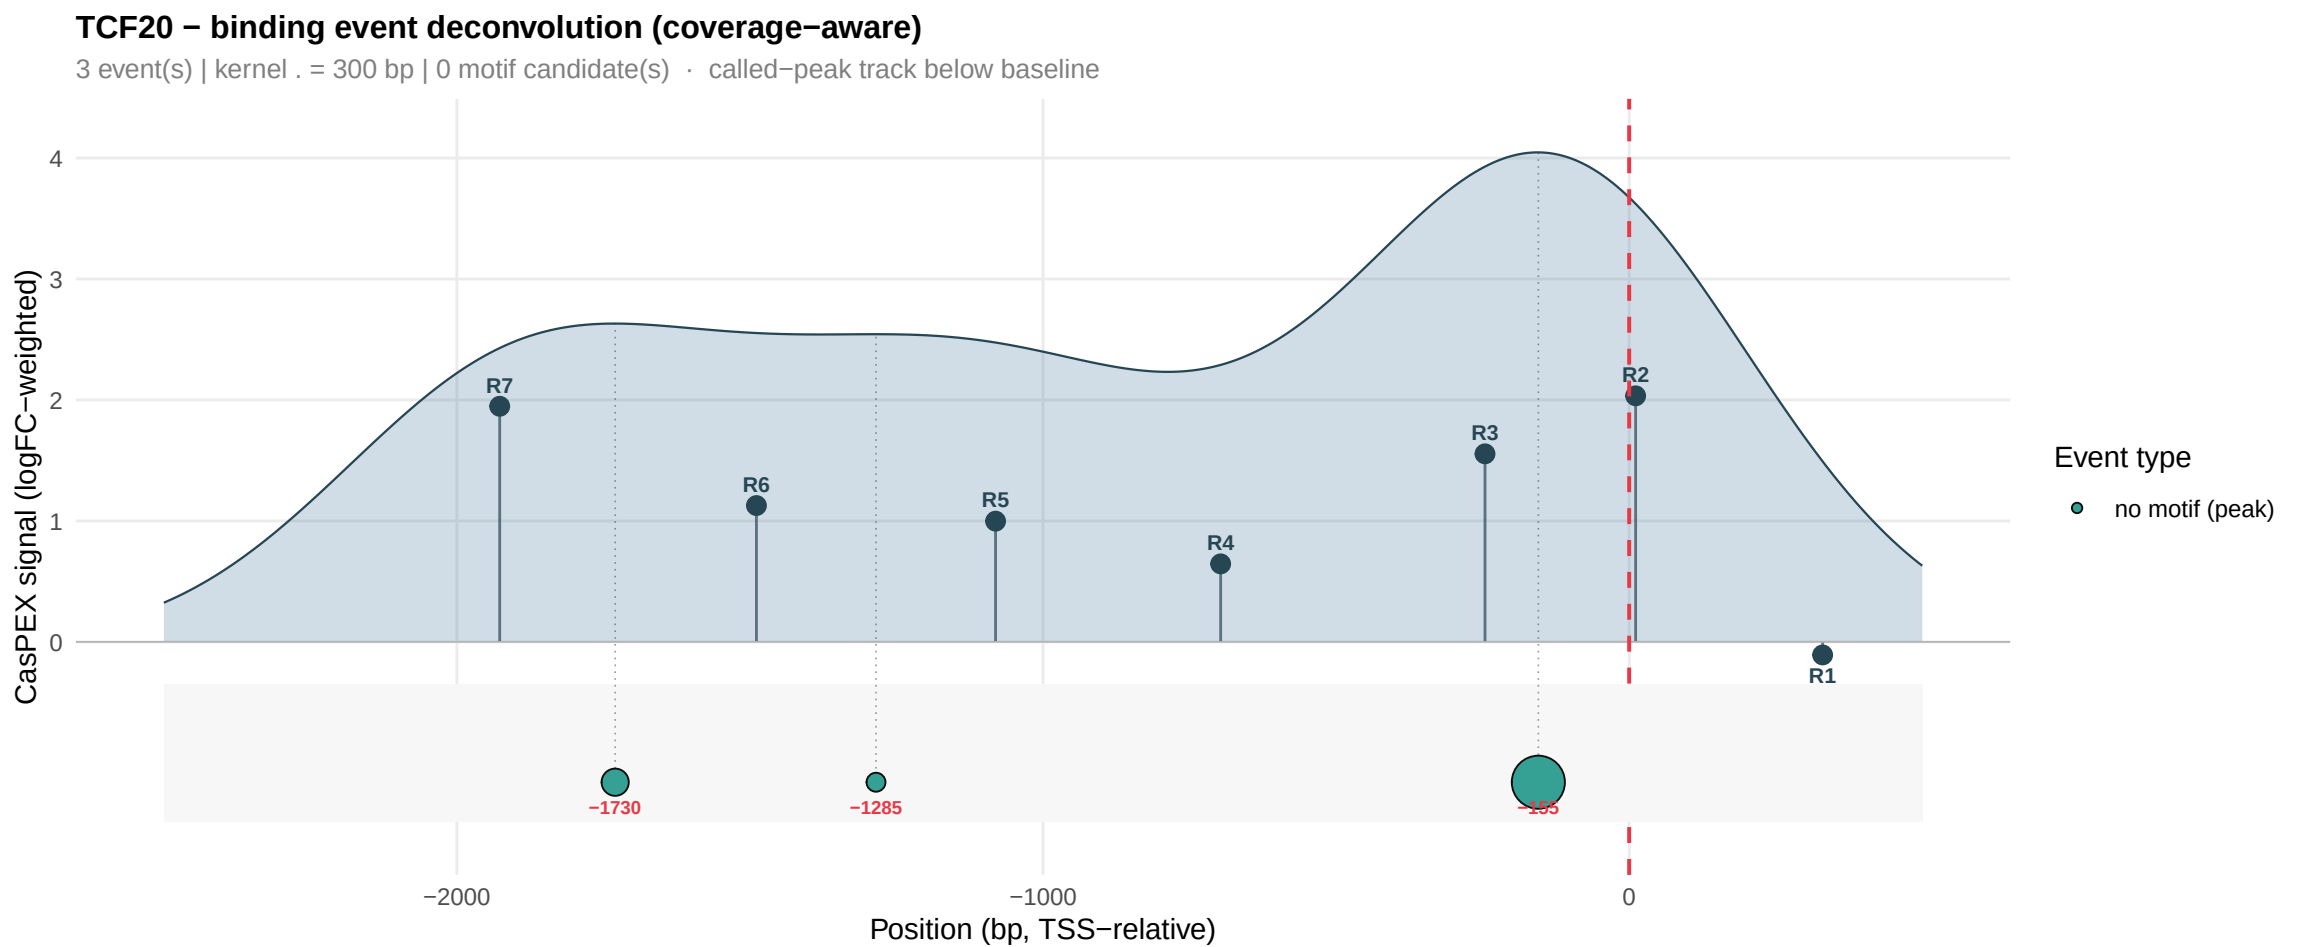
TCF20 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1730
−1285
−155
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

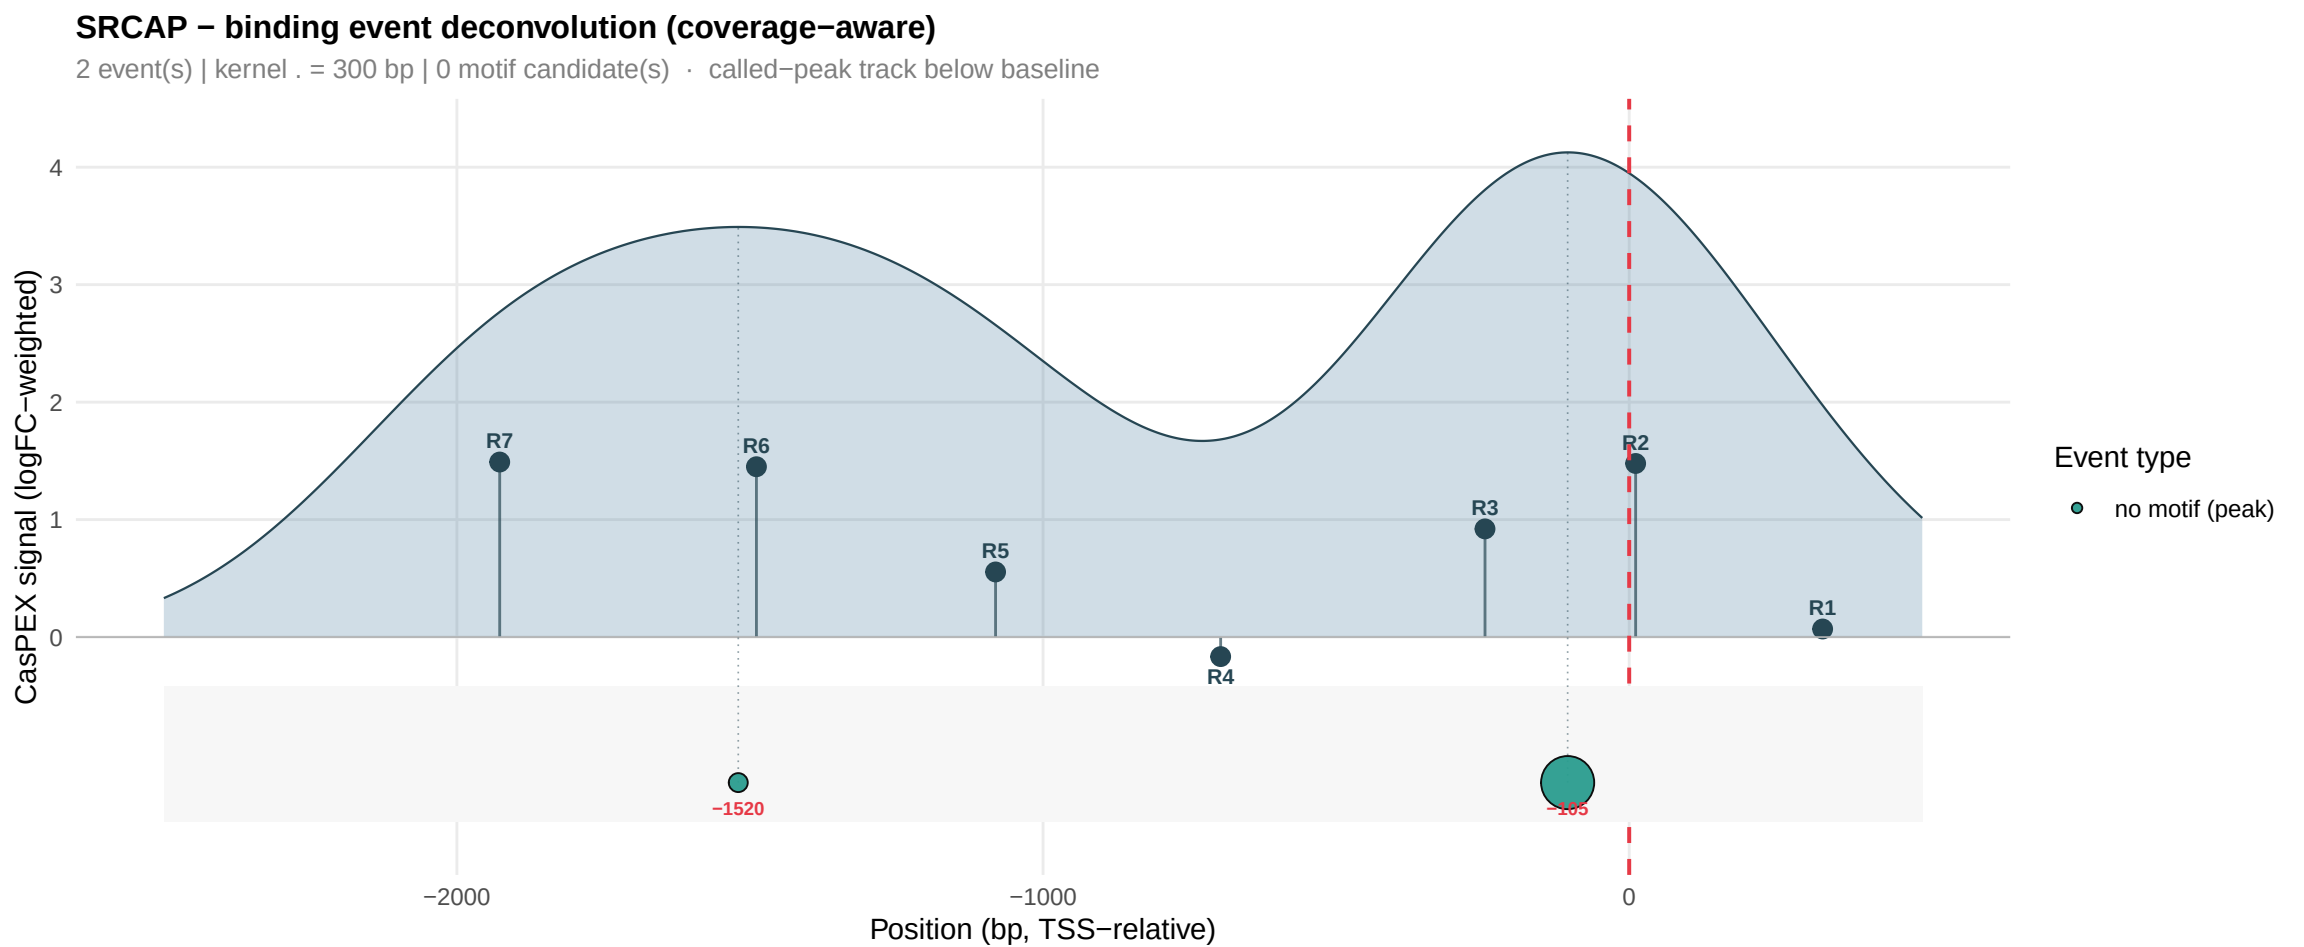
SRCAP − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1520
−105
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

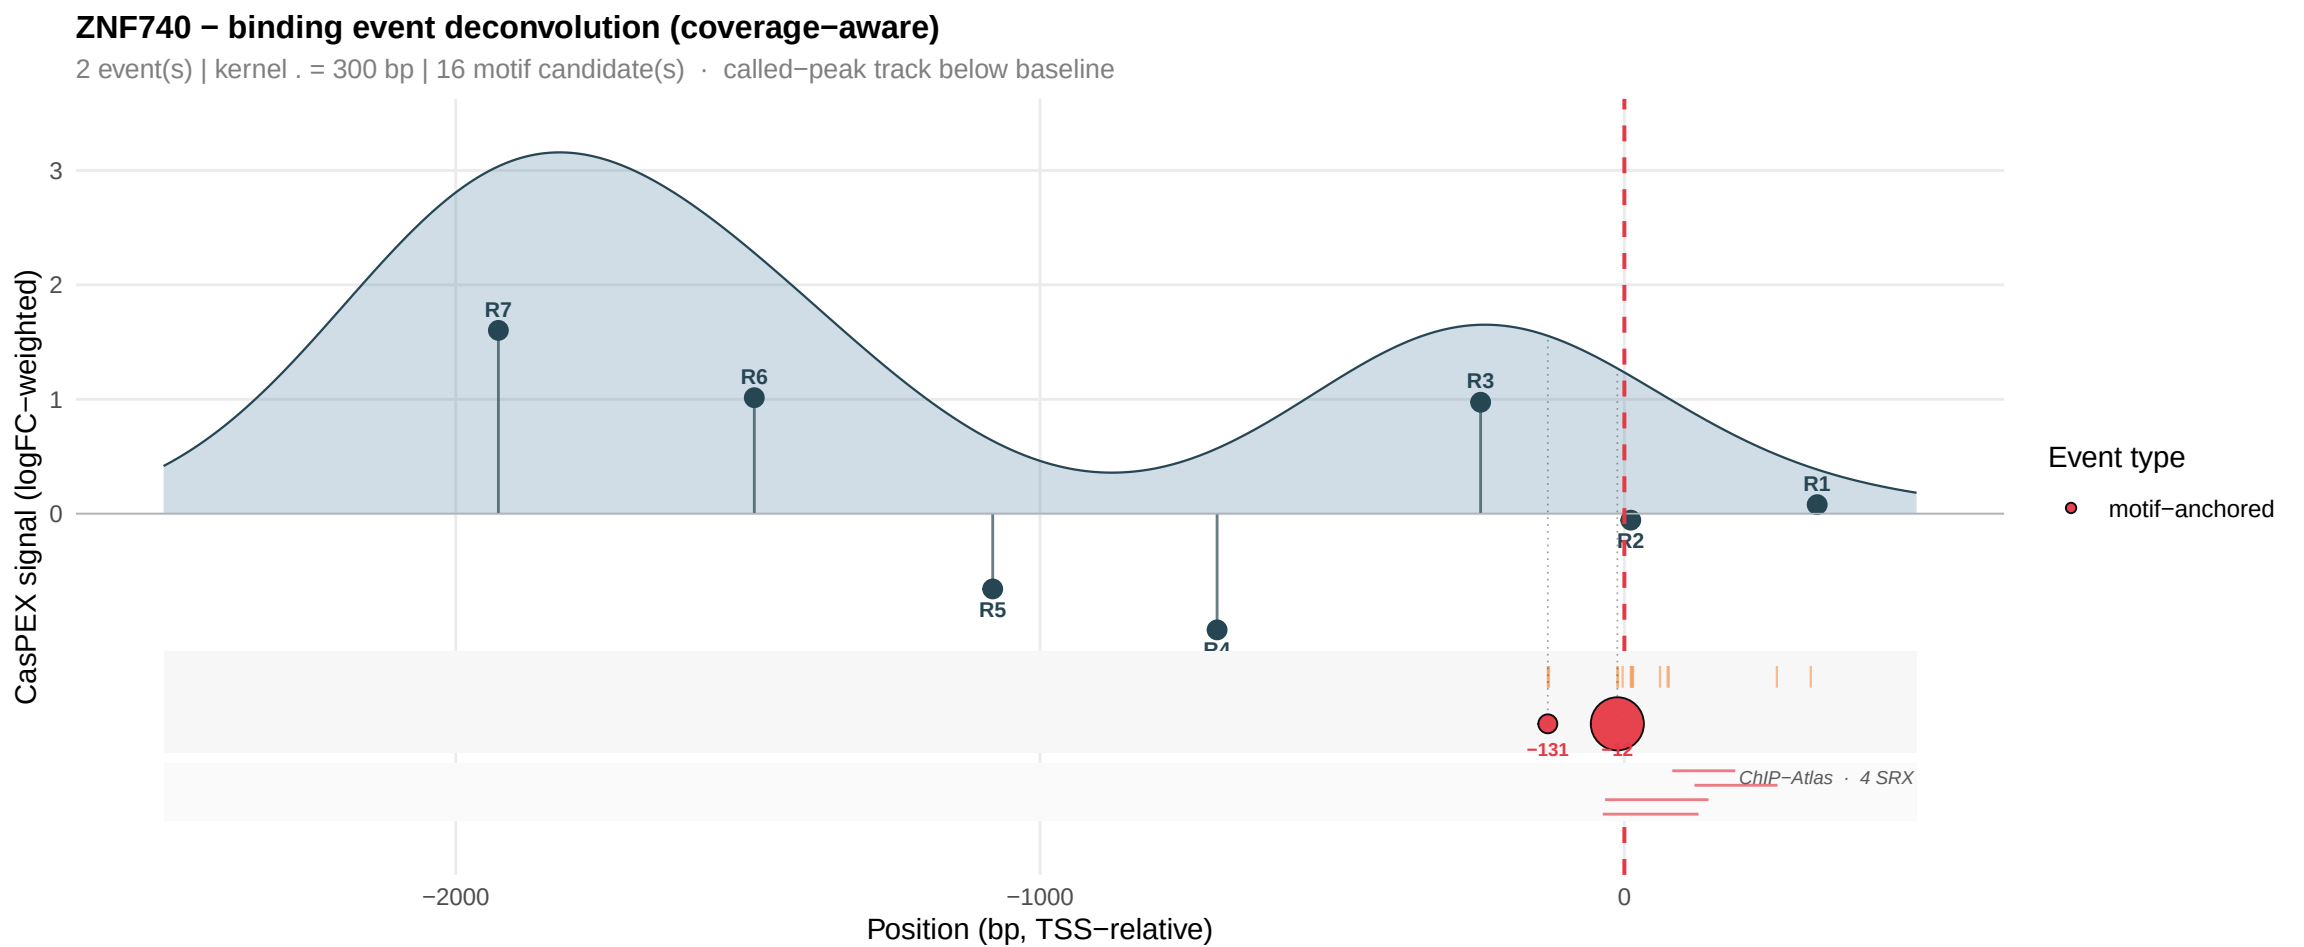
ZNF740 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 16 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−131
ChIP−Atlas · 4 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

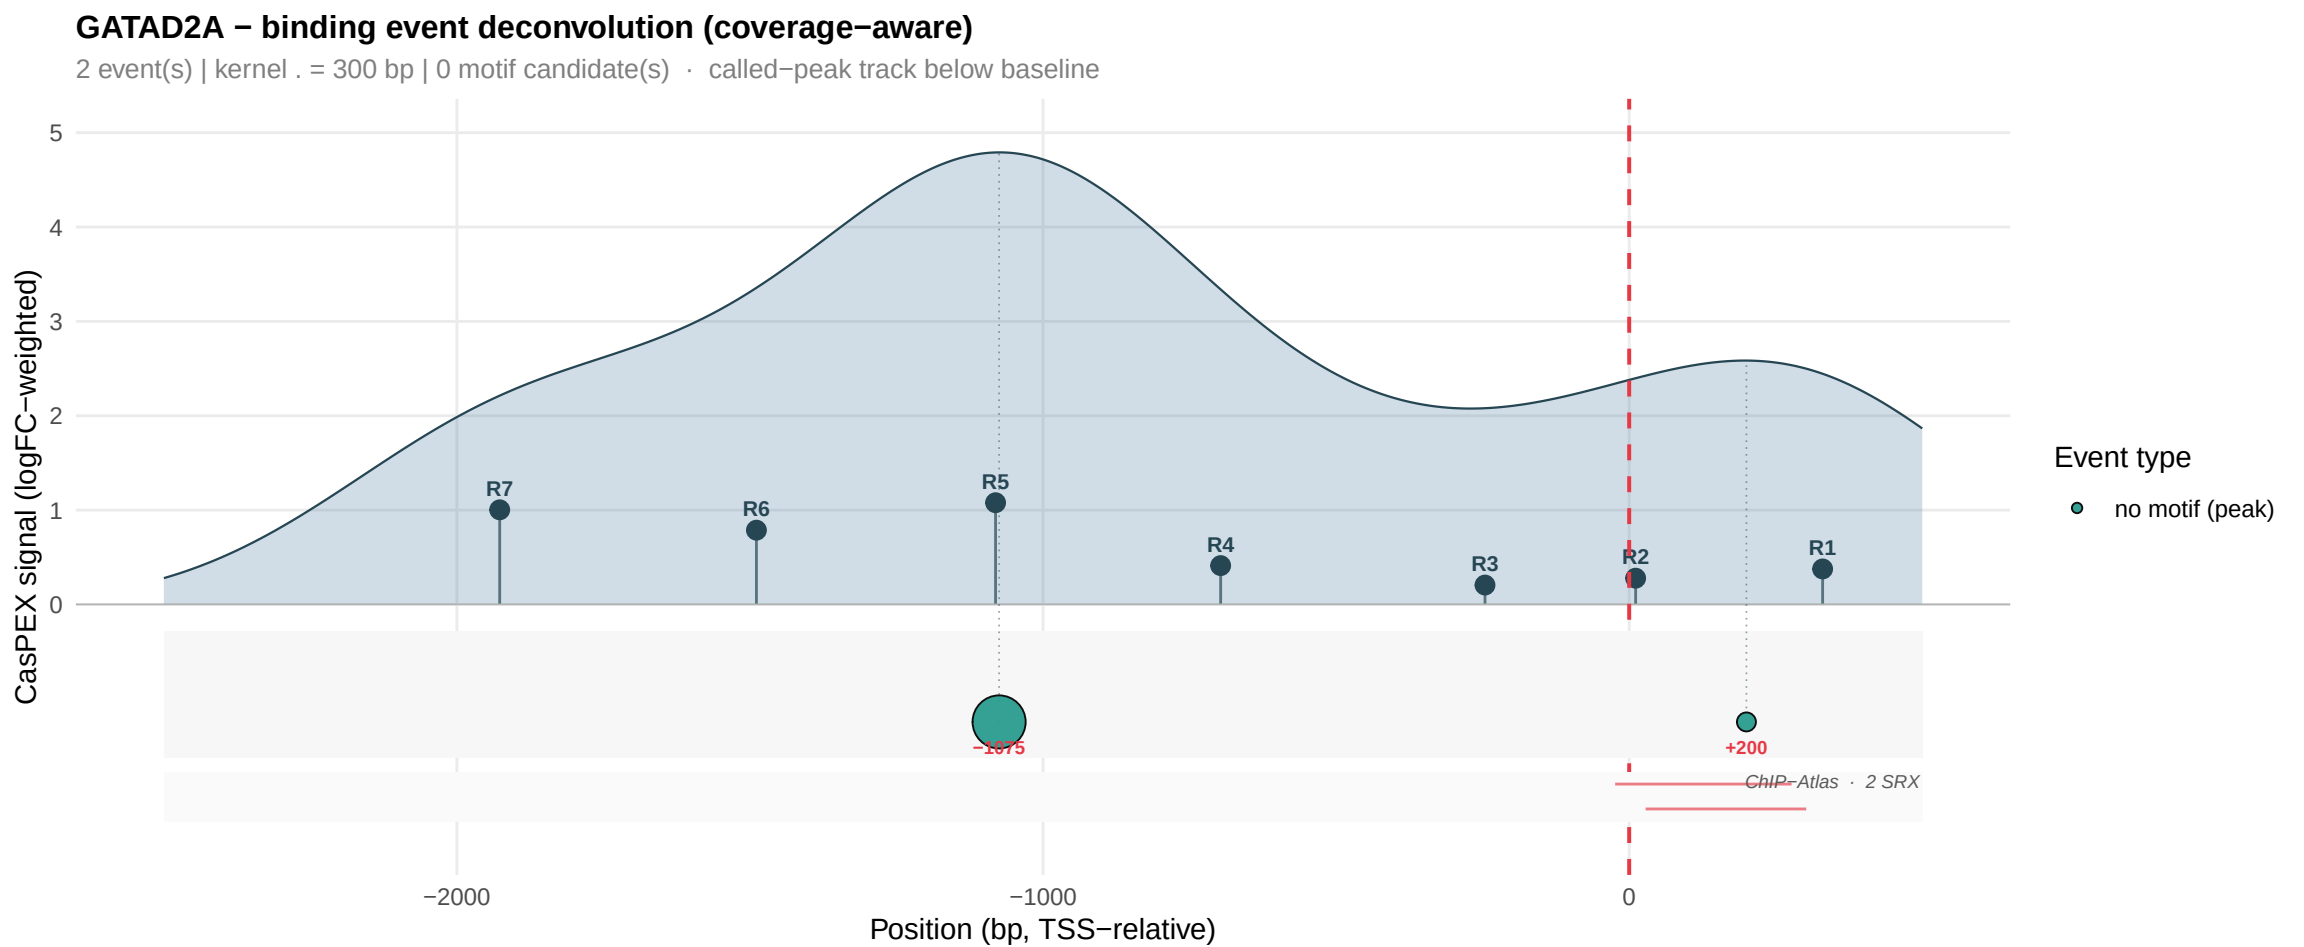
GATAD2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1075
+200
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

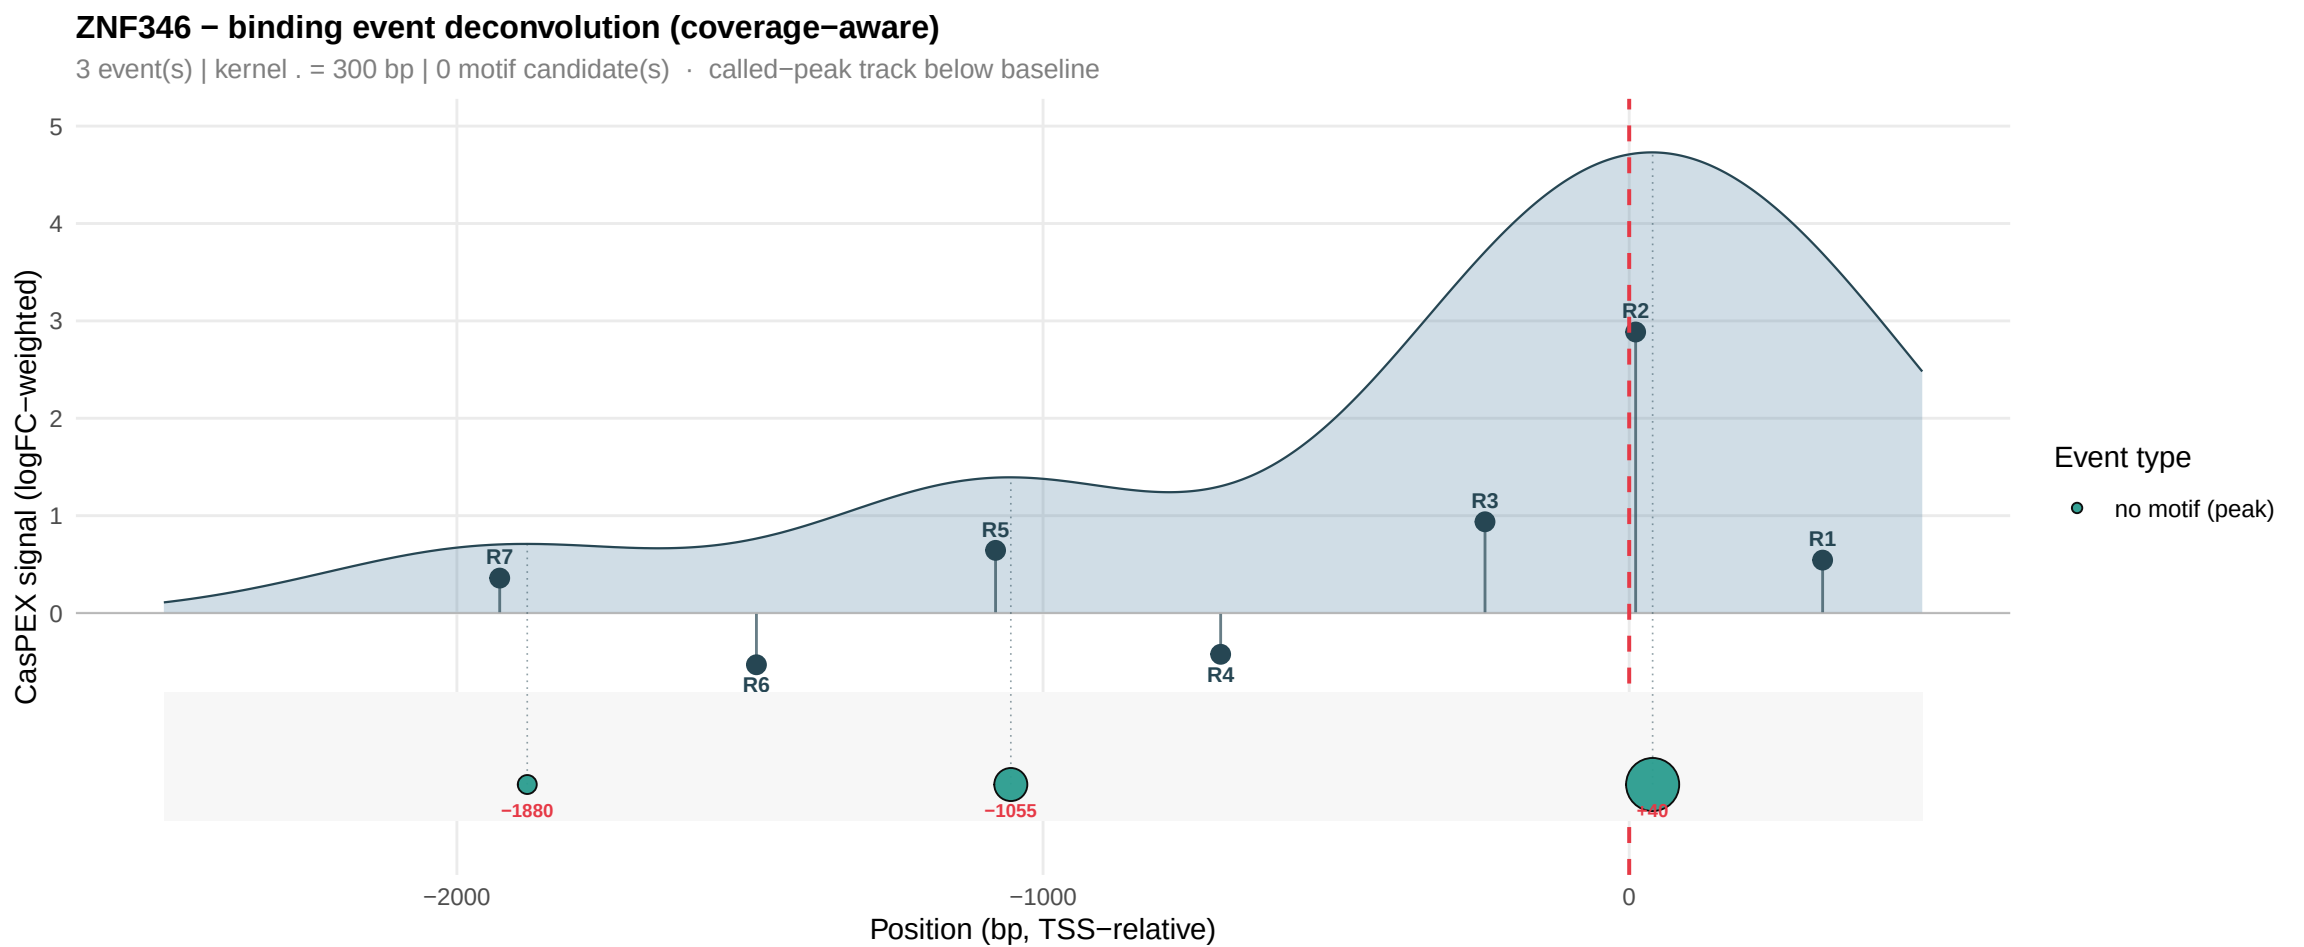
ZNF346 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−1880
−1055
+40
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

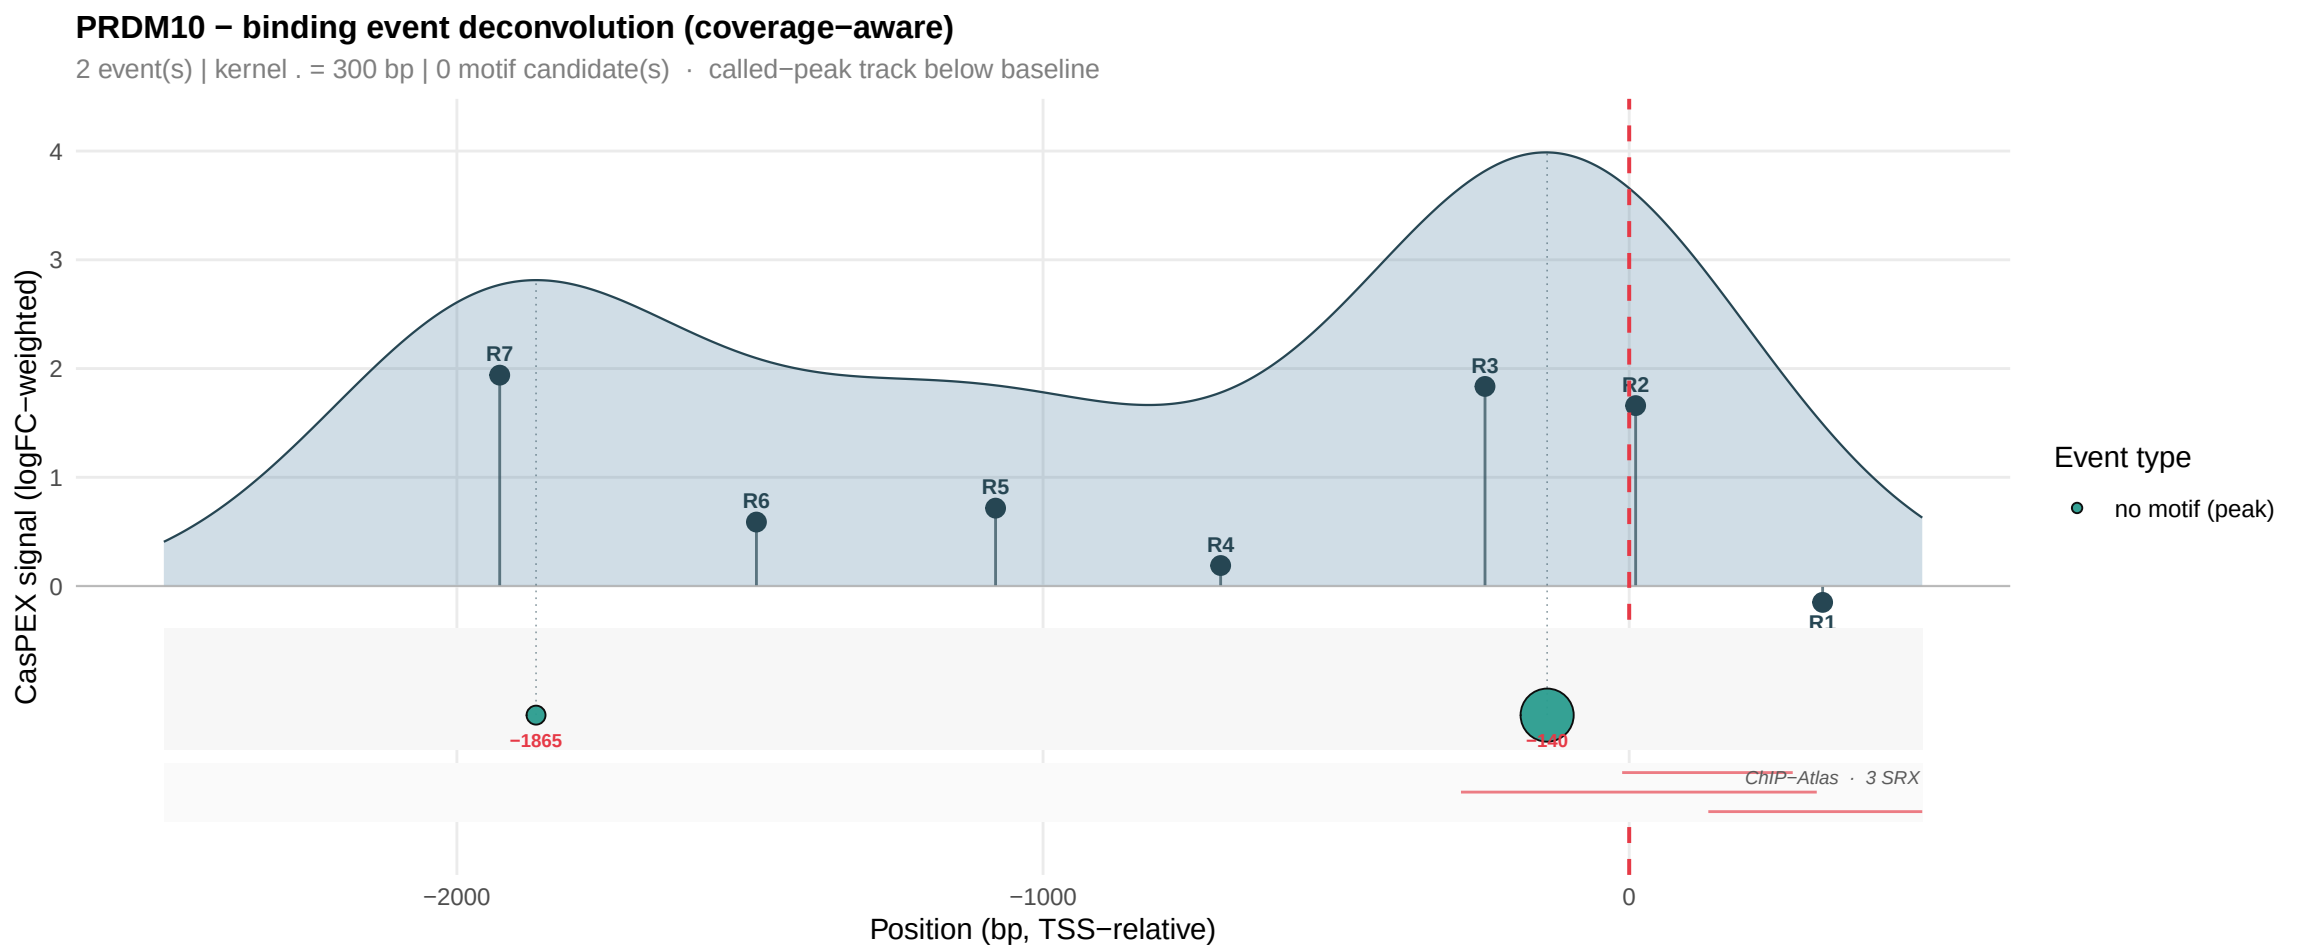
PRDM10 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1865
−140
ChIP−Atlas · 3 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

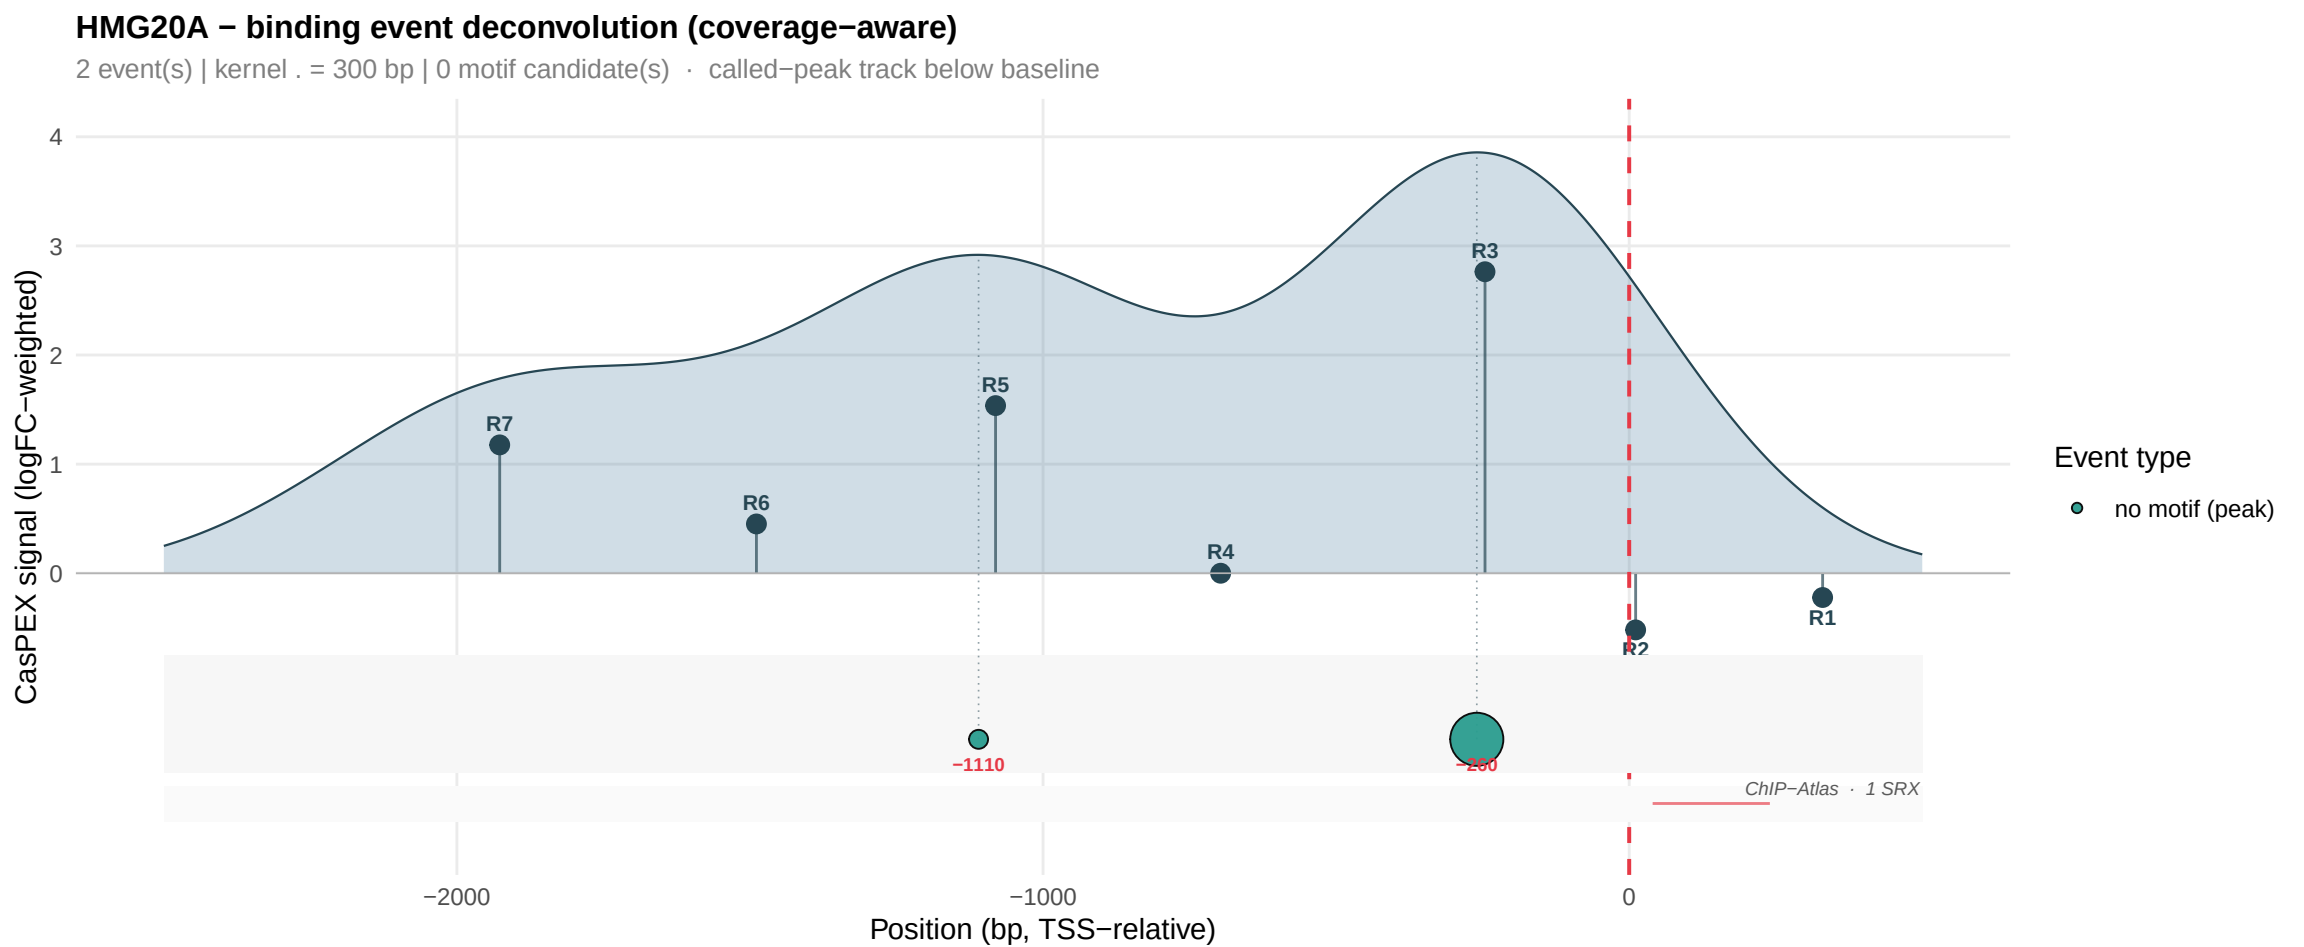
HMG20A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1110
−200
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

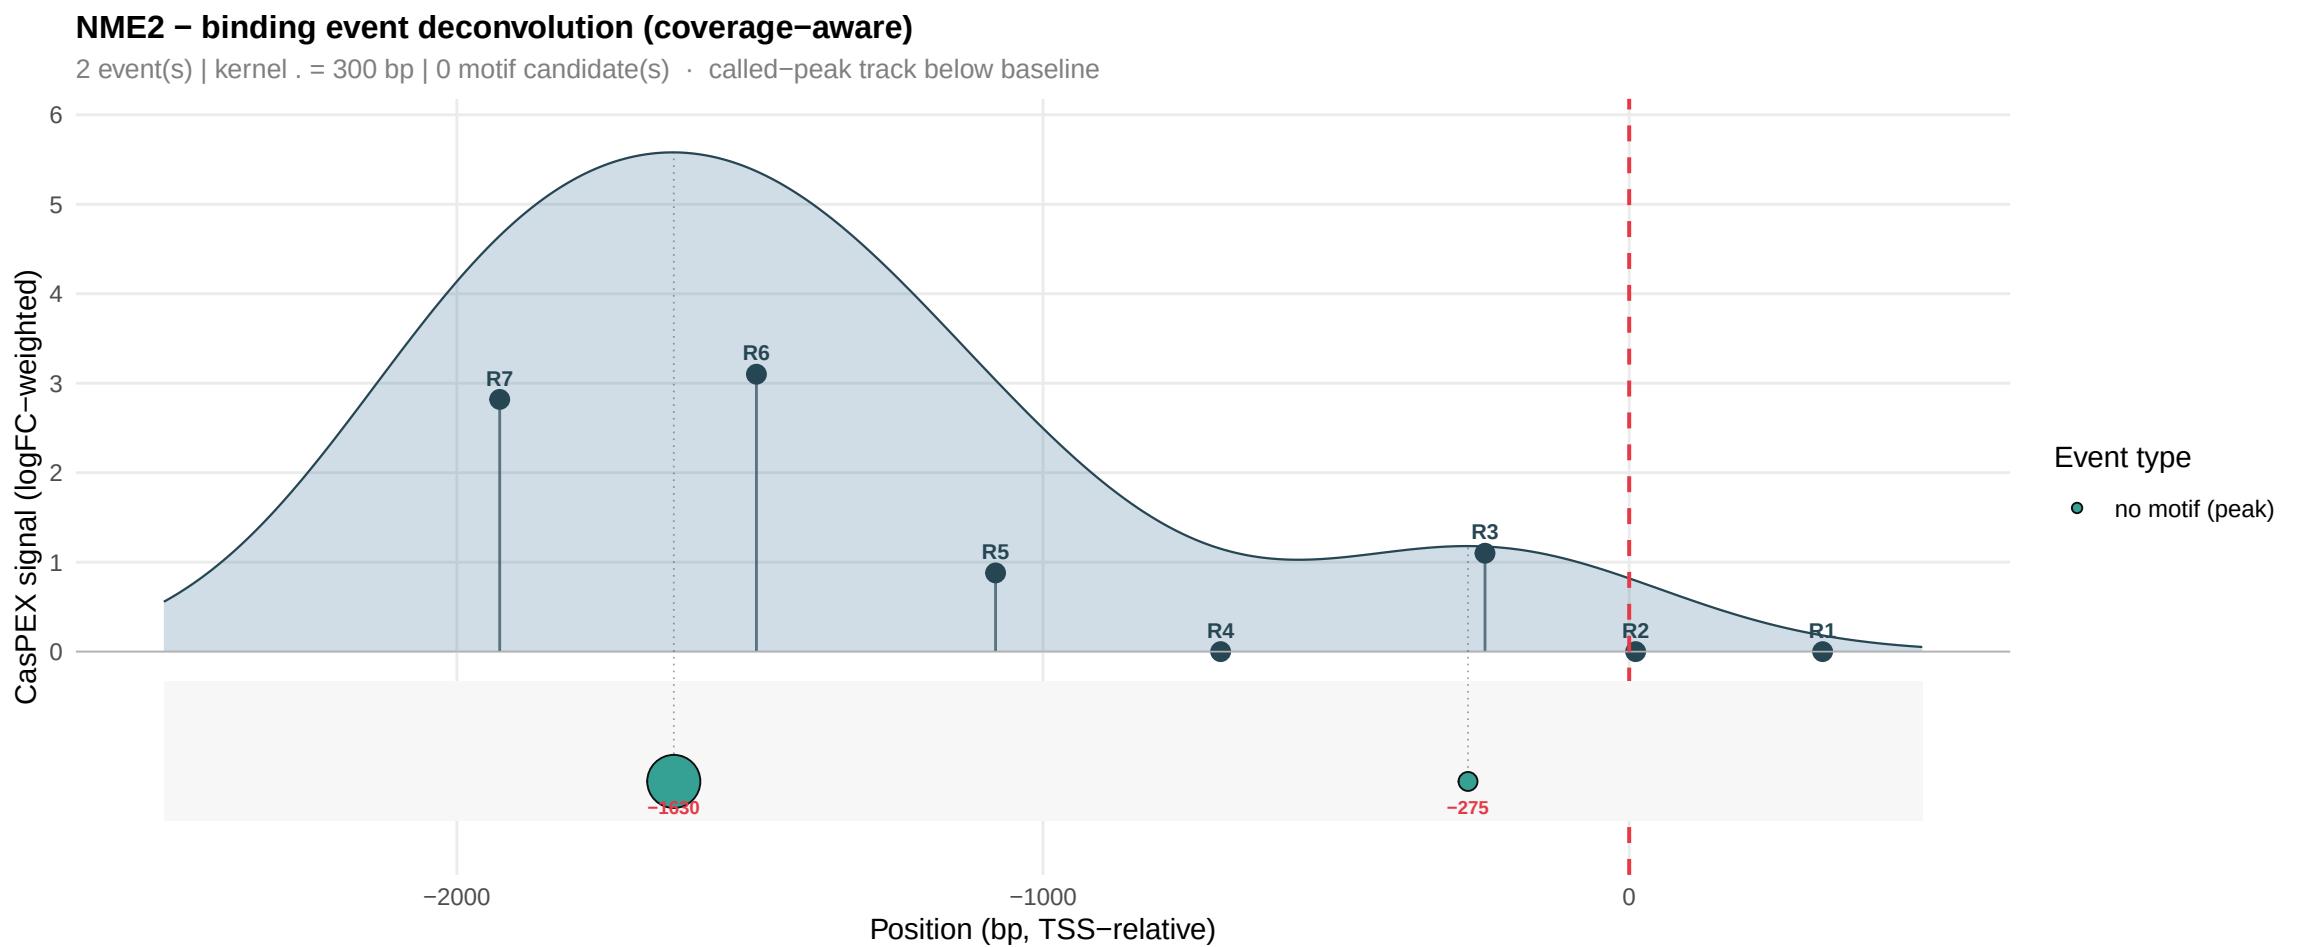
NME2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1630
−275
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

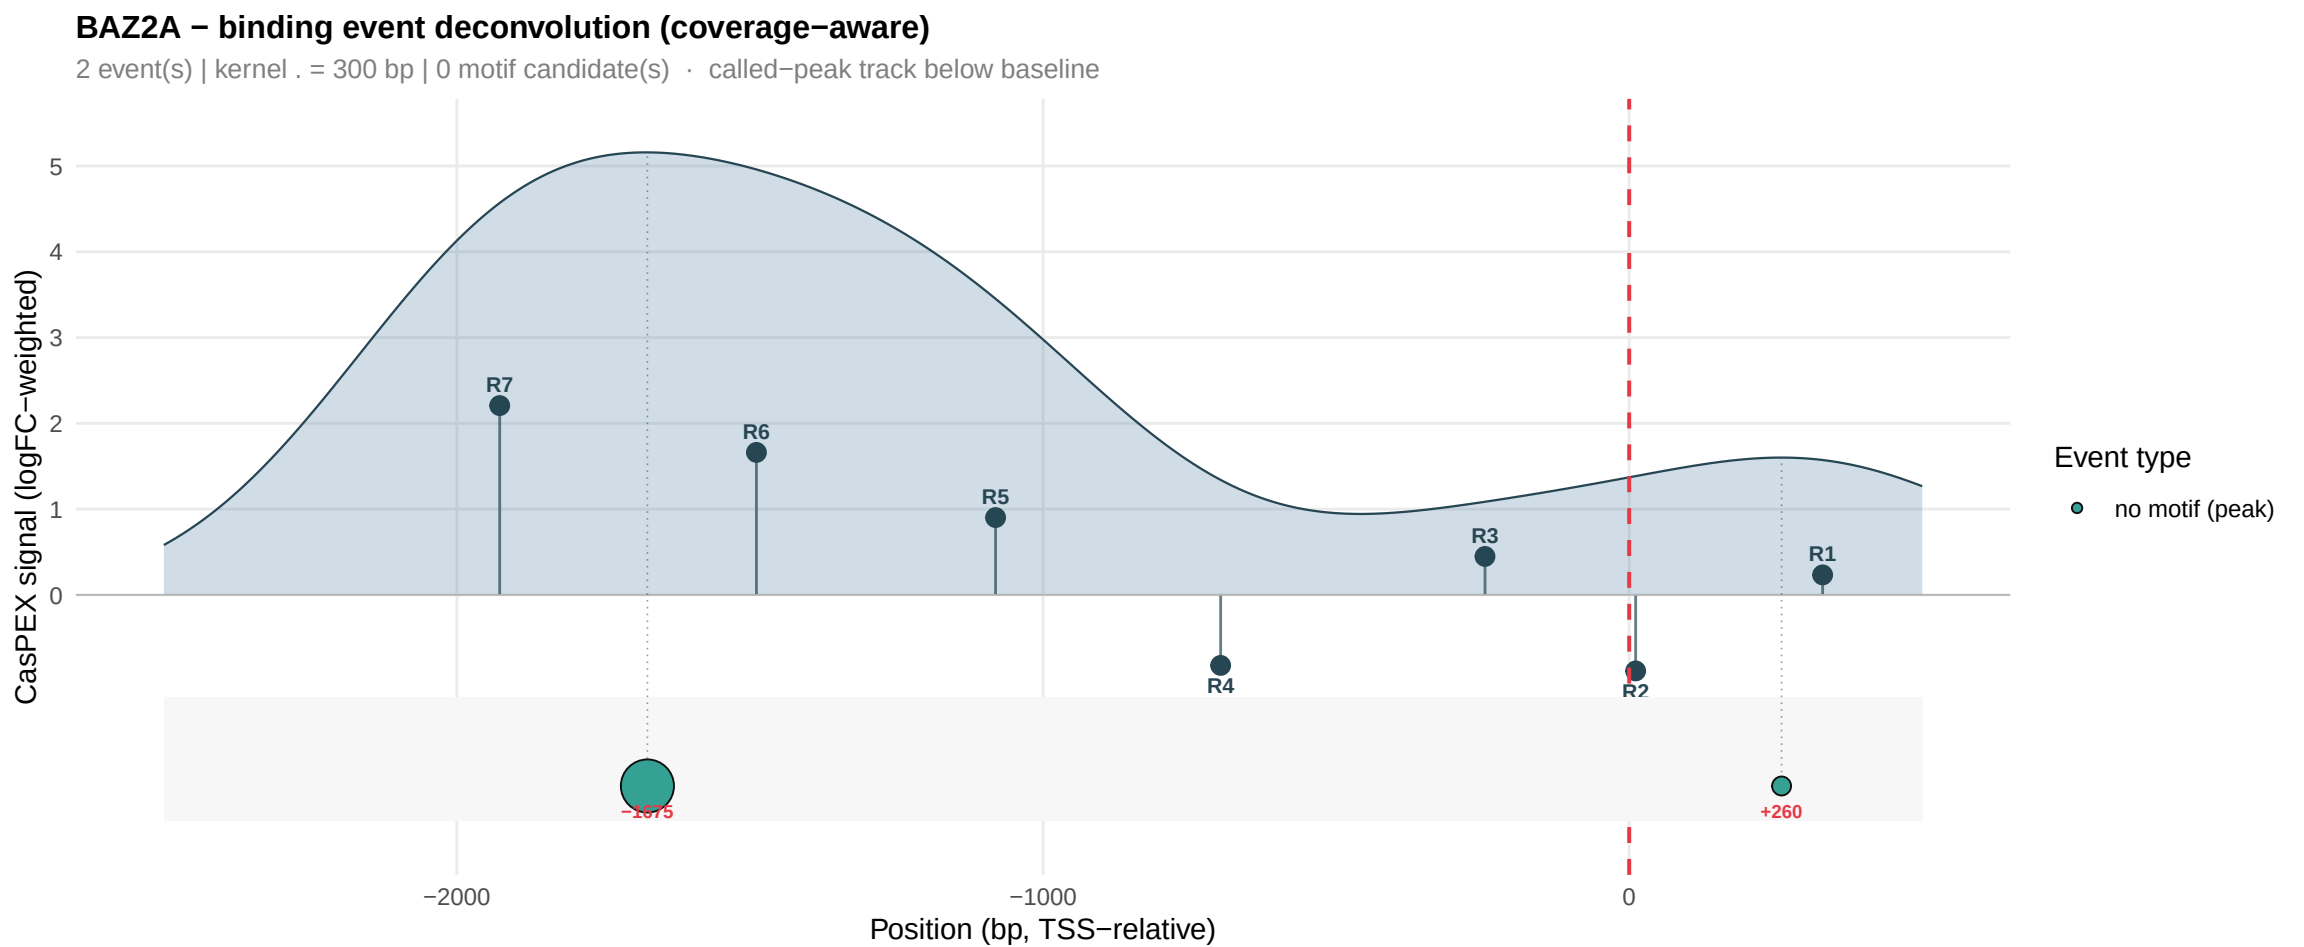
BAZ2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1575
+260
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

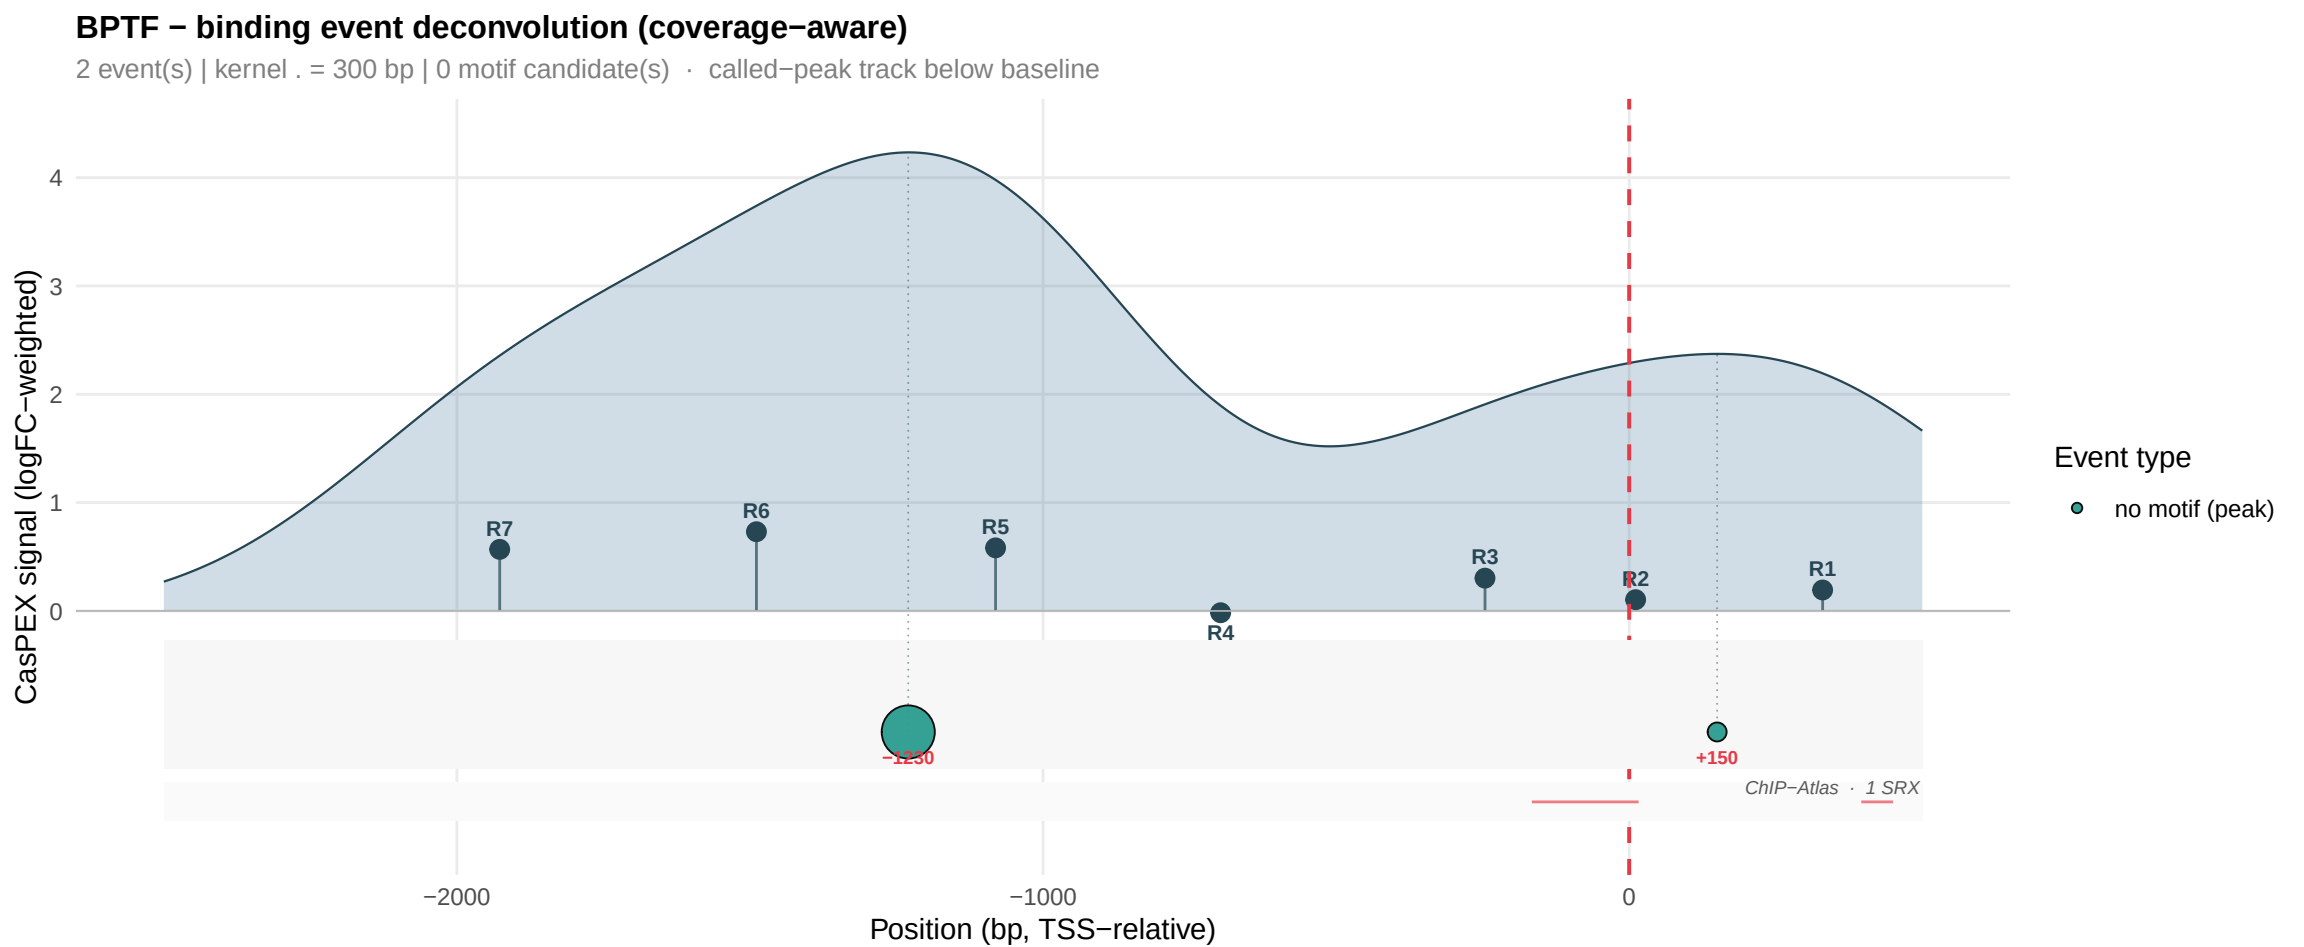
BPTF − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1230
+150
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

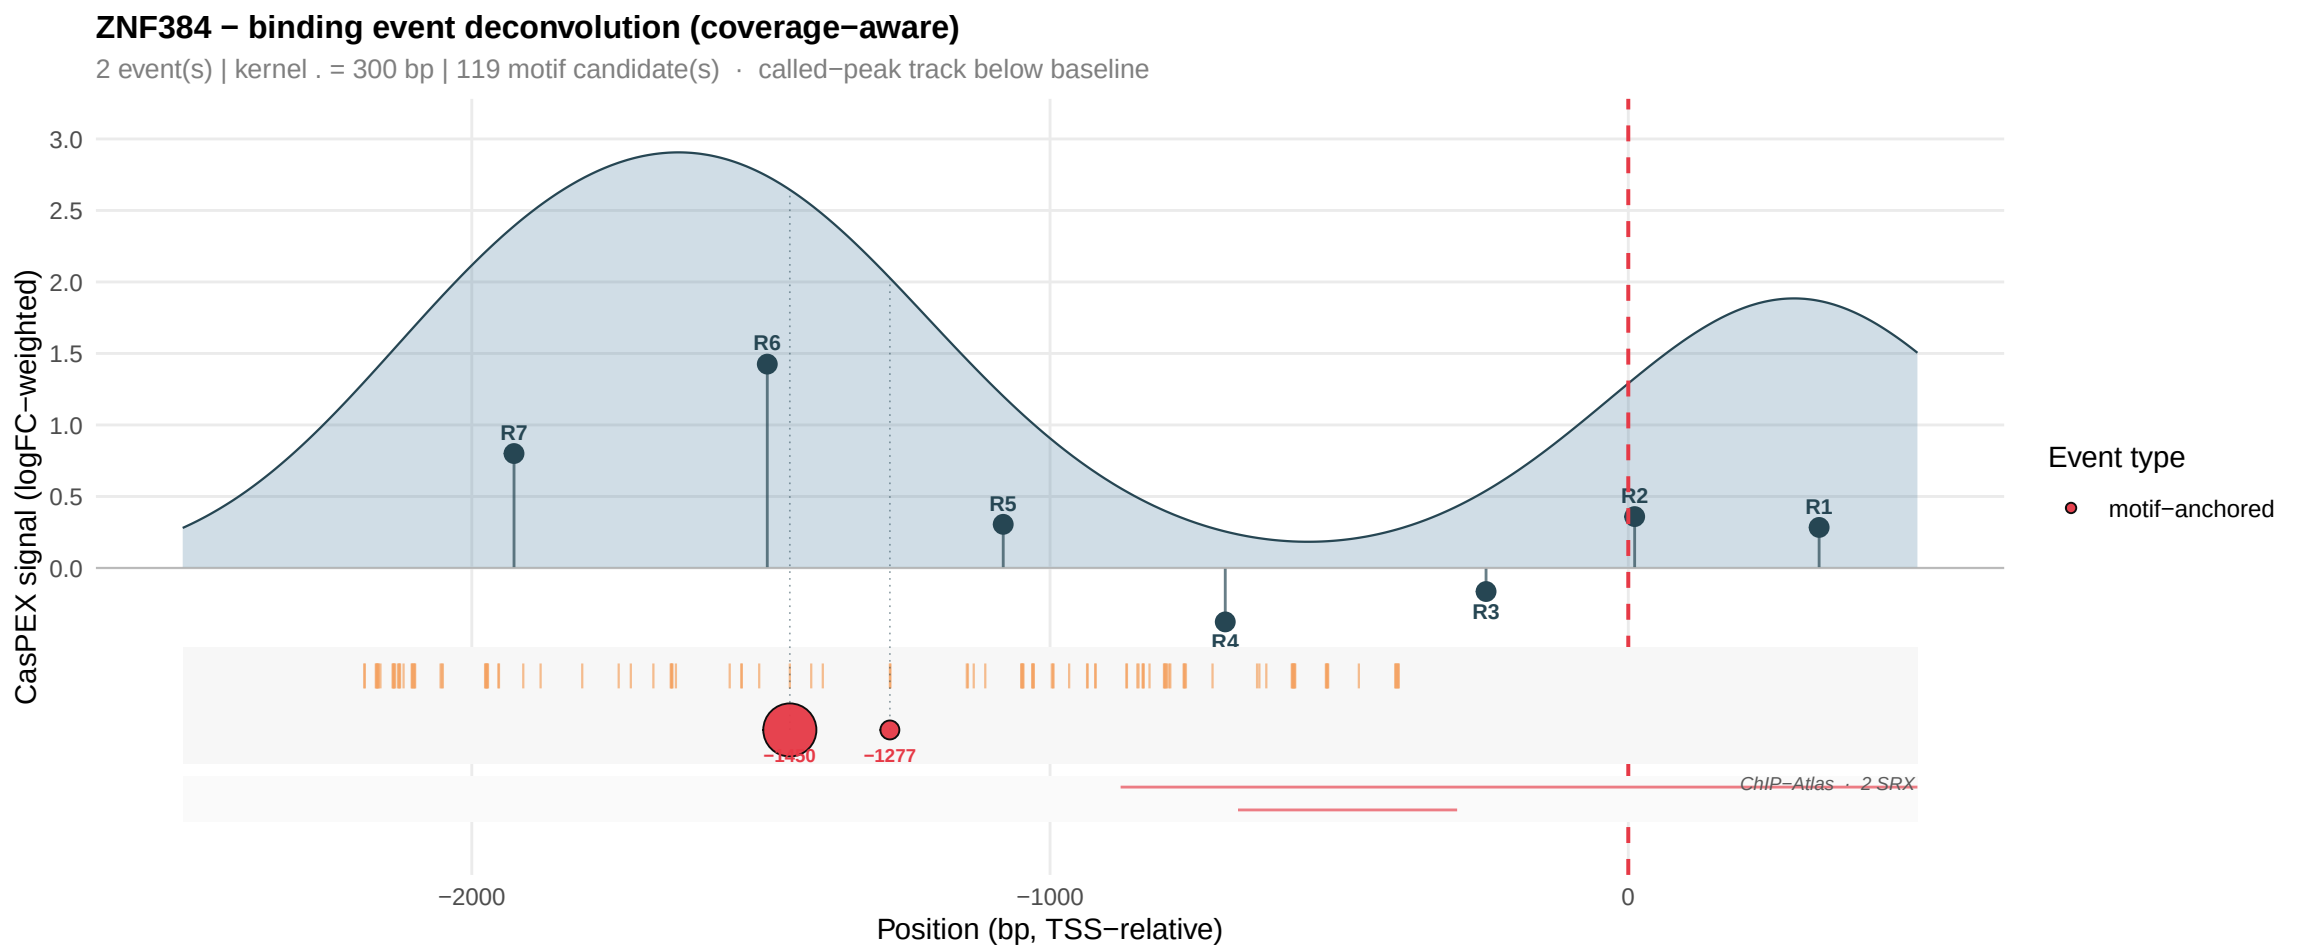
ZNF384 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 119 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1450
−1277
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

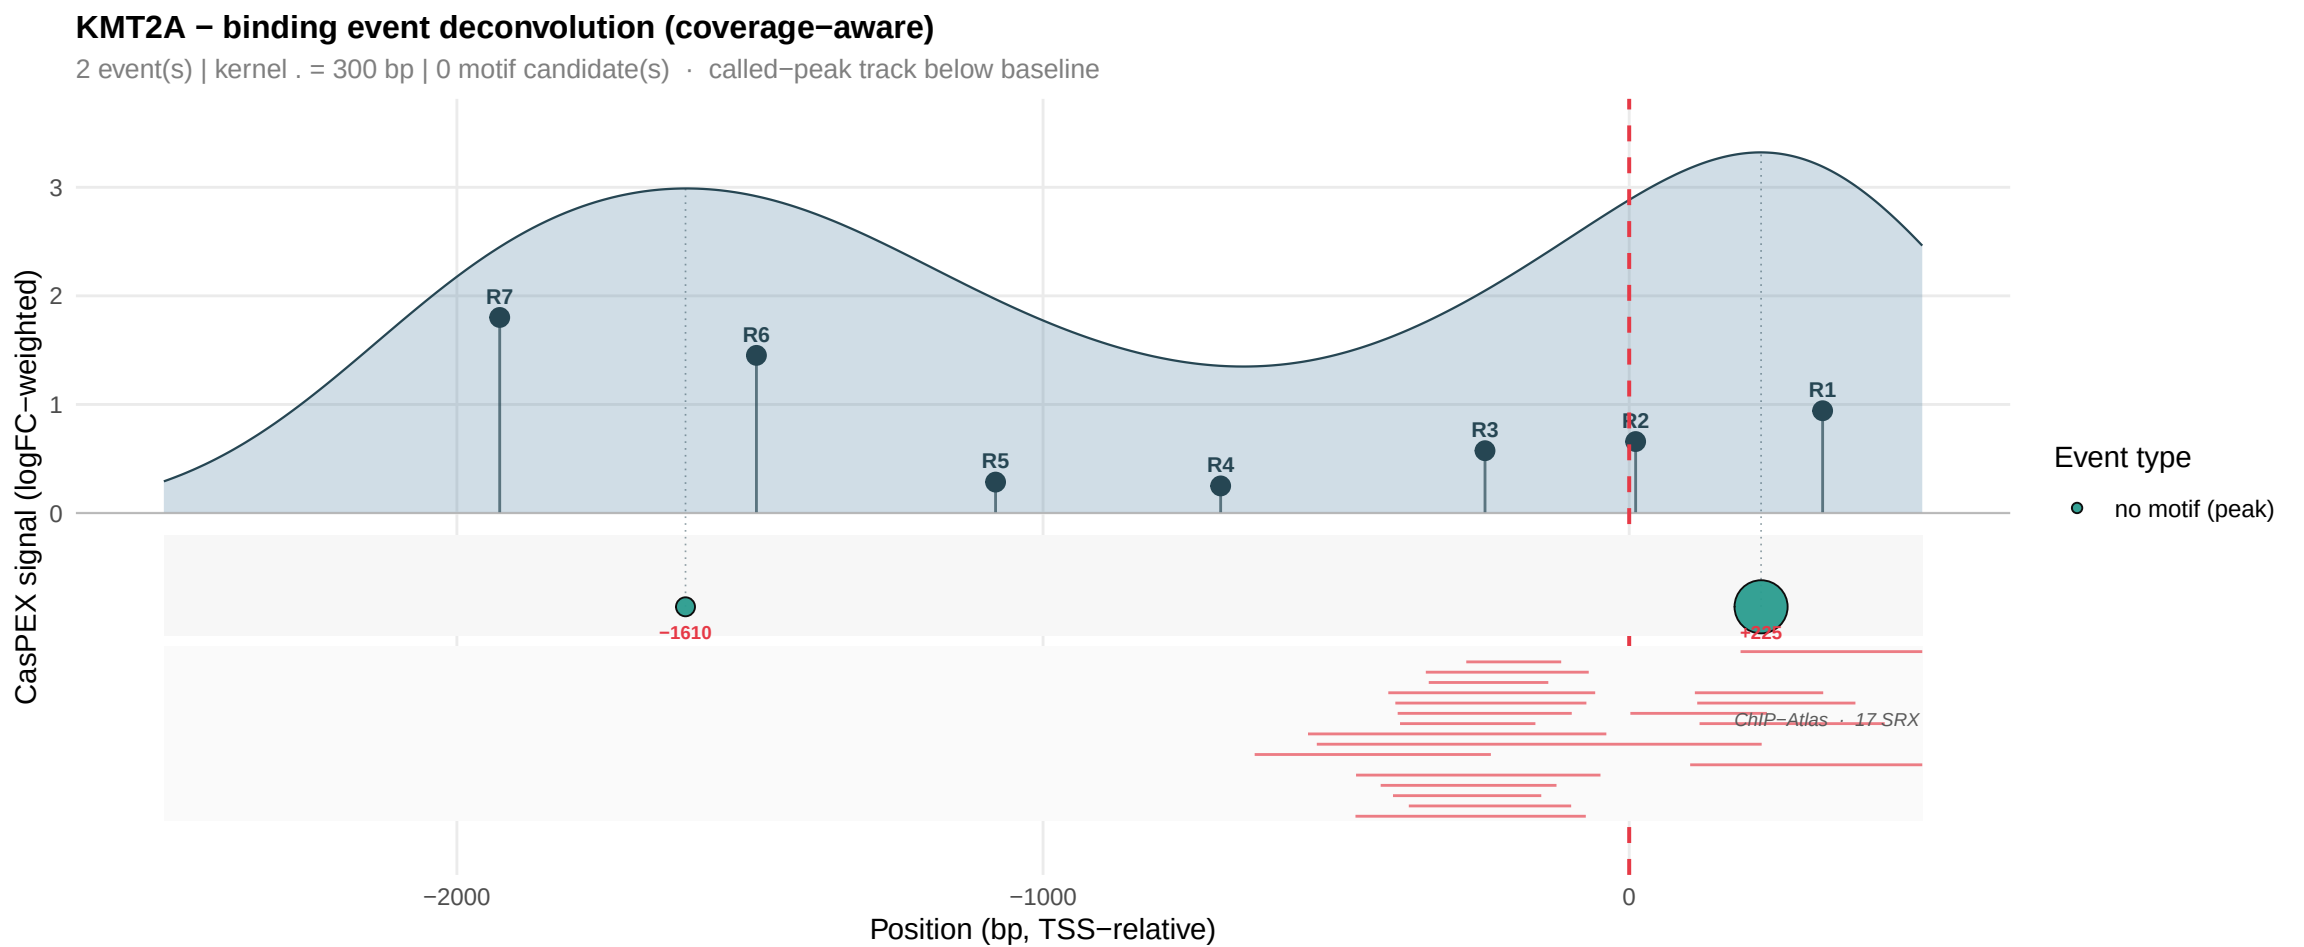
KMT2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1610
+225
ChIP−Atlas · 17 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

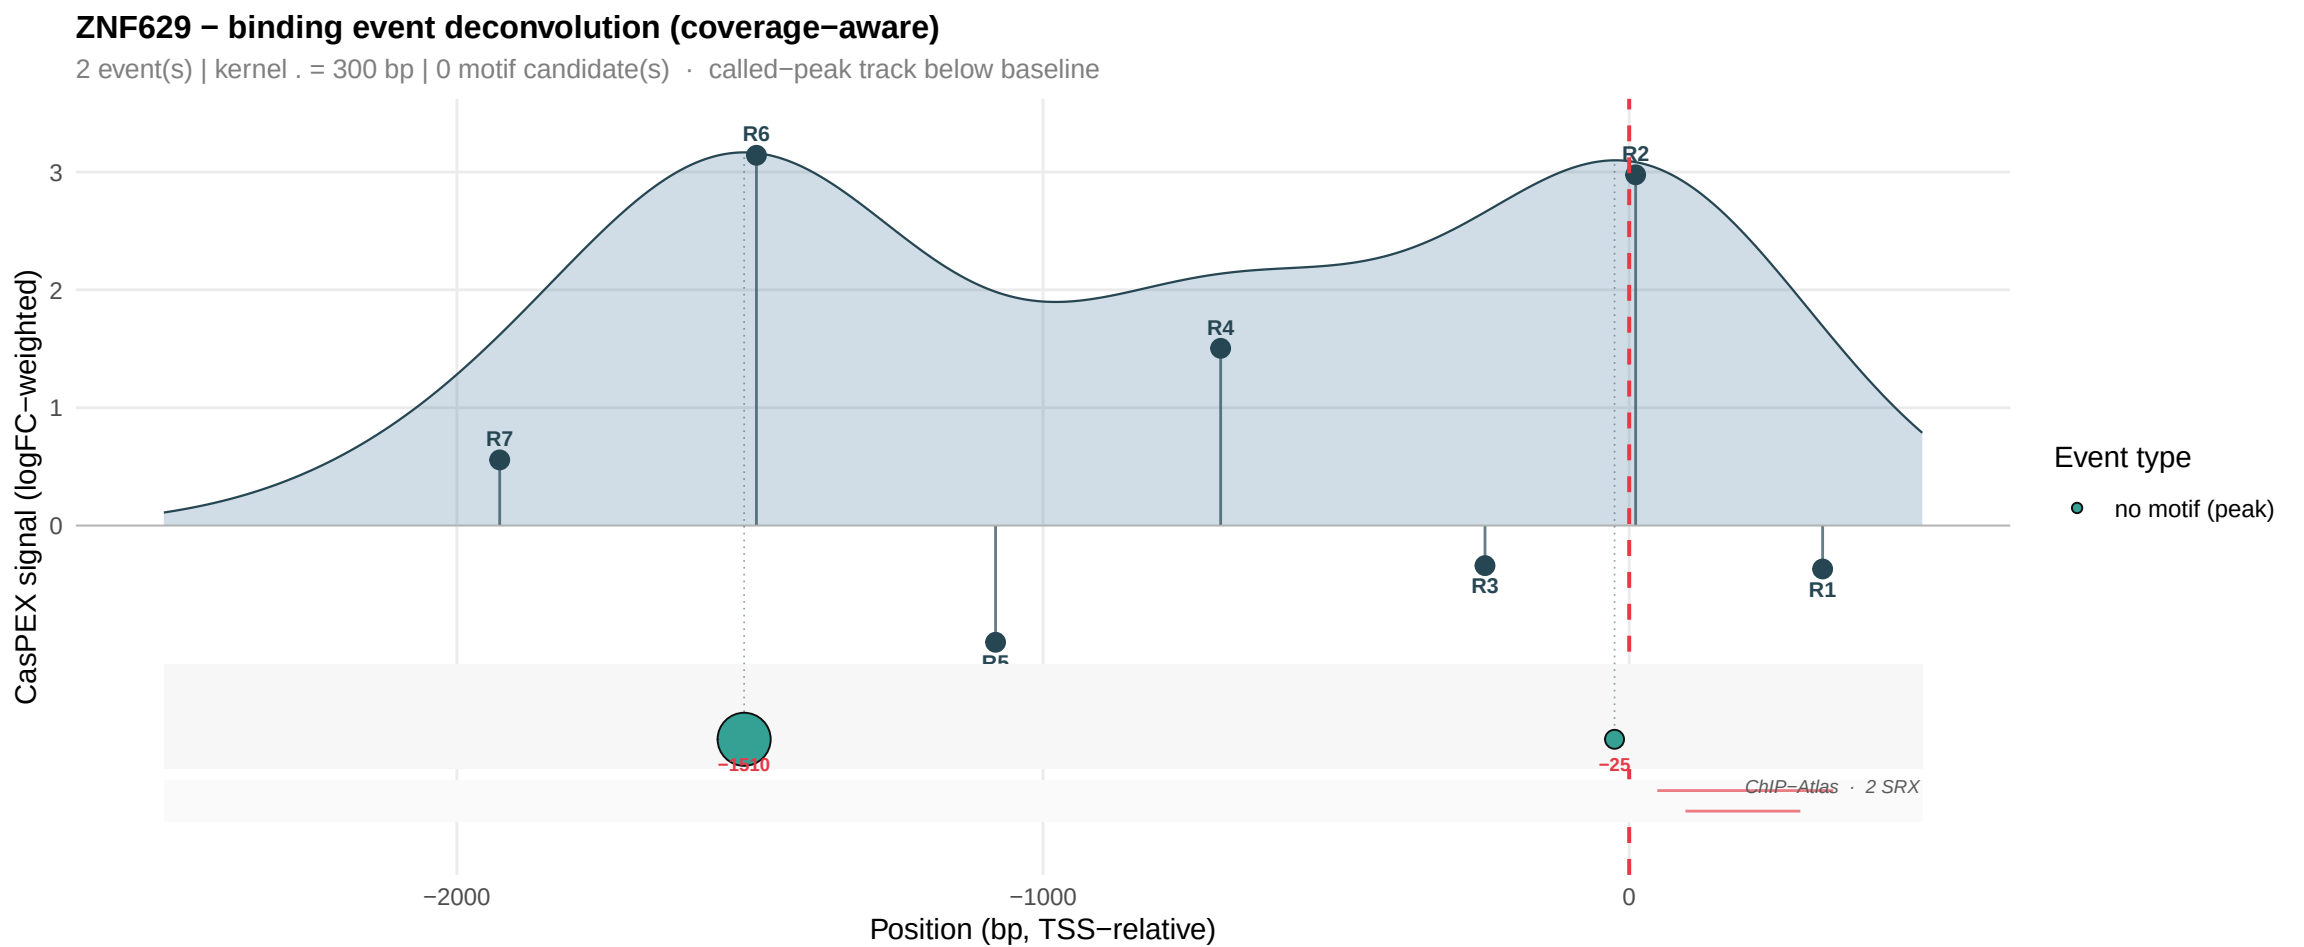
ZNF629 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R6
R2
R4
R7
R3
R1
R5
−1510
−25
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

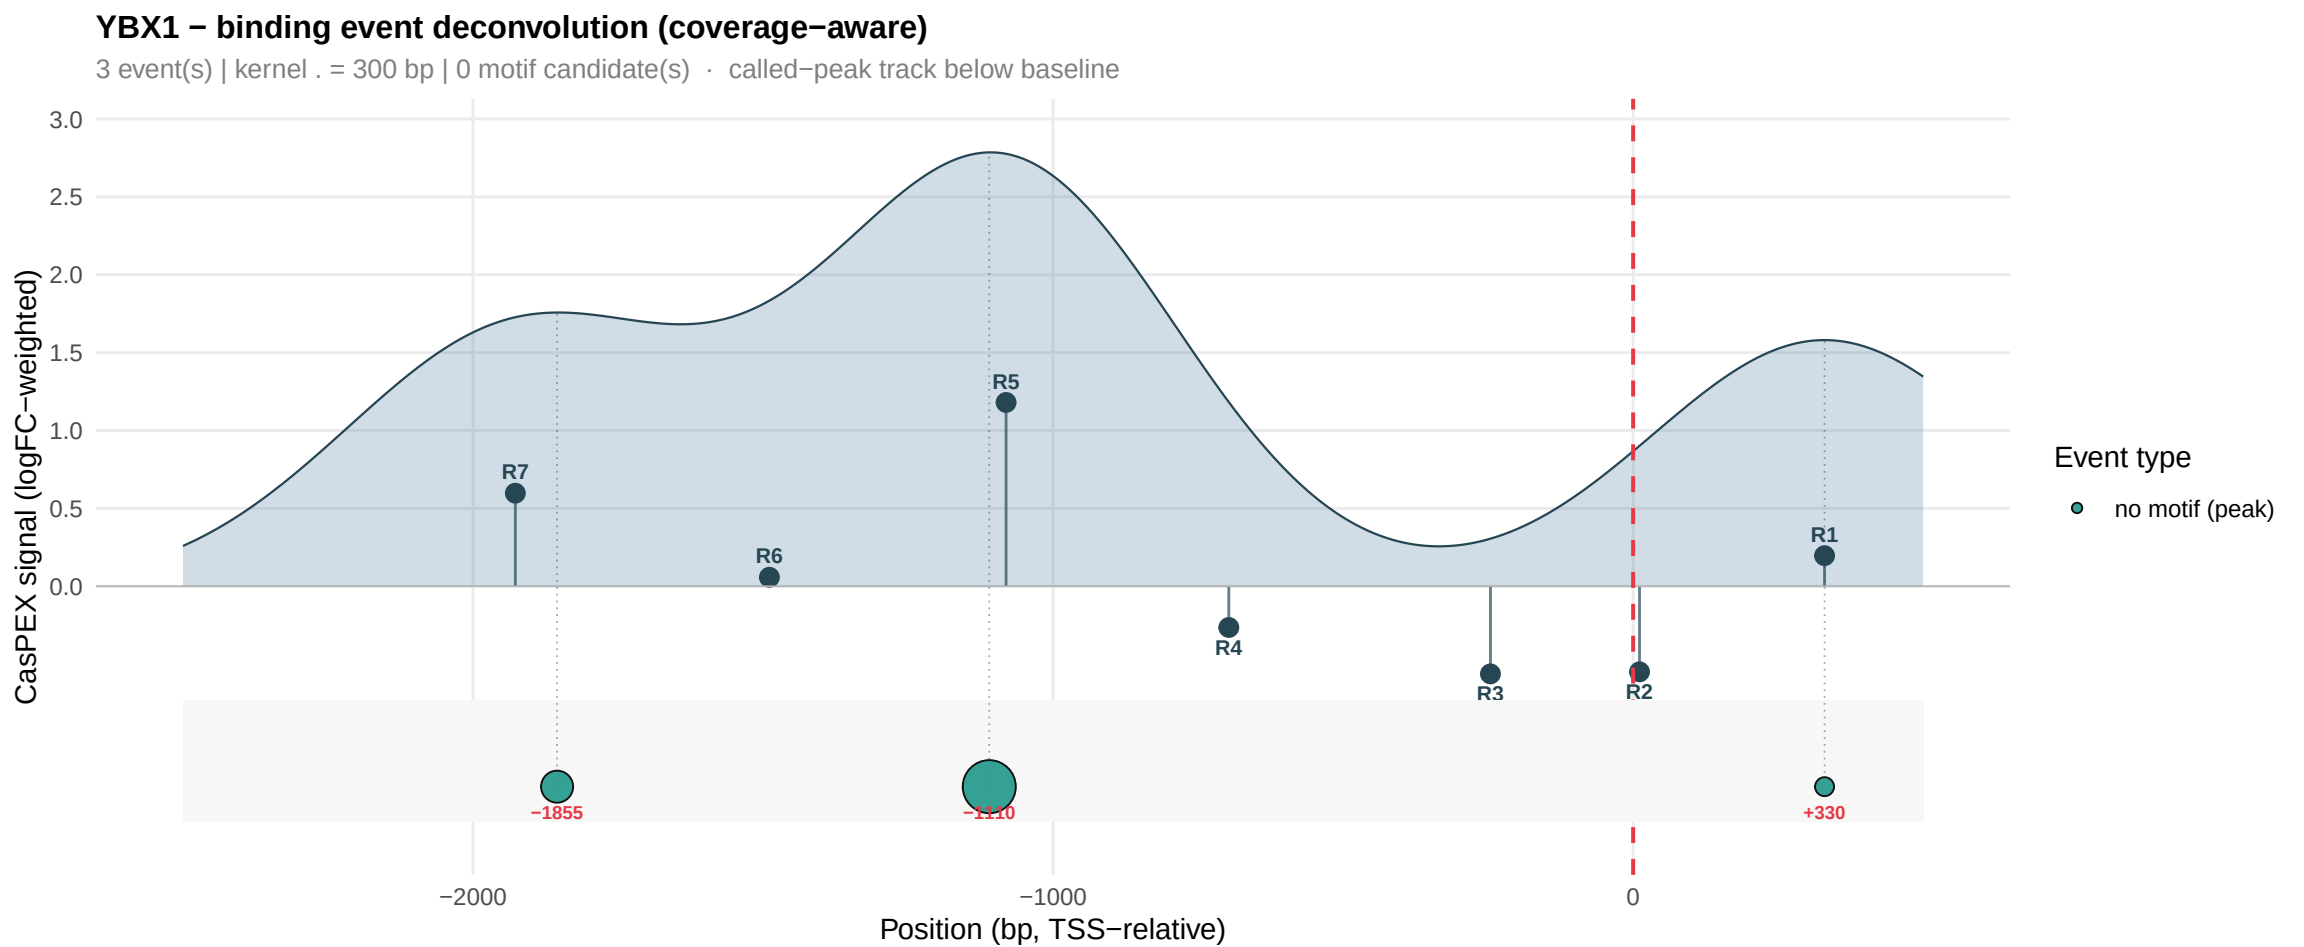
YBX1 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1855
−1110
+330
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

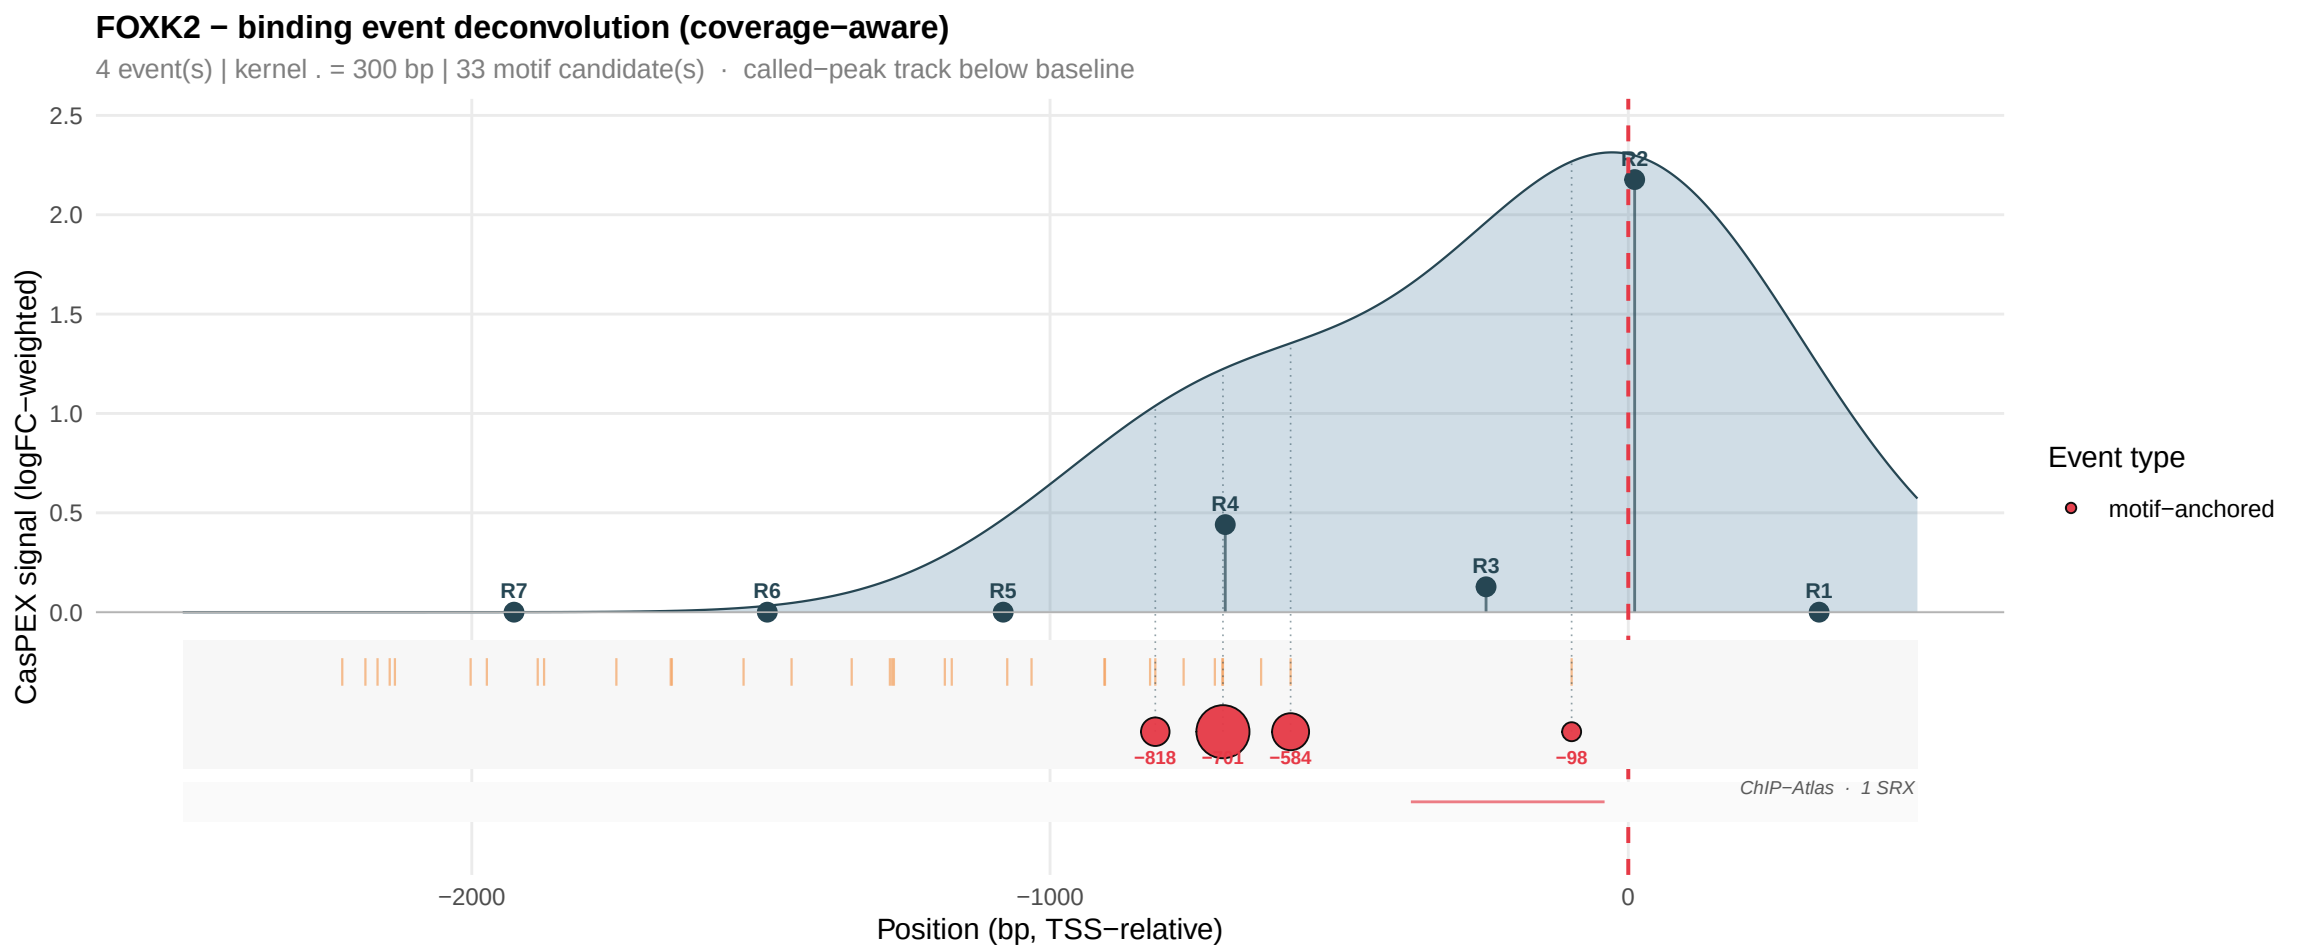
FOXK2 − binding event deconvolution (coverage−aware)
4 event(s) | kernel . = 300 bp | 33 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−818
−584
−98
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

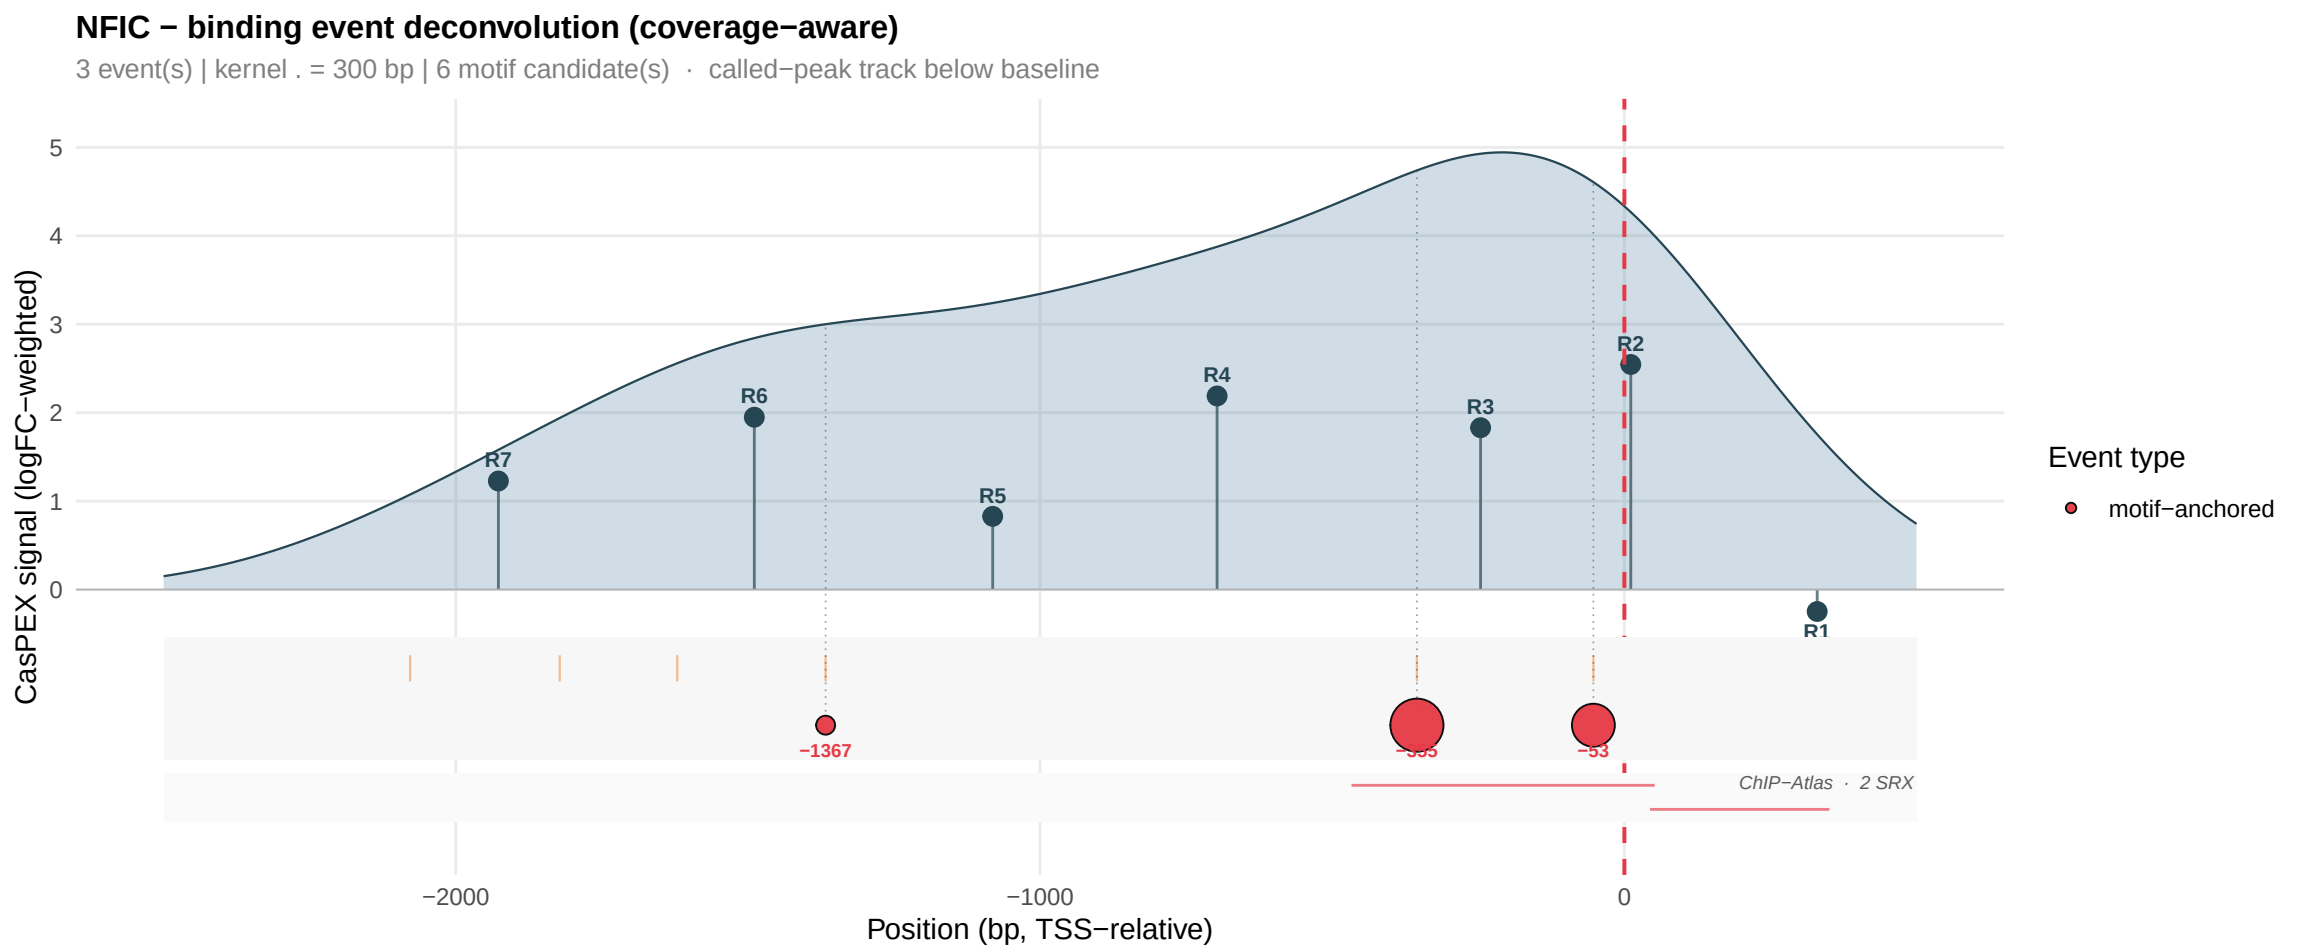
NFIC − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1367
−53
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

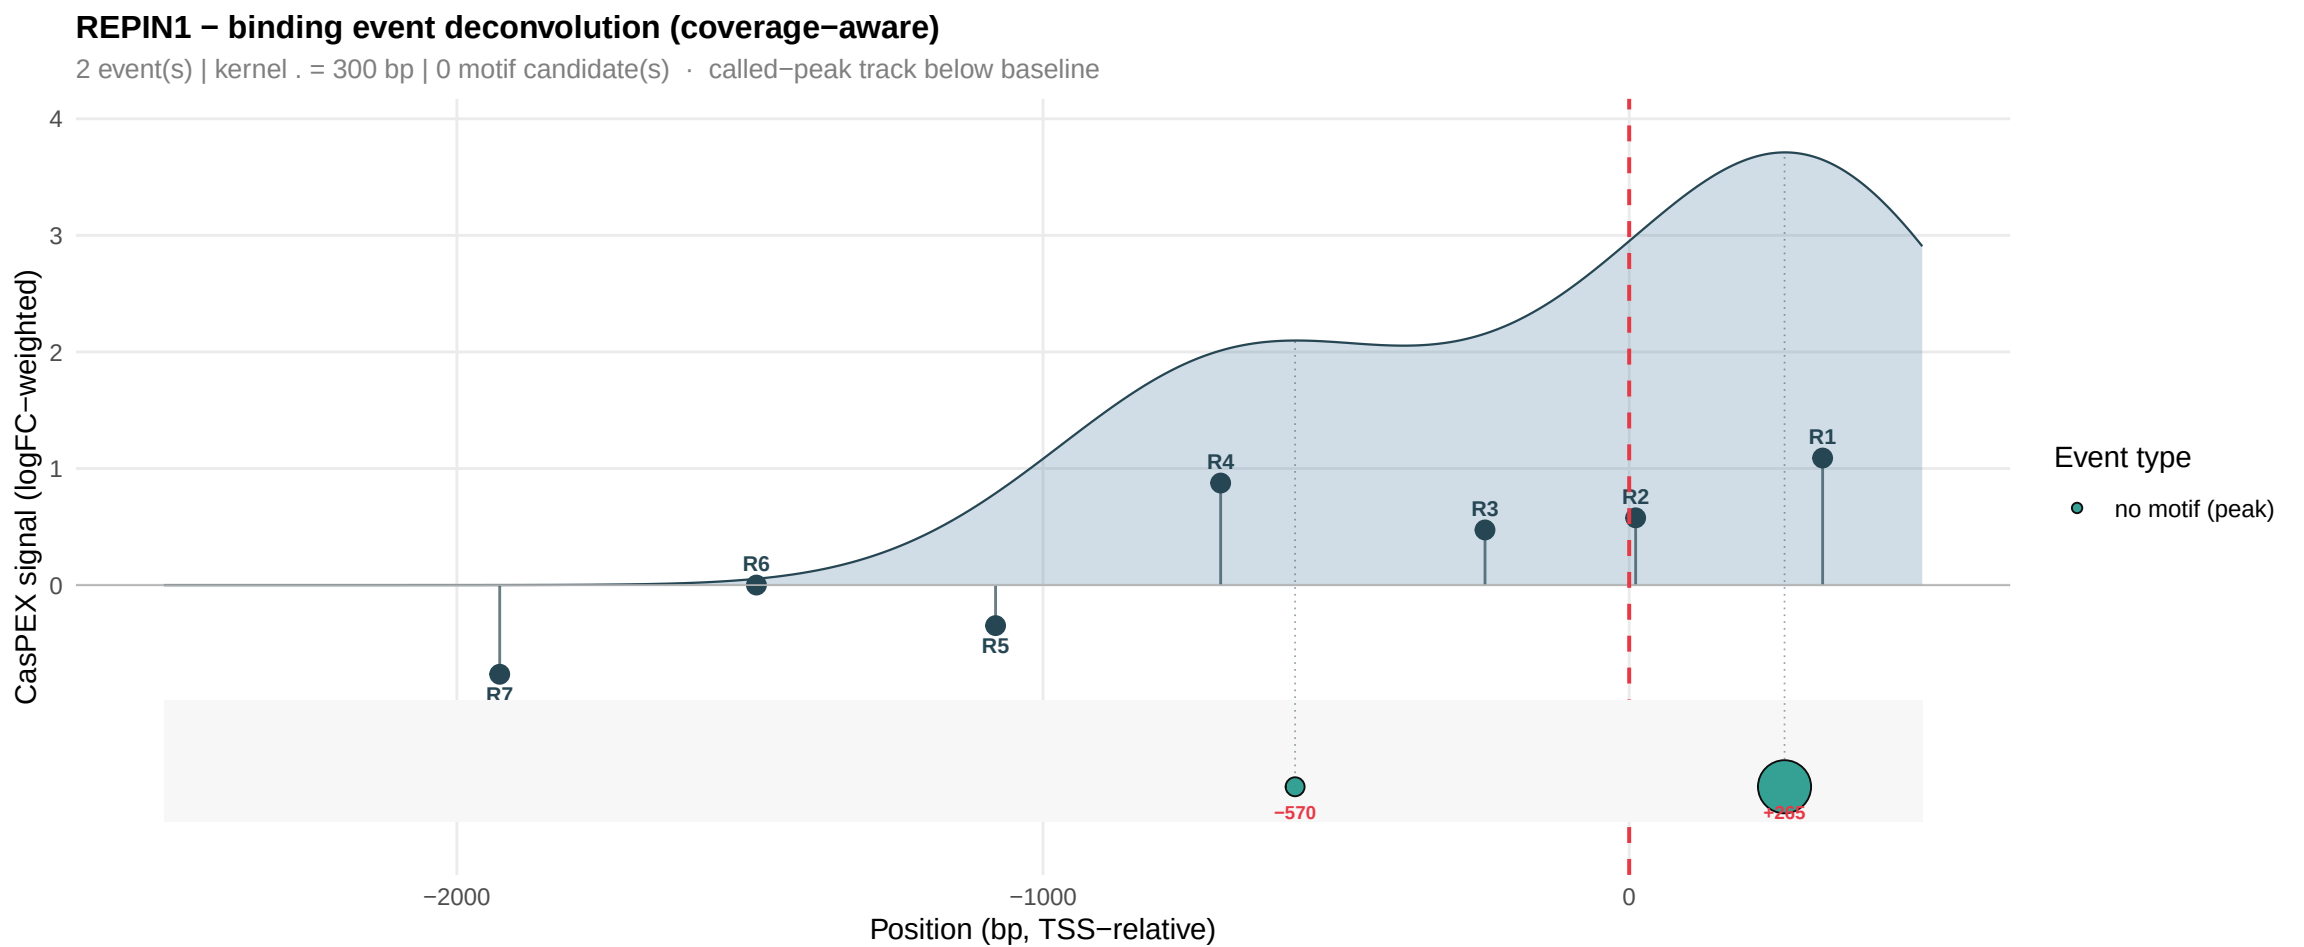
REPIN1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−570
+265
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

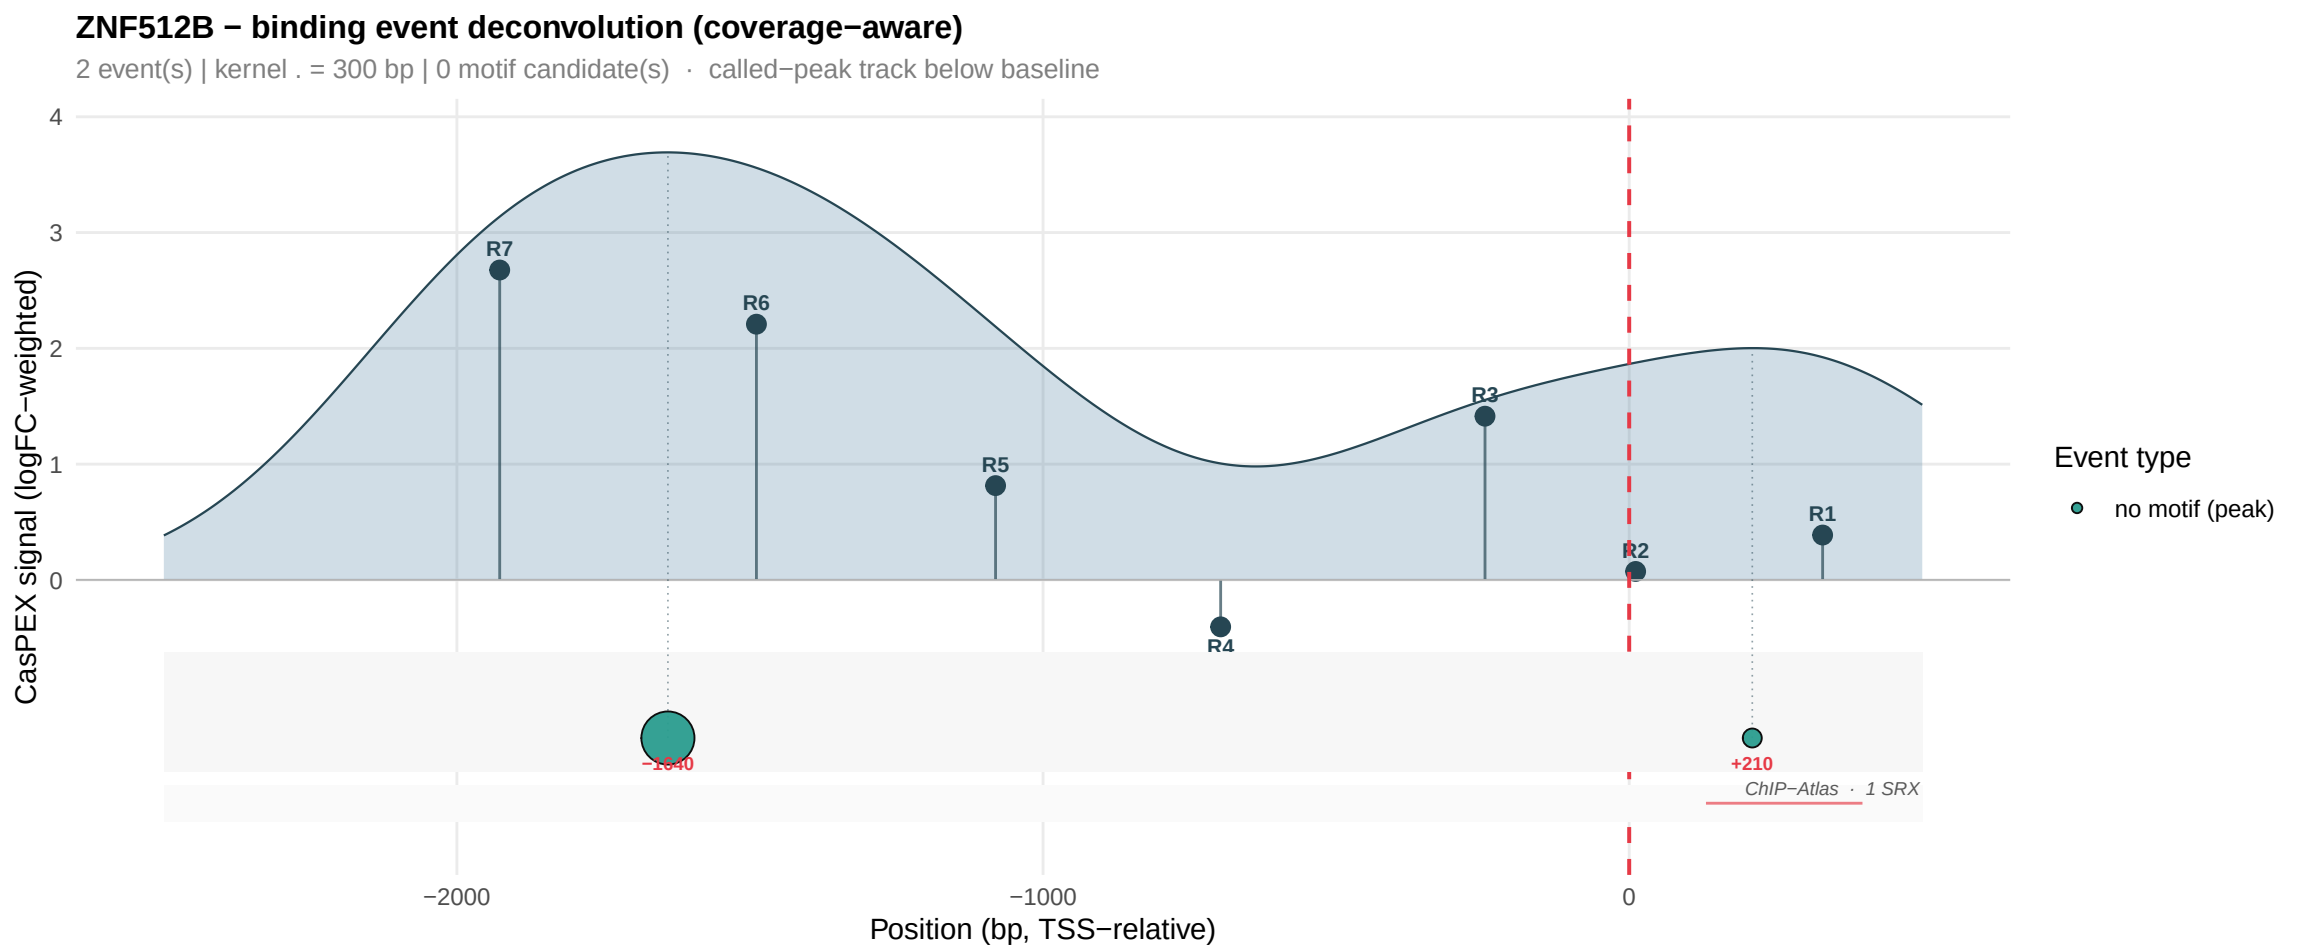
ZNF512B − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1640
+210
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

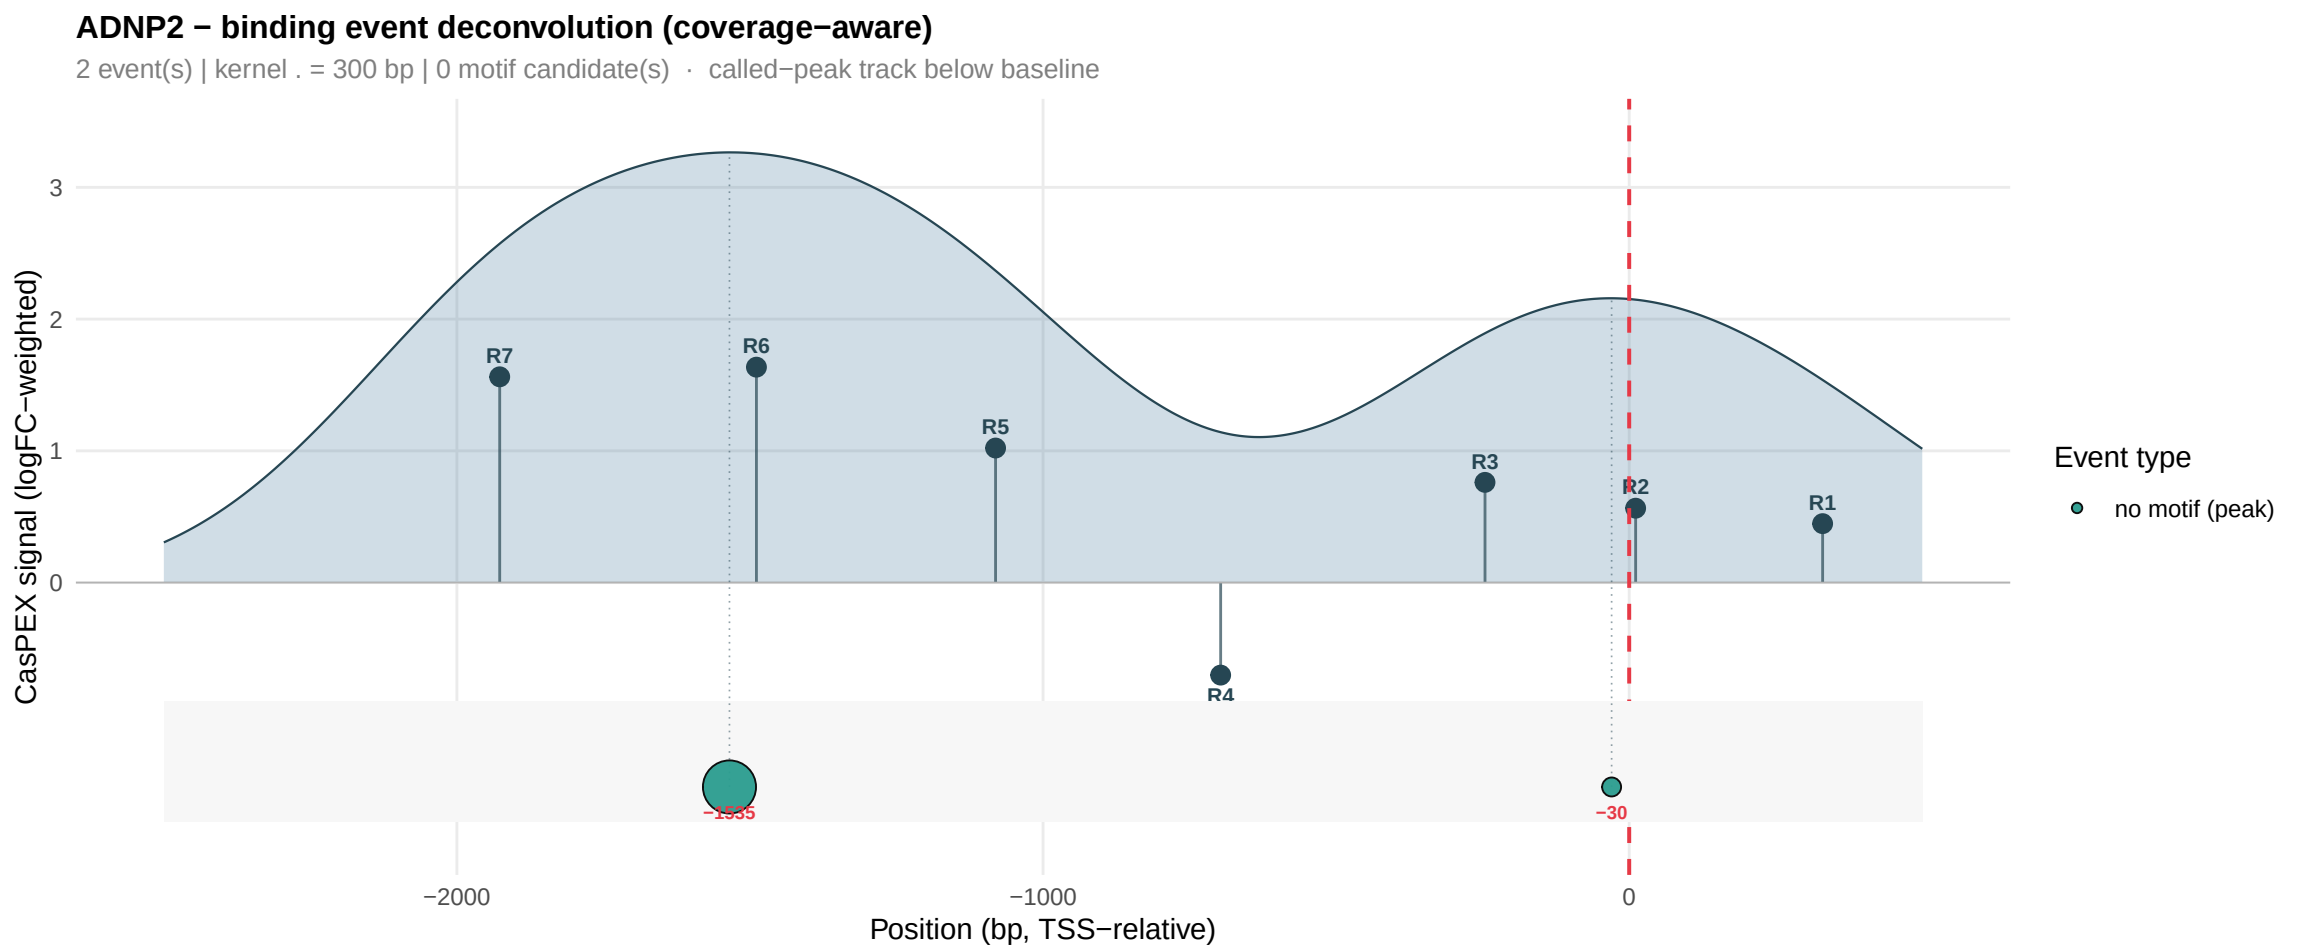
ADNP2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1535
−30
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

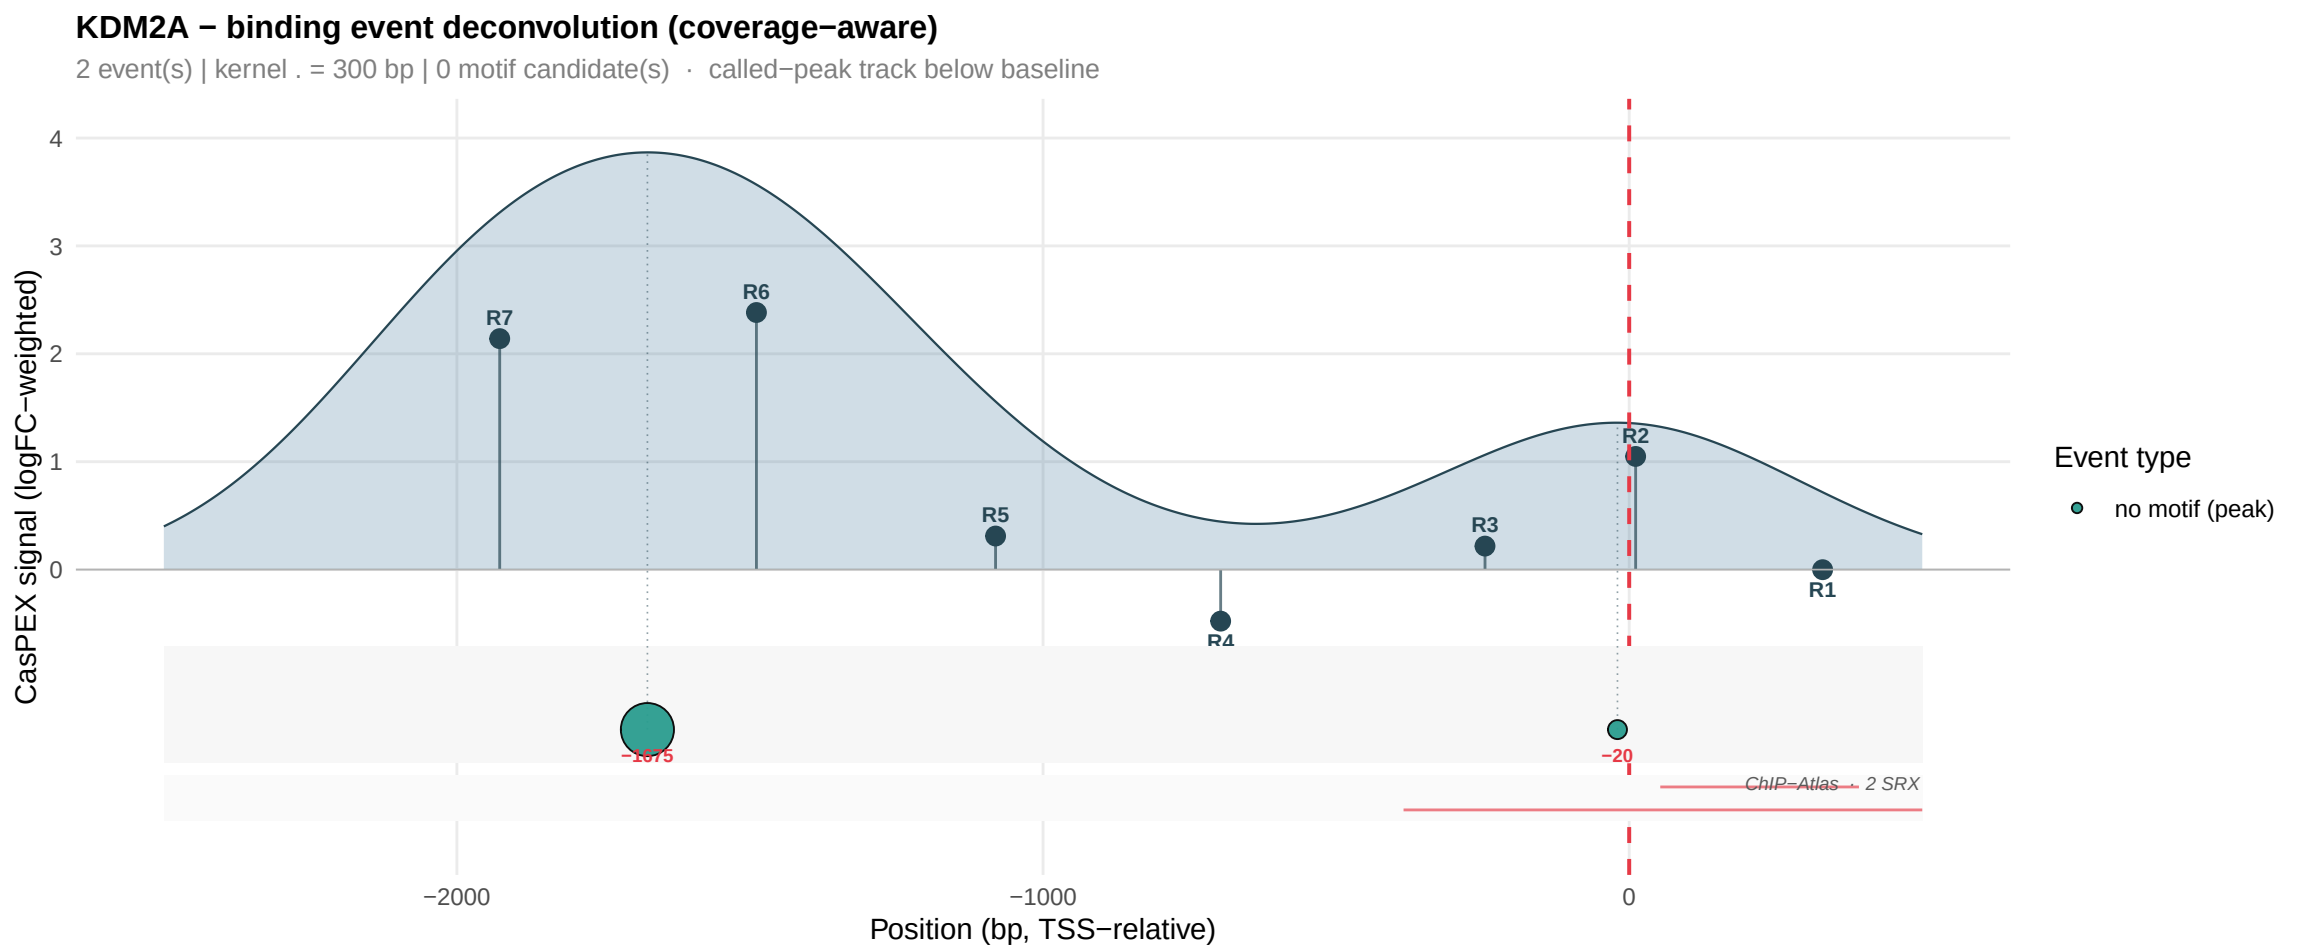
KDM2A − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1575
−20
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

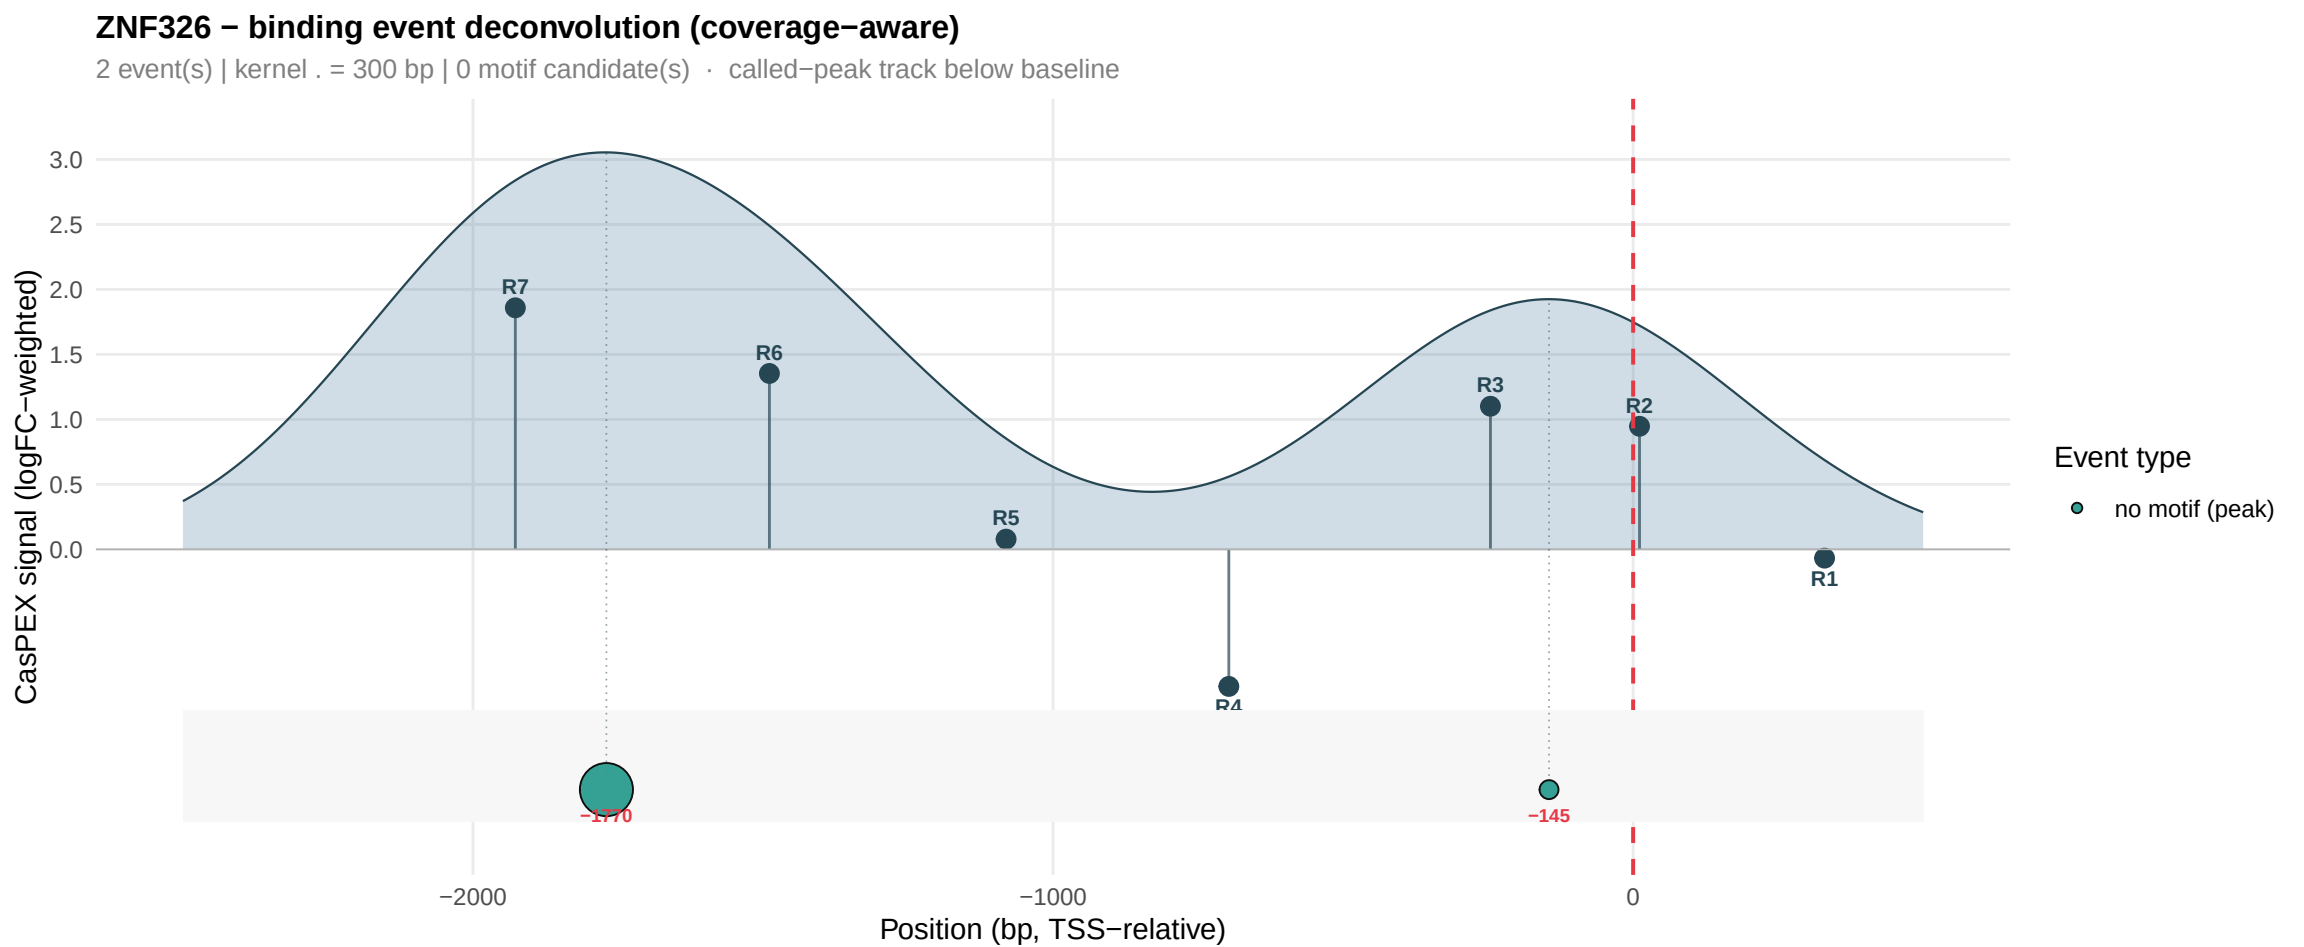
ZNF326 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1770
−145
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

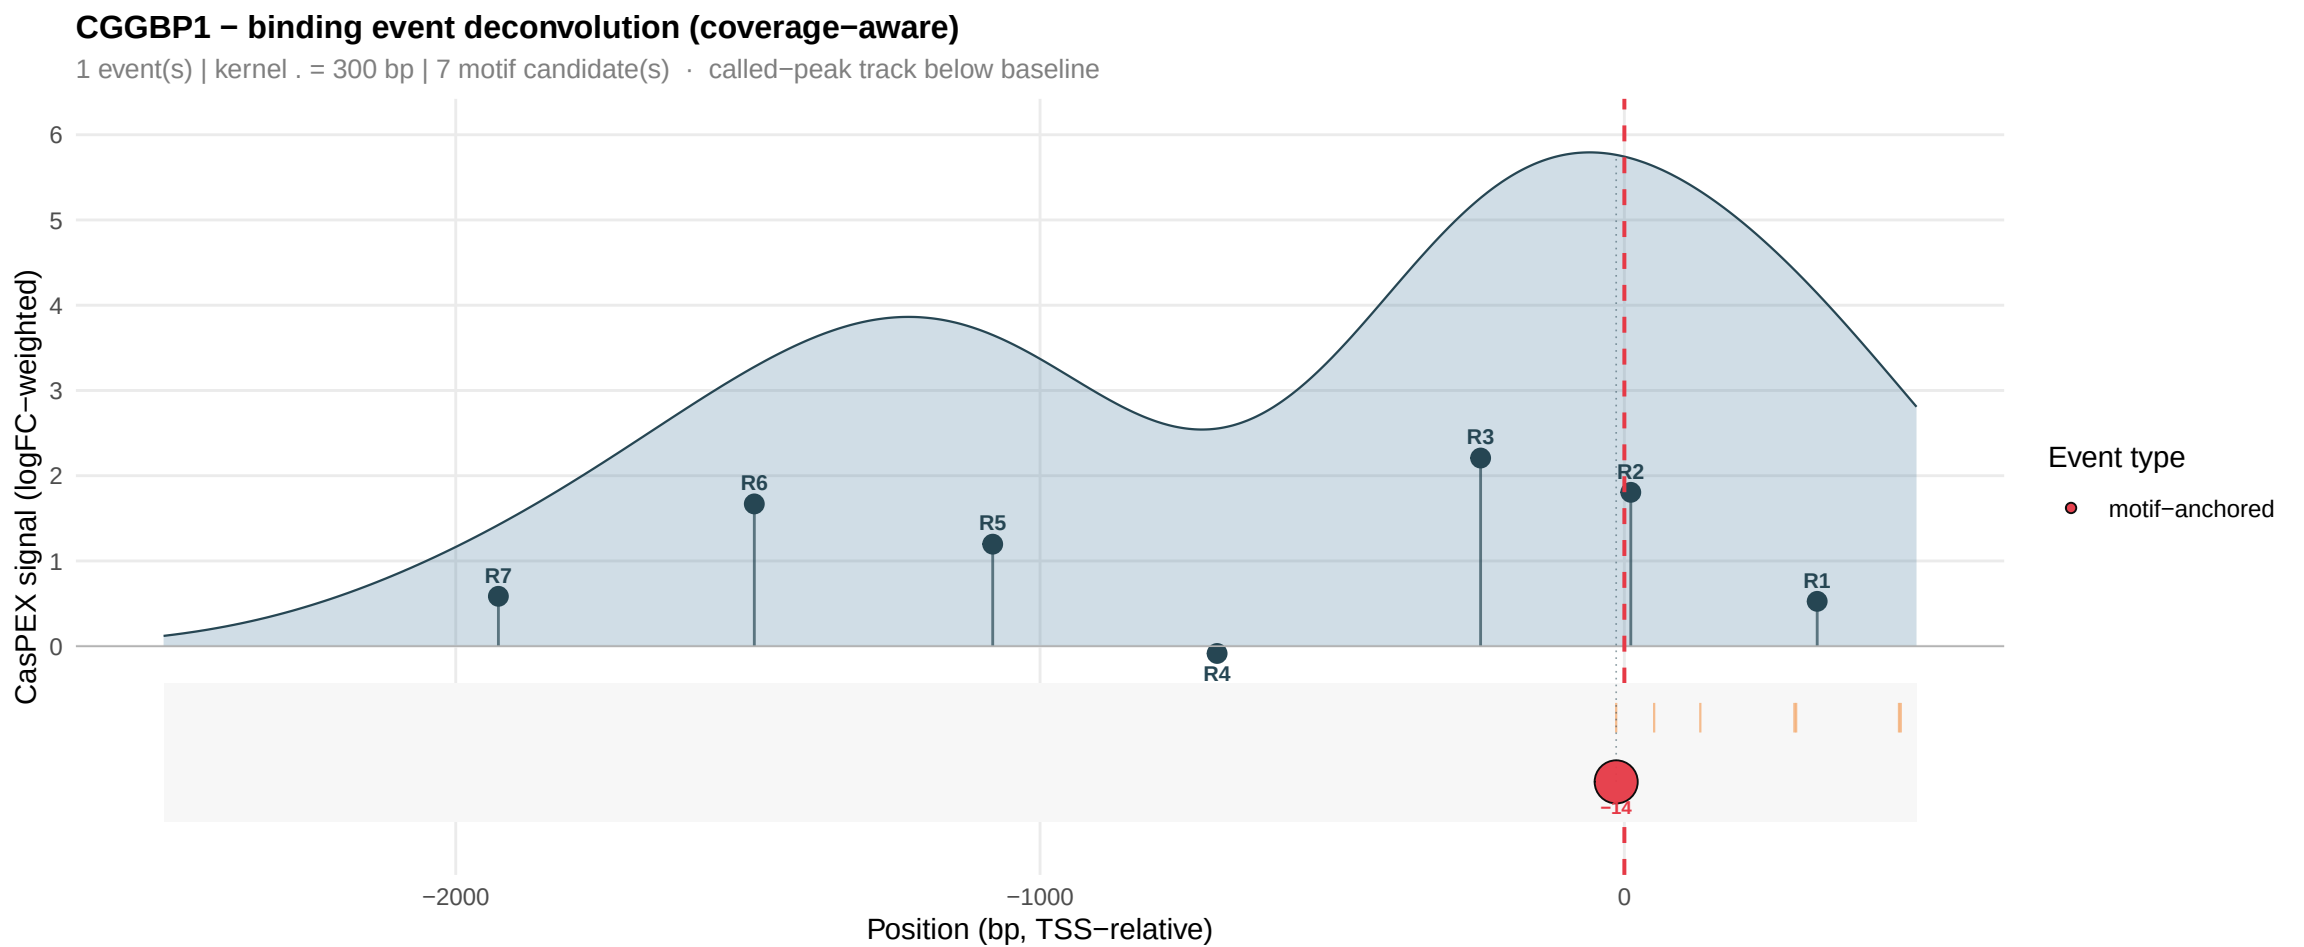
CGGBP1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 7 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
6
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−14
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

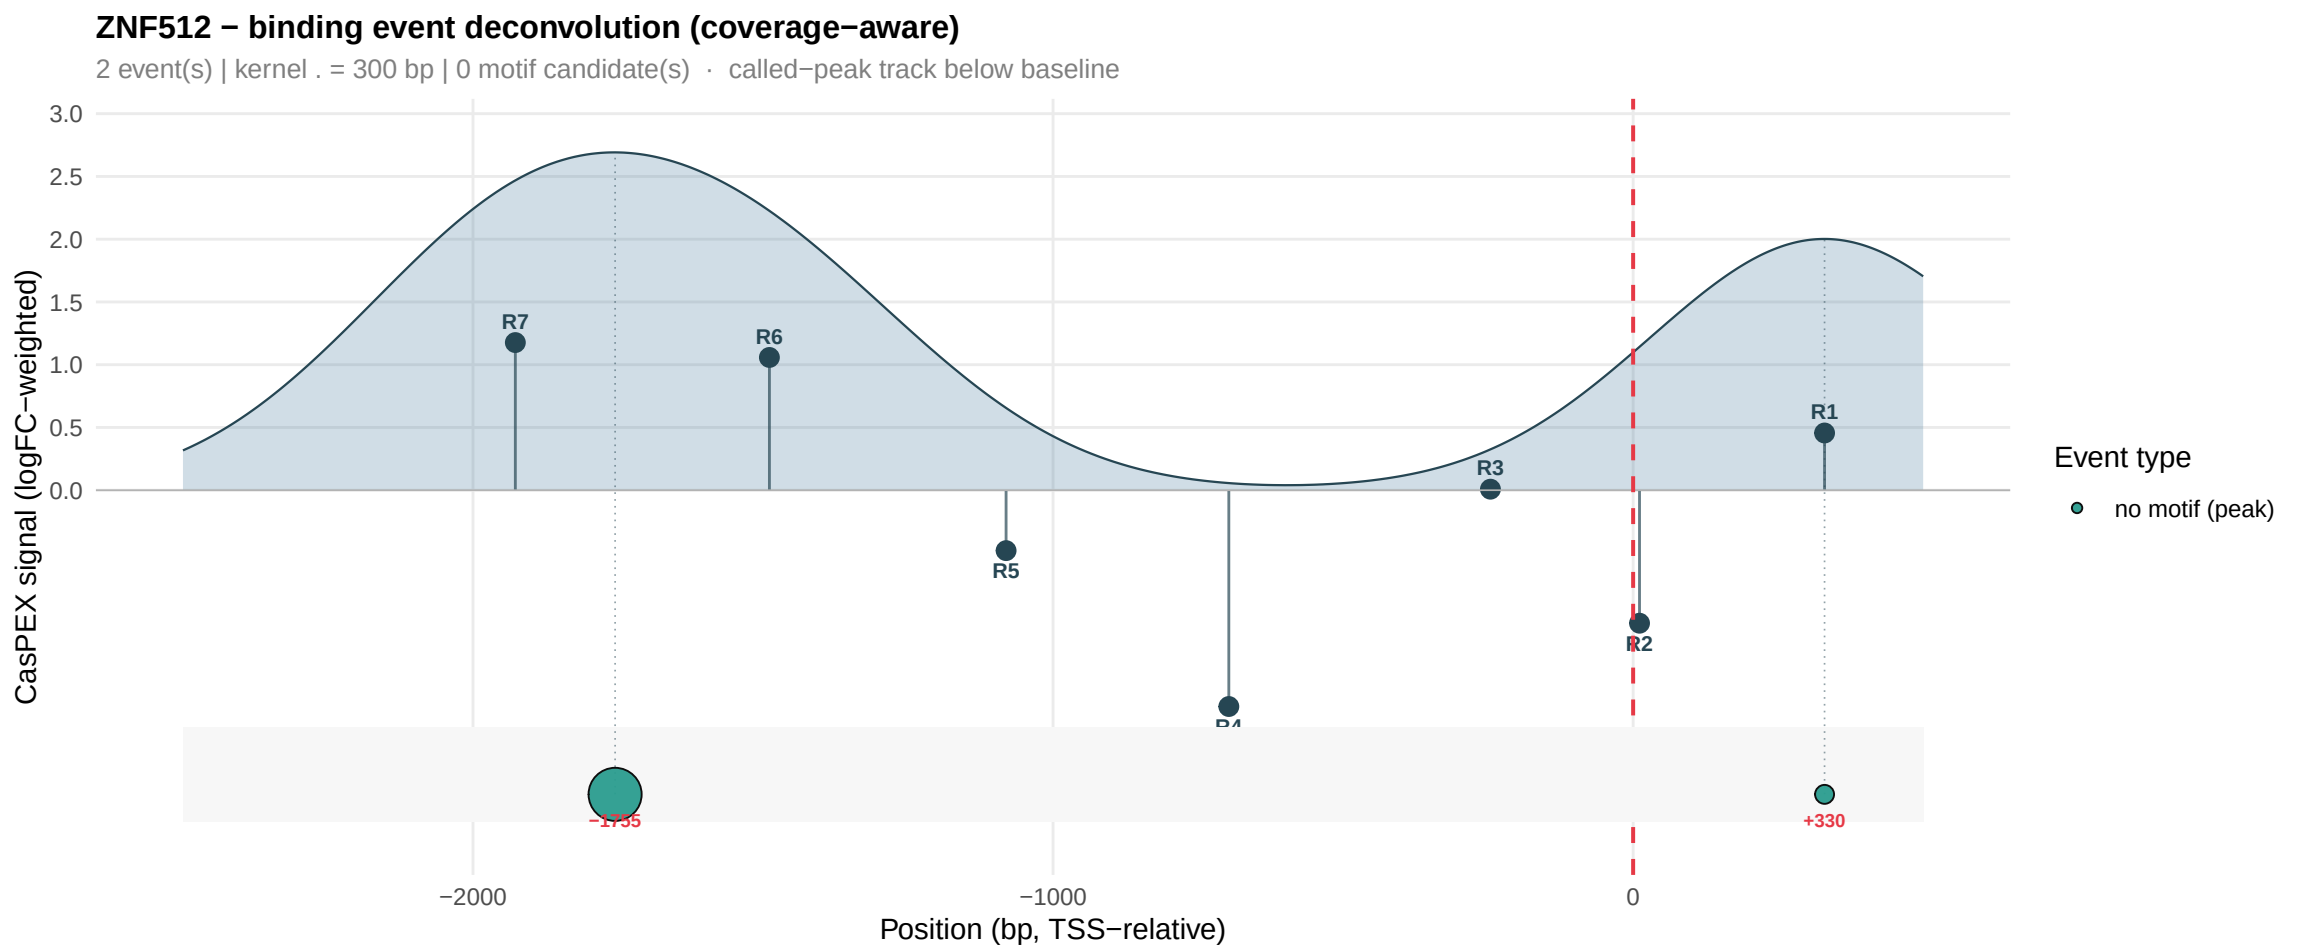
ZNF512 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1755
+330
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

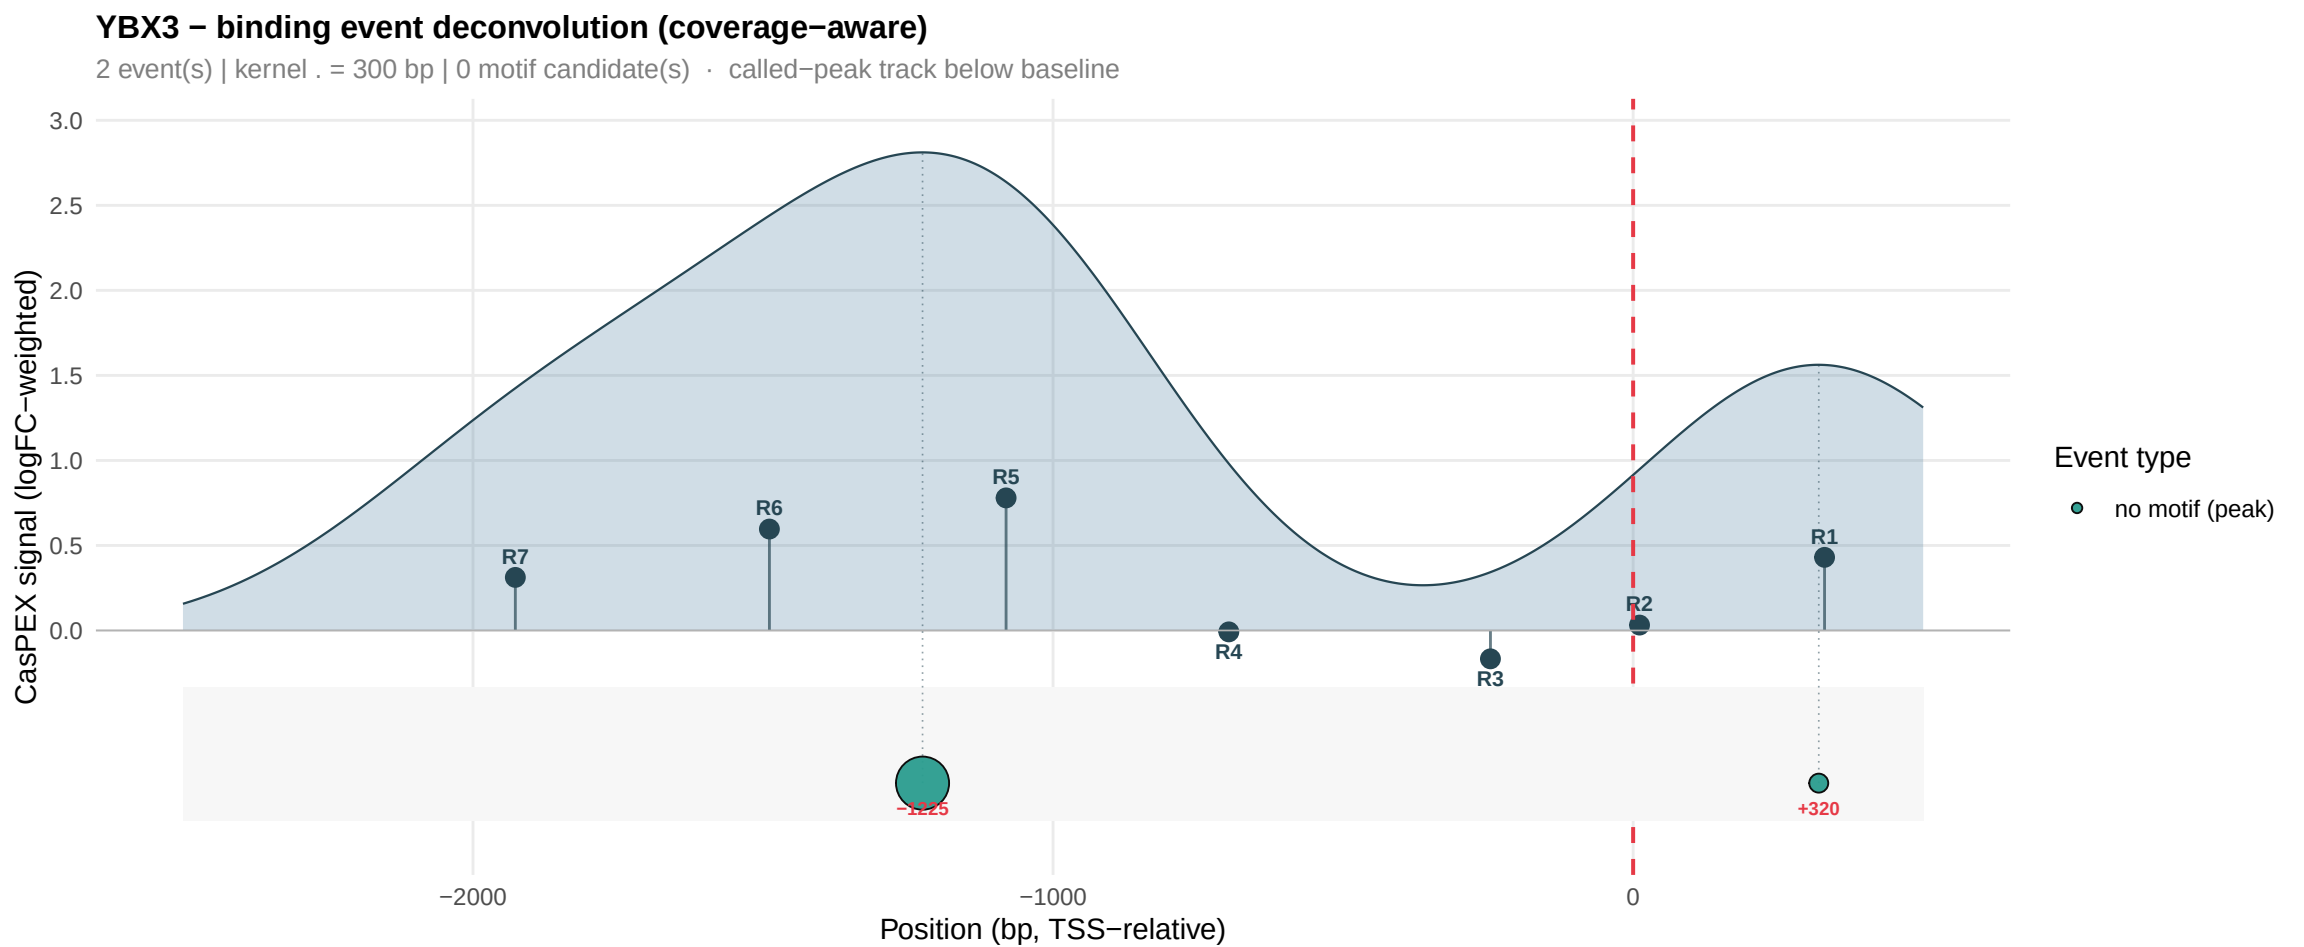
YBX3 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1225
+320
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

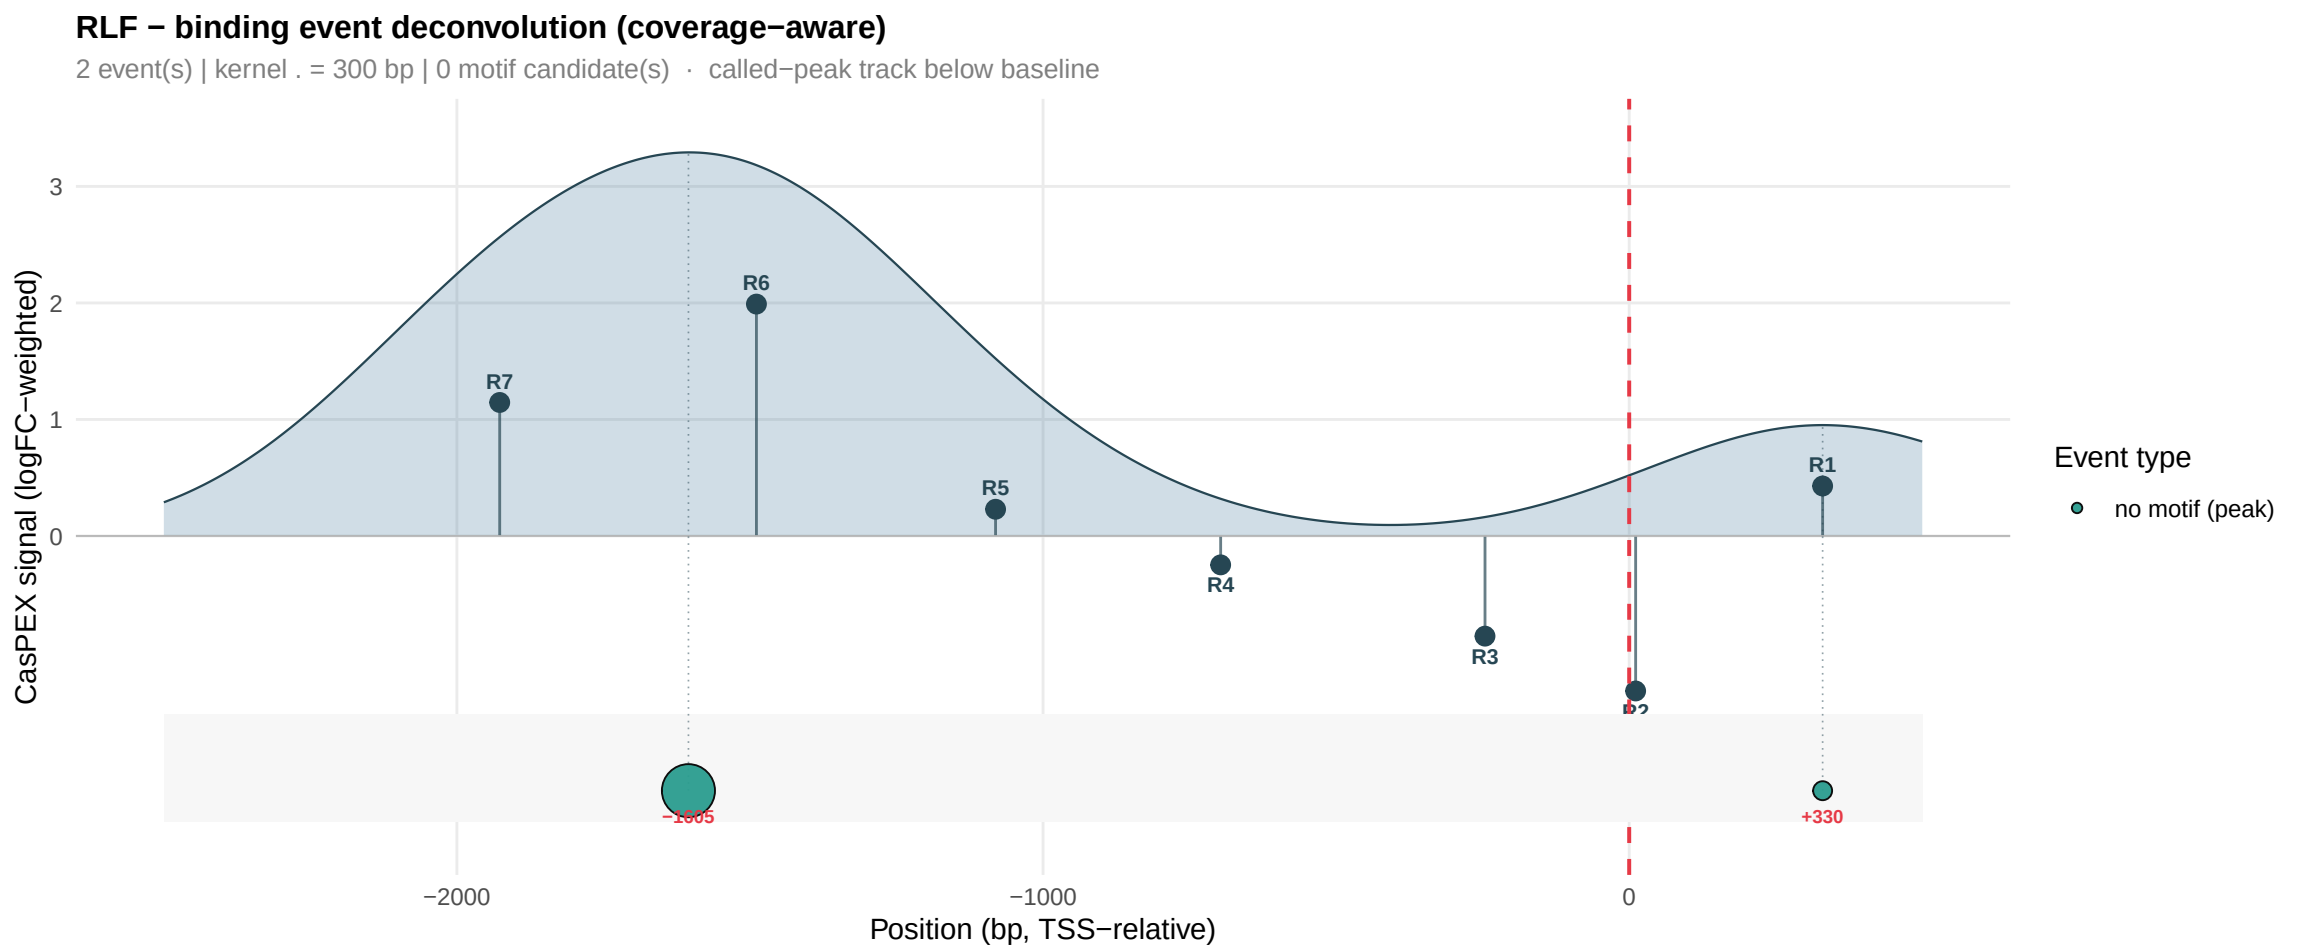
RLF − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1605
+330
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

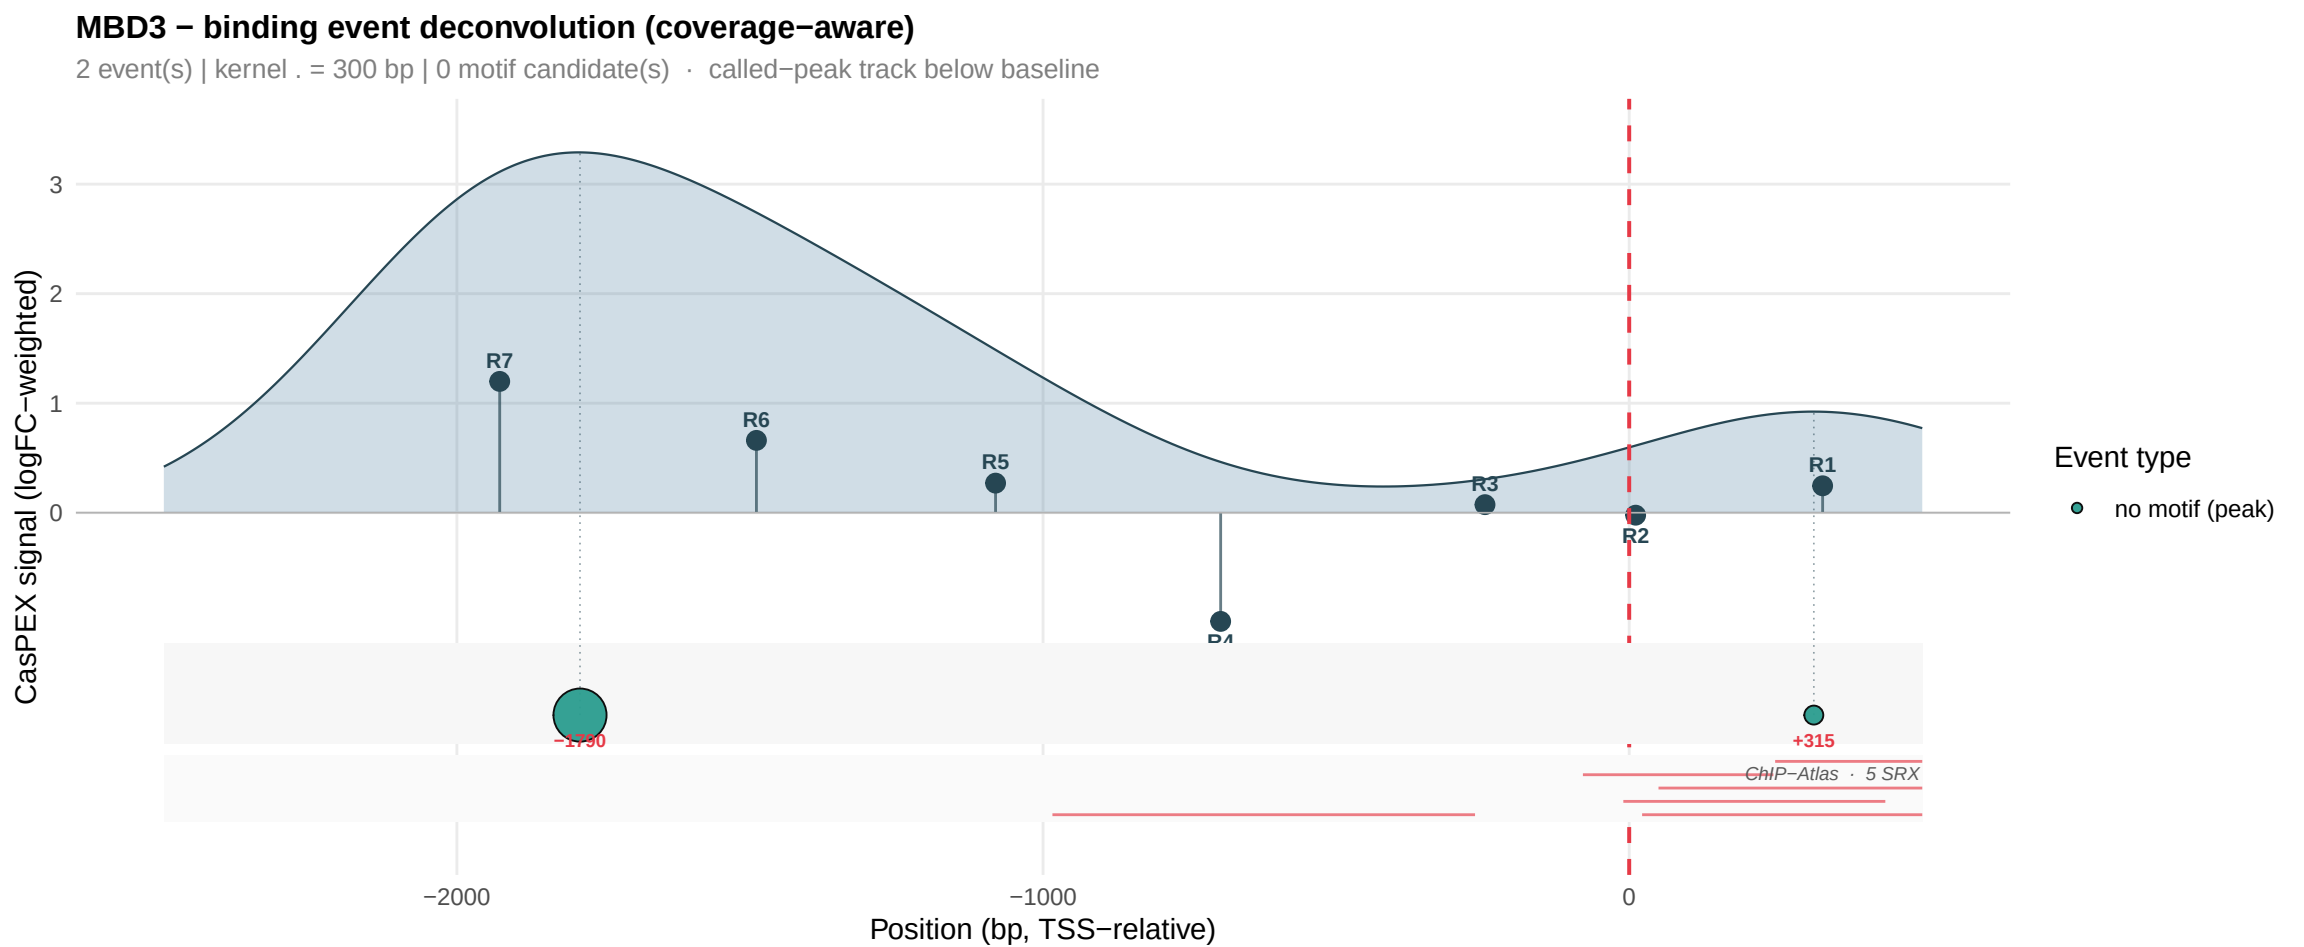
MBD3 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1790
+315
ChIP−Atlas · 5 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

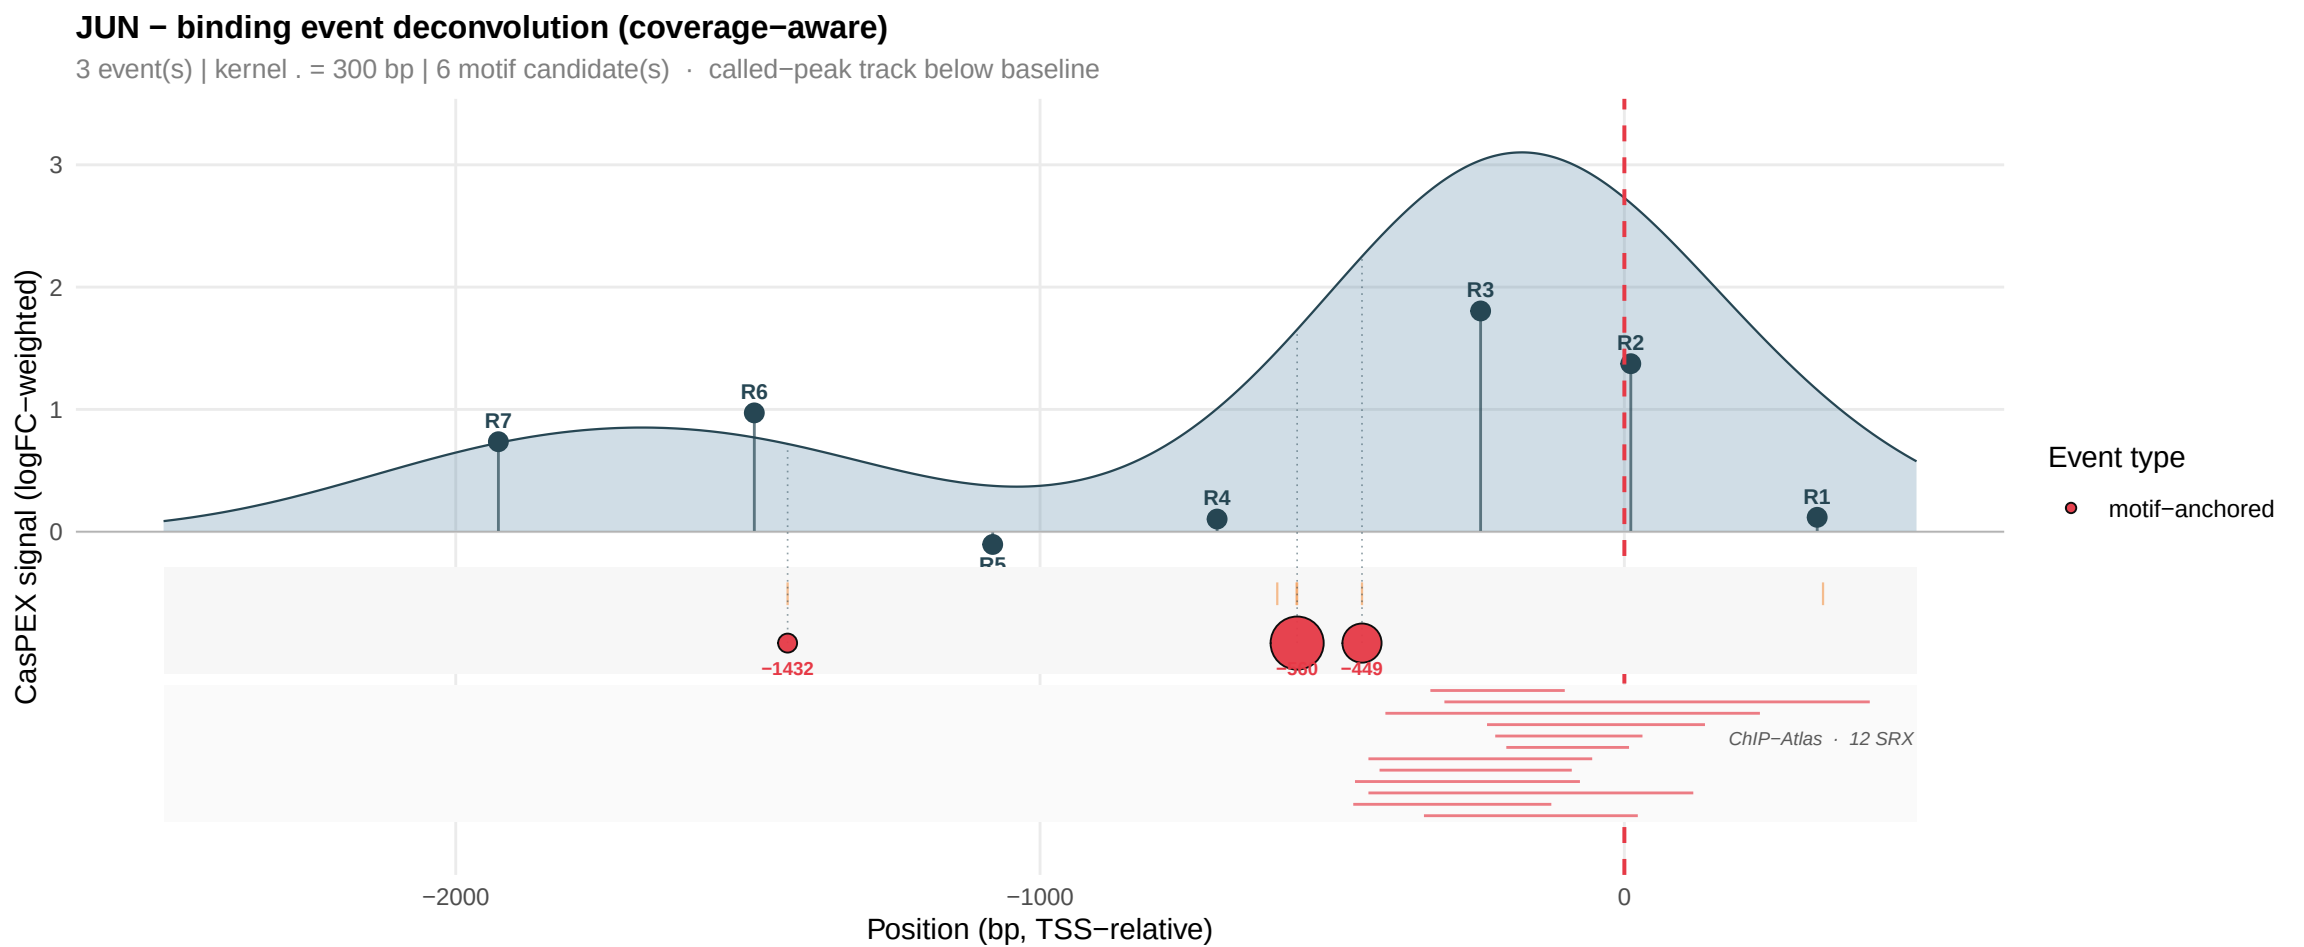
JUN − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1432
−380
−449
ChIP−Atlas · 12 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

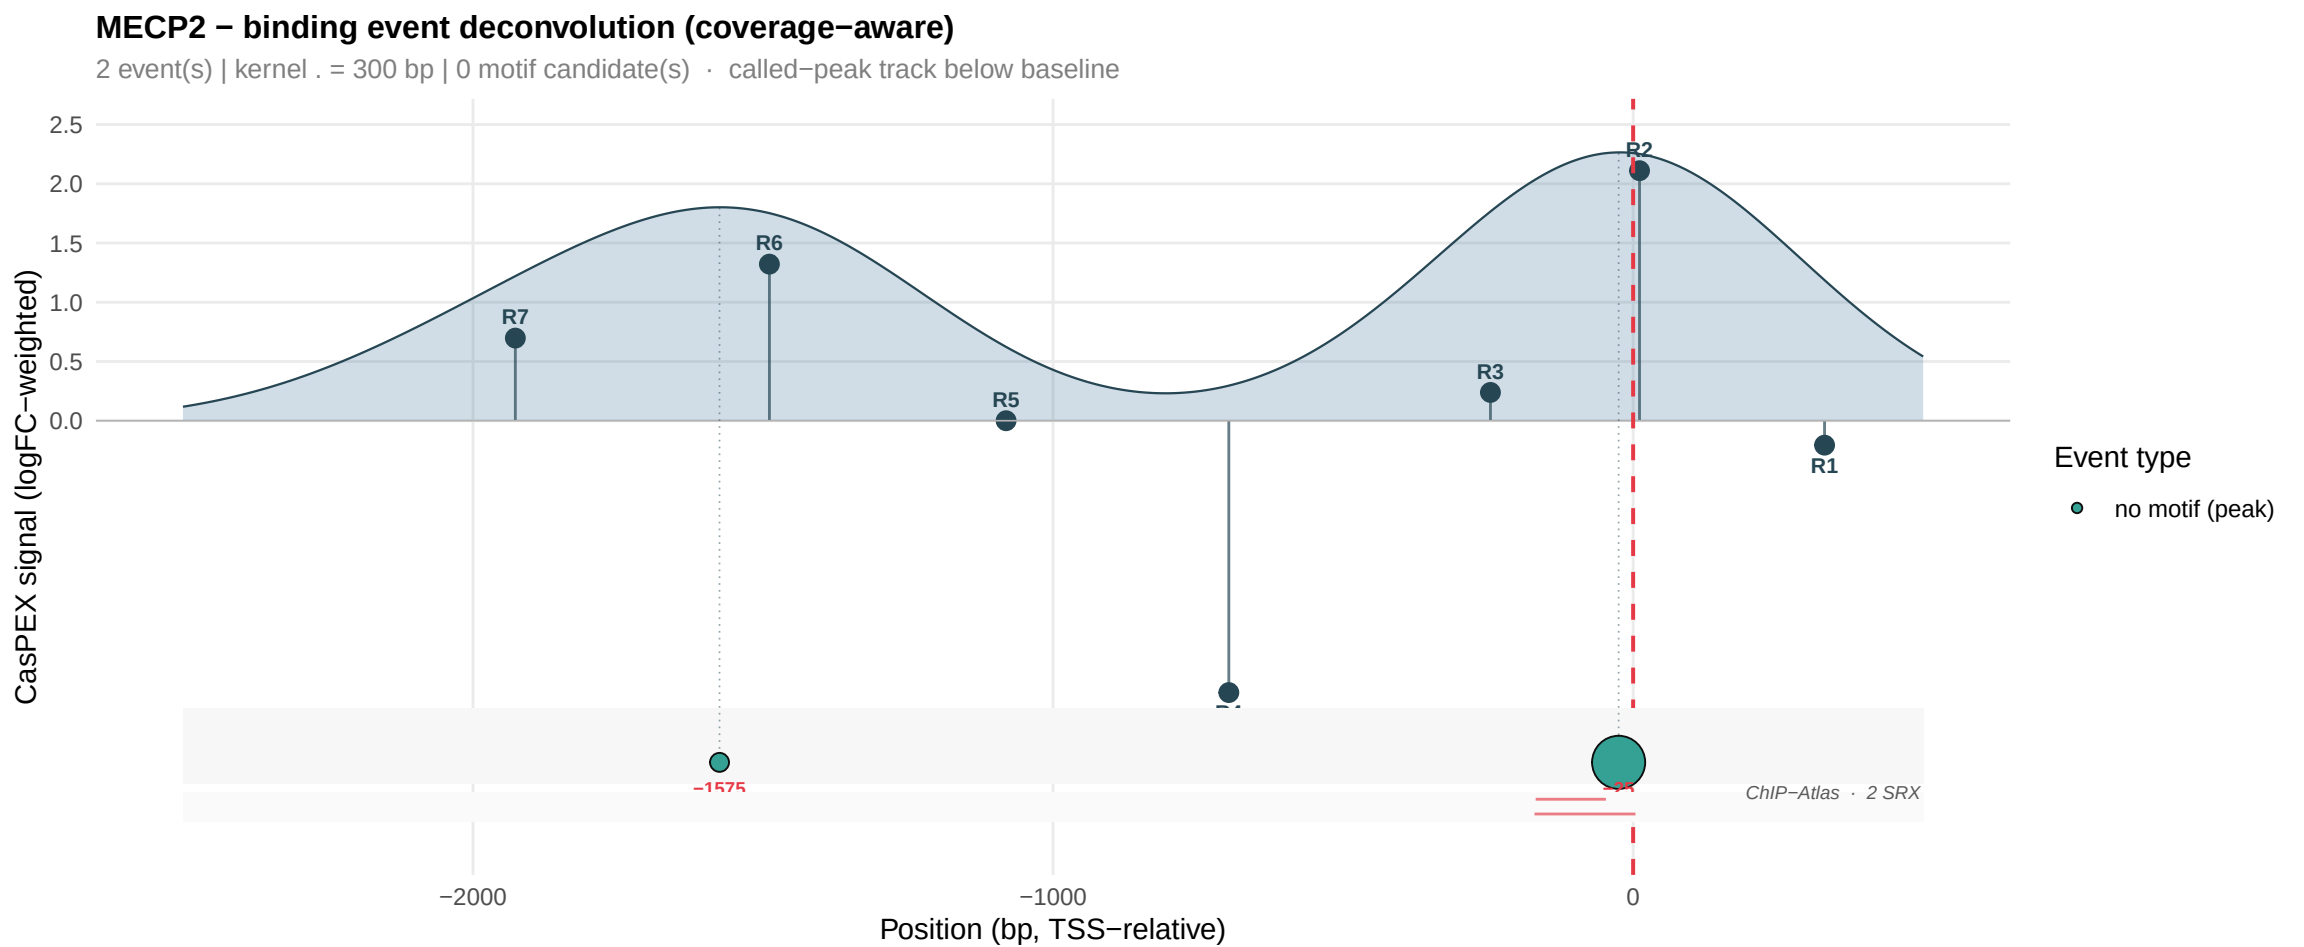
MECP2 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R3
R2
R1
−1575
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

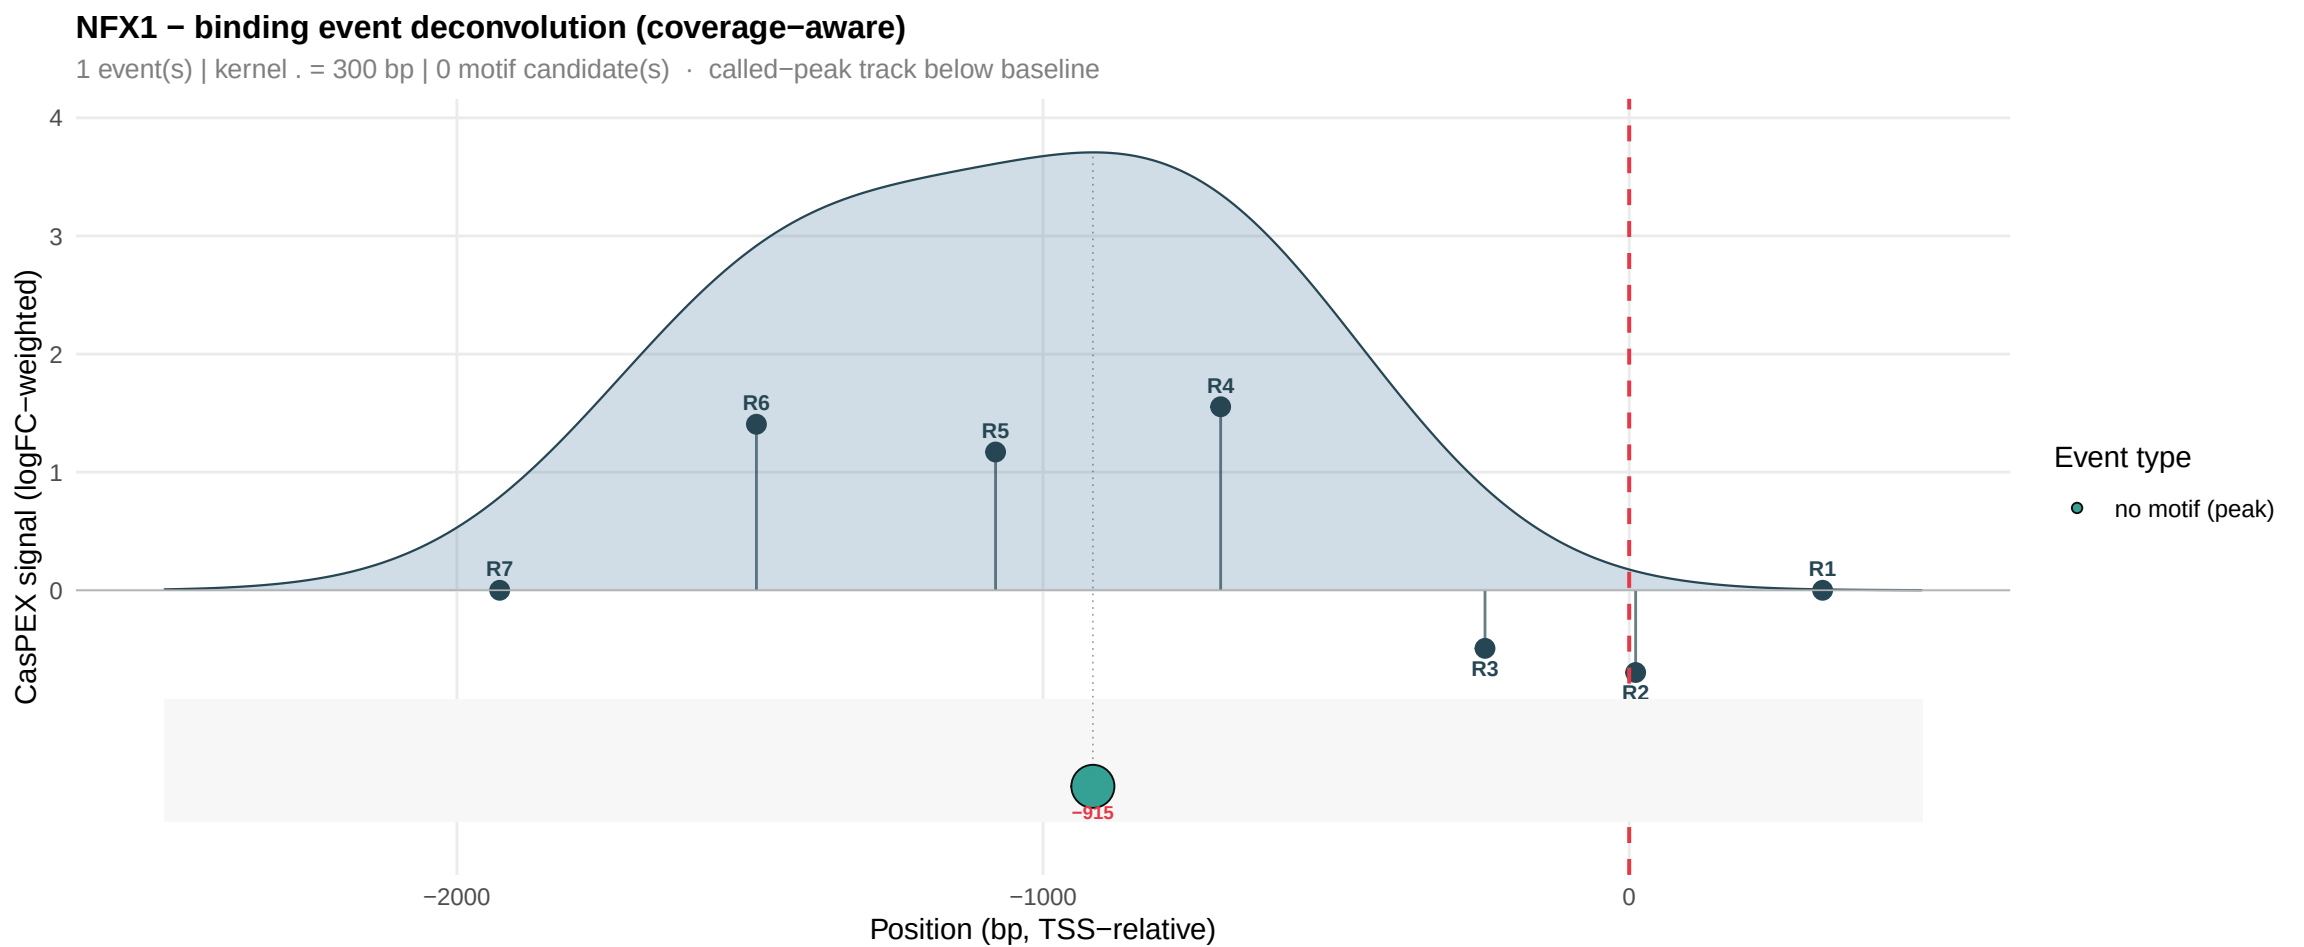
NFX1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−915
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

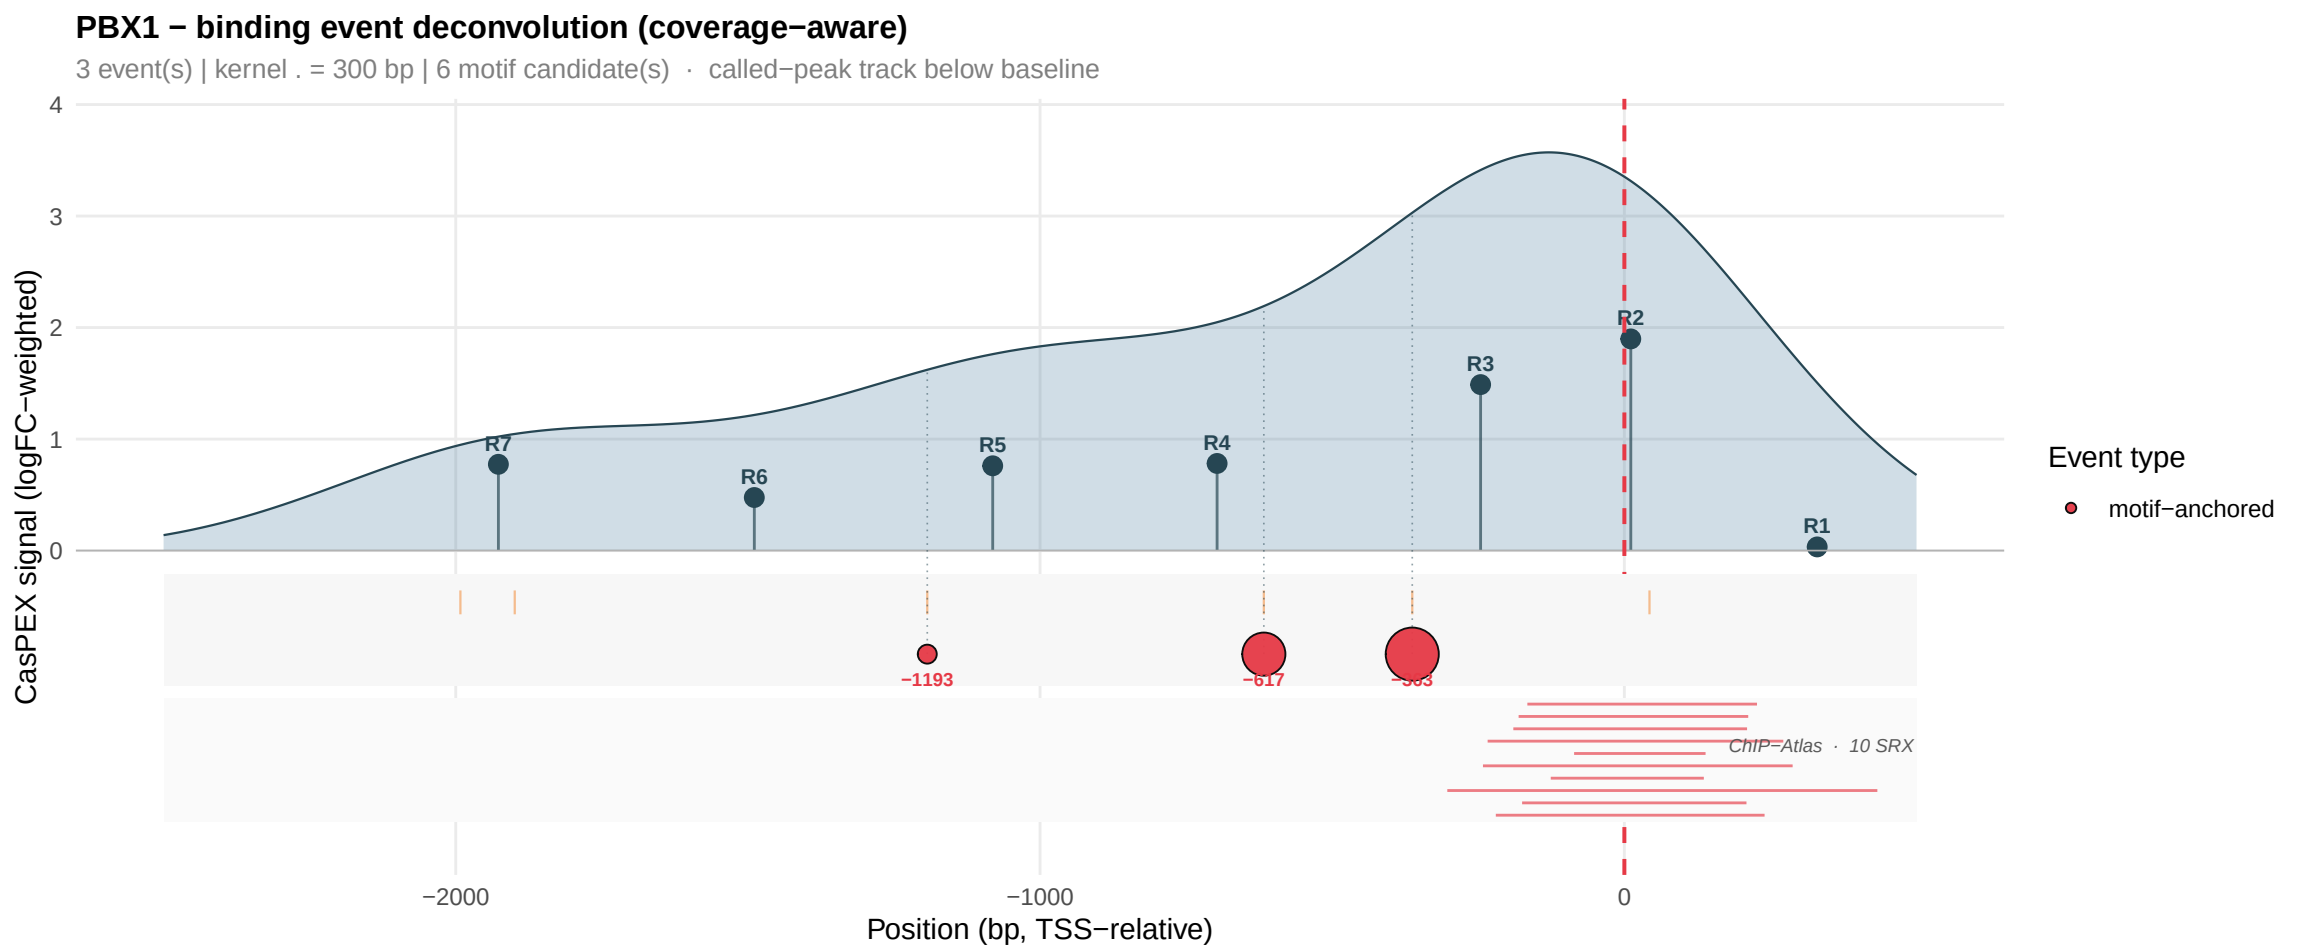
PBX1 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−1193
−617
−383
ChIP−Atlas · 10 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

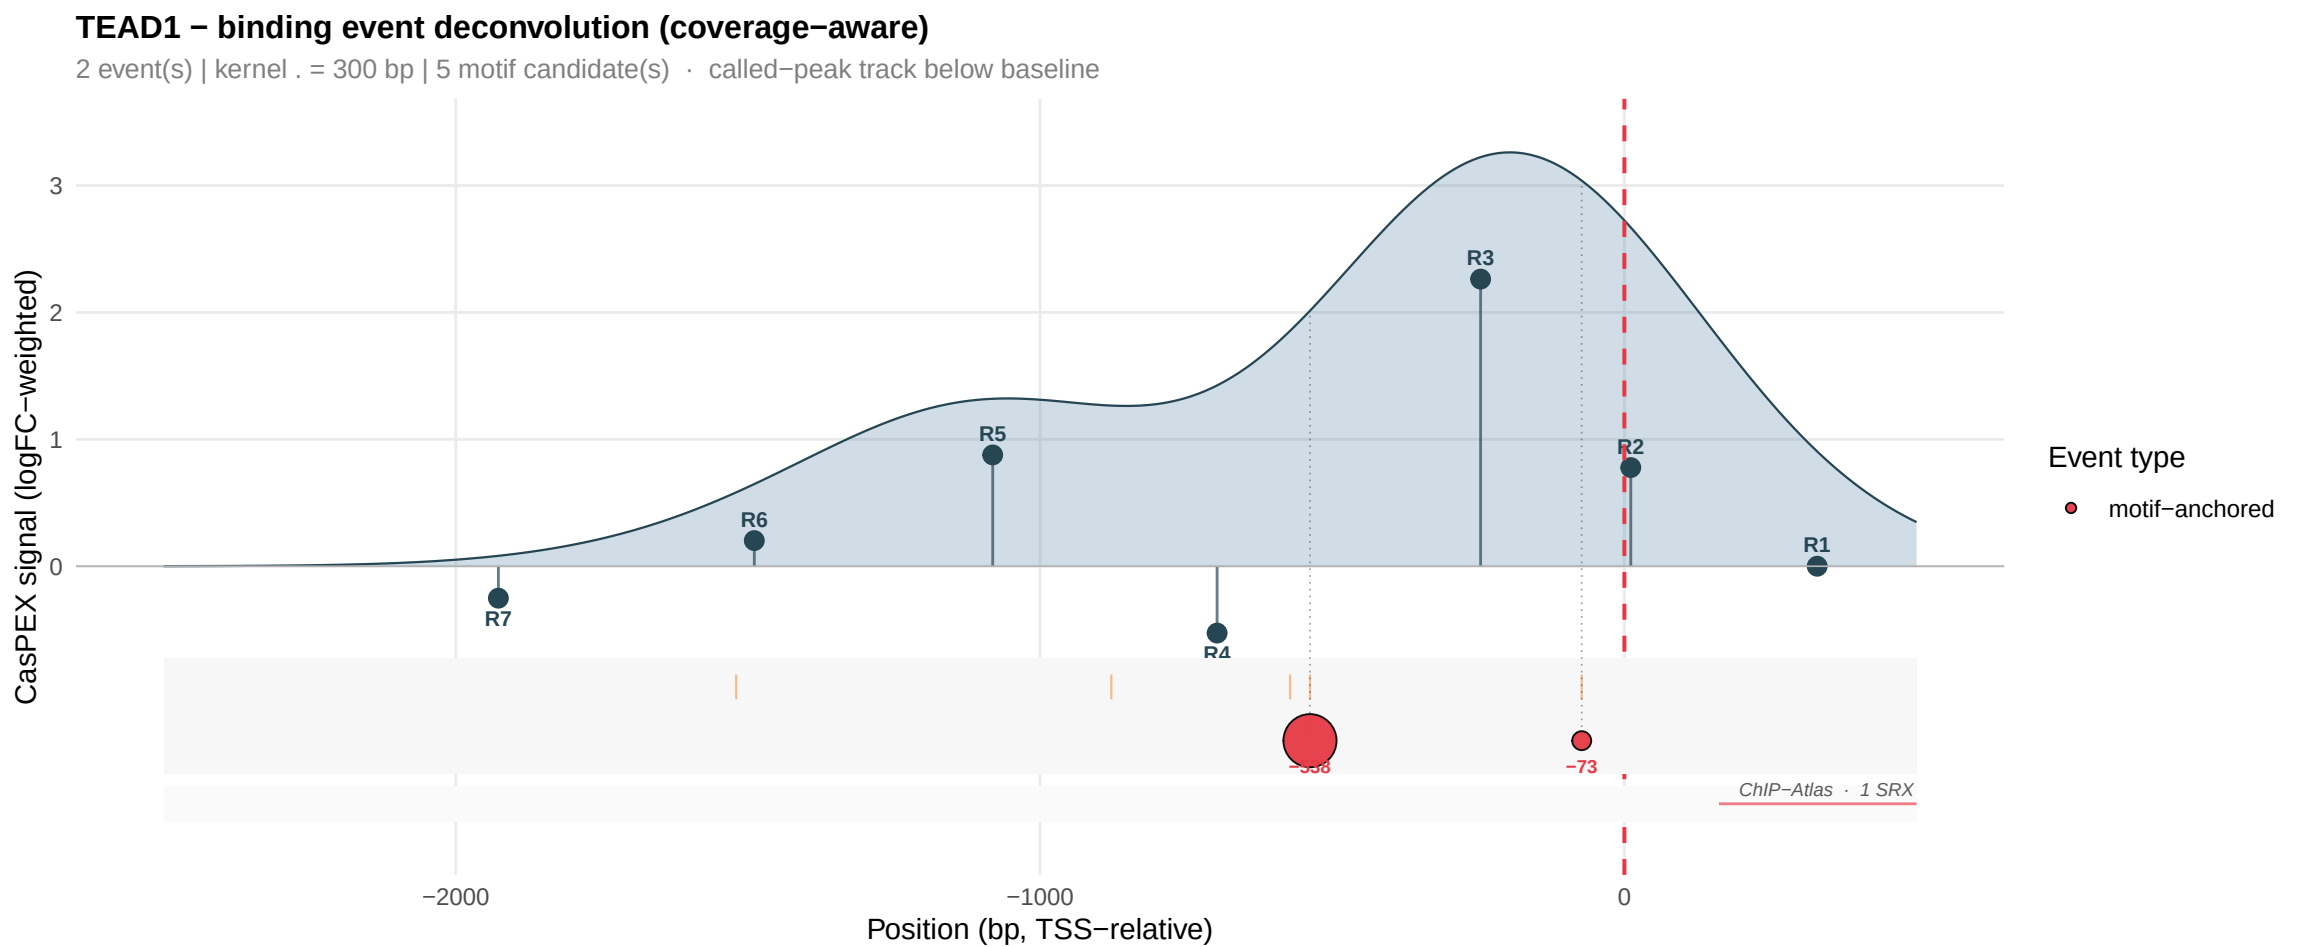
TEAD1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 5 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−73
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

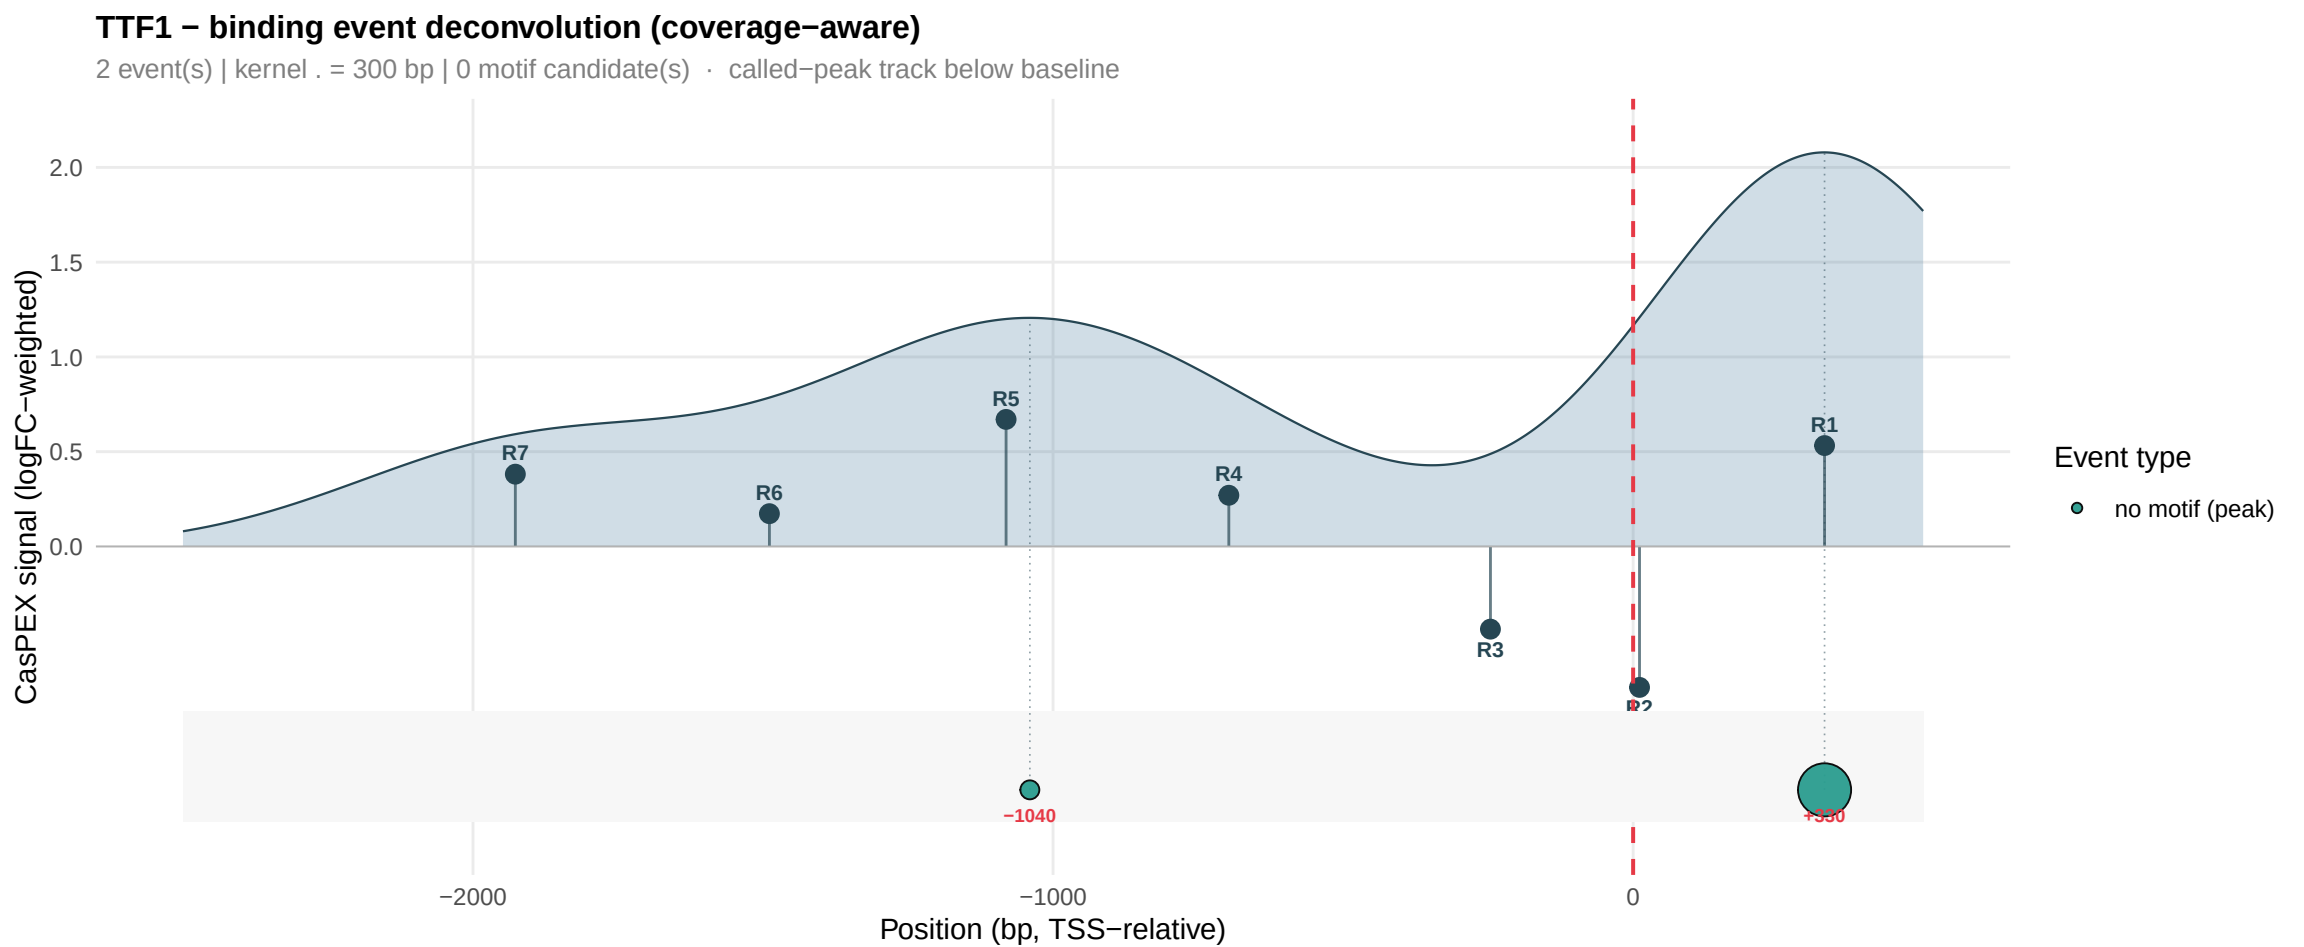
TTF1 − binding event deconvolution (coverage−aware)
2 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1040
+350
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

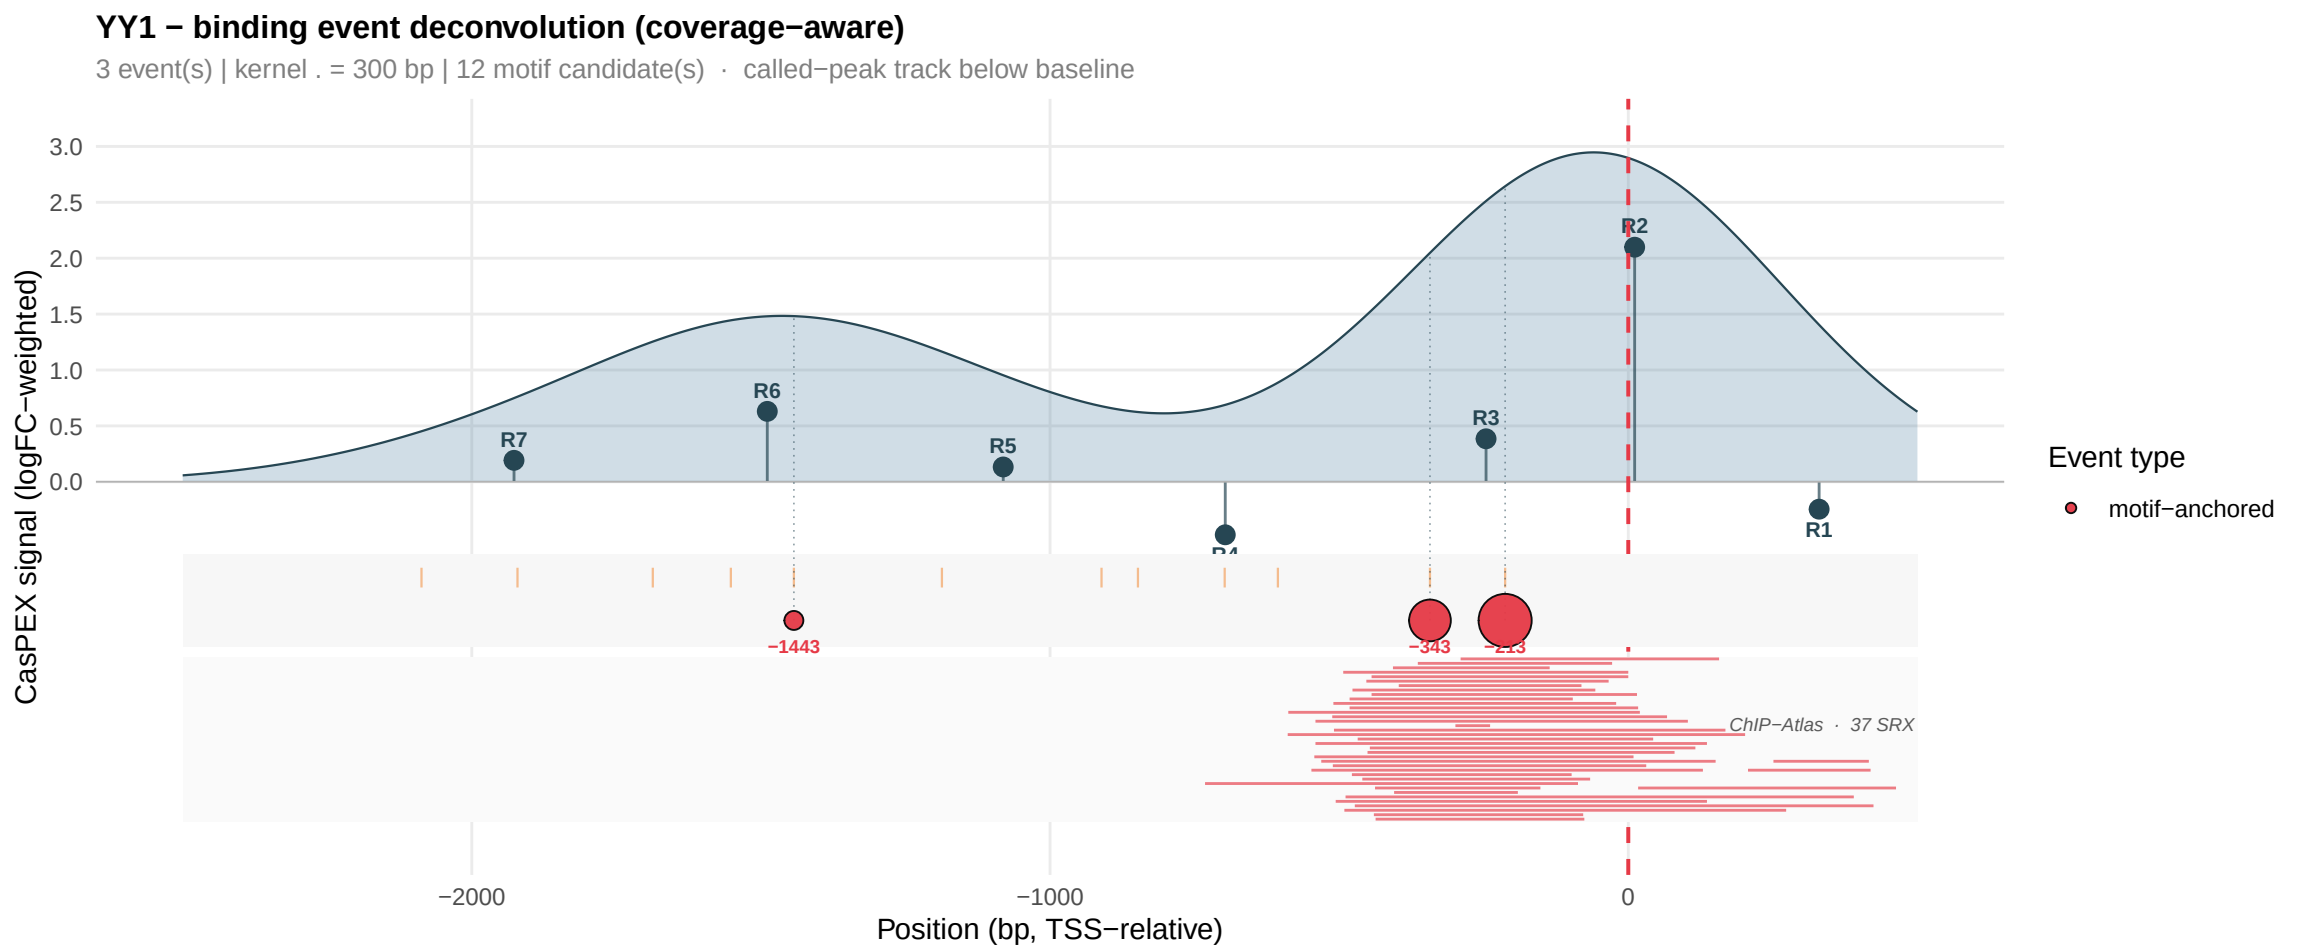
YY1 − binding event deconvolution (coverage−aware)
3 event(s) | kernel . = 300 bp | 12 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R6
R7
−1443
−343
−213
ChIP−Atlas · 37 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

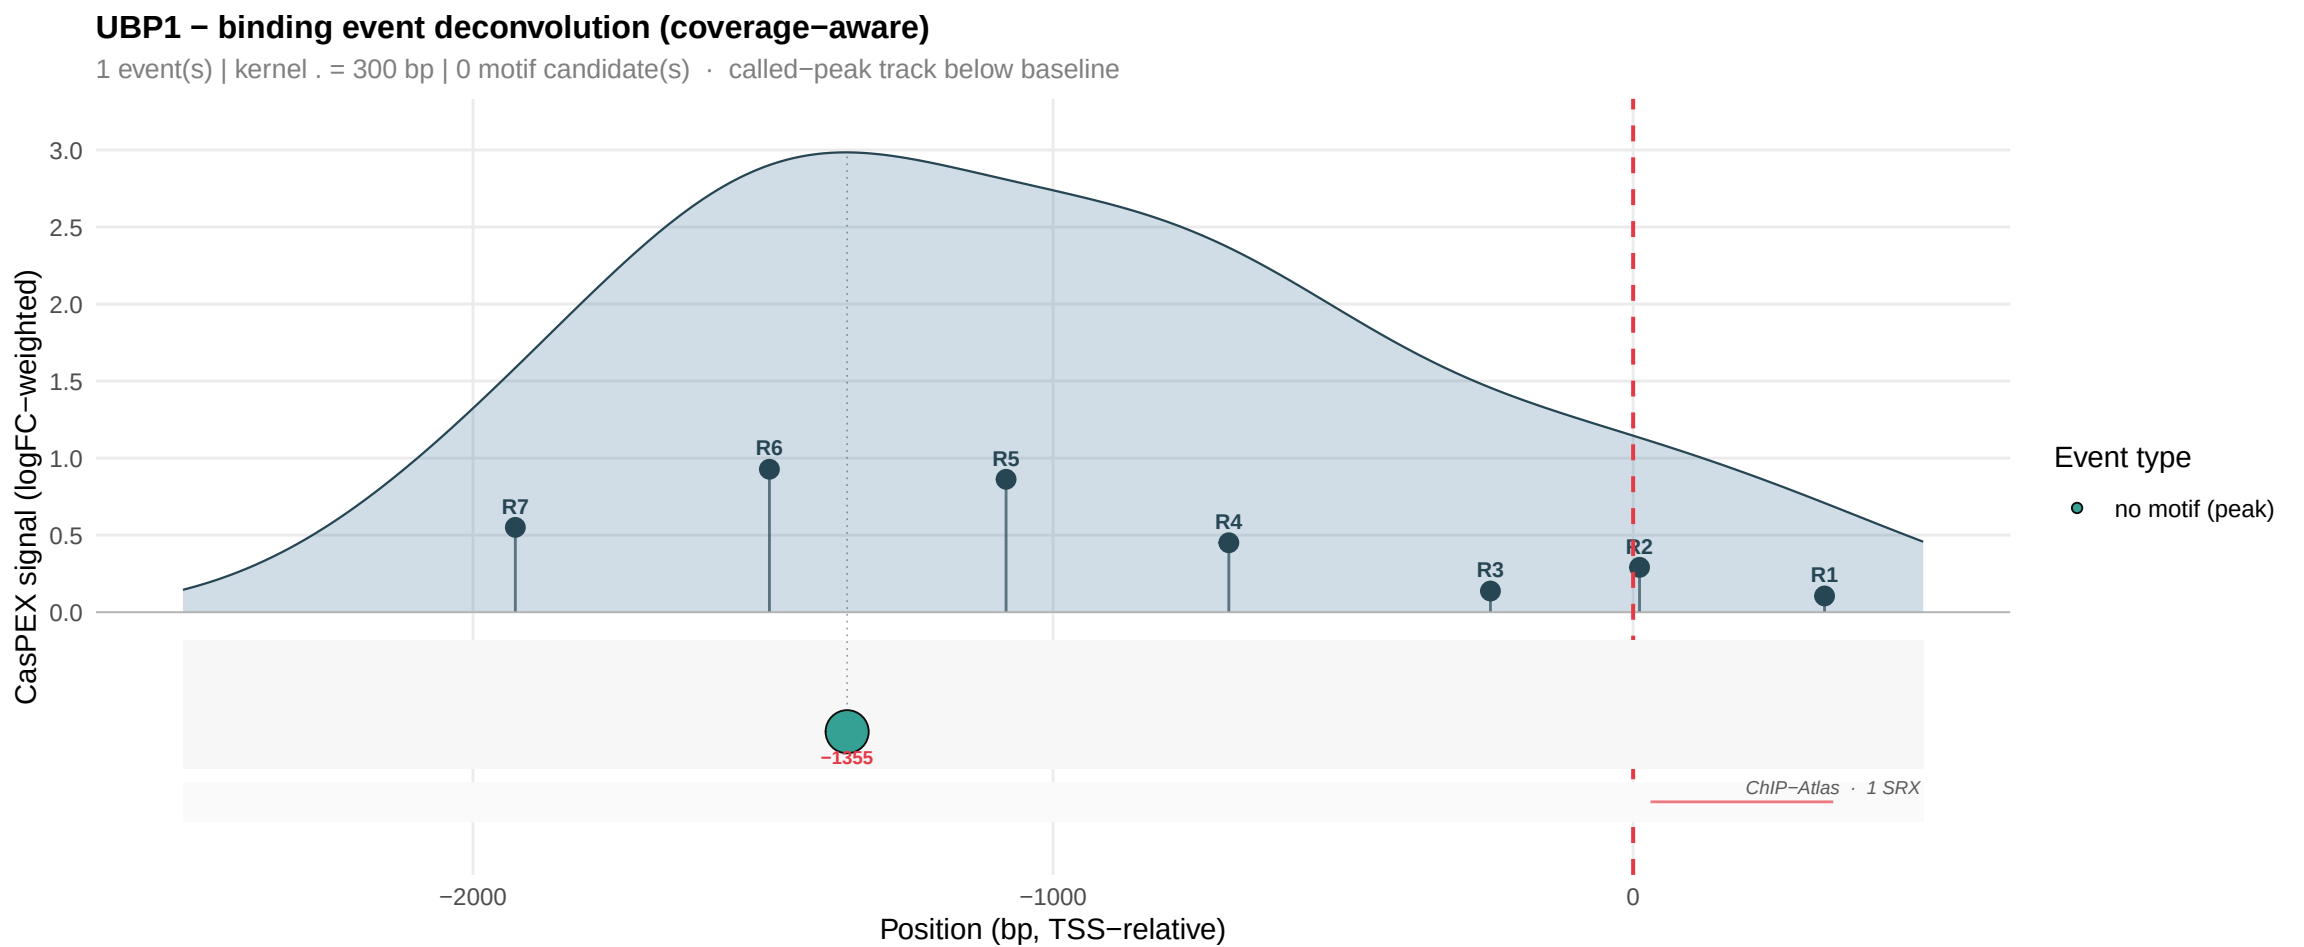
UBP1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1355
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

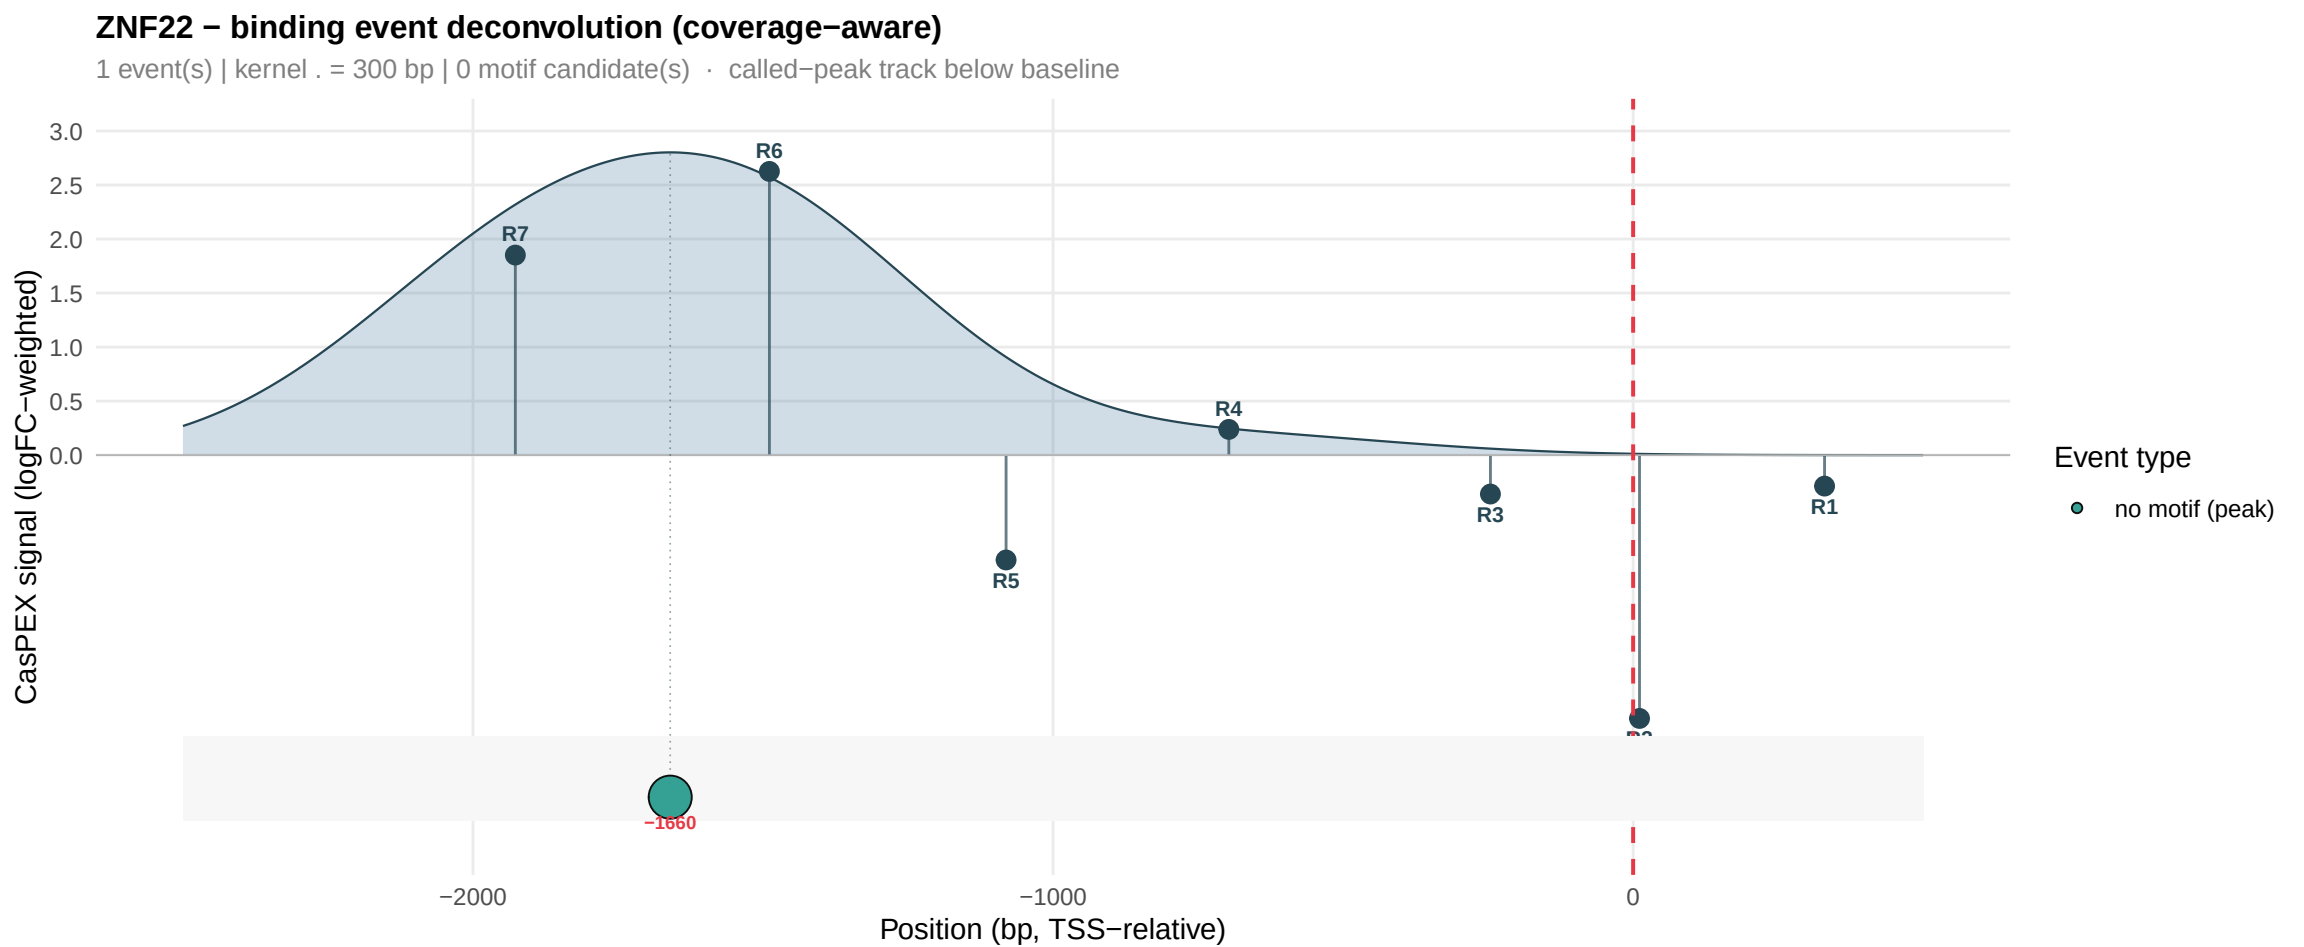
ZNF22 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R6
R7
R4
R5
R3
R1
−1660
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

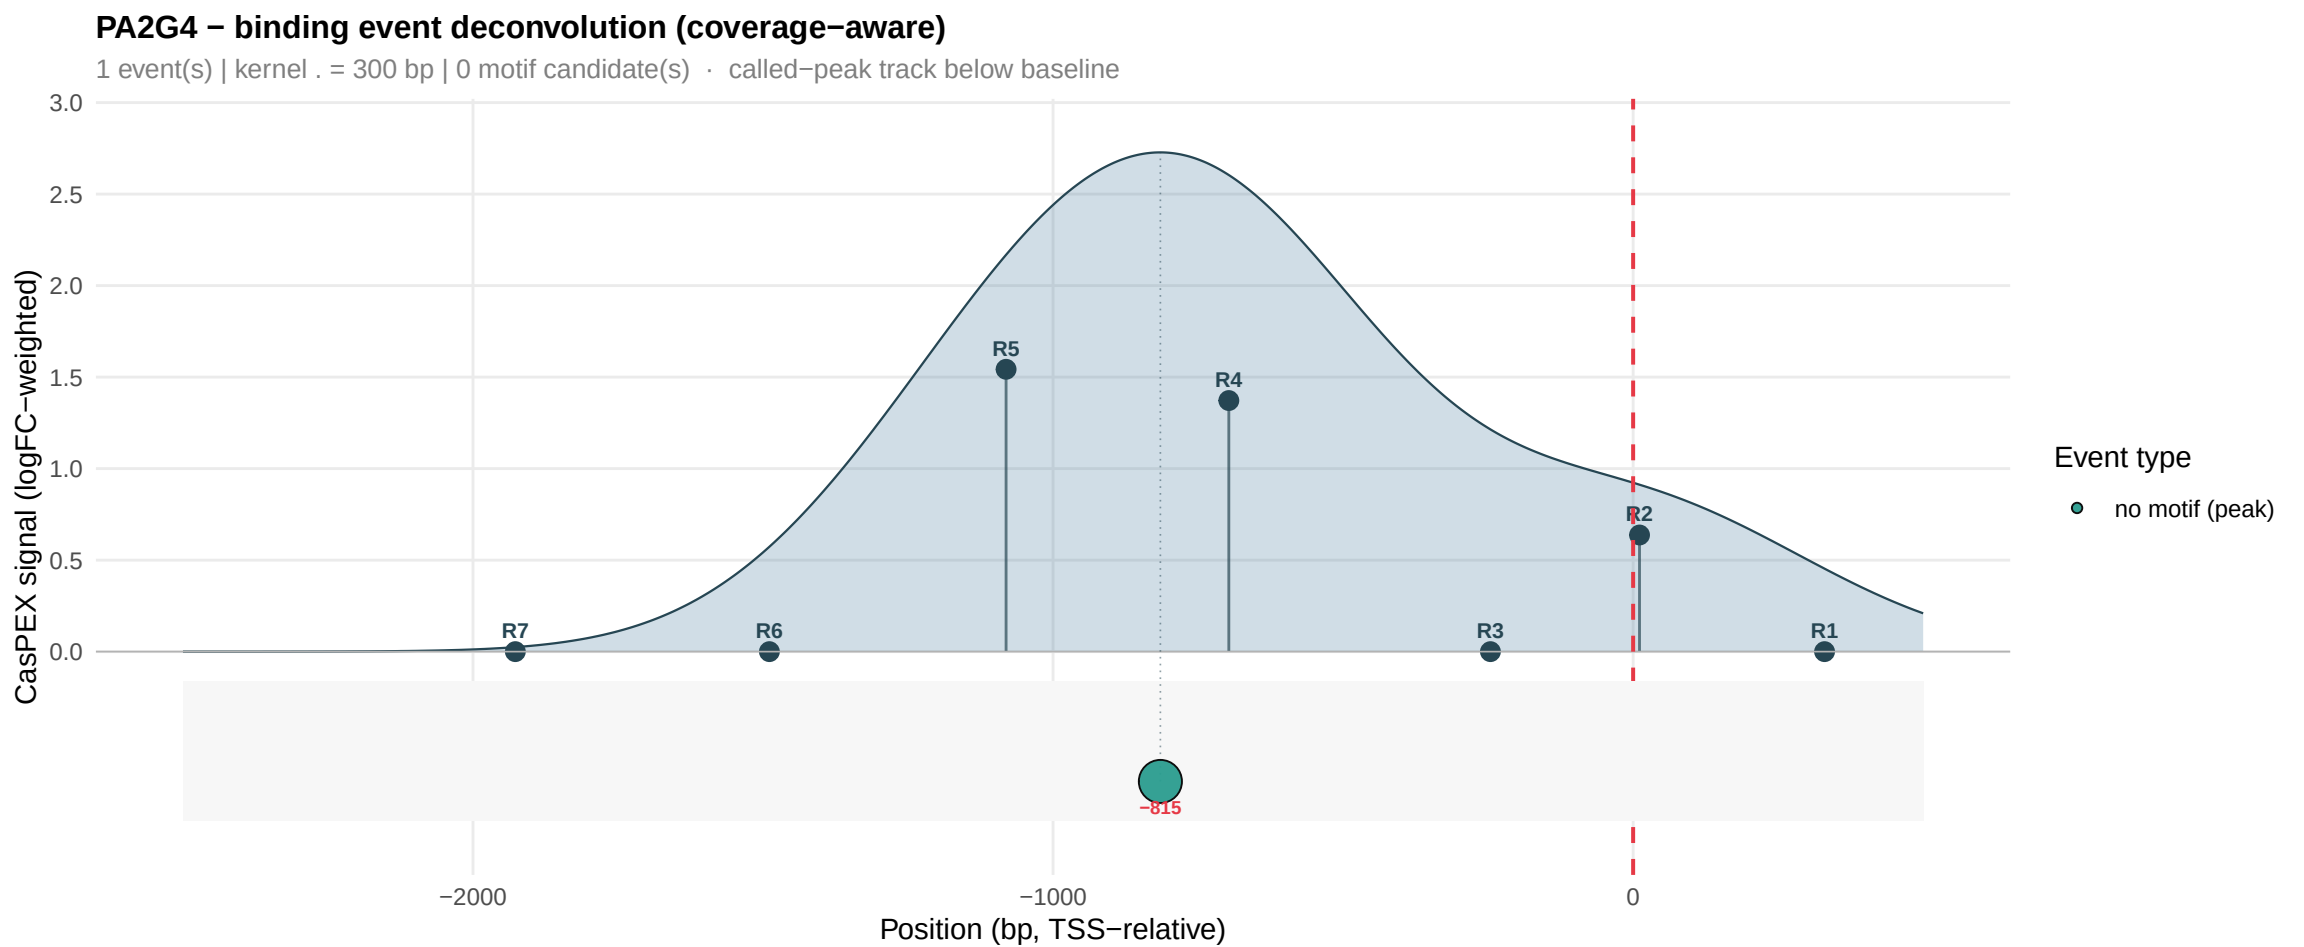
PA2G4 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R5
R4
R2
R7
R6
R3
R1
−815
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

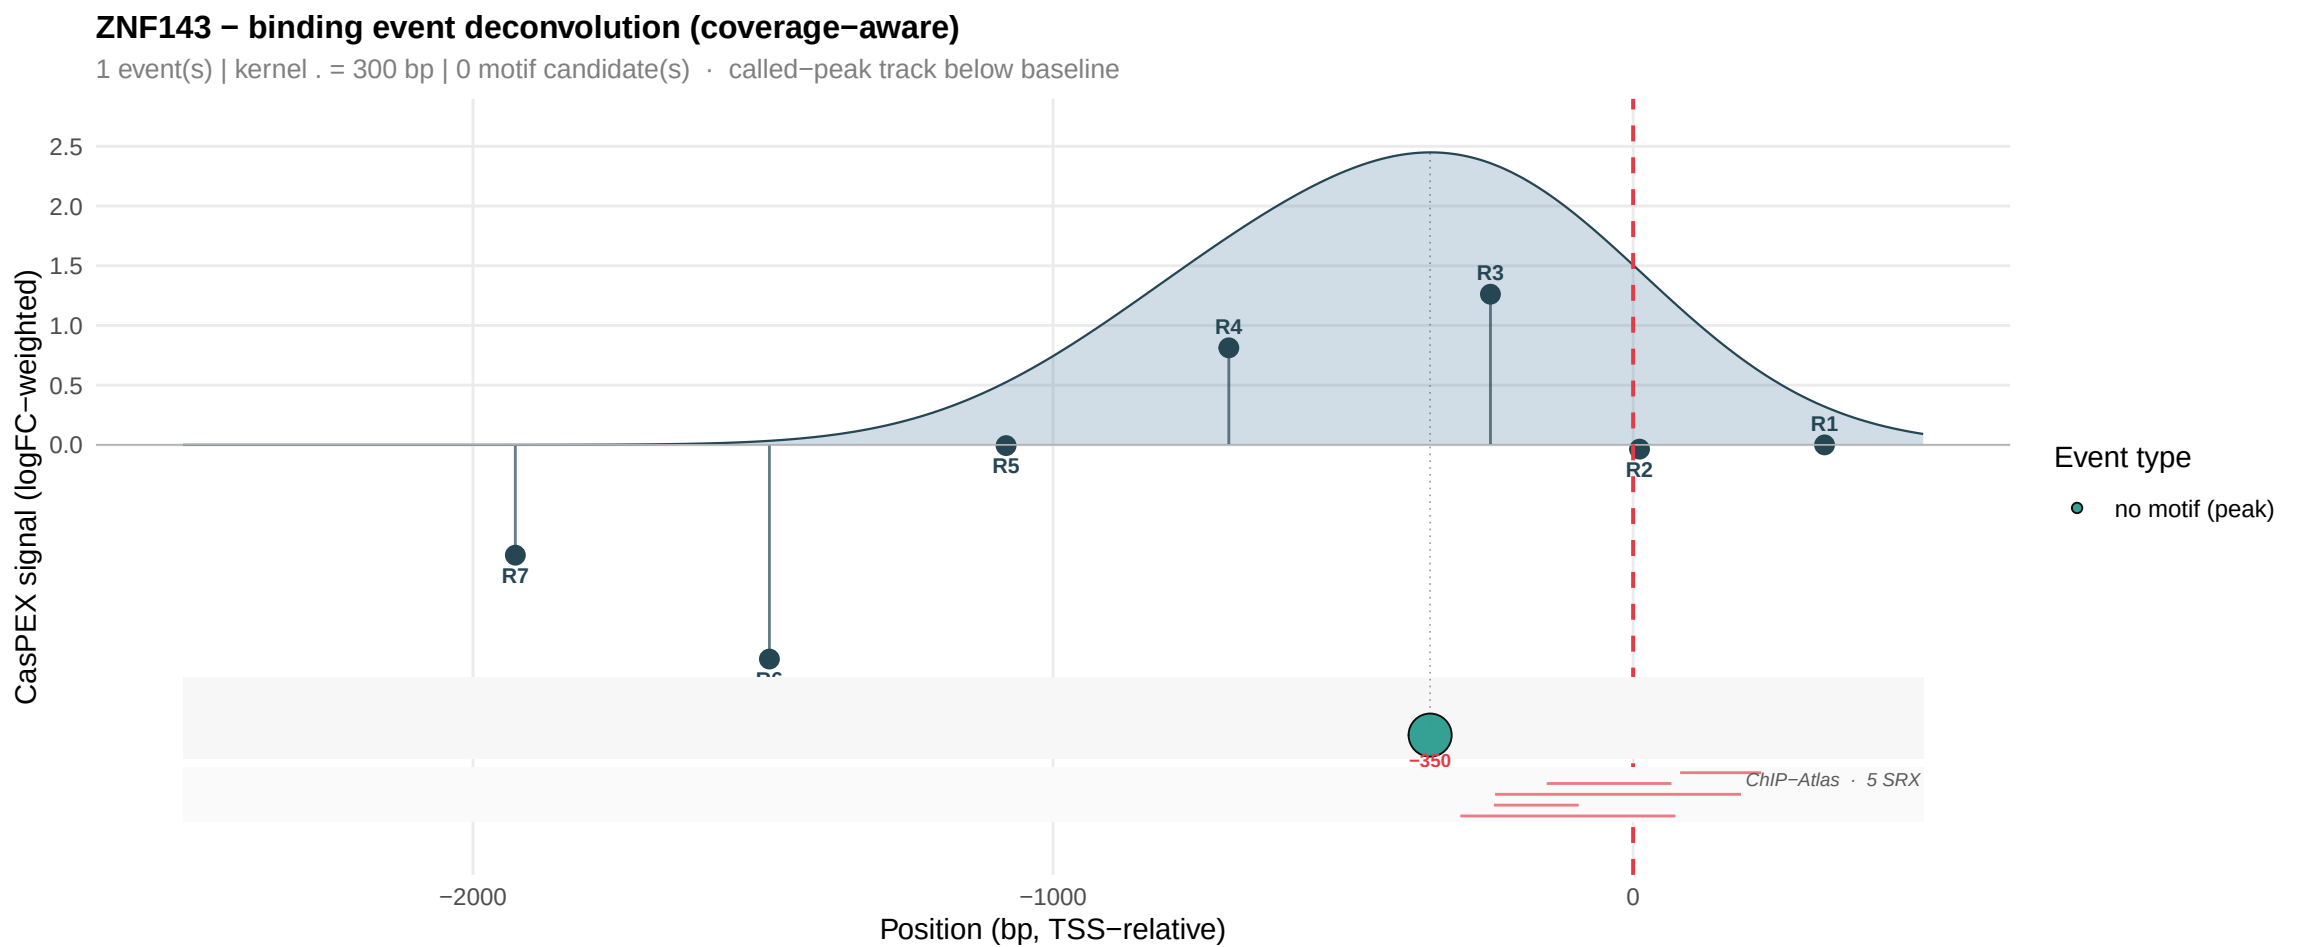
ZNF143 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R1
R2
R3
R4
R5
R7
−350
ChIP−Atlas · 5 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

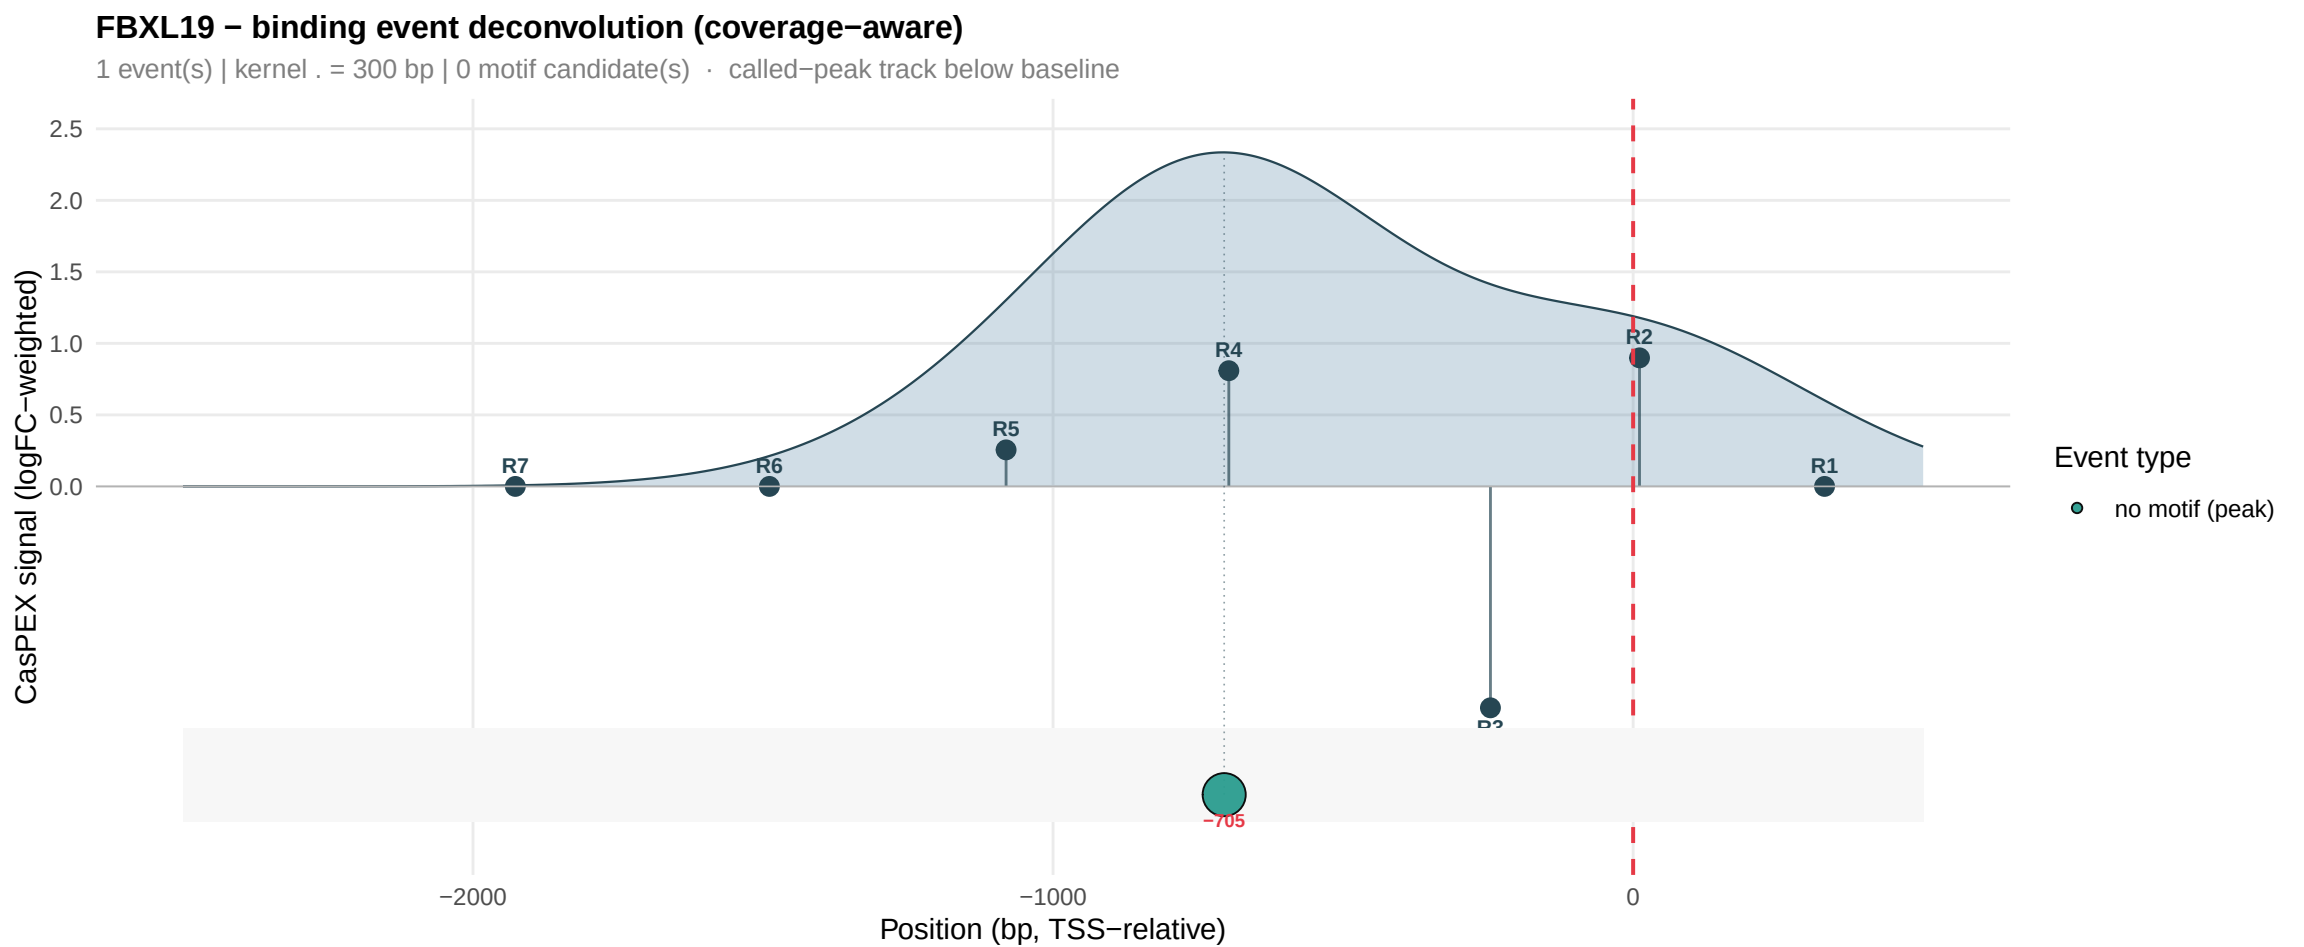
FBXL19 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R2
R1
−705
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

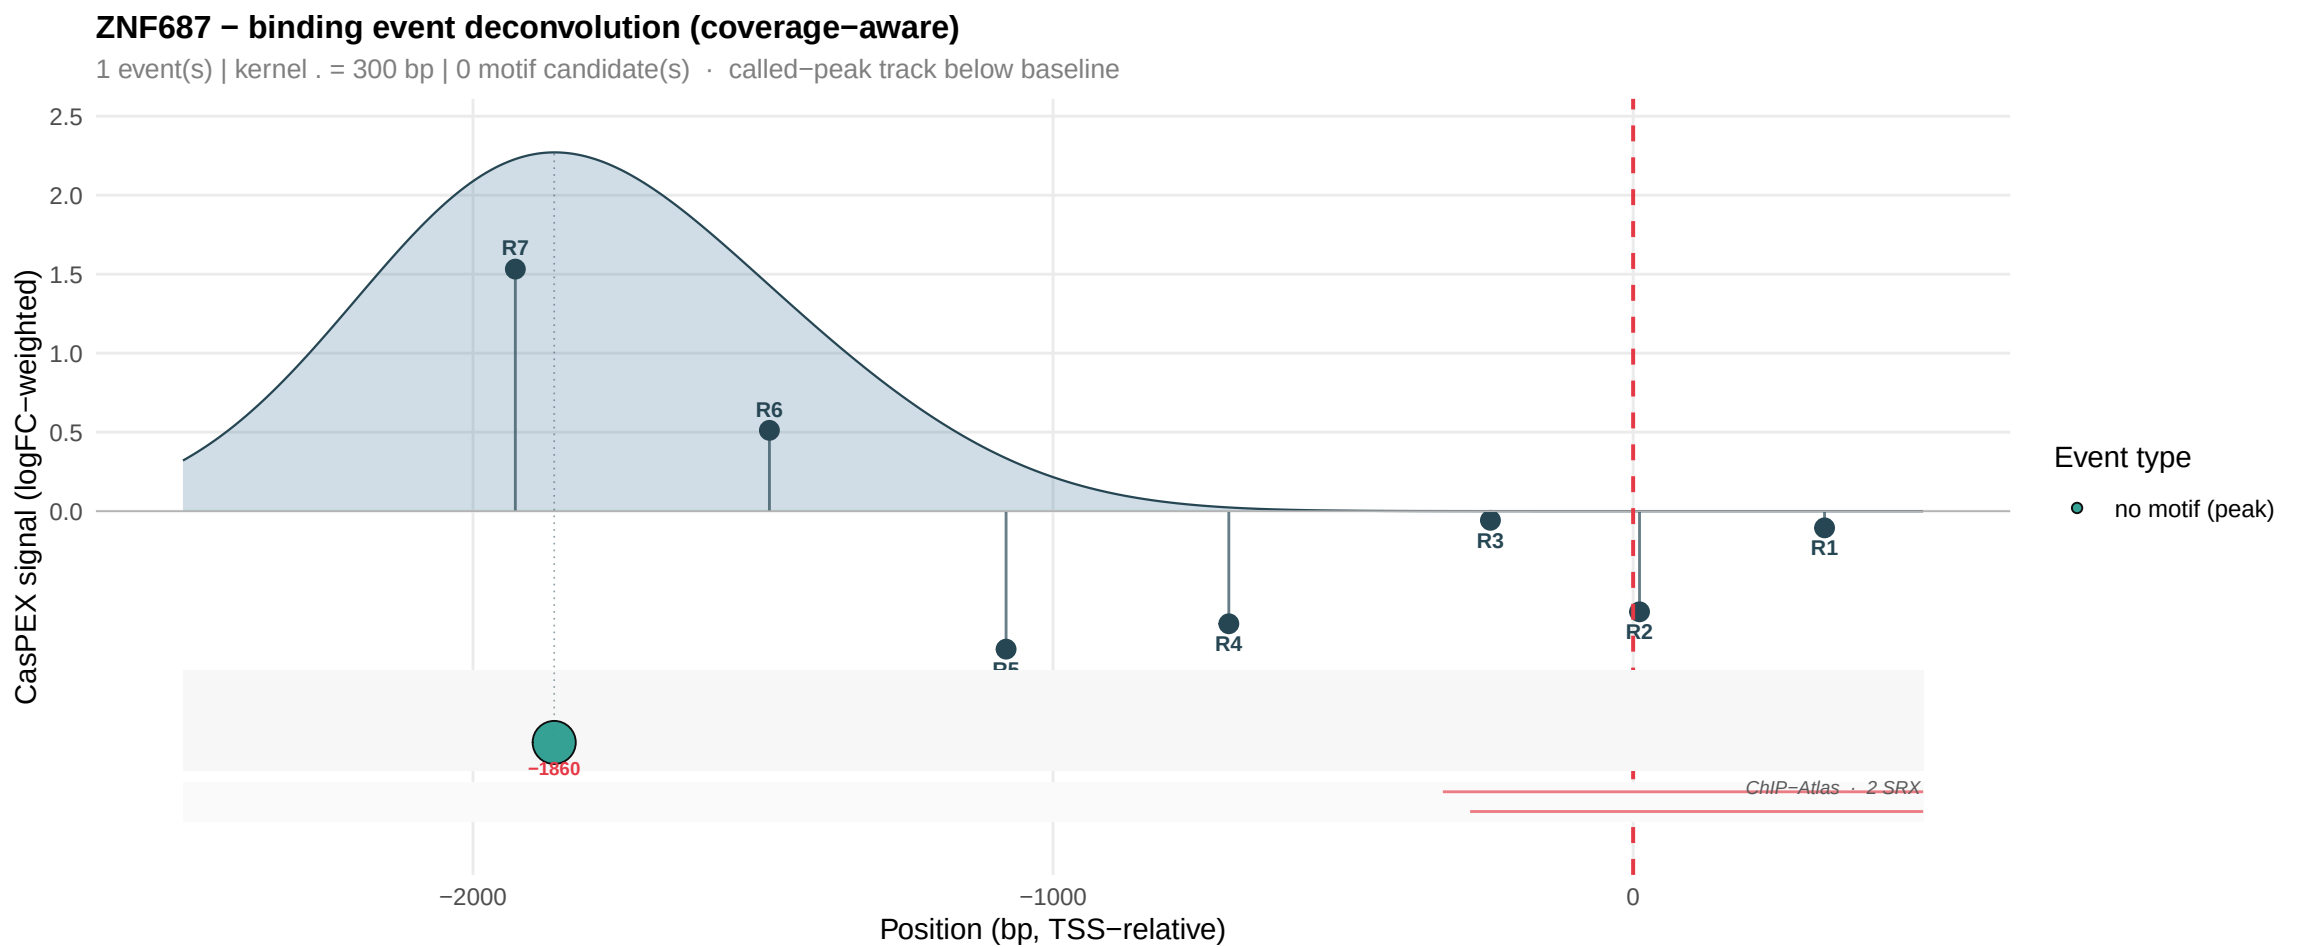
ZNF687 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−1860
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

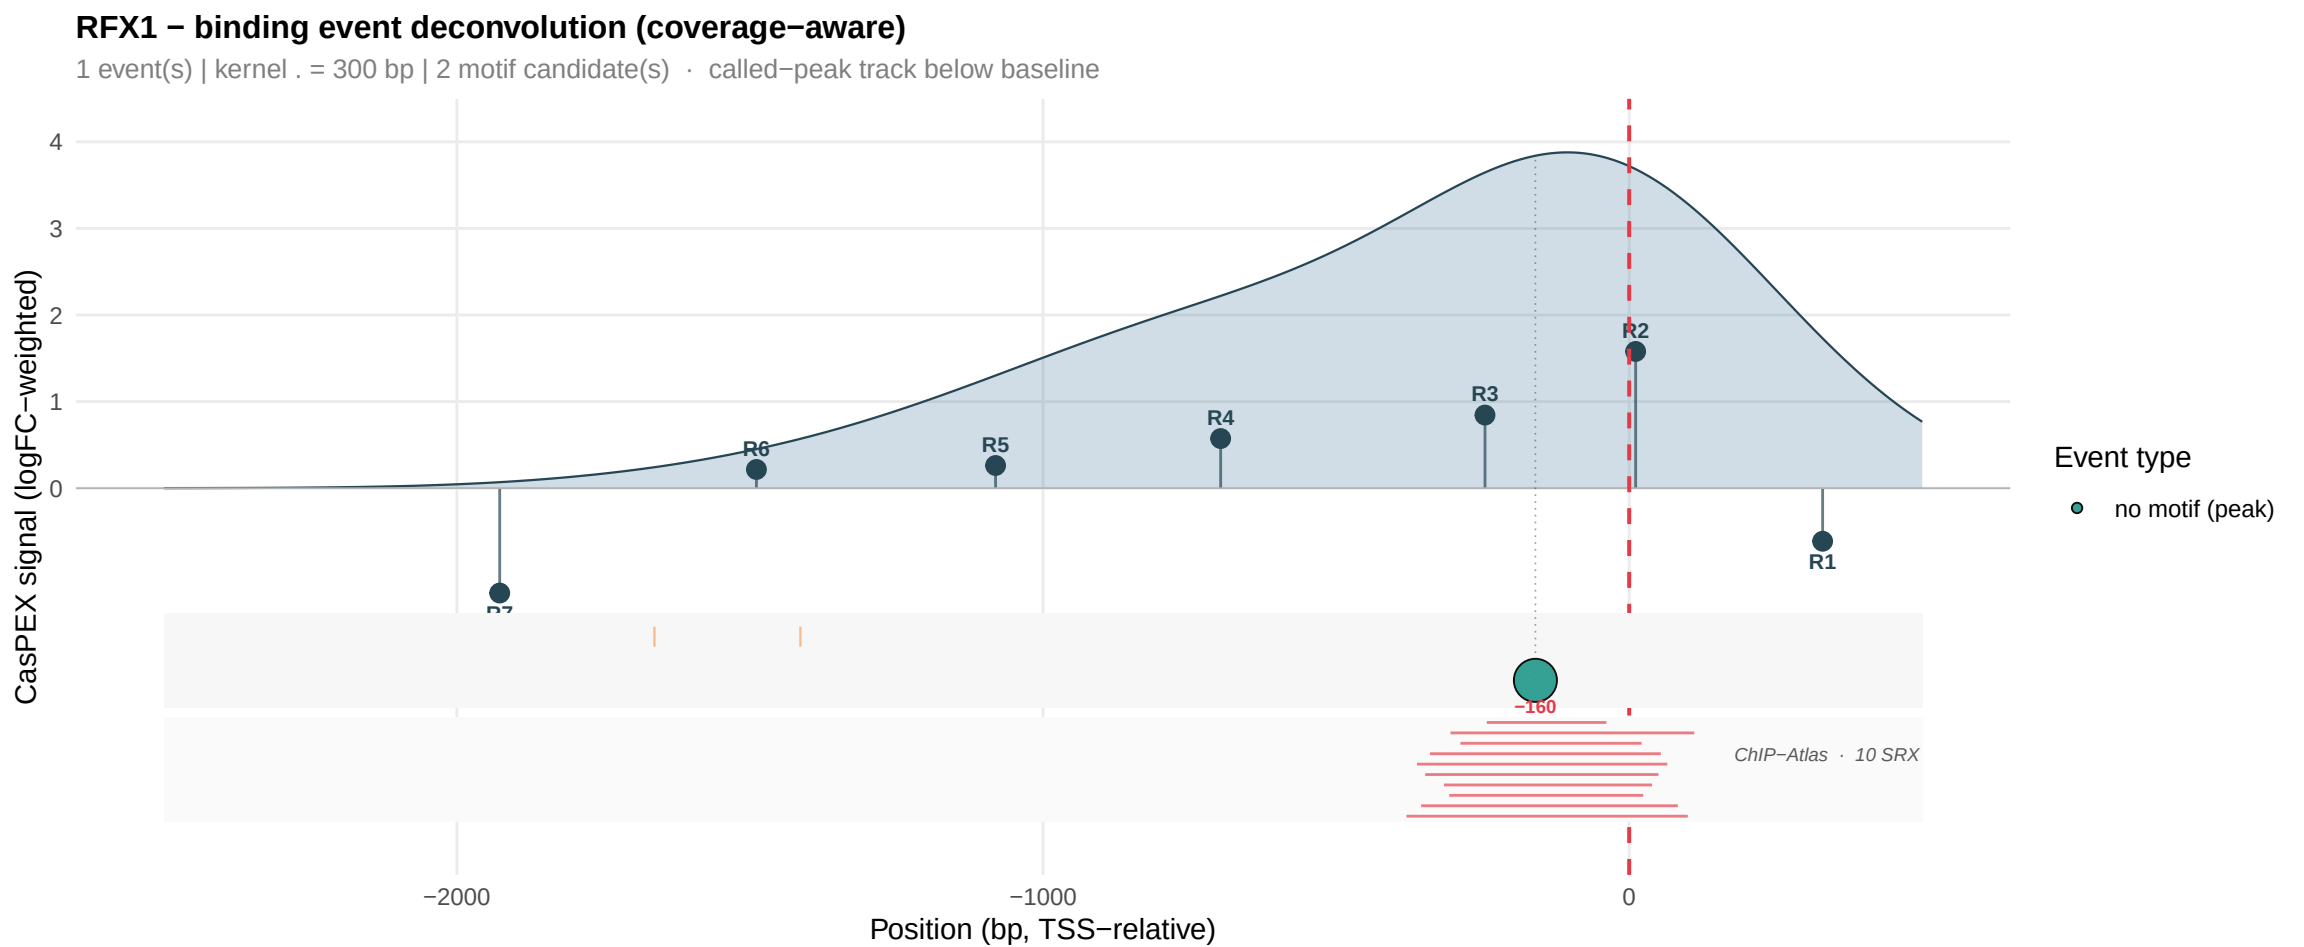
RFX1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 2 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R1
R2
R3
R4
R5
R6
R7
−160
ChIP−Atlas · 10 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

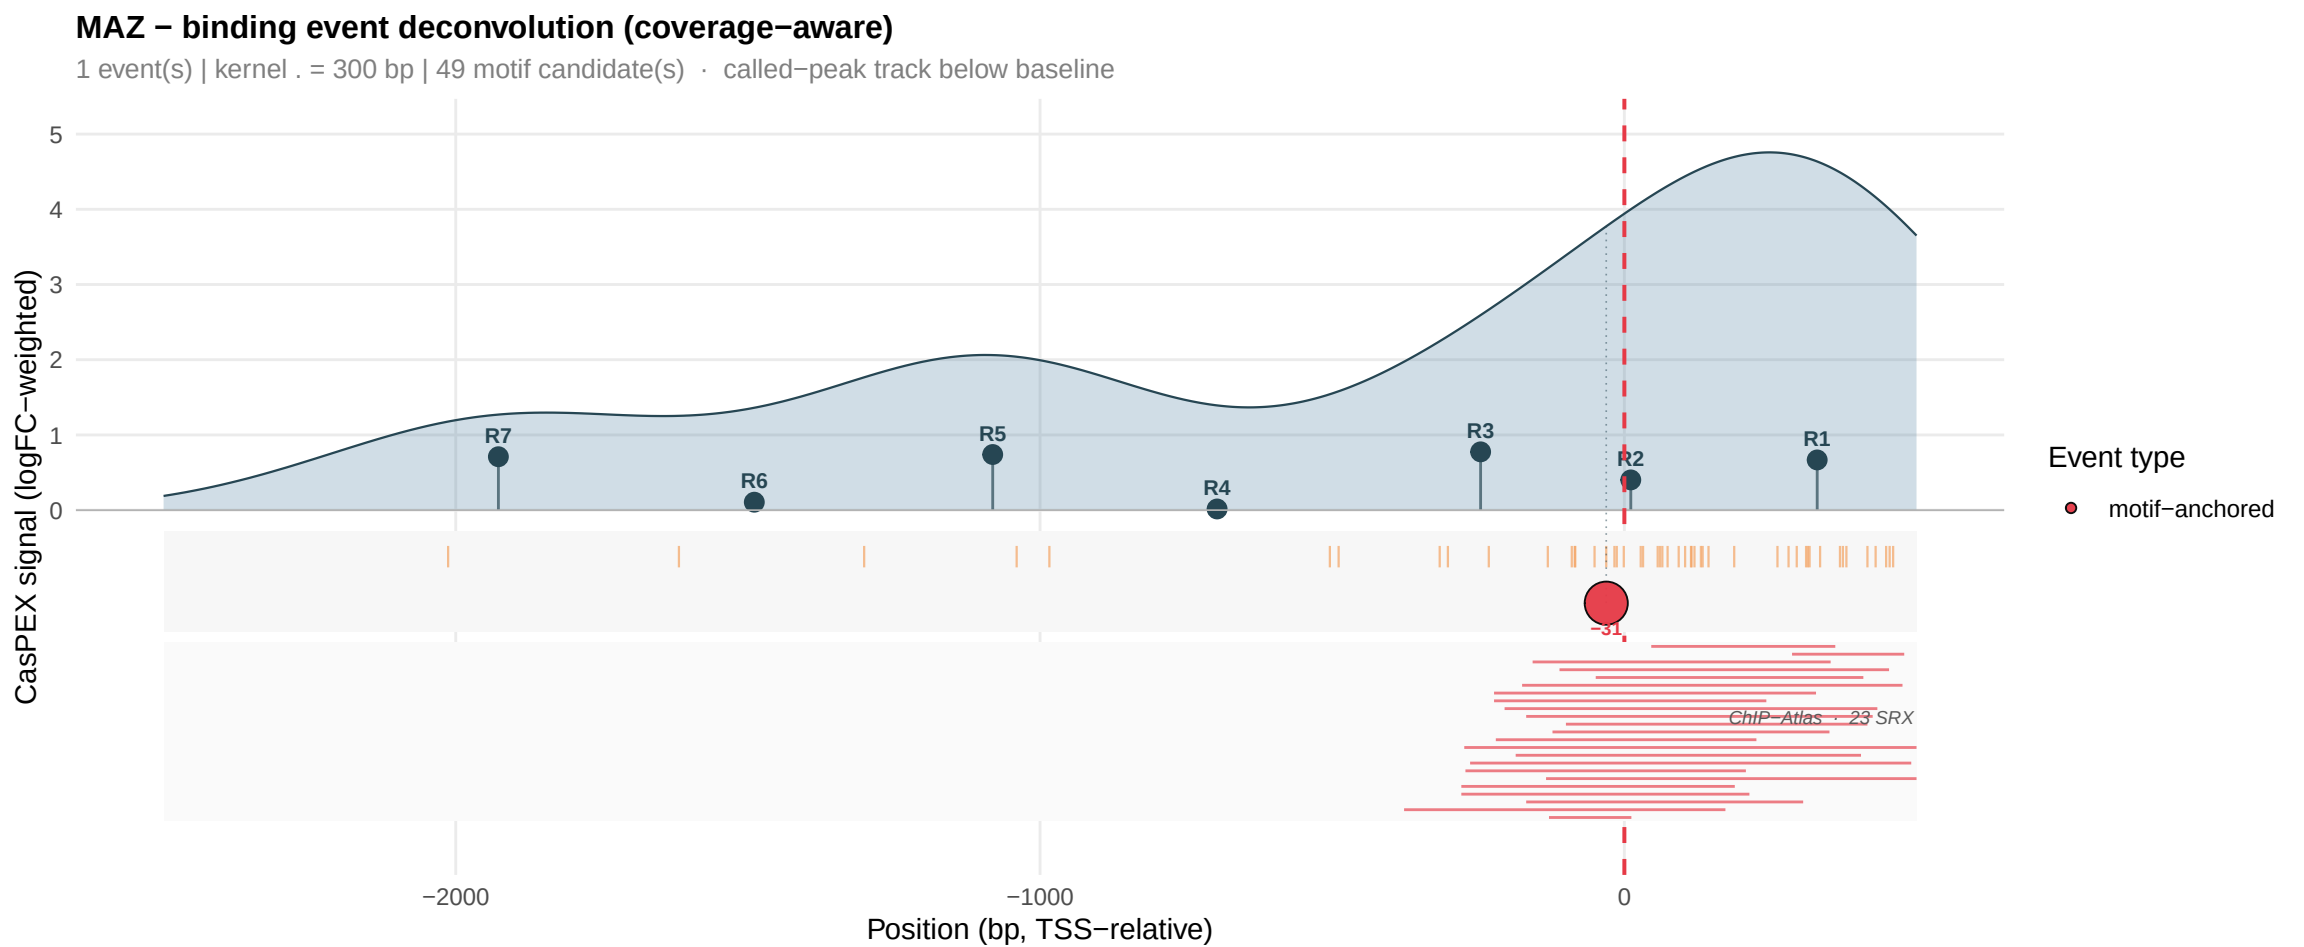
MAZ − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 49 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
5
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−31
ChIP−Atlas · 23 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

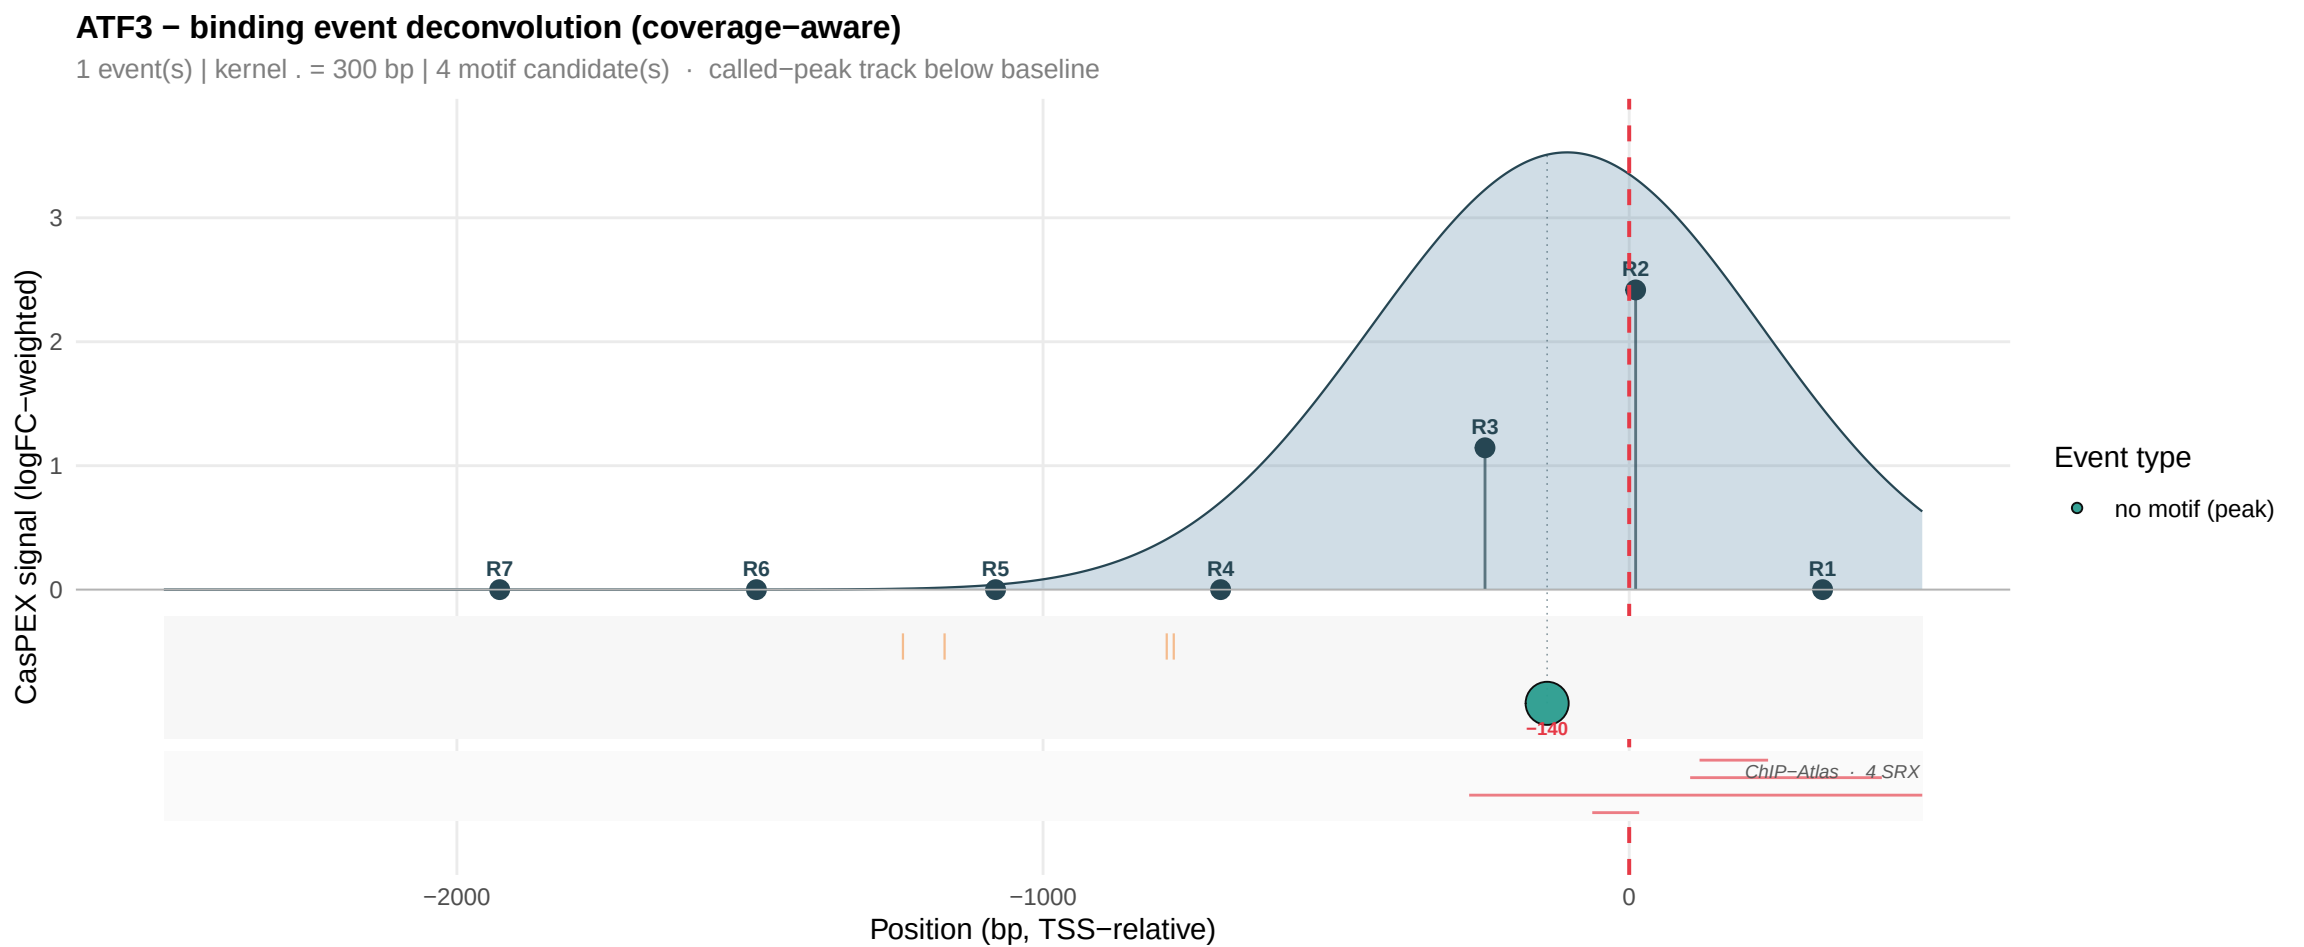
ATF3 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 4 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−140
ChIP−Atlas · 4 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
no motif (peak)

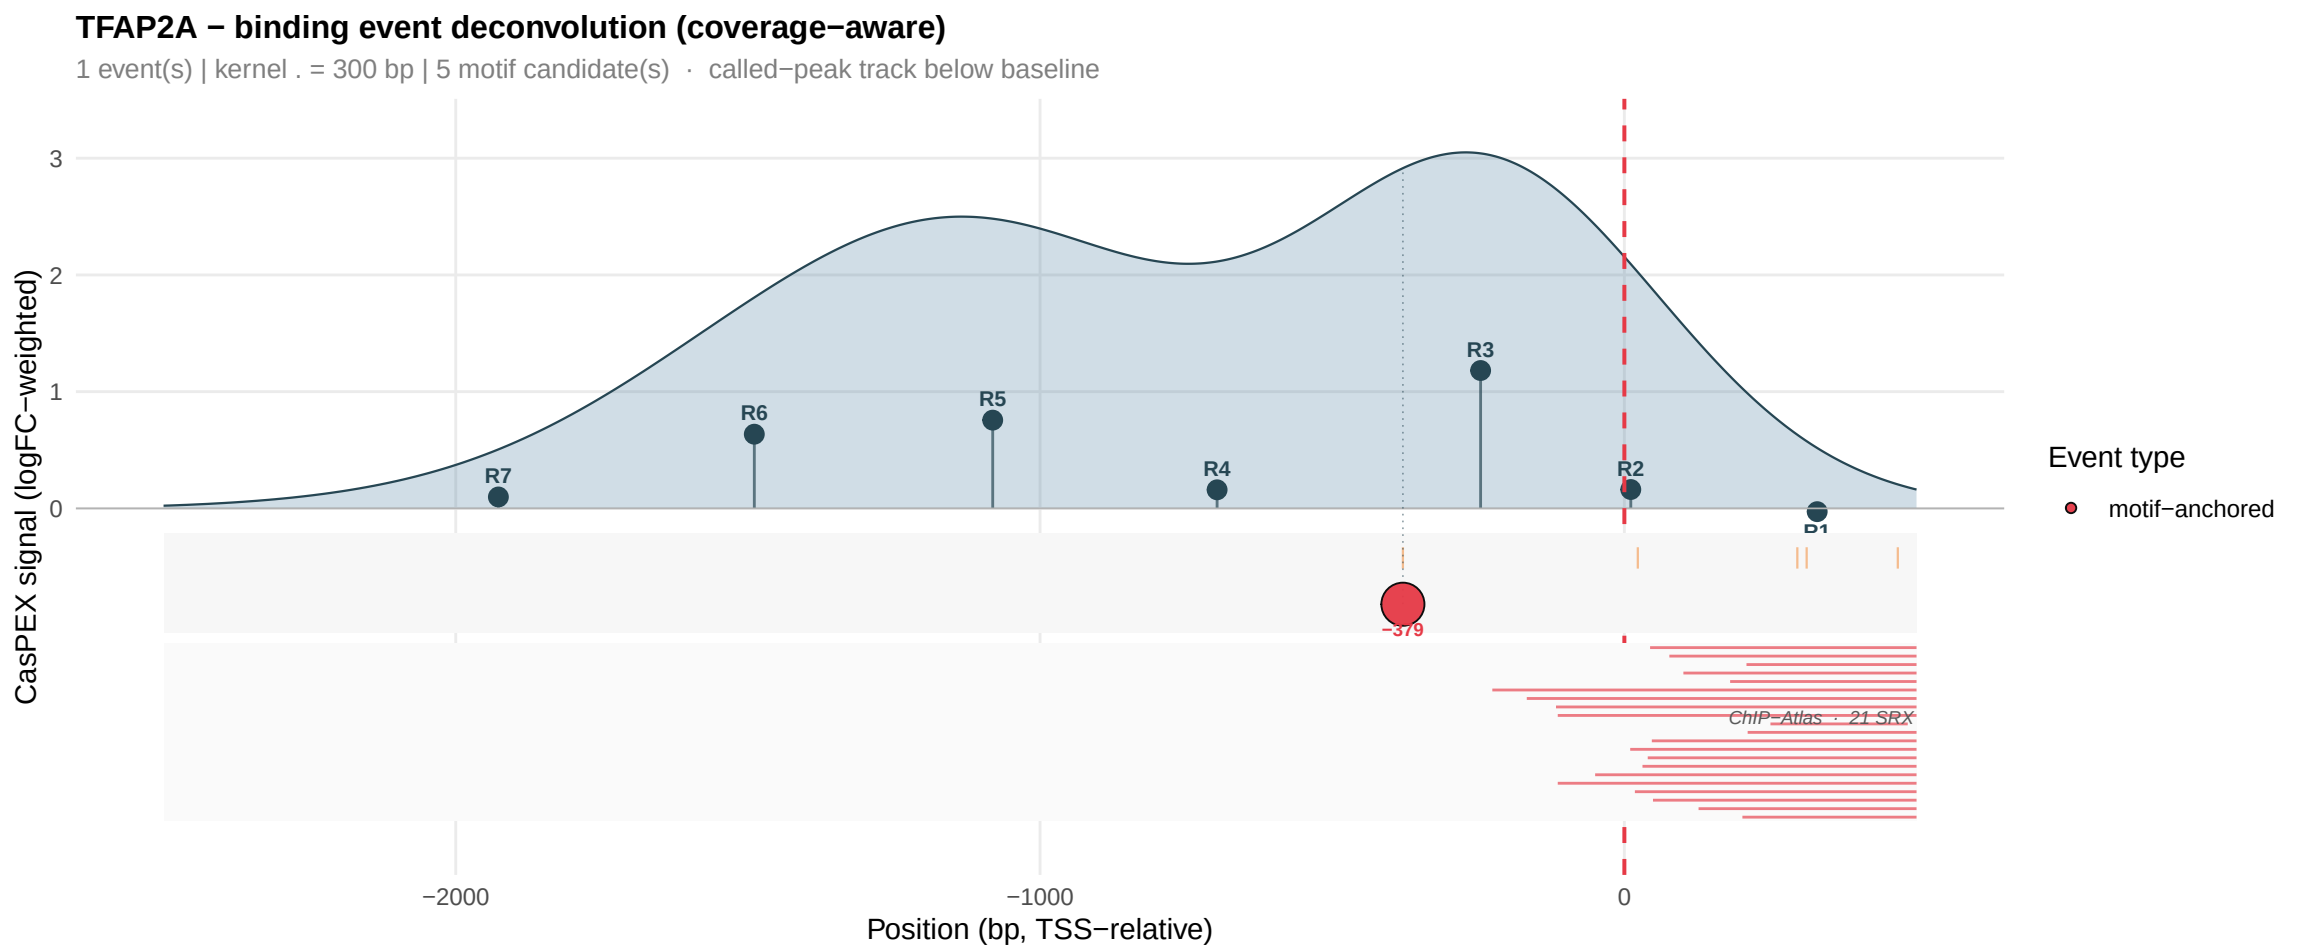
TFAP2A − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 5 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
−379
ChIP−Atlas · 21 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

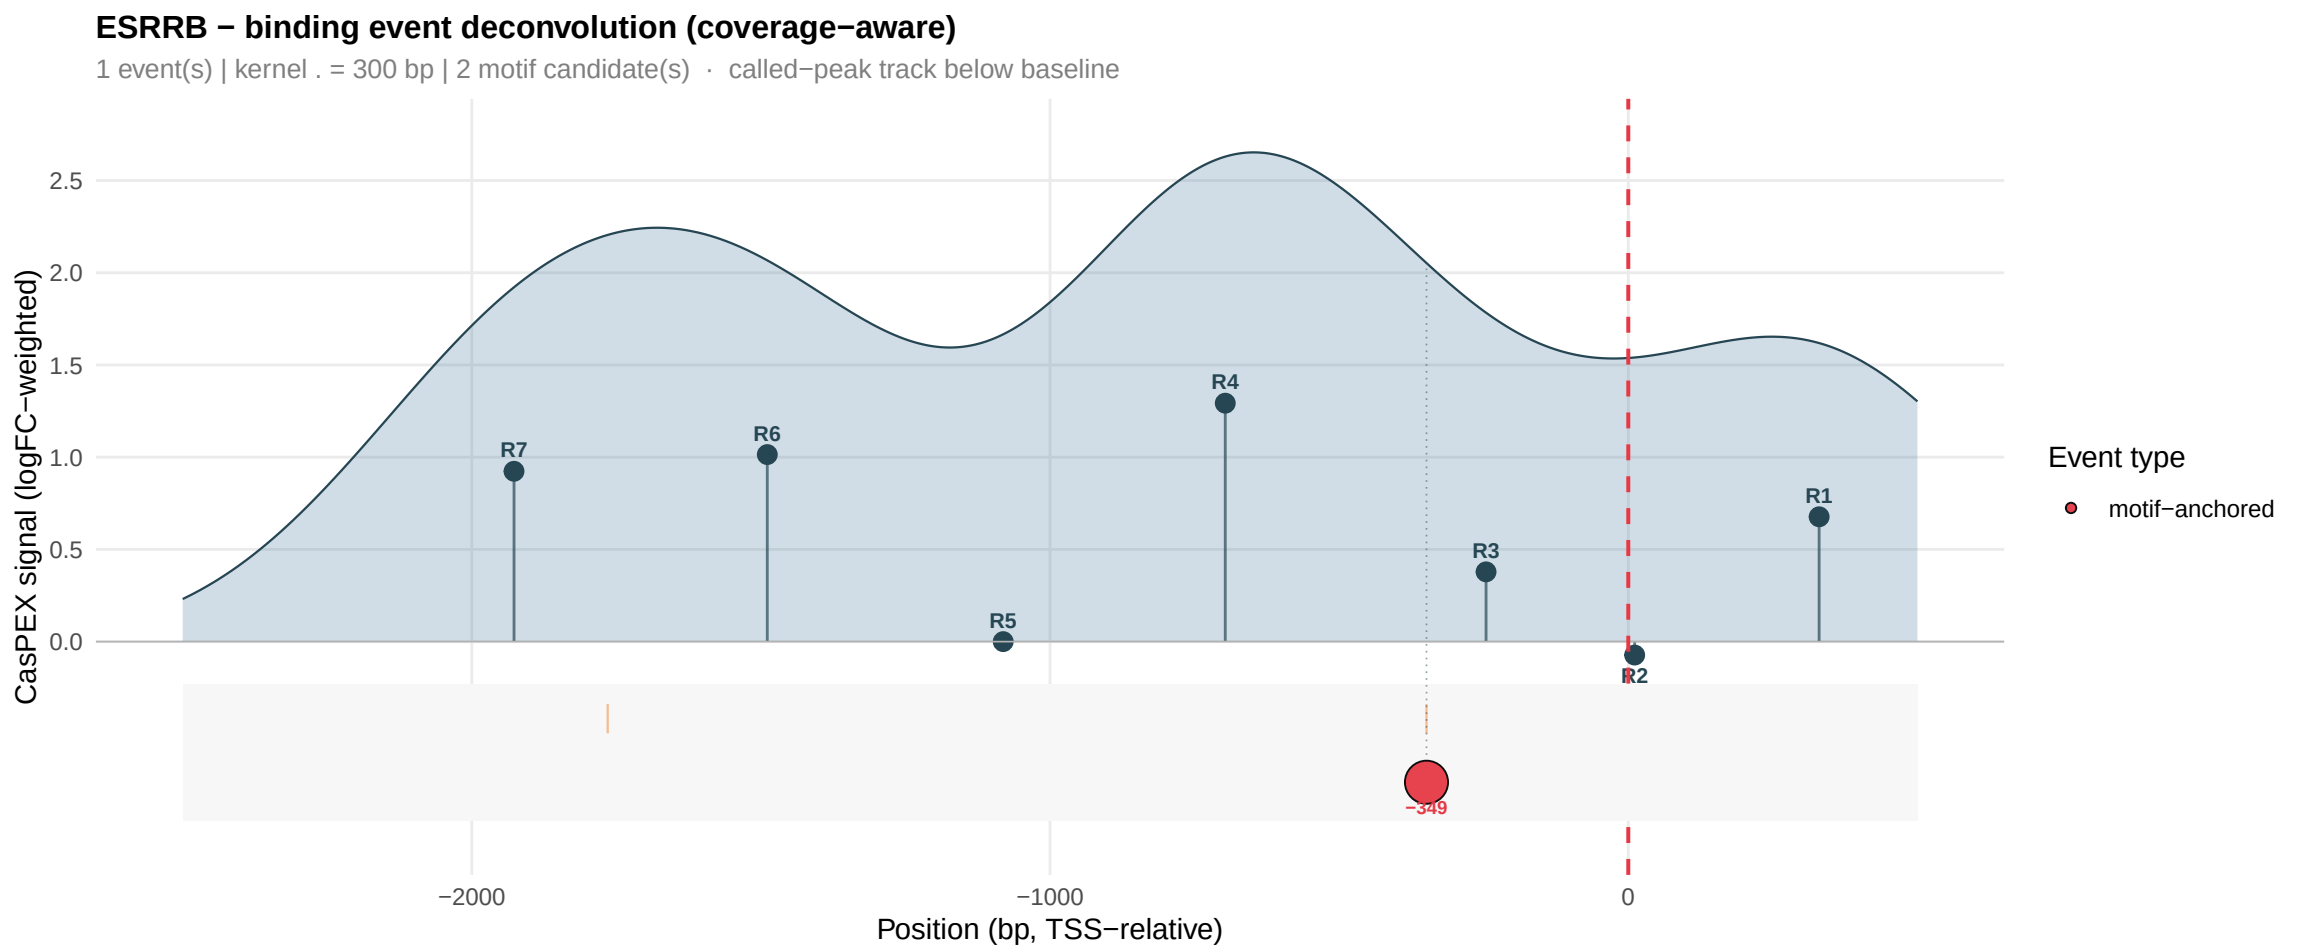
ESRRB − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 2 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
−349
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

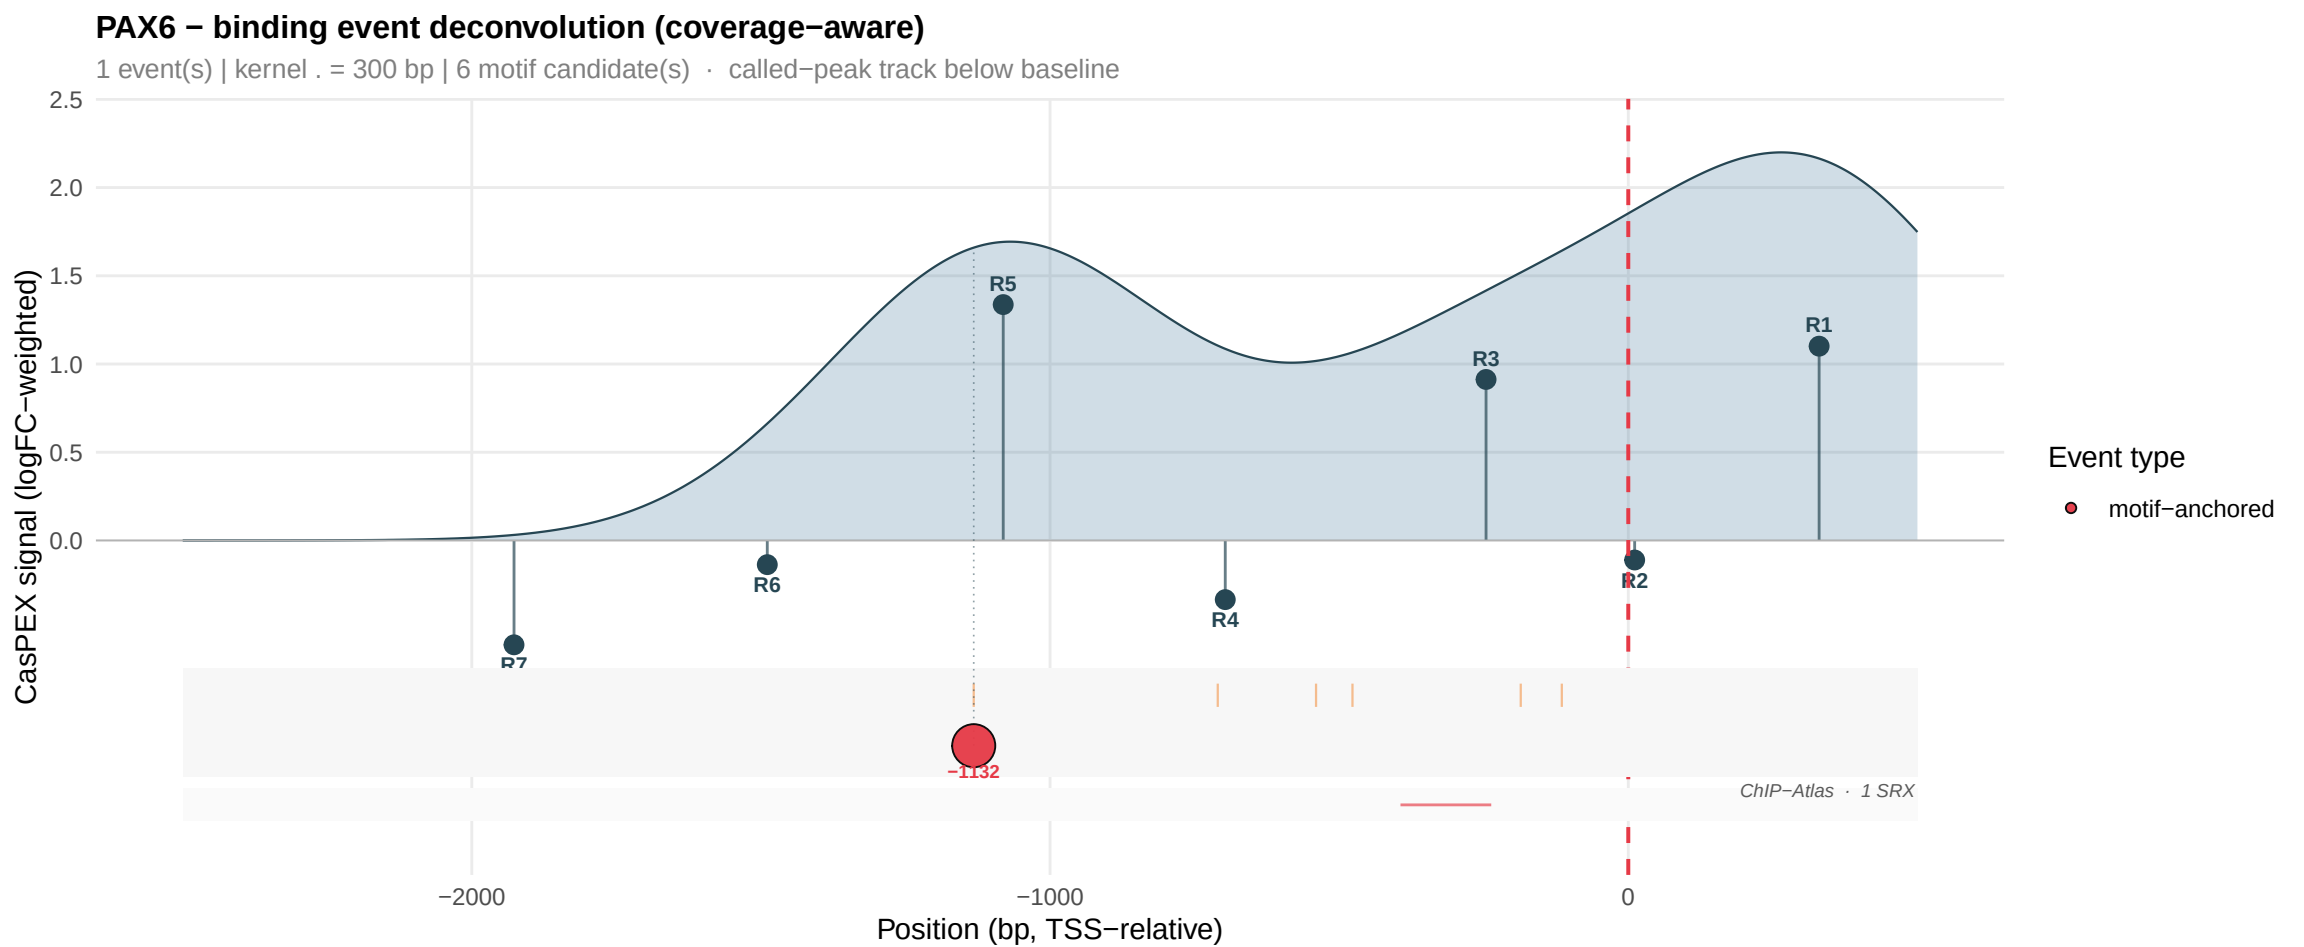
PAX6 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 6 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
2.5
2.0
1.5
1.0
0.5
0.0
R5
R1
R3
R6
R4
R2
R7
−1132
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

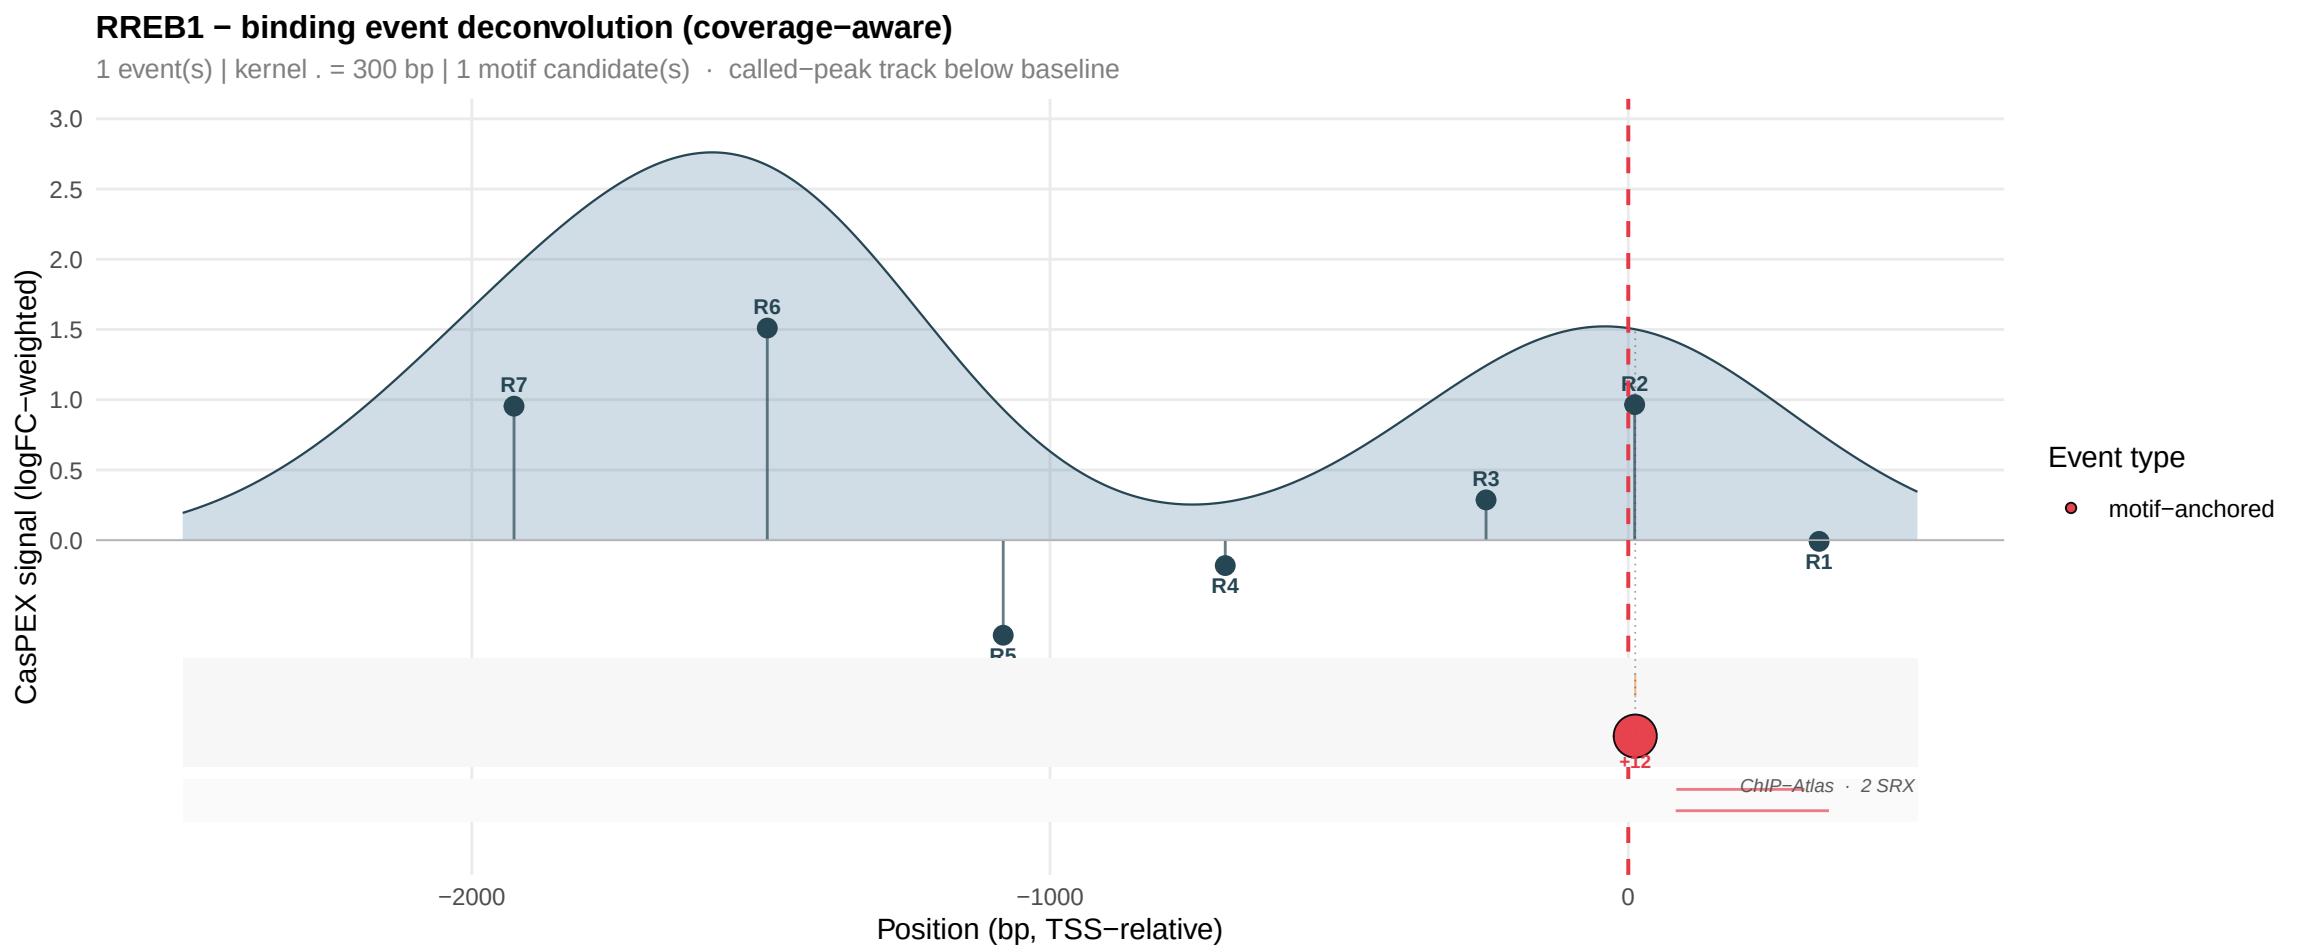
RREB1 − binding event deconvolution (coverage−aware)
1 event(s) | kernel . = 300 bp | 1 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
+12
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)
Event type
motif−anchored

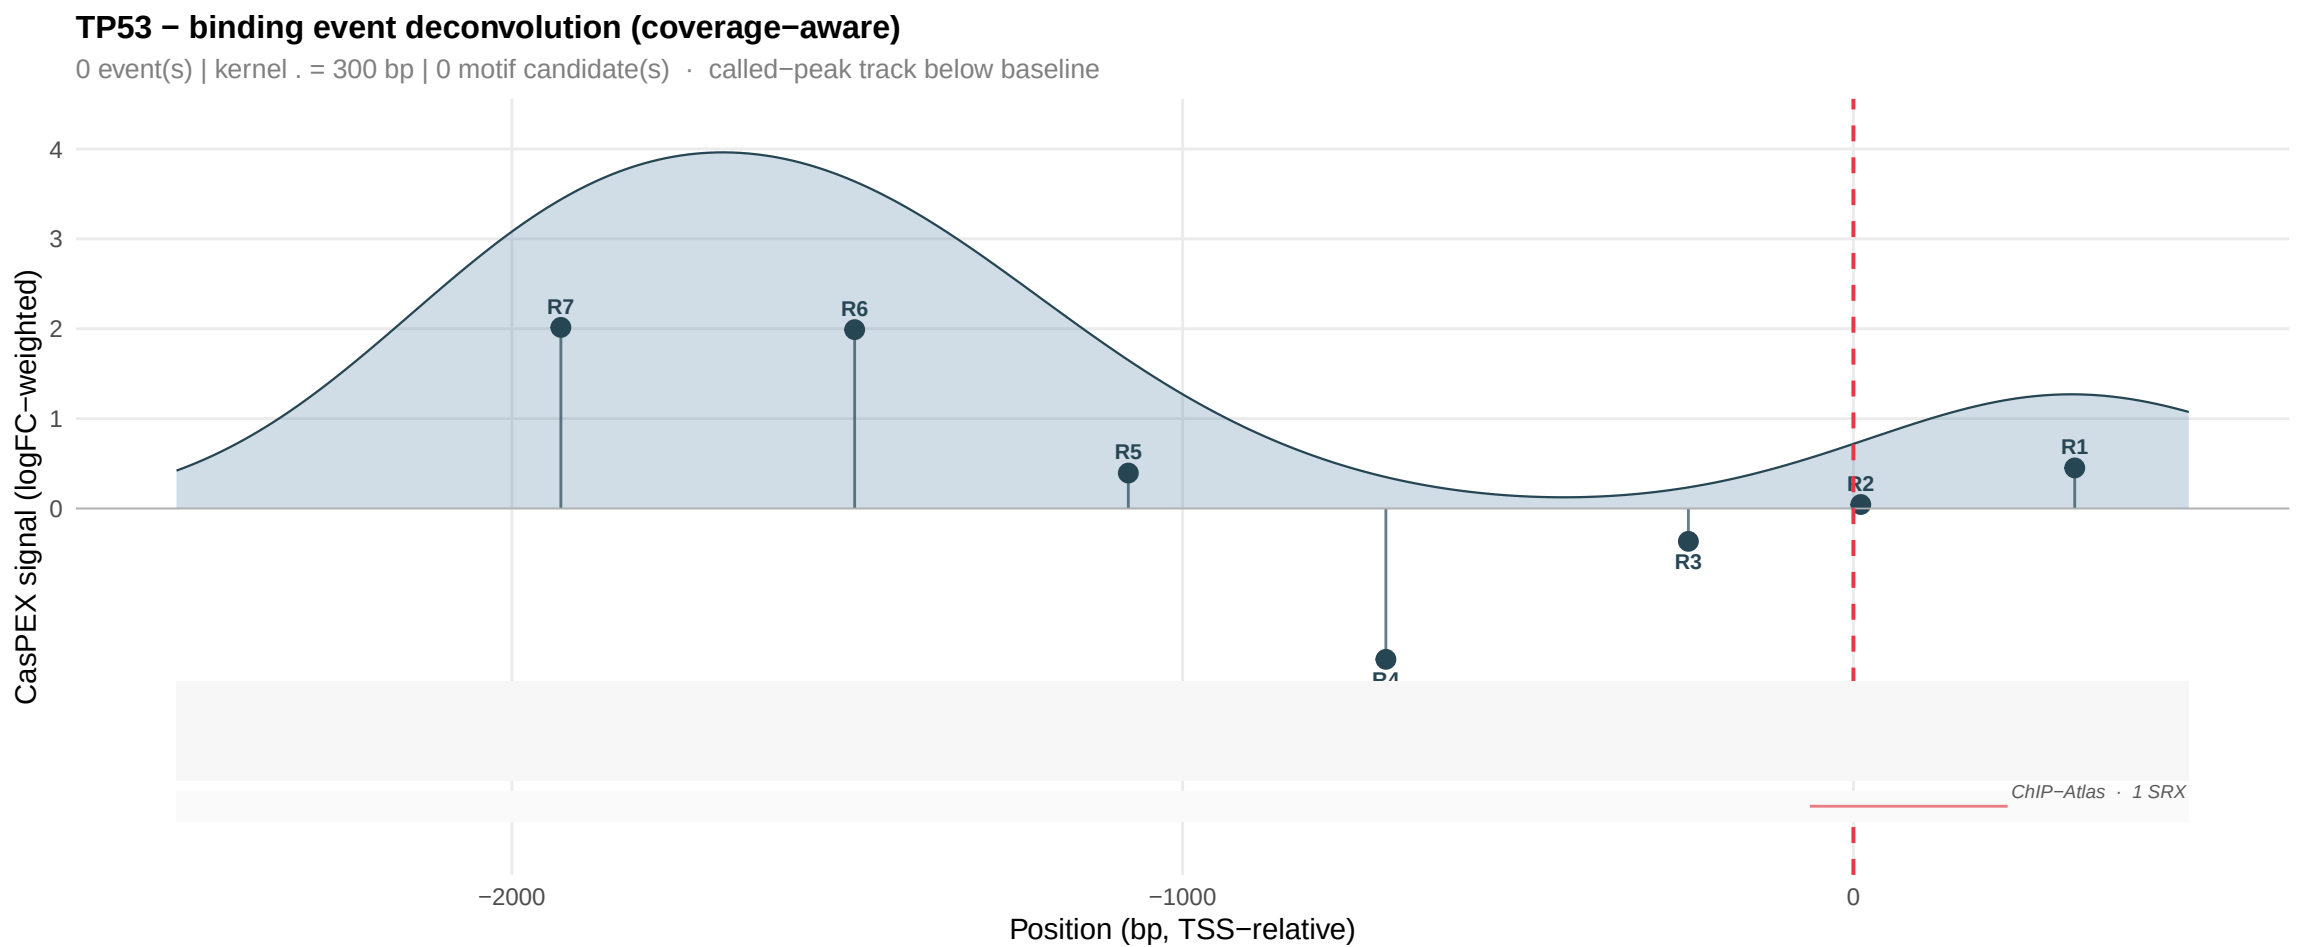
TP53 − binding event deconvolution (coverage−aware)
0 event(s) | kernel . = 300 bp | 0 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
4
3
2
1
0
R7
R6
R5
R4
R3
R2
R1
ChIP−Atlas · 1 SRX
−2000
−1000
0
Position (bp, TSS−relative)

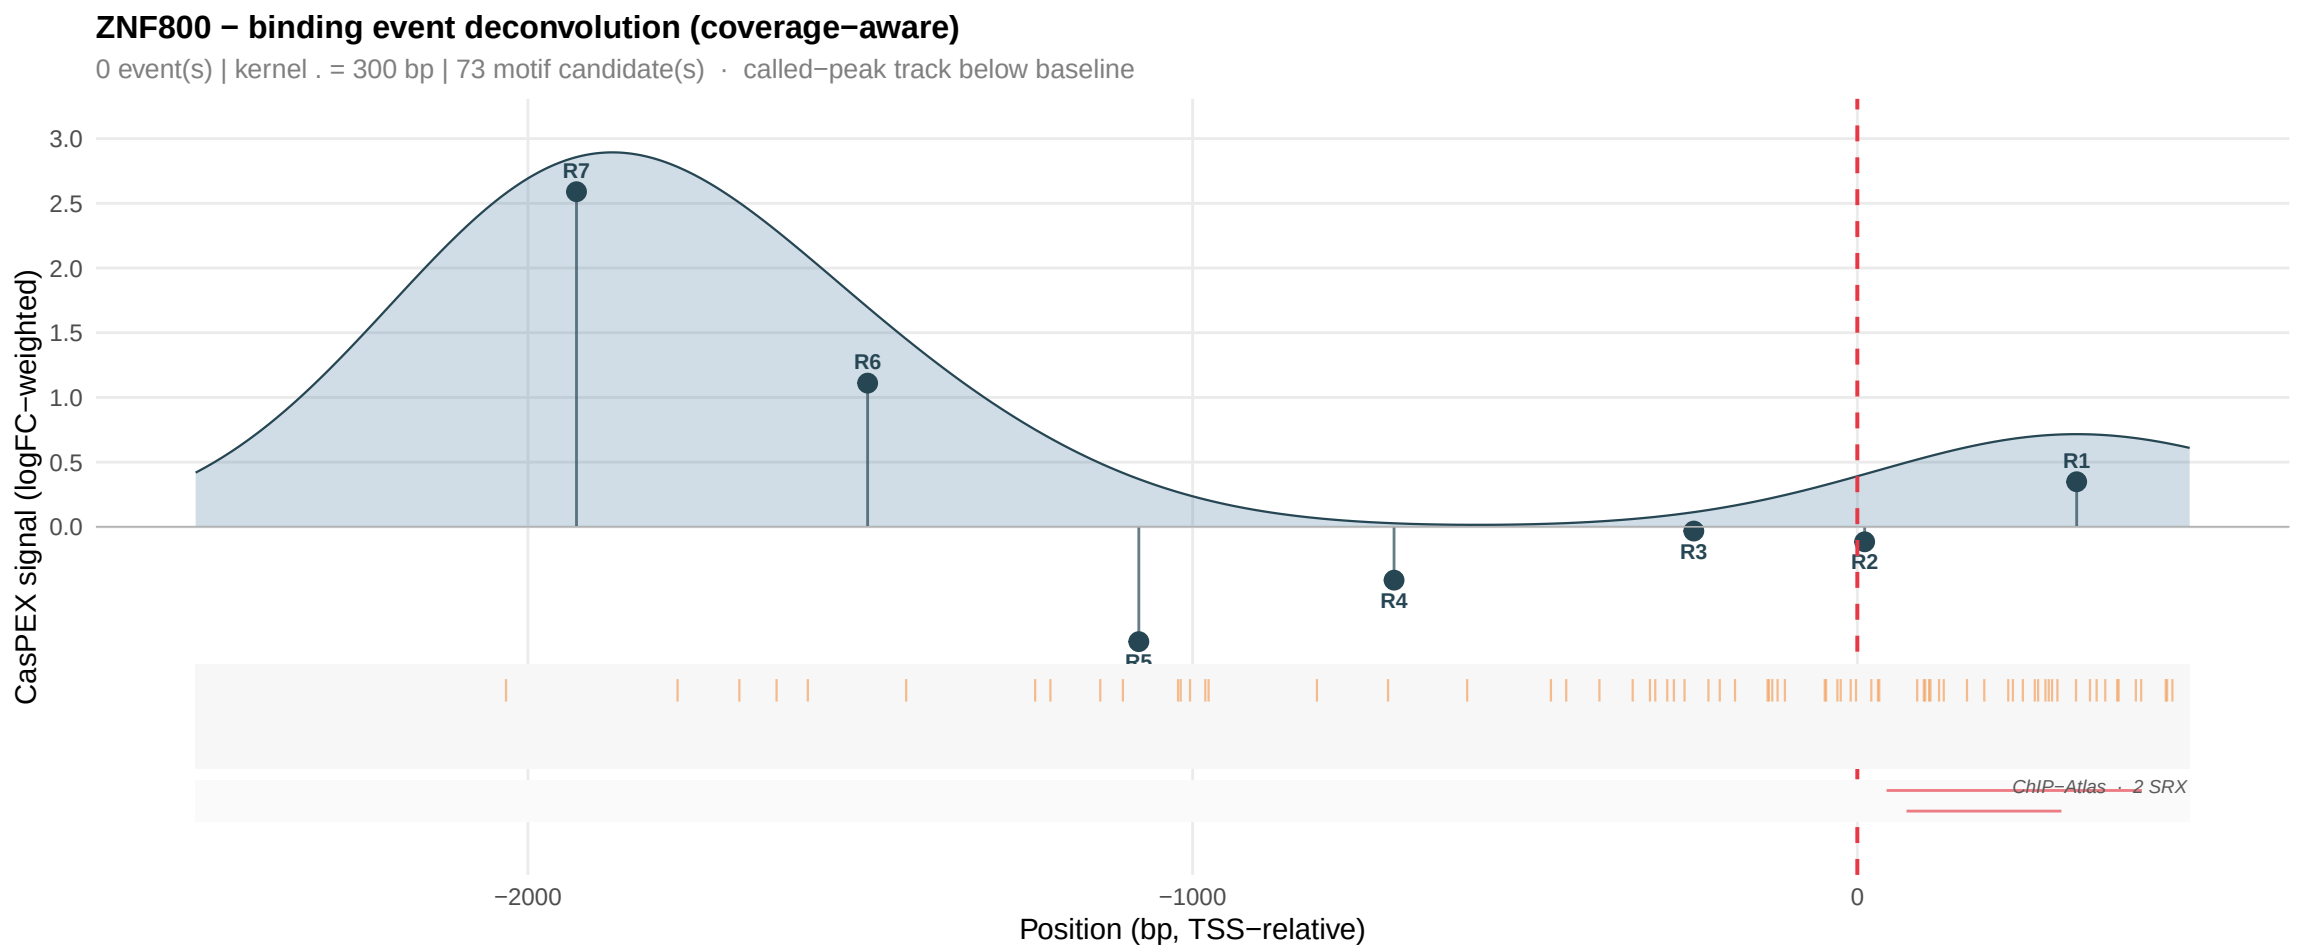
ZNF800 − binding event deconvolution (coverage−aware)
0 event(s) | kernel . = 300 bp | 73 motif candidate(s) · called−peak track below baseline
CasPEX signal (logFC−weighted)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
R7
R6
R5
R4
R3
R2
R1
ChIP−Atlas · 2 SRX
−2000
−1000
0
Position (bp, TSS−relative)