

7/7 points (100%)

## ✓ Congratulations! You passed!

Next Item



1. Suppose you want to start a goroutine which executes a function called **test1()**. What code would create this goroutine?

1/1 point

test1() go


start test1()

goroutine test1()


go test1()

Correct

Correct!

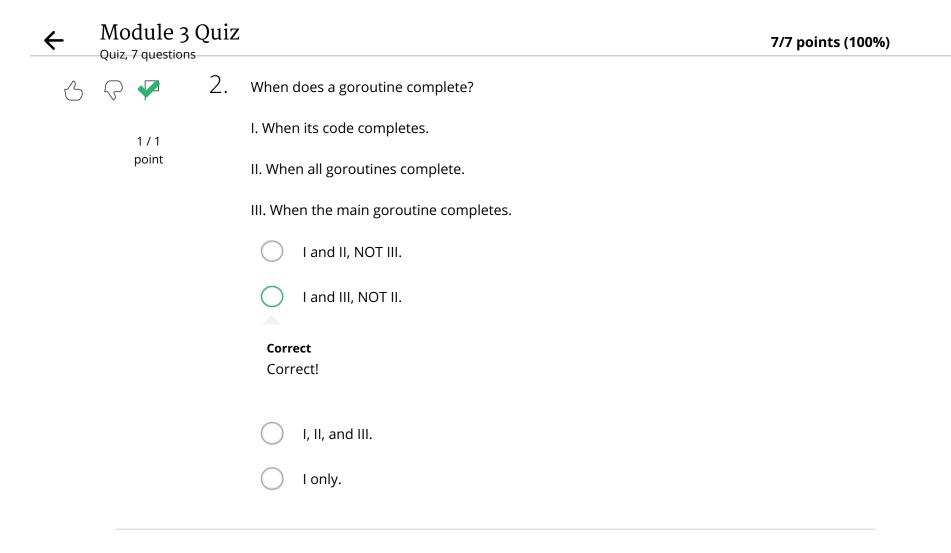


7/7 points (100%)

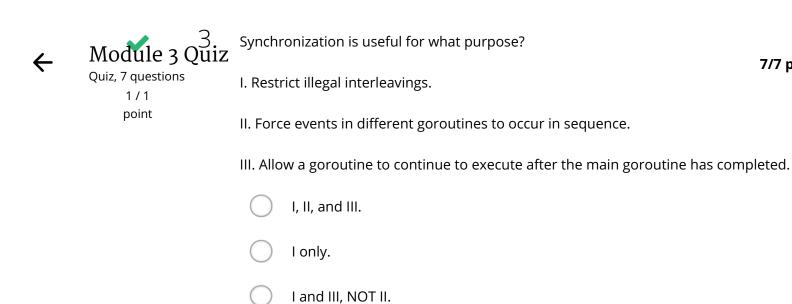

I and II, NOT III.

Correct!

3 of 7

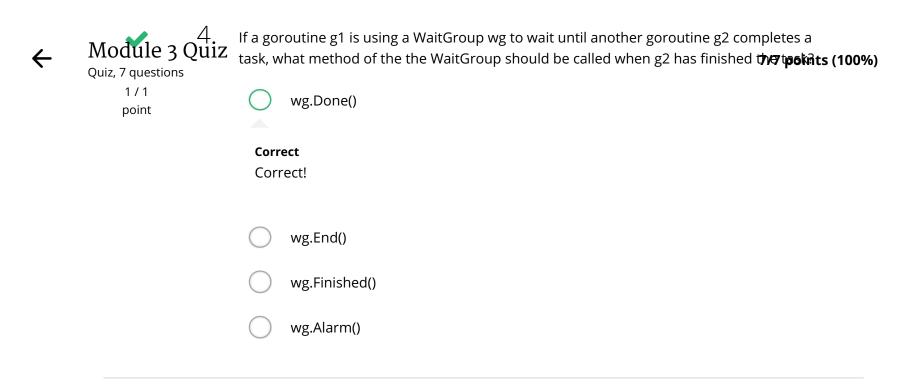

| <b>←</b> | Module 3 Quiz  Quiz, 7 questions | If a goroutine g1 is using a WaitGroup wg to wait until another goroutine g2 completes a task, what method of the WaitGroup should be called <i>before</i> g2 starts its tas <b>‡/7 points (100%)</b> wg.Fork() |
|----------|----------------------------------|---|
|          | point                            | wg.Start()  |
|          |                                  | wg.Add()  |
|          |                                  | Correct!  |
|          |                                  | wg.Begin()  |



How might you write code to allow a goroutine to receive data from a channel c?

7/7 points (100%)

Quiz, 7 questions 1 / 1 point

○ x <- c



Correct

Correct!



x <-- c

