


Sw-Structure of pedalier

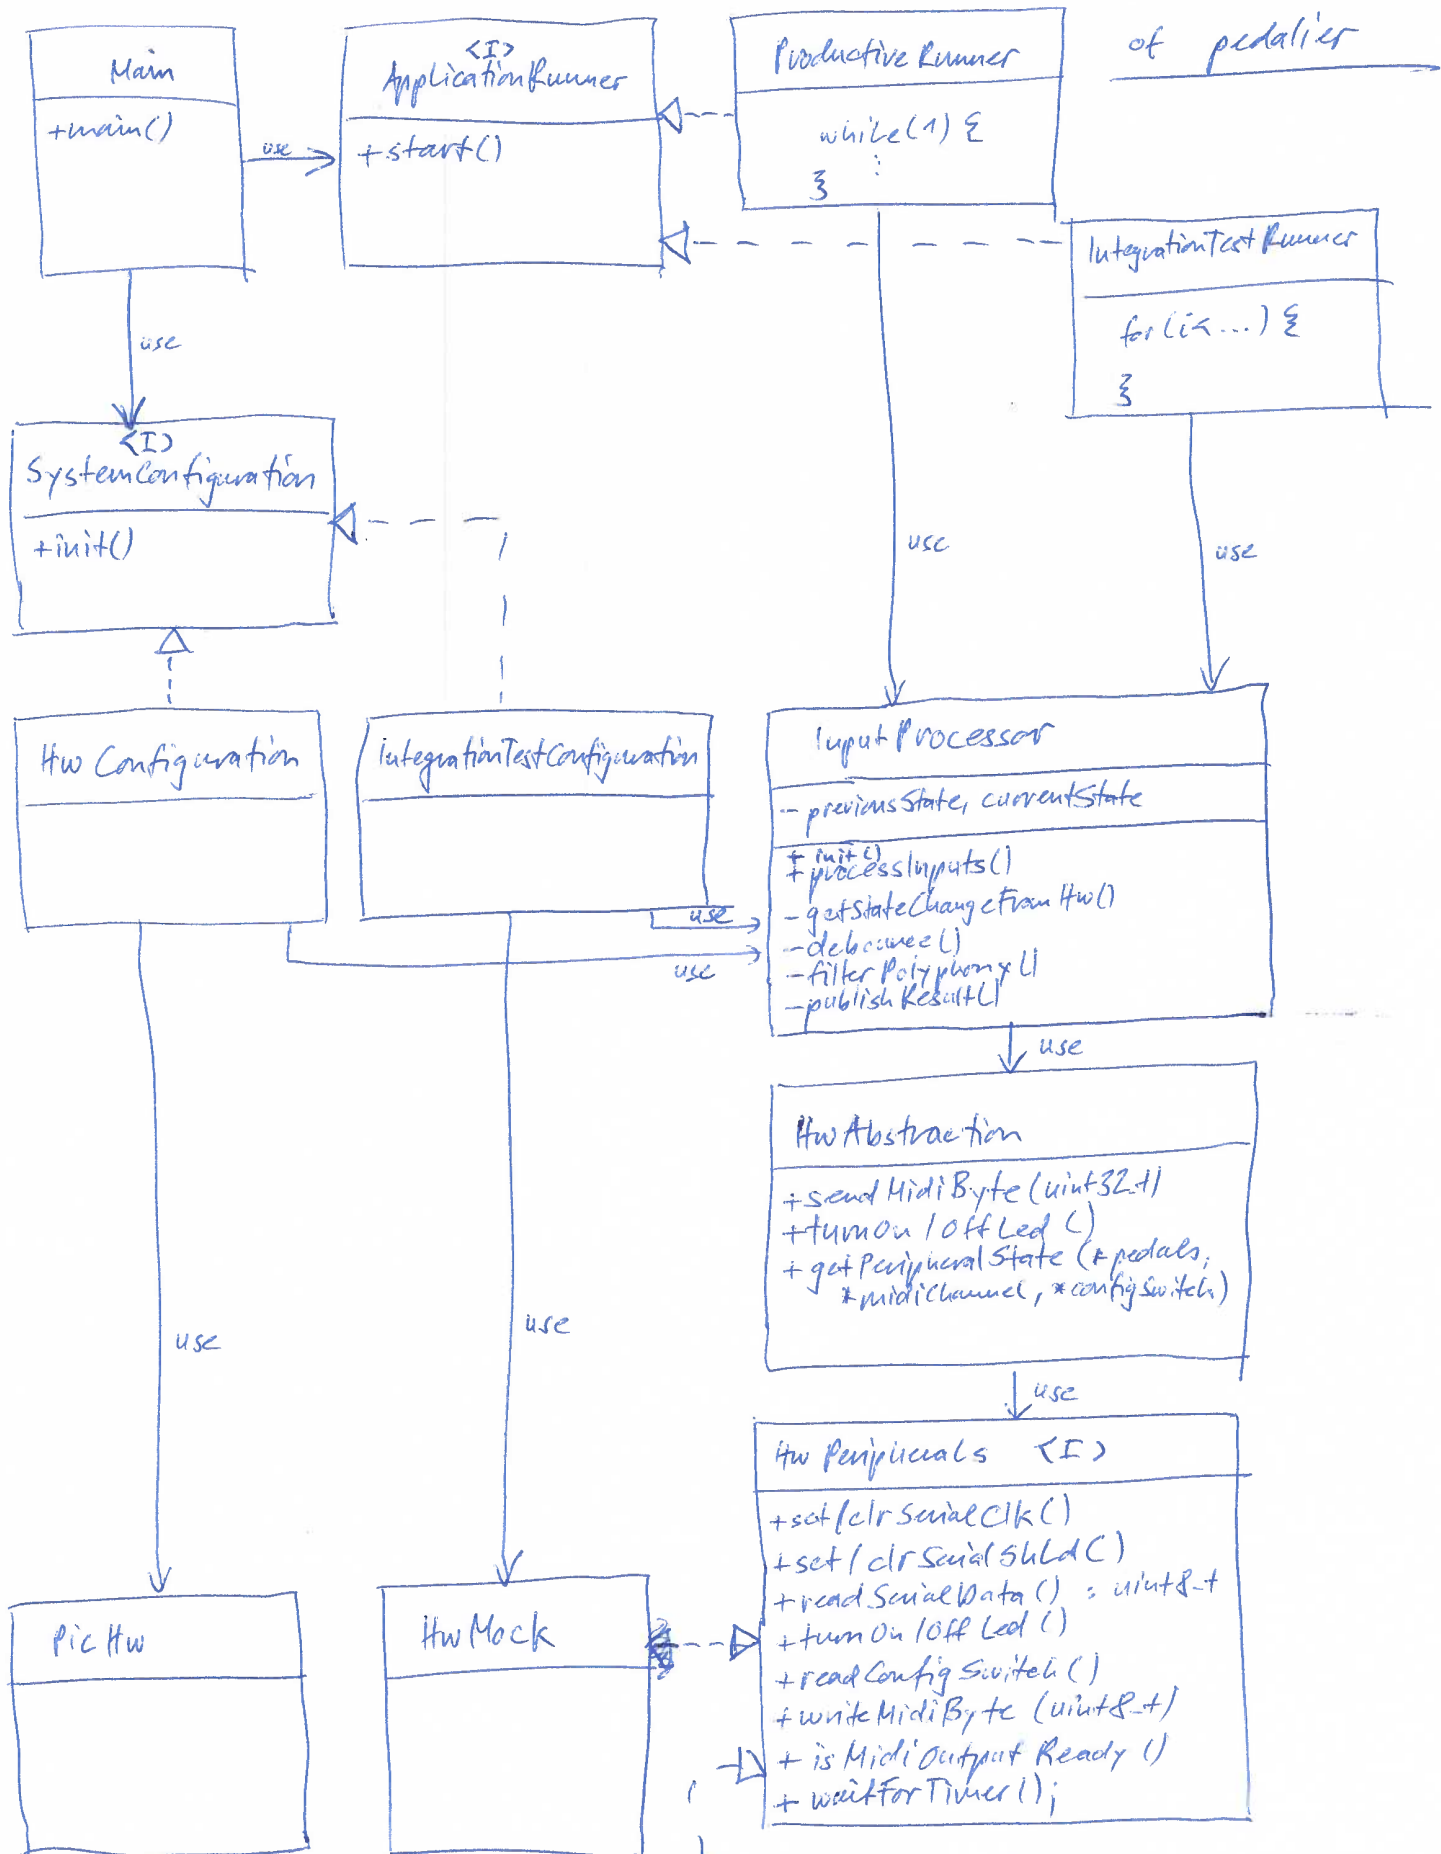

- Concepts:
- ① Interface implementations are chosen by Linker (→ compile script)
 - ② For integration testing:
 - each test compiles to its own executable
 - predefined stimuli, chosen by define statement.

③ Productive config: → sdcc compiler
 Test config: → gcc compiler