


TaDa!

Package name

ggplot2


```
library(tidyverse)
downloads <- cranlogs::cran_downloads("ggplot2", from = Sys.Date() - 365, to = Sys.Date())
downloads_rolling <- downloads %>%
  mutate(count = zoo::rollapply(count, 7, mean, fill = "extend"))
ggplot(downloads_rolling, aes(date, count)) + geom_line()
```

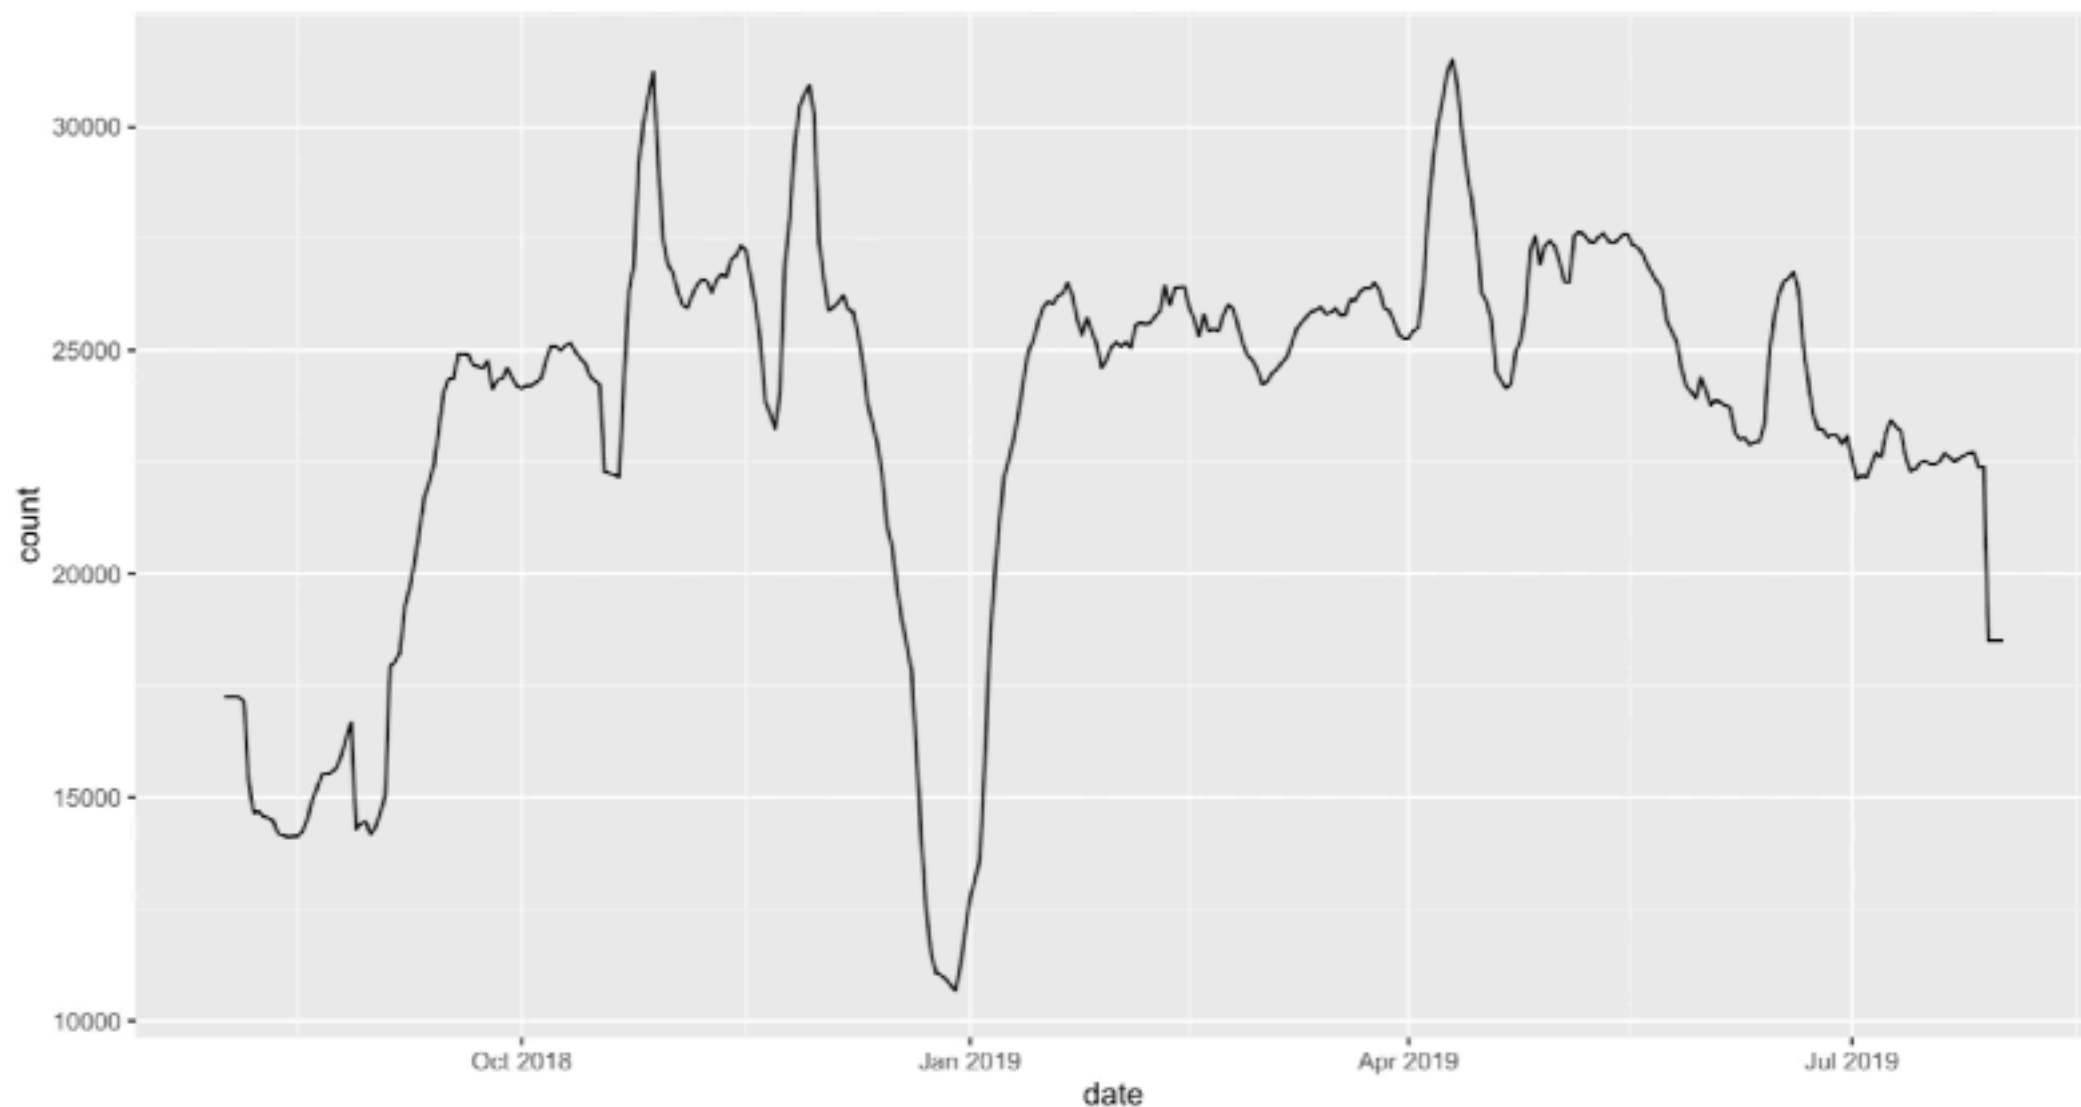

Package name

ggplot2


```
library(tidyverse)
downloads <- cranlogs::cran_downloads("ggplot2", from = Sys.Date() - 365, to = Sys.Date())
downloads_rolling <- downloads %>%
  mutate(count = zoo::rollapply(count, 7, mean, fill = "extend"))
ggplot(downloads_rolling, aes(date, count)) + geom_line()
```

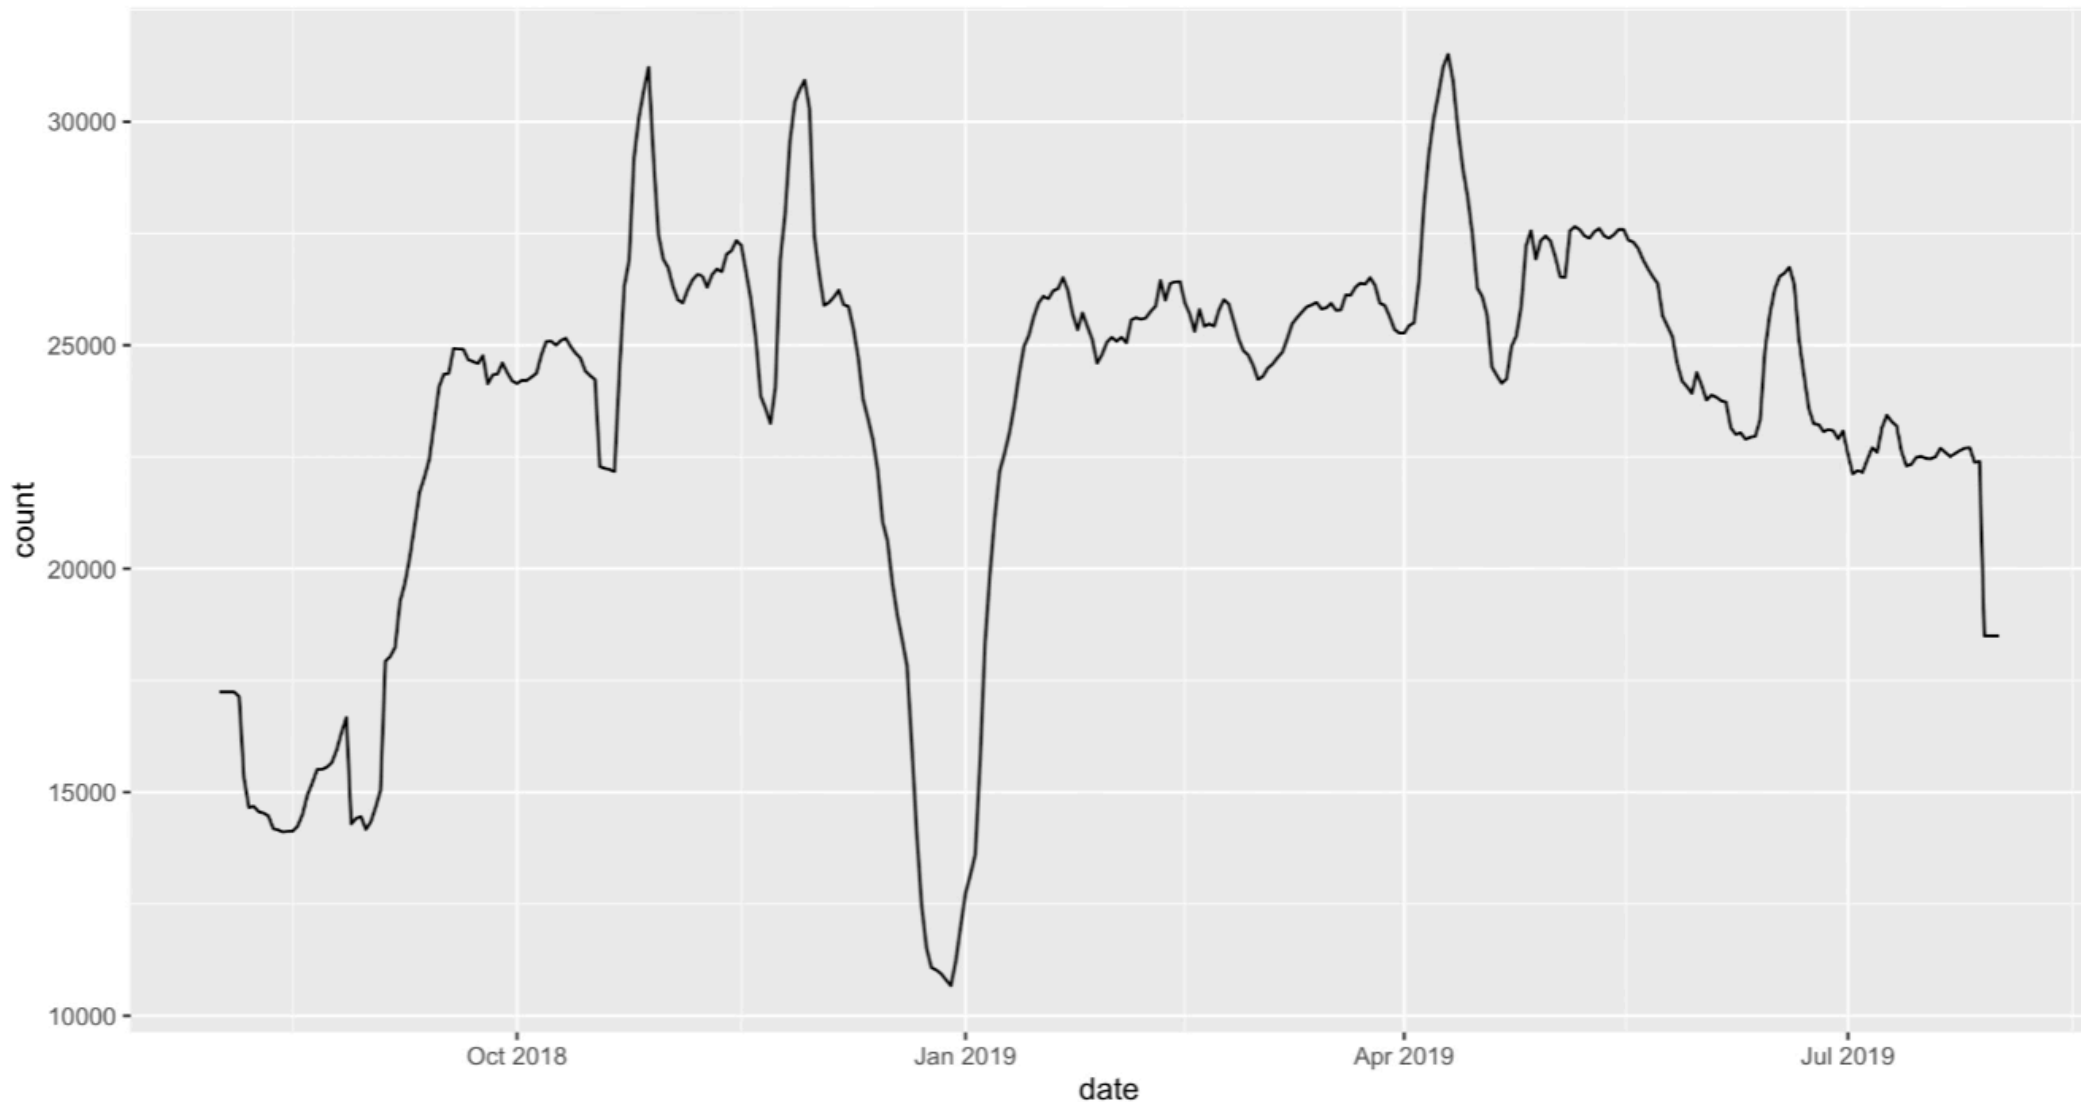

TaDa!

Package name

```
library(tidyverse)
downloads <- cranlogs::cran_downloads("ggplot2", from = Sys.Date() - 365, to = Sys.Date())
downloads_rolling <- downloads %>%
  mutate(count = zoo::rollapply(count, 7, mean, fill = "extend"))
ggplot(downloads_rolling, aes(date, count)) + geom_line()
```

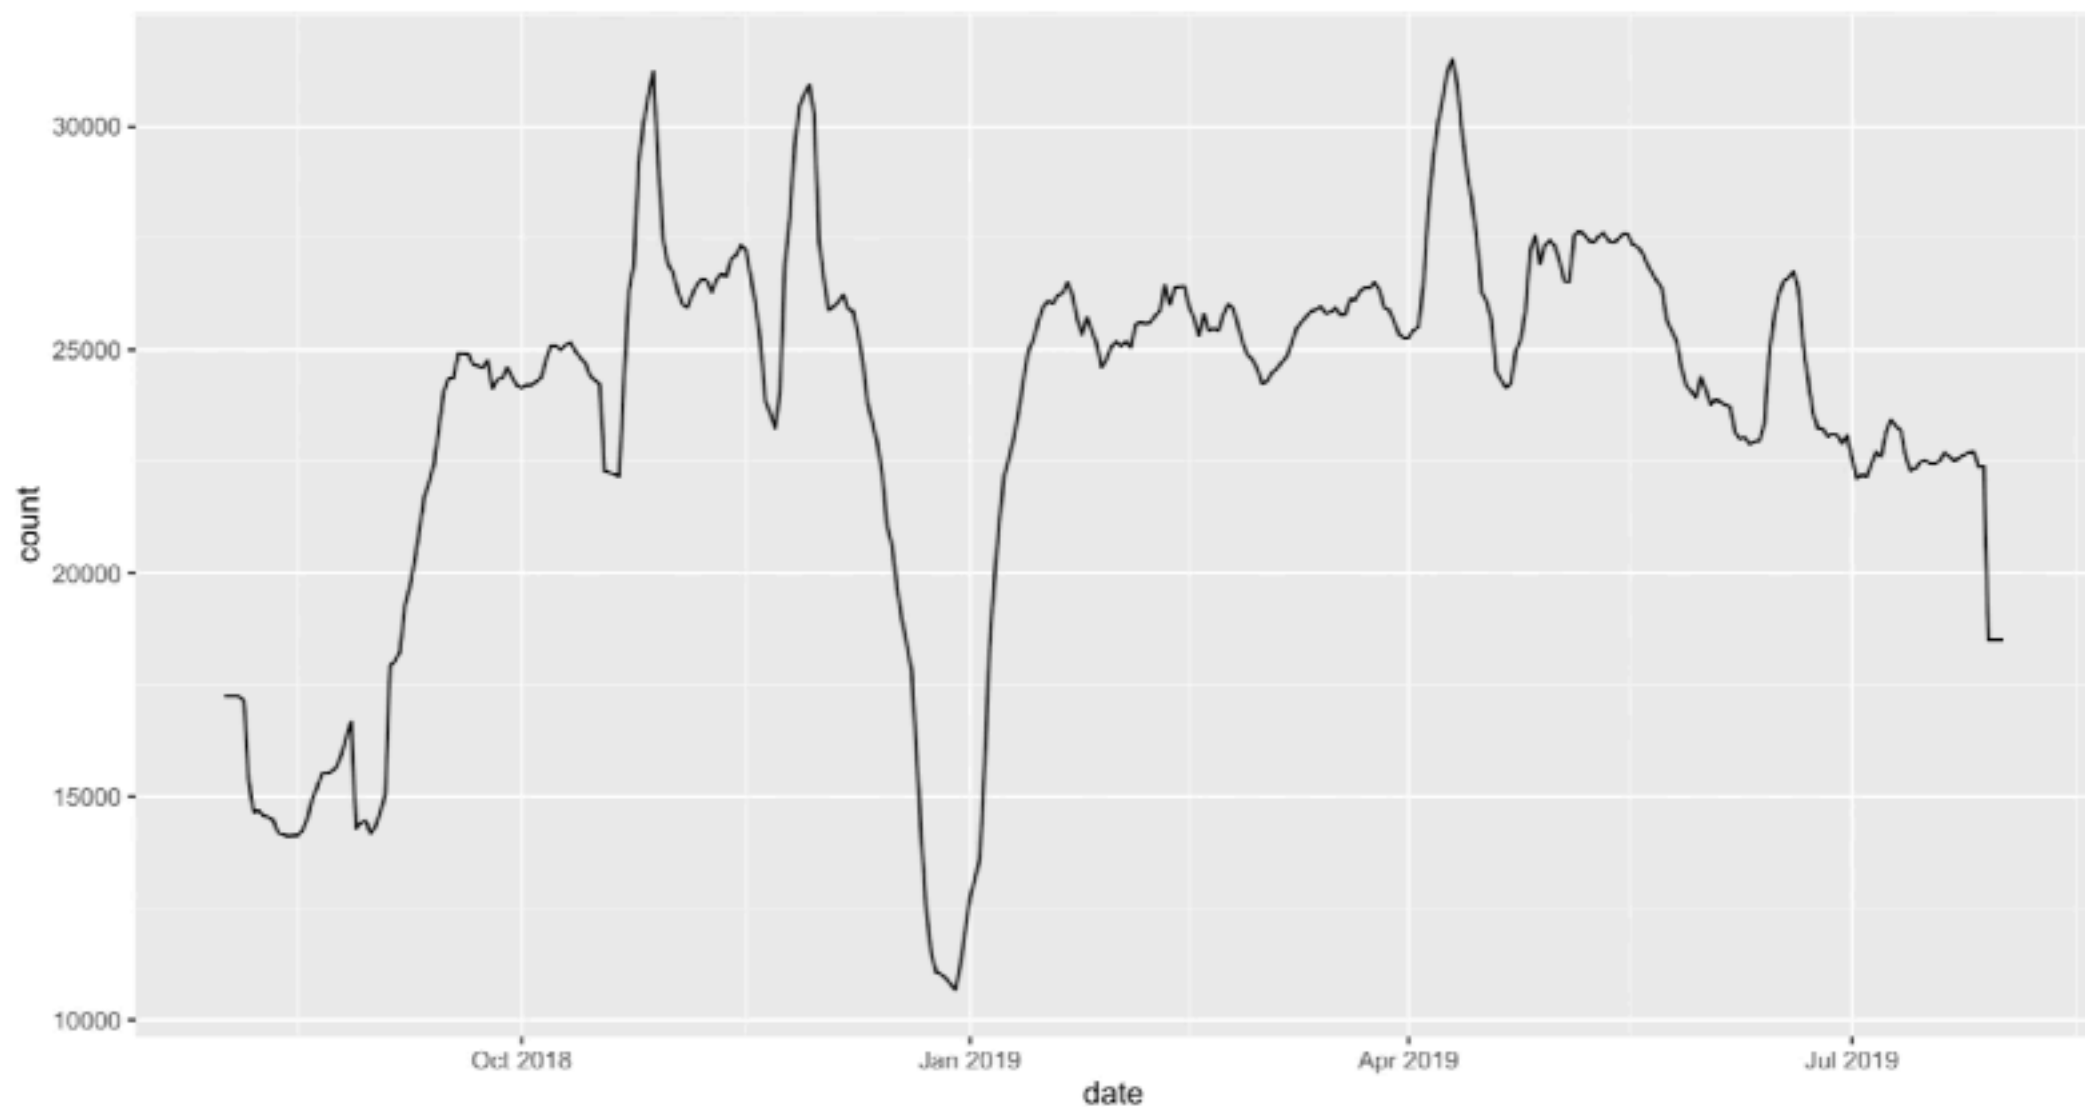

... but I don't need the code ***yet***

Package name

ggplot2

```
library(tidyverse)
downloads <- cranlogs::cran_downloads("ggplot2", from = Sys.Date() - 365, to = Sys.Date())
downloads_rolling <- downloads %>%
  mutate(count = zoo::rollapply(count, 7, mean, fill = "extend"))
ggplot(downloads_rolling, aes(date, count)) + geom_line()
```

