

Ans: Middlewares!


• `{p1umber2}` routes are built upon:

• {fiery}-Server lifecycle events

• {router}-Simple and versatile router

- `{reqres}` - Request parsing and response serialization



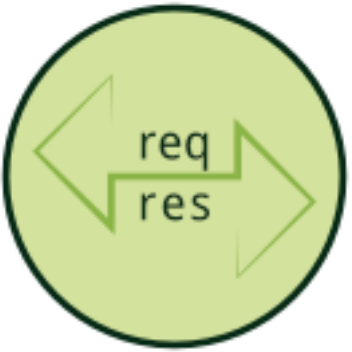

req
res

ROUTR







responsese serialization

• {reqres} - Request parsing and

Controlflow

•Compose many routers! Route's!

• Break-When returned, resolves "right now!"

- Ex: Logging/authn applied only if path matches

• Next-Must be next to the next Route



ROUTR

