

heLpr

Help for R

Barret Schloerke

Hadley Wickham


Funded by  REVOLUTION
ANALYTICS

R organization

- packages
 - loaded / installed
 - old
 - requirements
- demos
- vignettes
- examples

R help

📌 `help.start()`

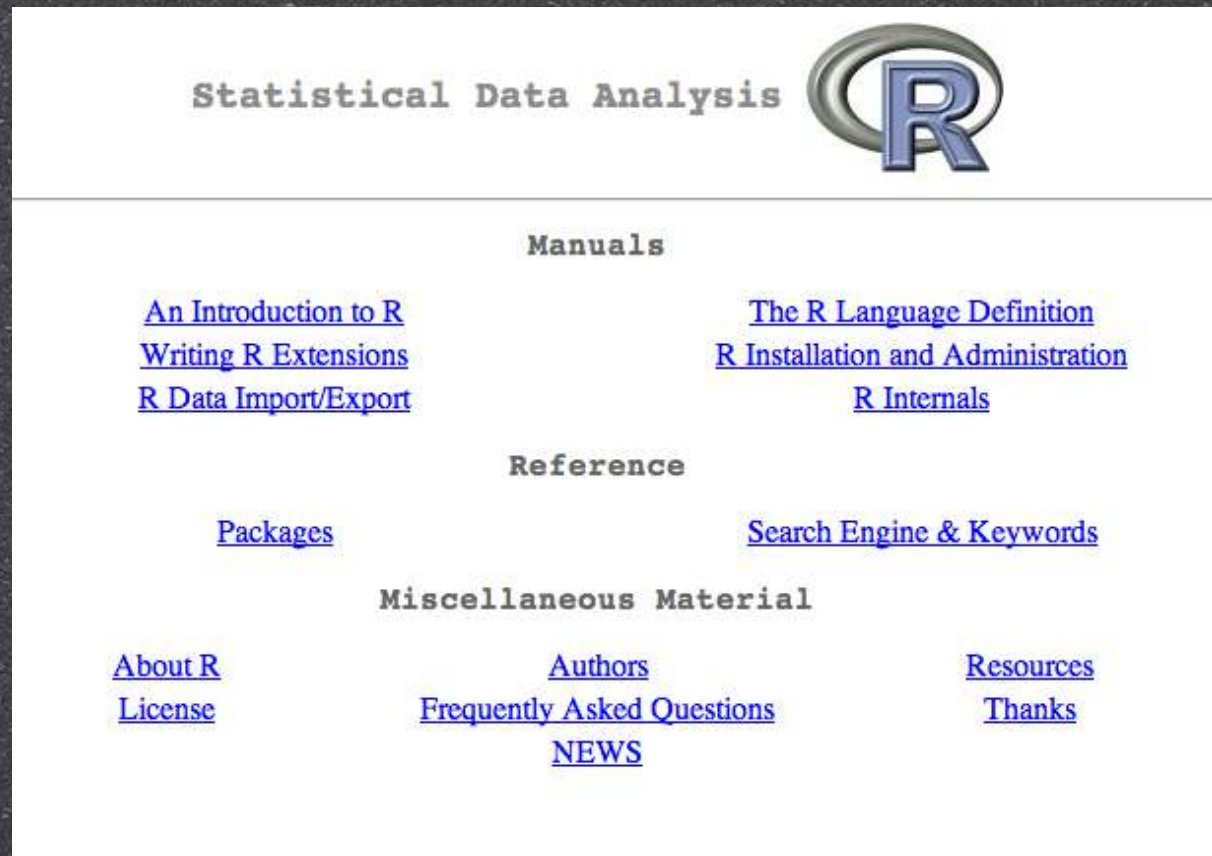

documentation

- plain text
- no links or connectivity
- can only look at help or work
- package maintenance

```
help                                package:utils                        R Documentation

Documentation

Description:

  'help' is the primary interface to the help systems.

Usage:

  help(topic, package = NULL, lib.loc = NULL,
        verbose = getOption("verbose"),
        try.all.packages = getOption("help.try.all.packages"),
        help_type = getOption("help_type"))


Arguments:

  topic: usually, a name or character string specifying the topic for
        which help is sought. A character string (enclosed in
        explicit single or double quotes) is always taken as naming a
        topic.

        If the value of 'topic' is a length-one character vector the
```


documentation

- plain text
- no links or connectivity
- can only look at help or work
- package maintenance

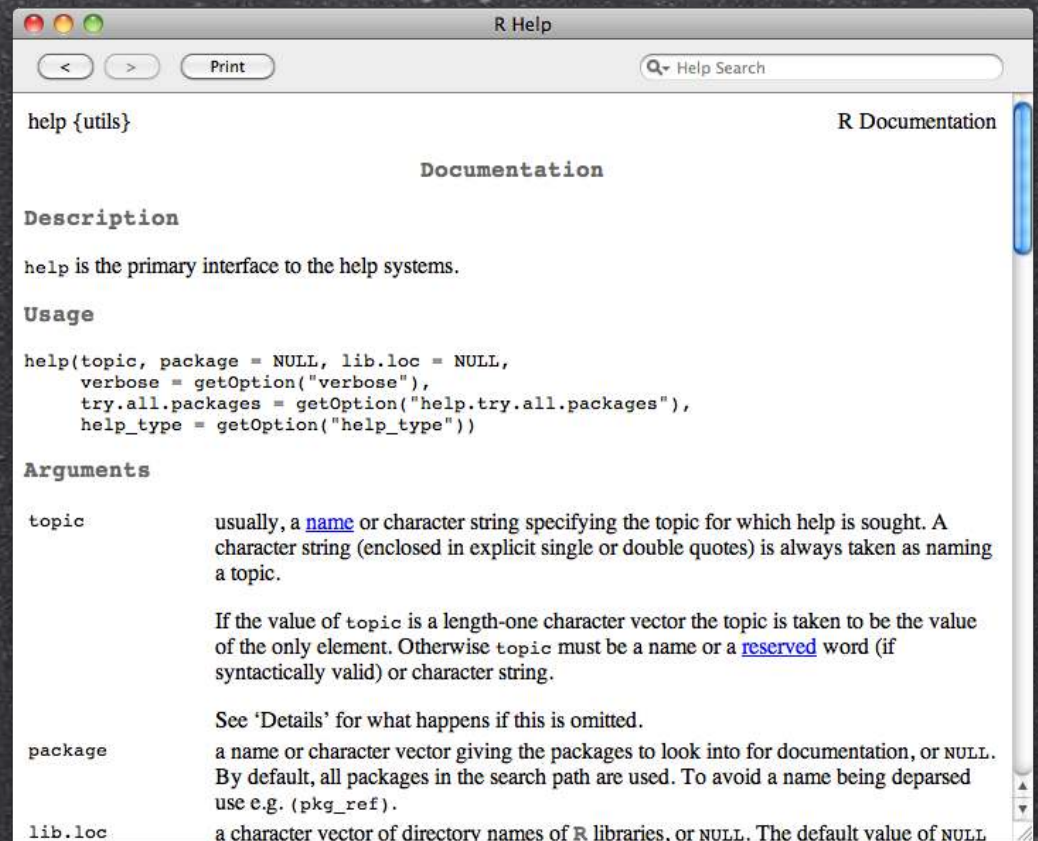

Vignettes

 vignette()

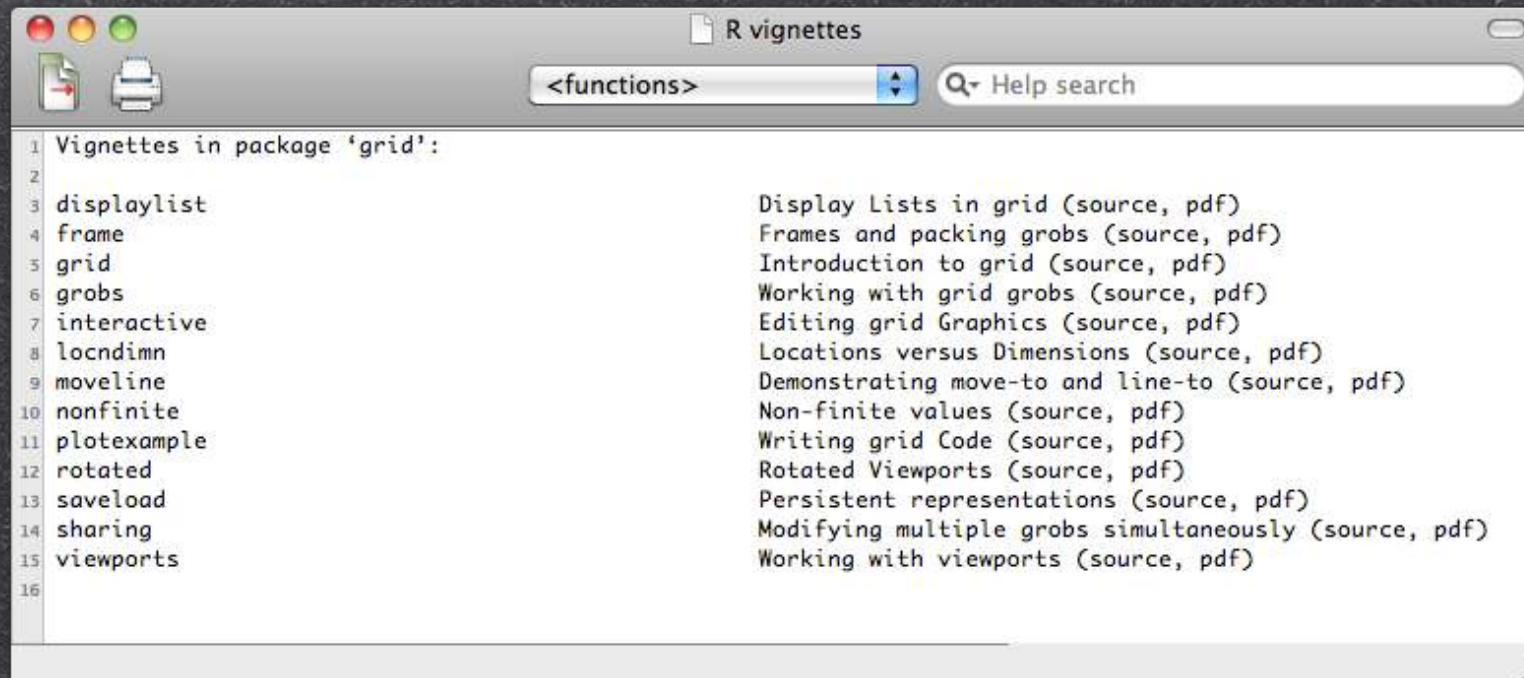

help for help?

help for help?



help

- web based documentation
- dynamic help for each user
- vastly connected documentation
- creative use of typography

home

Inside-R

[Barchart or Dotchart?](#) - Sep 07, 2010

powered by Google

Search:

Installed packages

Subset:

Name	Description
base	The R Base Package
bitops	Functions for Bitwise operations
codetools	Code Analysis Tools for R
datasets	The R Datasets Package
devtools	Tools to make developing R code easier
digest	Create cryptographic hash digests of R objects
evaluate	Parsing and evaluation tools that provide more details than the default.
ggplot2	An implementation of the Grammar of Graphics
graphics	The R Graphics Package
grDevices	The R Graphics Devices and Support for Colours and Fonts
grid	The Grid Graphics Package
highlight	Syntax highlighter
methods	Formal Methods and Classes
mutatr	Mutable objects for R.
parser	Detailed R source code parser
plyr	Tools for splitting, applying and combining data
profr	An alternative display for profiling information
proto	Prototype object-based programming
Rcpp	Seamless R and C++ Integration
RCurl	General network (HTTP/FTP/...) client interface for R
reshape	Flexibly reshape data.
rjson	JSON for R
roxygen	Literate Programming in R
sinatra	A simple web app framework for R, based on sinatra.
stats	The R Stats Package
stringr	Make it easier to work with strings.

Top 10 Functions

- [as.data.frame](#)
- [c](#)
- [diff](#)
- [factor](#)
- [max](#)
- [range](#)
- [require](#)
- [stop](#)
- [subset](#)
- [sum](#)

Last 10 Functions

- [sum](#)
- [c](#)
- [max](#)
- [subset](#)
- [factor](#)
- [as.data.frame](#)
- [range](#)
- [diff](#)
- [stop](#)
- [require](#)

Manuals

- [R Installation and Administration](#)
- [R Data Import/Export](#)
- [Writing R Extensions](#)
- [R FAQ](#)
- [An Introduction to R](#)
- [R Internals](#)
- [R Language Definition](#)

home

Inside-R

[Barchart or Dotchart?](#) - Sep 07, 2010

powered by Google

Search:

Installed packages

Subset:

Name	Description
base	The R Base Package
bitops	Functions for Bitwise operations
codetools	Code Analysis Tools for R
datasets	The R Datasets Package
devtools	Tools to make developing R code easier
digest	Create cryptographic hash digests of R objects
evaluate	Parsing and evaluation tools that provide more details than the default.
ggplot2	An implementation of the Grammar of Graphics
graphics	The R Graphics Package
grDevices	The R Graphics Devices and Support for Colours and Fonts
grid	The Grid Graphics Package
highlight	Syntax highlighter
methods	Formal Methods and Classes
mutatr	Mutable objects for R.
parser	Detailed R source code parser
plyr	Tools for splitting, applying and combining data
profr	An alternative display for profiling information
proto	Prototype object-based programming
Rcpp	Seamless R and C++ Integration
RCurl	General network (HTTP/FTP/...) client interface for R
reshape	Flexibly reshape data.
rjson	JSON for R
roxygen	Literate Programming in R
sinatra	A simple web app framework for R, based on sinatra.
stats	The R Stats Package
stringr	Make it easier to work with strings.

Top 10 Functions

- [as.data.frame](#)
- [c](#)
- [diff](#)
- [factor](#)
- [max](#)
- [range](#)
- [require](#)
- [stop](#)
- [subset](#)
- [sum](#)

Last 10 Functions

- [sum](#)
- [c](#)
- [max](#)
- [subset](#)
- [factor](#)
- [as.data.frame](#)
- [range](#)
- [diff](#)
- [stop](#)
- [require](#)

Manuals

- [R Installation and Administration](#)
- [R Data Import/Export](#)
- [Writing R Extensions](#)
- [R FAQ](#)
- [An Introduction to R](#)
- [R Internals](#)
- [R Language Definition](#)

Dynamic Help

home

Inside-R [Barchart or Dotchart?](#) - Sep 07, 2010

powered by Google

Search:

Installed packages

Subset:

Name	Description
base	The R Base Package
bitops	Functions for Bitwise operations
codetools	Code Analysis Tools for R
datasets	The R Datasets Package
devtools	Tools to make developing R code easier
digest	Create cryptographic hash digests of R objects
evaluate	Parsing and evaluation tools that provide more details than the default.
ggplot2	An implementation of the Grammar of Graphics
graphics	The R Graphics Package
grDevices	The R Graphics Devices and Support for Colours and Fonts
grid	The Grid Graphics Package
highlight	Syntax highlighter
methods	Formal Methods and Classes
mutatr	Mutable objects for R.
parser	Detailed R source code parser
plyr	Tools for splitting, applying and combining data
profr	An alternative display for profiling information
proto	Prototype object-based programming
Rcpp	Seamless R and C++ Integration
RCurl	General network (HTTP/FTP/...) client interface for R
reshape	Flexibly reshape data.
rjson	JSON for R
roxygen	Literate Programming in R
sinatra	A simple web app framework for R, based on sinatra.
stats	The R Stats Package
stringr	Make it easier to work with strings.

Loaded Packages

Top 10 Functions

- [as.data.frame](#)
- [c](#)
- [diff](#)
- [factor](#)
- [max](#)
- [range](#)
- [require](#)
- [stop](#)
- [subset](#)
- [sum](#)

Last 10 Functions

- [sum](#)
- [c](#)
- [max](#)
- [subset](#)
- [factor](#)
- [as.data.frame](#)
- [range](#)
- [diff](#)
- [stop](#)
- [require](#)

Manuals

- [R Installation and Administration](#)
- [R Data Import/Export](#)
- [Writing R Extensions](#)
- [R FAQ](#)
- [An Introduction to R](#)
- [R Internals](#)
- [R Language Definition](#)

Dynamic Help

home

Comprehensive Search

Inside-R [Barchart or Dotchart?](#) - Sep 07, 2010

powered by Google

Search:

Installed packages

Subset:

Name	Description
base	The R Base Package
bitops	Functions for Bitwise operations
codetools	Code Analysis Tools for R
datasets	The R Datasets Package
devtools	Tools to make developing R code easier
digest	Create cryptographic hash digests of R objects
evaluate	Parsing and evaluation tools that provide more details than the default.
ggplot2	An implementation of the Grammar of Graphics
graphics	The R Graphics Package
grDevices	The R Graphics Devices and Support for Colours and Fonts
grid	The Grid Graphics Package
highlight	Syntax highlighter
methods	Formal Methods and Classes
mutatr	Mutable objects for R.
parser	Detailed R source code parser
plyr	Tools for splitting, applying and combining data
profr	An alternative display for profiling information
proto	Prototype object-based programming
Rcpp	Seamless R and C++ Integration
RCurl	General network (HTTP/FTP/...) client interface for R
reshape	Flexibly reshape data.
rjson	JSON for R
roxygen	Literate Programming in R
sinatra	A simple web app framework for R, based on sinatra.
stats	The R Stats Package
stringr	Make it easier to work with strings.

Loaded Packages

Top 10 Functions

- [as.data.frame](#)
- [c](#)
- [diff](#)
- [factor](#)
- [max](#)
- [range](#)
- [require](#)
- [stop](#)
- [subset](#)
- [sum](#)

Last 10 Functions

- [sum](#)
- [c](#)
- [max](#)
- [subset](#)
- [factor](#)
- [as.data.frame](#)
- [range](#)
- [diff](#)
- [stop](#)
- [require](#)


Manuals

- [R Installation and Administration](#)
- [R Data Import/Export](#)
- [Writing R Extensions](#)
- [R FAQ](#)
- [An Introduction to R](#)
- [R Internals](#)
- [R Language Definition](#)


Dynamic Help

home


- show all packages
- update visible packages

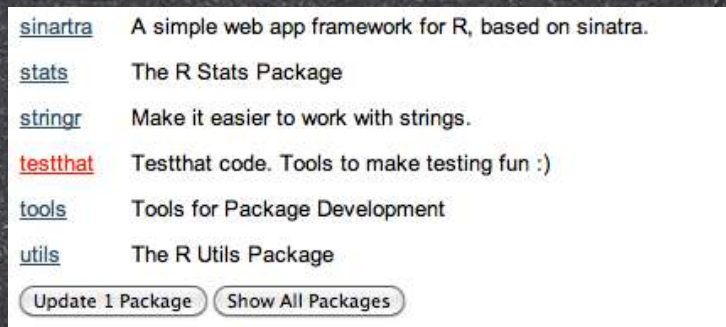

- update individual packages (on hover)



- block screen while updating

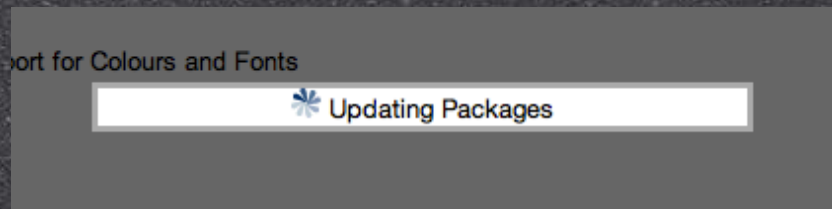

package

R → stats

Search:

stats

R statistical functions

Package Info

[stats](#)

Groups

[Beta](#), [Binomial](#), [Cauchy](#), [Chisquare](#), [dendrogram](#), [Error](#), [Exponential](#), [FDist](#), [GammaDist](#), [Geometric](#), [Hypergeometric](#), [Logistic](#), [Lognormal](#), [Multinomial](#), [NegBinomial](#), [Normal](#), [Poisson](#), [SafePrediction](#), [SignRank](#), [spec](#), [stats-deprecated](#), [TDist](#), [terms.object](#), [Tukey](#), [Uniform](#), [vcov.gls](#), [vcov.lme](#), [Weibull](#), [Wilcoxon](#)

Functions

[.checkMFCClasses](#), [.getXlevels](#), [.MFclass](#), [acf](#), [acf2AR](#), [add.scope](#), [add1](#), [add1.default](#), [add1.glm](#), [add1.lm](#), [addmargins](#), [aggregate](#), [aggregate.data.frame](#), [aggregate.default](#), [aggregate.formula](#), [aggregate.ts](#), [AIC](#), [alias](#), [alias.formula](#), [alias.lm](#), [anova](#), [anova.glm](#), [anova.glm.list](#), [anova.lm](#), [anova.lm.list](#), [anova.mlm](#), [anova.mlmlist](#), [ansari.test](#), [ansari.test.default](#), [ansari.test.formula](#), [aov](#), [approx](#), [approxfun](#), [ar](#), [ar.burg](#), [ar.burg.default](#), [ar.burg.mts](#), [ar.mle](#), [ar.ols](#), [ar.yw](#), [ar.yw.default](#), [ar.yw.mts](#), [arima](#), [arima.sim](#), [arima0](#), [arima0.diag](#), [ARMAacf](#), [ARMAtoMA](#), [as.dendrogram](#), [as.dendrogram.dendrogram](#), [as.dendrogram.hclust](#), [as.dist](#), [as.dist.default](#), [as.formula](#), [as.hclust](#), [as.hclust.default](#), [as.hclust.twins](#), [as.matrix.dist](#), [as.stepfun](#), [as.ts](#), [as.ts.default](#), [asOneSidedFormula](#), [ave](#), [bandwidth.kernel](#), [bartlett.test](#), [bartlett.test.default](#), [bartlett.test.formula](#), [binom.test](#), [binomial](#), [biplot](#), [biplot.default](#), [biplot.pcomp](#), [biplot.princomp](#), [Box.test](#), [bw.bcv](#), [bw.nrd](#), [bw.nrd0](#), [bw.SJ](#), [bw.ucv](#), [C](#), [cancor](#), [case.names](#), [case.names.lm](#), [cbind.ts](#), [ccf](#), [chisq.test](#), [cmdscale](#), [coef](#), [coefficients](#), [complete.cases](#), [confint](#), [confint.default](#), [constrOptim](#), [contr.helmert](#), [contr.poly](#), [contr.SAS](#), [contr.sum](#), [contr.treatment](#), [contrasts](#), [contrasts<-](#), [convolve](#), [cooks.distance](#), [cooks.distance.glm](#), [cooks.distance.lm](#), [cophenetic](#), [cophenetic.default](#), [cophenetic.dendrogram](#), [cor](#), [cor.test](#), [cor.test.default](#), [cor.test.formula](#), [cov](#), [cov.wt](#), [cov2cor](#), [covratio](#), [cpgram](#), [cut.dendrogram](#), [cutree](#), [cycle](#), [D](#), [dbeta](#), [dbinom](#), [dcauchy](#), [dchisq](#), [decompose](#), [delete.response](#), [deltat](#), [dendapply](#), [density](#), [density.default](#), [deriv](#), [deriv.default](#), [deriv.formula](#), [deriv3](#), [deriv3.default](#), [deriv3.formula](#), [deviance](#), [dexp](#), [df](#), [df.kernel](#), [df.residual](#), [dfbeta](#), [dfbeta.lm](#), [dfbetas](#), [dfbetas.lm](#), [dffits](#), [dgamma](#), [dgeom](#), [dhyper](#), [diff.ts](#), [diffinv](#), [diffinv.default](#), [diffinv.ts](#), [dist](#), [dlnorm](#), [dlogis](#), [dmultinom](#), [dnbinom](#), [dnorm](#), [dpois](#), [drop.scope](#), [drop.terms](#), [drop1](#), [drop1.default](#), [drop1.glm](#), [drop1.lm](#), [dsignrank](#), [dt](#), [dummy.coef](#), [dummy.coef.aovlist](#), [dummy.coef.lm](#), [dunif](#), [dweibull](#), [dwilcox](#), [ecdf](#), [eff.aovlist](#), [effects](#), [effects.glm](#), [effects.lm](#), [embed](#), [end](#), [estVar](#), [expand.model.frame](#), [extractAIC](#), [factanal](#), [factor.scope](#), [family](#), [family.glm](#), [family.lm](#), [fft](#), [filter](#), [fisher.test](#), [fitted](#), [fitted.default](#), [fitted.values](#), [fivenum](#), [fligner.test](#), [fligner.test.default](#), [fligner.test.formula](#), [format.dist](#), [format.ftable](#), [formula](#), [formula.data.frame](#), [formula.default](#), [formula.formula](#), [formula.lm](#), [formula.nls](#), [formula.terms](#), [frequency](#), [friedman.test](#), [friedman.test.default](#), [friedman.test.formula](#), [ftable](#), [ftable.default](#), [ftable.formula](#), [Gamma](#), [gaussian](#), [getInitial](#), [getInitial.default](#), [getInitial.formula](#), [getInitial.selfStart](#), [get_all_vars](#), [glm](#), [glm.control](#),

Authors

R Development Core Team and contributors worldwide; [R Core Team](#)

Demos

[glm.vr](#)

Some `glm()` examples from V&R with several predictors

[lm.glm](#)

Some linear and generalized linear modelling examples from 'An Introduction to Statistical Modelling' by Annette Dobson

[nlm](#)

Nonlinear least-squares using `nlm()`

[smooth](#)

'Visualize' steps in Tukey's smoothers

Reverse Dependencies

[cluster](#), [e1071](#), [graph](#), [MASS](#), [Matrix](#), [MatrixModels](#), [mclust](#), [mix](#), [princurve](#), [randomForest](#), [RODBC](#), [RWeka](#), [SparseM](#), [vcd](#), [boot](#), [class](#), [foreign](#), [KernSmooth](#), [lattice](#), [mgcv](#), [nlme](#), [nnet](#), [part](#), [spatial](#), [splines](#), [stats4](#), [survival](#), [animation](#), [FitAR](#), [ggplot2](#), [glmnet](#), [Hmisc](#), [RBGL](#), [Snowball](#), [YaleToolkit](#), [GGally](#), [productplots](#), [tourr](#), [tourrGui](#)

General Info

Version: 2.11.1

License: Part of R 2.11.1

[CRAN](#)

[CRAN Package Check](#)

package

R → stats

Search:

stats

R statistical functions

Package Info

stats

Groups

Beta, Binomial, Cauchy, Chisquare, dendrogram, Error, Exponential, FDist, GammaDist, Geometric, Hypergeometric, Logistic, Lognormal, Multinomial, NegBinomial, Normal, Poisson, SafePrediction, SignRank, spec, stats-deprecated, TDist, terms.object, Tukey, Uniform, vcov.gls, vcov.lme, Weibull, Wilcoxon

Functions

[.checkMFCClasses](#), [.getXlevels](#), [.MFclass](#), [acf](#), [acf2AR](#), [add.scope](#), [add1](#), [add1.default](#), [add1.glm](#), [add1.lm](#), [addmargins](#), [aggregate](#), [aggregate.data.frame](#), [aggregate.default](#), [aggregate.formula](#), [aggregate.ts](#), [AIC](#), [alias](#), [alias.formula](#), [alias.lm](#), [anova](#), [anova.glm](#), [anova.glm.list](#), [anova.lm](#), [anova.lm.list](#), [anova.mlm](#), [anova.mlmlist](#), [ansari.test](#), [ansari.test.default](#), [ansari.test.formula](#), [aov](#), [approx](#), [approxfun](#), [ar](#), [ar.burg](#), [ar.burg.default](#), [ar.burg.mts](#), [ar.mle](#), [ar.ols](#), [ar.yw](#), [ar.yw.default](#), [ar.yw.mts](#), [arima](#), [arima.sim](#), [arima0](#), [arima0.diag](#), [ARMAacf](#), [ARMAtoMA](#), [as.dendrogram](#), [as.dendrogram.dendrogram](#), [as.dendrogram.hclust](#), [as.dist](#), [as.dist.default](#), [as.formula](#), [as.hclust](#), [as.hclust.default](#), [as.hclust.twins](#), [as.matrix.dist](#), [as.stepfun](#), [as.ts](#), [as.ts.default](#), [asOneSidedFormula](#), [ave](#), [bandwidth.kernel](#), [bartlett.test](#), [bartlett.test.default](#), [bartlett.test.formula](#), [binom.test](#), [binomial](#), [biplot](#), [biplot.default](#), [biplot.pcomp](#), [biplot.princomp](#), [Box.test](#), [bw.bcv](#), [bw.nrd](#), [bw.nrd0](#), [bw.SJ](#), [bw.ucv](#), [C](#), [cancor](#), [case.names](#), [case.names.lm](#), [cbind.ts](#), [ccf](#), [chisq.test](#), [cmdscale](#), [coef](#), [coefficients](#), [complete.cases](#), [confint](#), [confint.default](#), [constrOptim](#), [contr.helmert](#), [contr.poly](#), [contr.SAS](#), [contr.sum](#), [contr.treatment](#), [contrasts](#), [contrasts<-](#), [convolve](#), [cooks.distance](#), [cooks.distance.glm](#), [cooks.distance.lm](#), [cophenetic](#), [cophenetic.default](#), [cophenetic.dendrogram](#), [cor](#), [cor.test](#), [cor.test.default](#), [cor.test.formula](#), [cov](#), [cov.wt](#), [cov2cor](#), [covratio](#), [cpgram](#), [cut.dendrogram](#), [cutree](#), [cycle](#), [D](#), [dbeta](#), [dbinom](#), [dcauchy](#), [dchisq](#), [decompose](#), [delete.response](#), [deltat](#), [dendapply](#), [density](#), [density.default](#), [deriv](#), [deriv.default](#), [deriv.formula](#), [deriv3](#), [deriv3.default](#), [deriv3.formula](#), [deviance](#), [dexp](#), [df](#), [df.kernel](#), [df.residual](#), [dfbeta](#), [dfbeta.lm](#), [dfbetas](#), [dfbetas.lm](#), [dfft](#), [dgamma](#), [dgeom](#), [dhyper](#), [diff.ts](#), [diffinv](#), [diffinv.default](#), [diffinv.ts](#), [dist](#), [dlnorm](#), [dlogis](#), [dmultinom](#), [dnbinom](#), [dnorm](#), [dpois](#), [drop.scope](#), [drop.terms](#), [drop1](#), [drop1.default](#), [drop1.glm](#), [drop1.lm](#), [dsignrank](#), [dt](#), [dummy.coef](#), [dummy.coef.aovlist](#), [dummy.coef.lm](#), [dunif](#), [dweibull](#), [dwilcox](#), [ecdf](#), [eff.aovlist](#), [effects](#), [effects.glm](#), [effects.lm](#), [embed](#), [end](#), [estVar](#), [expand.model.frame](#), [extractAIC](#), [factanal](#), [factor.scope](#), [family](#), [family.glm](#), [family.lm](#), [fft](#), [filter](#), [fisher.test](#), [fitted](#), [fitted.default](#), [fitted.values](#), [fivenum](#), [fligner.test](#), [fligner.test.default](#), [fligner.test.formula](#), [format.dist](#), [format.ftable](#), [formula](#), [formula.data.frame](#), [formula.default](#), [formula.formula](#), [formula.lm](#), [formula.nls](#), [formula.terms](#), [frequency](#), [friedman.test](#), [friedman.test.default](#), [friedman.test.formula](#), [ftable](#), [ftable.default](#), [ftable.formula](#), [Gamma](#), [gaussian](#), [getInitial](#), [getInitial.default](#), [getInitial.formula](#), [getInitial.selfStart](#), [get_all_vars](#), [glm](#), [glm.control](#),

Authors

R Development Core Team and contributors worldwide; [R Core Team](#)

Demos

[glm.vr](#)
Some glm() examples from V&R with several predictors

[lm.glm](#)
Some linear and generalized linear modelling examples from 'An Introduction to Statistical Modelling' by Annette Dobson

[nlm](#)
Nonlinear least-squares using nlm()

[smooth](#)
'Visualize' steps in Tukey's smoothers

Reverse Dependencies

[cluster](#), [e1071](#), [graph](#), [MASS](#), [Matrix](#), [MatrixModels](#), [mclust](#), [mix](#), [prncurve](#), [randomForest](#), [RODBC](#), [RWeka](#), [SparseM](#), [vcd](#), [boot](#), [class](#), [foreign](#), [KernSmooth](#), [lattice](#), [mgcv](#), [nlme](#), [nnet](#), [part](#), [spatial](#), [splines](#), [stats4](#), [survival](#), [animation](#), [FitAR](#), [ggplot2](#), [glmnet](#), [Hmisc](#), [RBGL](#), [Snowball](#), [YaleToolkit](#), [GGally](#), [productplots](#), [tour](#), [tourGui](#)

General Info

Version: 2.11.1

License: Part of R 2.11.1

[CRAN](#)

[CRAN Package Check](#)

package

R → stats

Search:

stats

Info

R statistical functions

Package Info

stats

Groups

Beta, Binomial, Cauchy, Chisquare, dendrogram, Error, Exponential, FDist, GammaDist, Geometric, Hypergeometric, Logistic, Lognormal, Multinomial, NegBinomial, Normal, Poisson, SafePrediction, SignRank, spec, stats-deprecated, TDist, terms.object, Tukey, Uniform, vcov.gls, vcov.lme, Weibull, Wilcoxon

Functions

[.checkMFCClasses](#), [.getXlevels](#), [_MFclass](#), [acf](#), [acf2AR](#), [add.scope](#), [add1](#), [add1.default](#), [add1.glm](#), [add1.lm](#), [addmargins](#), [aggregate](#), [aggregate.data.frame](#), [aggregate.default](#), [aggregate.formula](#), [aggregate.ts](#), [AIC](#), [alias](#), [alias.formula](#), [alias.lm](#), [anova](#), [anova.glm](#), [anova.glm.list](#), [anova.lm](#), [anova.lm.list](#), [anova.mlm](#), [anova.mlm.list](#), [ansari.test](#), [ansari.test.default](#), [ansari.test.formula](#), [aov](#), [approx](#), [approxfun](#), [ar](#), [ar.burg](#), [ar.burg.default](#), [ar.burg.mts](#), [ar.mle](#), [ar.ols](#), [ar.yw](#), [ar.yw.default](#), [ar.yw.mts](#), [arima](#), [arima.sim](#), [arima0](#), [arima0.diag](#), [ARMAacf](#), [ARMAtoMA](#), [as.dendrogram](#), [as.dendrogram.dendrogram](#), [as.dendrogram.hclust](#), [as.dist](#), [as.dist.default](#), [as.formula](#), [as.hclust](#), [as.hclust.default](#), [as.hclust.twins](#), [as.matrix.dist](#), [as.stepfun](#), [as.ts](#), [as.ts.default](#), [asOneSidedFormula](#), [ave](#), [bandwidth.kernel](#), [bartlett.test](#), [bartlett.test.default](#), [bartlett.test.formula](#), [binom.test](#), [binomial](#), [biplot](#), [biplot.default](#), [biplot.pcomp](#), [biplot.princomp](#), [Box.test](#), [bw.bcv](#), [bw.nrd](#), [bw.nrd0](#), [bw.SJ](#), [bw.ucv](#), [C](#), [cancor](#), [case.names](#), [case.names.lm](#), [cbind.ts](#), [ccf](#), [chisq.test](#), [cmdscale](#), [coef](#), [coefficients](#), [complete.cases](#), [confint](#), [confint.default](#), [constrOptim](#), [contr.helmert](#), [contr.poly](#), [contr.SAS](#), [contr.sum](#), [contr.treatment](#), [contrasts](#), [contrasts<-](#), [convolve](#), [cooks.distance](#), [cooks.distance.glm](#), [cooks.distance.lm](#), [cophenetic](#), [cophenetic.default](#), [cophenetic.dendrogram](#), [cor](#), [cor.test](#), [cor.test.default](#), [cor.test.formula](#), [cov](#), [cov.wt](#), [cov2cor](#), [covratio](#), [cpgam](#), [cut.dendrogram](#), [cutree](#), [cycle](#), [D](#), [dbeta](#), [dbinom](#), [dcauchy](#), [dchisq](#), [decompose](#), [delete.response](#), [deltat](#), [dendapply](#), [density](#), [density.default](#), [deriv](#), [deriv.default](#), [deriv.formula](#), [deriv3](#), [deriv3.default](#), [deriv3.formula](#), [deviance](#), [dexp](#), [df](#), [df.kernel](#), [df.residual](#), [dfbeta](#), [dfbeta.lm](#), [dfbetas](#), [dfbetas.lm](#), [dffits](#), [dgamma](#), [dgeom](#), [dhyper](#), [diff.ts](#), [diffinv](#), [diffinv.default](#), [diffinv.ts](#), [dist](#), [dlnorm](#), [dlogis](#), [dmultinom](#), [dnbinom](#), [dnorm](#), [dpois](#), [drop.scope](#), [drop.terms](#), [drop1](#), [drop1.default](#), [drop1.glm](#), [drop1.lm](#), [dsignrank](#), [dt](#), [dummy.coef](#), [dummy.coef.aovlist](#), [dummy.coef.lm](#), [dunif](#), [dweibull](#), [dwilcox](#), [ecdf](#), [eff.aovlist](#), [effects](#), [effects.glm](#), [effects.lm](#), [embed](#), [end](#), [estVar](#), [expand.model.frame](#), [extractAIC](#), [factanal](#), [factor.scope](#), [family](#), [family.glm](#), [family.lm](#), [fft](#), [filter](#), [fisher.test](#), [fitted](#), [fitted.default](#), [fitted.values](#), [fivenum](#), [fligner.test](#), [fligner.test.default](#), [fligner.test.formula](#), [format.dist](#), [format.fable](#), [formula](#), [formula.data.frame](#), [formula.default](#), [formula.formula](#), [formula.lm](#), [formula.nls](#), [formula.terms](#), [frequency](#), [friedman.test](#), [friedman.test.default](#), [friedman.test.formula](#), [ftable](#), [ftable.default](#), [ftable.formula](#), [Gamma](#), [gaussian](#), [getInitial](#), [getInitial.default](#), [getInitial.formula](#), [getInitial.selfStart](#), [get.all.vars](#), [glm](#), [glm.control](#)

Files

Authors

R Development Core Team and contributors worldwide; [R Core Team](#)

Demos

[glm.vr](#)
Some glm() examples from V&R with several predictors

[lm.glm](#)
Some linear and generalized linear modelling examples from 'An Introduction to Statistical Modelling' by Annette Dobson

[nlm](#)
Nonlinear least-squares using nlm()

[smooth](#)
'Visualize' steps in Tukey's smoothers

Reverse Dependencies

[cluster](#), [e1071](#), [graph](#), [MASS](#), [Matrix](#), [MatrixModels](#), [mclust](#), [mix](#), [prncurve](#), [randomForest](#), [RODBC](#), [RWeka](#), [SparseM](#), [vcd](#), [boot](#), [class](#), [foreign](#), [KernSmooth](#), [lattice](#), [mgcv](#), [nlme](#), [nnet](#), [part](#), [spatial](#), [splines](#), [stats4](#), [survival](#), [animation](#), [FitAR](#), [ggplot2](#), [glmnet](#), [Hmisc](#), [RBGL](#), [Snowball](#), [YaleToolkit](#), [GGally](#), [productplots](#), [tour](#), [tourGui](#)

General Info

Version: 2.11.1

License: Part of R 2.11.1

[CRAN](#)

[CRAN Package Check](#)

package

R → stats

Search:

stats

R statistical functions

Info

Files

Authors

R Development Core Team and contributors worldwide; [R Core Team](#)

Demos

[glm.vr](#)
Some glm() examples from V&R with several predictors
[lm.glm](#)
Some linear and generalized linear modelling examples from 'An Introduction to Statistical Modelling' by Annette Dobson
[nlm](#)
Nonlinear least-squares using nlm()
[smooth](#)
'Visualize' steps in Tukey's smoothers

Reverse Dependencies

[cluster](#), [e1071](#), [graph](#), [MASS](#), [Matrix](#), [MatrixModels](#), [mclust](#), [mix](#), [princurve](#), [randomForest](#), [RODBC](#), [RWeka](#), [SparseM](#), [vcd](#), [boot](#), [class](#), [foreign](#), [KernSmooth](#), [lattice](#), [mgcv](#), [nlme](#), [nnet](#), [part](#), [spatial](#), [splines](#), [stats4](#), [survival](#), [animation](#), [FitAR](#), [ggplot2](#), [glmnet](#), [Hmisc](#), [RBGL](#), [Snowball](#), [YaleToolkit](#), [GGally](#), [productplots](#), [tour](#), [tourGui](#)

General Info

Version: 2.11.1
License: Part of R 2.11.1
[CRAN](#)
[CRAN Package Check](#)

Package Info

[stats](#)

Groups

[Beta](#), [Binomial](#), [Cauchy](#), [Chisquare](#), [dendrogram](#), [Error](#), [Exponential](#), [FDist](#), [GammaDist](#), [Geometric](#), [Hypergeometric](#), [Logistic](#), [Lognormal](#), [Multinomial](#), [NegBinomial](#), [Normal](#), [Poisson](#), [SafePrediction](#), [SignRank](#), [spec](#), [stats-deprecated](#), [TDist](#), [terms.object](#), [Tukey](#), [Uniform](#), [vcov.gls](#), [vcov.lme](#), [Weibull](#), [Wilcoxon](#)

Functions

[.checkMFCClasses](#), [.getXlevels](#), [.MFclass](#), [acf](#), [acf2AR](#), [add.scope](#), [add1](#), [add1.default](#), [add1.glm](#), [add1.lm](#), [addmargins](#), [aggregate](#), [aggregate.data.frame](#), [aggregate.default](#), [aggregate.formula](#), [aggregate.ts](#), [AIC](#), [alias](#), [alias.formula](#), [alias.lm](#), [anova](#), [anova.glm](#), [anova.glm.list](#), [anova.lm](#), [anova.lm.list](#), [anova.nlm](#), [anova.nlm.list](#), [ansari.test](#), [ansari.test.default](#), [ansari.test.formula](#), [aov](#), [approx](#), [approxfun](#), [ar](#), [ar.burg](#), [ar.burg.default](#), [ar.burg.mts](#), [ar.mle](#), [ar.ols](#), [ar.yw](#), [ar.yw.default](#), [ar.yw.mts](#), [arima](#), [arima.sim](#), [arima0](#), [arima0.diag](#), [ARMAacf](#), [ARMAtoMA](#), [as.dendrogram](#), [as.dendrogram.dendrogram](#), [as.dendrogram.hclust](#), [as.dist](#), [as.dist.default](#), [as.formula](#), [as.hclust](#), [as.hclust.default](#), [as.hclust.twins](#), [as.matrix.dist](#), [as.stepfun](#), [as.ts](#), [as.ts.default](#), [asOneSidedFormula](#), [ave](#), [bandwidth.kernel](#), [bartlett.test](#), [bartlett.test.default](#), [bartlett.test.formula](#), [binom.test](#), [binomial](#), [biplot](#), [biplot.default](#), [biplot.pcomp](#), [biplot.princomp](#), [Box.test](#), [bw.bcv](#), [bw.nrd](#), [bw.nrd0](#), [bw.SJ](#), [bw.ucv](#), [C](#), [cancor](#), [case.names](#), [case.names.lm](#), [cbind.ts](#), [ccf](#), [chisq.test](#), [cmdscale](#), [coef](#), [coefficients](#), [complete.cases](#), [confint](#), [confint.default](#), [constrOptim](#), [contr.helmert](#), [contr.poly](#), [contr.SAS](#), [contr.sum](#), [contr.treatment](#), [contrasts](#), [contrasts<-](#), [convolve](#), [cooks.distance](#), [cooks.distance.glm](#), [cooks.distance.lm](#), [cophenetic](#), [cophenetic.default](#), [cophenetic.dendrogram](#), [cor](#), [cor.test](#), [cor.test.default](#), [cor.test.formula](#), [cov](#), [cov.wt](#), [cov2cor](#), [covratio](#), [cpgam](#), [cut.dendrogram](#), [cutree](#), [cycle](#), [D](#), [dbeta](#), [dbinom](#), [dcauchy](#), [dchisq](#), [decompose](#), [delete.response](#), [deltat](#), [dendapply](#), [density](#), [density.default](#), [deriv](#), [deriv.default](#), [deriv.formula](#), [deriv3](#), [deriv3.default](#), [deriv3.formula](#), [deviance](#), [dexp](#), [df](#), [df.kernel](#), [df.residual](#), [dfbeta](#), [dfbeta.lm](#), [dfbetas](#), [dfbetas.lm](#), [dffits](#), [dgamma](#), [dgeom](#), [dhyper](#), [diff.ts](#), [diffinv](#), [diffinv.default](#), [diffinv.ts](#), [dist](#), [dlnorm](#), [dlogis](#), [dmultinom](#), [dnbinom](#), [dnorm](#), [dpois](#), [drop.scope](#), [drop.terms](#), [drop1](#), [drop1.default](#), [drop1.glm](#), [drop1.lm](#), [dsignrank](#), [dt](#), [dummy.coef](#), [dummy.coef.aovlist](#), [dummy.coef.lm](#), [dunif](#), [dweibull](#), [dwilcox](#), [ecdf](#), [eff.aovlist](#), [effects](#), [effects.glm](#), [effects.lm](#), [embed](#), [end](#), [estVar](#), [expand.model.frame](#), [extractAIC](#), [factanal](#), [factor.scope](#), [family](#), [family.glm](#), [family.lm](#), [fft](#), [filter](#), [fisher.test](#), [fitted](#), [fitted.default](#), [fitted.values](#), [fivenum](#), [fligner.test](#), [fligner.test.default](#), [fligner.test.formula](#), [format.dist](#), [format.fable](#), [formula](#), [formula.data.frame](#), [formula.default](#), [formula.formula](#), [formula.lm](#), [formula.nls](#), [formula.terms](#), [frequency](#), [friedman.test](#), [friedman.test.default](#), [friedman.test.formula](#), [ftable](#), [ftable.default](#), [ftable.formula](#), [Gamma](#), [gaussian](#), [getInitial](#), [getInitial.default](#), [getInitial.formula](#), [getInitial.selfStart](#), [get.all.vars](#), [glm](#), [glm.control](#)

CRAN

package

R → stats

Search:

stats

R statistical functions

Info

Files

Package Info

[stats](#)

Groups

[Beta](#), [Binomial](#), [Cauchy](#), [Chisquare](#), [dendrogram](#), [Error](#), [Exponential](#), [FDist](#), [GammaDist](#), [Geometric](#), [Hypergeometric](#), [Logistic](#), [Lognormal](#), [Multinomial](#), [NegBinomial](#), [Normal](#), [Poisson](#), [SafePrediction](#), [SignRank](#), [spec](#), [stats-deprecated](#), [TDist](#), [terms.object](#), [Tukey](#), [Uniform](#), [vcov.gls](#), [vcov.lme](#), [Weibull](#), [Wilcoxon](#)

Functions

[.checkMFCClasses](#), [.getXlevels](#), [.MFclass](#), [acf](#), [acf2AR](#), [add.scope](#), [add1](#), [add1.default](#), [add1.glm](#), [add1.lm](#), [addmargins](#), [aggregate](#), [aggregate.data.frame](#), [aggregate.default](#), [aggregate.formula](#), [aggregate.ts](#), [AIC](#), [alias](#), [alias.formula](#), [alias.lm](#), [anova](#), [anova.glm](#), [anova.glm.list](#), [anova.lm](#), [anova.lm.list](#), [anova.mlm](#), [anova.mlm.list](#), [ansari.test](#), [ansari.test.default](#), [ansari.test.formula](#), [aov](#), [approx](#), [approxfun](#), [ar](#), [ar.burg](#), [ar.burg.default](#), [ar.burg.mts](#), [ar.mle](#), [ar.ols](#), [ar.yw](#), [ar.yw.default](#), [ar.yw.mts](#), [arima](#), [arima.sim](#), [arima0](#), [arima0.diag](#), [ARMAacf](#), [ARMAtoMA](#), [as.dendrogram](#), [as.dendrogram.dendrogram](#), [as.dendrogram.hclust](#), [as.dist](#), [as.dist.default](#), [as.formula](#), [as.hclust](#), [as.hclust.default](#), [as.hclust.twins](#), [as.matrix.dist](#), [as.stepfun](#), [as.ts](#), [as.ts.default](#), [asOneSidedFormula](#), [ave](#), [bandwidth.kernel](#), [bartlett.test](#), [bartlett.test.default](#), [bartlett.test.formula](#), [binom.test](#), [binomial](#), [biplot](#), [biplot.default](#), [biplot.prcomp](#), [biplot.princomp](#), [Box.test](#), [bw.bcv](#), [bw.nrd](#), [bw.nrd0](#), [bw.SJ](#), [bw.ucv](#), [C](#), [cancor](#), [case.names](#), [case.names.lm](#), [cbind.ts](#), [ccf](#), [chisq.test](#), [cmdscale](#), [coef](#), [coefficients](#), [complete.cases](#), [confint](#), [confint.default](#), [constrOptim](#), [contr.helmert](#), [contr.poly](#), [contr.SAS](#), [contr.sum](#), [contr.treatment](#), [contrasts](#), [contrasts<-](#), [convolve](#), [cooks.distance](#), [cooks.distance.glm](#), [cooks.distance.lm](#), [cophenetic](#), [cophenetic.default](#), [cophenetic.dendrogram](#), [cor](#), [cor.test](#), [cor.test.default](#), [cor.test.formula](#), [cov](#), [cov.wt](#), [cov2cor](#), [covratio](#), [cpgam](#), [cut.dendrogram](#), [cutree](#), [cycle](#), [D](#), [dbeta](#), [dbinom](#), [dcauchy](#), [dchisq](#), [decompose](#), [delete.response](#), [deltat](#), [dendapply](#), [density](#), [density.default](#), [deriv](#), [deriv.default](#), [deriv.formula](#), [deriv3](#), [deriv3.default](#), [deriv3.formula](#), [deviance](#), [dexp](#), [df](#), [df.kernel](#), [df.residual](#), [dfbeta](#), [dfbeta.lm](#), [dfbetas](#), [dfbetas.lm](#), [dffits](#), [dgamma](#), [dgeom](#), [dhyper](#), [diff.ts](#), [diffinv](#), [diffinv.default](#), [diffinv.ts](#), [dist](#), [dlnorm](#), [dlogis](#), [dmultinom](#), [dnbinom](#), [dnorm](#), [dpois](#), [drop.scope](#), [drop.terms](#), [drop1](#), [drop1.default](#), [drop1.glm](#), [drop1.lm](#), [dsignrank](#), [dt](#), [dummy.coef](#), [dummy.coef.aovlist](#), [dummy.coef.lm](#), [dunif](#), [dweibull](#), [dwilcox](#), [ecdf](#), [eff.aovlist](#), [effects](#), [effects.glm](#), [effects.lm](#), [embed](#), [end](#), [estVar](#), [expand.model.frame](#), [extractAIC](#), [factanal](#), [factor.scope](#), [family](#), [family.glm](#), [family.lm](#), [fft](#), [filter](#), [fisher.test](#), [fitted](#), [fitted.default](#), [fitted.values](#), [fivenum](#), [fligner.test](#), [fligner.test.default](#), [fligner.test.formula](#), [format.dist](#), [format.ftable](#), [formula](#), [formula.data.frame](#), [formula.default](#), [formula.formula](#), [formula.lm](#), [formula.nls](#), [formula.terms](#), [frequency](#), [friedman.test](#), [friedman.test.default](#), [friedman.test.formula](#), [ftable](#), [ftable.default](#), [ftable.formula](#), [Gamma](#), [gaussian](#), [getInitial](#), [getInitial.default](#), [getInitial.formula](#), [getInitial.selfStart](#), [get.all.vars](#), [glm](#), [glm.control](#)

Authors

R Development Core Team and contributors worldwide; [R Core Team](#)

Demos

[glm.vr](#) <- **Demos!**
Some glm() examples from V&R with several predictors

[lm.glm](#)
Some linear and generalized linear modelling examples from 'An Introduction to Statistical Modelling' by Annette Dobson

[nlm](#)
Nonlinear least-squares using nlm()

[smooth](#)
'Visualize' steps in Tukey's smoothers

Reverse Dependencies

[cluster](#), [e1071](#), [graph](#), [MASS](#), [Matrix](#), [MatrixModels](#), [mclust](#), [mix](#), [prncurve](#), [randomForest](#), [RODBC](#), [RWeka](#), [SparseM](#), [vcd](#), [boot](#), [class](#), [foreign](#), [KernSmooth](#), [lattice](#), [mgcv](#), [nlme](#), [nnet](#), [part](#), [spatial](#), [splines](#), [stats4](#), [survival](#), [animation](#), [FitAR](#), [ggplot2](#), [glmnet](#), [Hmisc](#), [RBGL](#), [Snowball](#), [YaleToolkit](#), [GGally](#), [productplots](#), [tour](#), [tourGui](#)

General Info

Version: 2.11.1
License: Part of R 2.11.1
[CRAN](#)
[CRAN Package Check](#)

CRAN

topic

R → [bitops](#) → bitAnd (aka bitOr, bitXor)

Search:

Bitwise And, Or and Xor operations

returns the bitwise operation applied to the arguments

Usage

Click the functions to view their source

[bitAnd\(a, b\)](#)

[bitOr\(a, b\)](#)

[bitXor\(a, b\)](#)

Arguments

`a, b` numeric vectors of compatible length.

Details

The bitwise operations are applied to the arguments cast as 32 bit (unsigned long) integers. NA is returned wherever the magnitude of the arguments is not less than 2^{31} , or, where either of the arguments is not finite.

Value

numeric vector of maximum length of `a` or `b`.

Examples

[Execute Whole Example](#) [Show/Hide Output](#)

```
bitAnd(15, 7) == 7
```

```
[1] TRUE
```

```
bitOr(15, 7) == 15
```

```
[1] TRUE
```

```
bitXor(15, 7) == 8
```

```
[1] TRUE
```

```
bitOr(-1, 0) == 4294967295
```

```
[1] TRUE
```

Authors

[Steve Dutky](#)

Top Functions

- [bitOr](#) - 2

[Like](#) [Share](#)

[DISQUS](#)

Add New Comment

Optional: Login below.

[DISQUS](#) [Twitter](#) [OpenID](#) [Yahoo!](#)

Type your comment here.

topic

R → [bitops](#) → bitAnd (aka bitOr, bitXor)

Search:

Bitwise And, Or and Xor operations

Authors

[Steve Dutky](#)

returns the bitwise operation applied to the arguments

Usage

Click the functions to view their source

[bitAnd\(a, b\)](#)

[bitOr\(a, b\)](#)

[bitXor\(a, b\)](#)

Arguments

`a, b` numeric vectors of compatible length.

Details

The bitwise operations are applied to the arguments cast as 32 bit (unsigned long) integers. NA is returned wherever the magnitude of the arguments is not less than 2^{31} , or, where either of the arguments is not finite.

Value

numeric vector of maximum length of `a` or `b`.

Examples

[Execute Whole Example](#) [Show/Hide Output](#)

```
bitAnd(15,7) == 7
```

```
[1] TRUE
```

```
bitOr(15,7) == 15
```

```
[1] TRUE
```

```
bitXor(15,7) == 8
```

```
[1] TRUE
```

```
bitOr(-1,0) == 4294967295
```

```
[1] TRUE
```

Top Functions

- [bitOr](#) - 2

Examples with Output

[Like](#) [Share](#)

[DISQUS](#)

Add New Comment

Optional: Login below.

[DISQUS](#) [Twitter](#) [OpenID](#) [Yahoo!](#)

Type your comment here.

topic

R → [bitops](#) → bitAnd (aka bitOr, bitXor)

Search:

Bitwise And, Or and Xor operations

Authors

[Steve Dutky](#)

returns the bitwise operation applied to the arguments

Usage

Click the functions to view their source

[bitAnd\(a, b\)](#)

[bitOr\(a, b\)](#)

[bitXor\(a, b\)](#)

Arguments

`a, b` numeric vectors of compatible length.

Details

The bitwise operations are applied to the arguments cast as 32 bit (unsigned long) integers. NA is returned wherever the magnitude of the arguments is not less than 2^{31} , or, where either of the arguments is not finite.

Value

numeric vector of maximum length of `a` or `b`.

Examples

[Execute Whole Example](#) [Show/Hide Output](#)

```
bitAnd(15, 7) == 7
```

```
[1] TRUE
```

```
bitOr(15, 7) == 15
```

```
[1] TRUE
```

```
bitXor(15, 7) == 8
```

```
[1] TRUE
```

```
bitOr(-1, 0) == 4294967295
```

```
[1] TRUE
```

Top Functions

- [bitOr](#) - 2

Examples with Output

[Like](#) [Share](#)

[DISQUS](#)

Add New Comment

Optional: Login below.

[DISQUS](#) [Twitter](#) [OpenID](#) [Yahoo!](#)

Type your comment here.

Comments

source

[R](#) → [bitops](#) → [bitAnd](#) → bitAnd (source)

bitAnd

returns the bitwise operation applied to the arguments

bitAnd Source

```
function (a, b)
{
  .Call("bitAnd", a, b, PACKAGE = "bitops")
}
```


Aliases (Source)

- [bitOr](#)
- [bitXor](#)



Add New Comment

Optional: Login below.



Type your comment here.

//

Post as ...

Showing 0 comments

Sort by Popular now

[Subscribe by email](#)

[Subscribe by RSS](#)

Trackback URL <http://disqus.com/forur>

[blog comments powered by DISQUS](#)

Help - R help. Funded by [Revolution Analytics](#). Style created by [Hadley Wickham](#). Synthesis by [Barret Schloerke](#)

source

[R](#) → [bitops](#) → [bitAnd](#) → bitAnd (source)

bitAnd

returns the bitwise operation applied to the arguments

bitAnd Source

```
function (a, b)
{
  .Call("bitAnd", a, b, PACKAGE = "bitops")
}
```

Source

Aliases (Source)

- [bitOr](#)
- [bitXor](#)



DISQUS +

Add New Comment

Optional: Login below.



DISQUS



Twitter



OpenID



YAHOO!

Type your comment here.

//

Post as ...

Showing 0 comments

Sort by Popular now



Subscribe by email



Subscribe by RSS

Trackback URL <http://disqus.com/forur>

blog comments powered by DISQUS

Help - R help. Funded by REVOLUTION ANALYTICS. Style created by [Hadley Wickham](#). Synthesis by [Barret Schloerke](#)

source

[R](#) → [bitops](#) → [bitAnd](#) → bitAnd (source)

bitAnd

returns the bitwise operation applied to the arguments

bitAnd Source

```
function (a, b)
{
  .Call("bitAnd", a, b, PACKAGE = "bitops")
}
```

Source

Aliases (Source)

- [bitOr](#)
- [bitXor](#)


Aliases



DISQUS +

Add New Comment

Optional: Login below.



Type your comment here.

//

Post as ...

Showing 0 comments

Sort by [Popular now](#)

[Subscribe by email](#)

[Subscribe by RSS](#)

Trackback URL <http://disqus.com/forur>

blog comments powered by [DISQUS](#)

Help - R help. Funded by [REVOLUTION](#). Style created by [Hadley Wickham](#). Synthesis by [Barret Schloerke](#)

source

[R](#) → [bitops](#) → [bitAnd](#) → bitAnd (source)

bitAnd

returns the bitwise operation applied to the arguments

bitAnd Source

```
function (a, b)
{
  .Call("bitAnd", a, b, PACKAGE = "bitops")
}
```

Source

Aliases (Source)

- [bitOr](#)
- [bitXor](#)


Aliases



DISQUS +

Add New Comment

Optional: Login below.



Type your comment here.

Comments

Post as ...

Showing 0 comments

Sort by [Popular now](#)

[Subscribe by email](#)

[Subscribe by RSS](#)

Trackback URL <http://disqus.com/forur>

blog comments powered by [DISQUS](#)

Help - R help. Funded by [REVOLUTION](#). Style created by [Hadley Wickham](#). Synthesis by [Barret Schloerke](#)

demo

“gossip”

- Languages

- R

- <- Web Server

- HTML / CSS

- <- Display Information

- Javascript
/ jQuery

- <- Go-Between
Alter Display

