

Effects of Irregular Topology in Spherical Self-Organizing Maps

Charles R. Schmidt
School of Geographical Sciences
Arizona State University
Charles.R.Schmidt@asu.edu

Sergio J. Rey
School of Geographical Sciences
Arizona State University
srey@asu.edu

André Skupin
Department of Geography
San Diego State University
skupin@mail.sdsu.edu

Abstract

We explore the effect of different topologies on properties of self-organizing maps (SOM). We suggest several diagnostics for measuring topology-induced errors in SOM and use these in a comparison of four different topologies. The results . . .

1. Introduction

The Self-Organizing Map (SOM) is an unsupervised competitive learning process developed by Teuvo Kohonen as a technique to analyze and visualize high dimensional data sets. The applications of SOM are far reaching; Kohonen [4] provides a thorough review of the SOM literature including applications of SOM. SOM has been used in applications ranging from speech recognition and image classification to breast cancer detection and gene expression clustering. Agarwal and Skupin [10] outline the growing interest of SOM to the GISciences, and propose that the relationship between SOM and GIScience should be bidirectional. The SOM offers a powerful method for exploring and visualizing geographic data and GIScience offers a wide array of tools and methods to enable the exploration of the SOM itself. The exploration of spatial relationships has always been of great interest to geographers, and as Ritter [8] states, the goal of SOM is “to translate *data similarities* into *spatial relationships*” [8, p. 1].


The SOM is a type of artificial neural network in which neurons are “organized” in such a way as to project the high-dimensional relationships of a set of training data onto a low-dimensional network structure. The traditional SOM uses a rectangular or hexagonal network topology [4]. These topologies create a well-known problem in SOM

called the boundary or edge effect. Neurons on the boundary of the hexagonal and rectangular lattices have fewer neighbors, which reduces their ability to interact with other neurons during the self-organizing process. Using a spherical lattice has been widely suggested as a solution to the problem [8, 1, 9, 6, 12]. The use of the spherical lattice, however, does not completely overcome the boundary problem, and the choice of which spherical topology to use for the network can be difficult to make.

A regular network topology is one in which every node on the network has exactly the same number of adjacent nodes. Any topology involving an edge is irregular. Arranging our lattice on the surface of a sphere seems to be an obvious way to overcome the edge. However, there exist only five arrangements on the sphere which are completely regular; these are the five platonic solids [8, 2]. Any other arrangement of neurons on the surface of the sphere will result in an irregular topology, as not all neurons will have the same number of neighbors.

The classic method for minimizing this irregularity is to generate the spherical lattice by tessellating (subdividing) the sides of the icosahedron [6]. While this method will always result in a highly regular spherical topology, the main drawback is that the number of neurons in the network (the network size), N , grows exponentially as tessellations are applied. That results in only very coarse control over network size. Other methods for arranging neurons on the sphere allow for unlimited control over network size, but yield topologies with increased irregularity [2, 11, 6]. To date the literature has largely ignored the more irregular methods in favor of the aforementioned tessellation-based methods. A topology which yields a more flexible network size may be desirable. However, in order to address this issue of network size, we must first determine the degree to which irregularity effects the SOM.

Figure 1. Edge effects in SOM

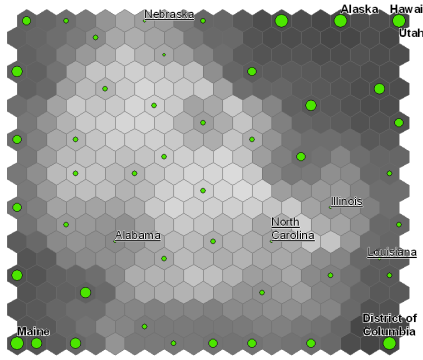

2. Edge Effects

An intrinsic problem with SOMs in two dimensions is the so called edge effect. This is illustrated in Figure 1, which displays a SOM trained on socioeconomic census data consisting of 32 variables for US states. The darker a neuron in the figure, the larger is the distance between the neuron and mean of the input vectors. The distance between each of the original observations (states) and the mean is represented by a graduated circle. Taken these two together it is clear that the outlier observations are pushed towards the edges of the map, while the observations that are closest to the multidimensional center of the data are assigned to central neurons on the map.

At the edge of the map, neurons have fewer neighbors which results in any observations being assigned to them having fewer competitive signals. At the same time, the edge of the neural lattice represents a true visual boundary which affects its ability to represent data similarities as spatial relationships.

One way to eliminate the edge effect is to wrap the lattice around a three-dimensional object such as a sphere or torus, thereby removing the edge entirely. The toroidal SOM was introduced by [5], however the torus is not effective for visualization, as maps generated from a torus are not very intuitive [3, 12]. [8] describes the torus as being topologically flat and suggests that a curved topology, such as that of a sphere, may better reflect directional data. A sphere also results in a more intuitive map, since we are accustomed to looking at geographic maps based on a sphere.

Ritter [8] first introduced the spherical SOM, and several enhancements have since been suggested [1, 9, 6, 12]. A good comparison of these enhancements can be found in Wu and Takatsuka [12]. All of these methods derive their spherical structure through the tessellation of a polyhedron as originally proposed by Ritter [8]. Wu and Takatsuka

[12] point out the importance of a uniform distribution on the sphere, and that it is preferable for all neurons to have an equal number of neighbors and to be equally spaced. They find generally that the tessellation method best satisfies these conditions, and specifically that the icosahedron is the best starting point [11]. Tessellation of the icosahedron results in a network of neurons, each having exactly six neighbors, save the original twelve which each have five neighbors. This is very close to the ideal structure in which every neuron would have exactly six neighbors. [12] prefer this structure, because it has very low variances in both neuron spacing and neighborhood size.

Based solely on measures of neuron spacing, [11] dismissed the usefulness of a method proposed by [7] for distributing points on a sphere. Similarly [6] use these variance measures to support their helix algorithm for distributing points on a sphere. However, these metrics can be misleading and comparison across topologies may not be consistent. The traditional rectangular and hexagonal topologies have no variance in neuron spacing, and the generally preferred hexagonal structure displays greater variance in neighborhood size than the rectangular structure. The torus, by comparison, would have variance in neuron spacing, yet no variance in neighborhood size. The distance between two neurons is only considered during the formation of the neural network. At this stage the spacing is significant as it plays a part in constructing the network's topology by determining neuron adjacency. However, using this measure to evaluate potential topologies for use in SOM may be misleading.

As spherical (and other alternative) topologies become increasingly more common it is necessary to investigate how the choice of topology effects the SOM. In this thesis the effect of irregularity within topologies is studied as an attempt to investigate not only the edge effect, but also to help facilitate the comparison of topologies. It is important to note that spherical topologies may not be appropriate for all applications. Removing the edge may reduce the SOM's ability to converge. As outliers are forced to interact they introduce more competition among the neurons. We would also expect outliers to occupy more space in the final map as their dissimilarity in attribute space should translate to more distant spatial relationships in the trained SOM. More research will be needed to help researchers determine the most appropriate topology for their data and research objectives.

In this paper we explore the general utility of certain irregular spherical topologies beyond offering greater control over network size. We develop and test new diagnostics to measure and visualize topology-induced errors in SOM. More specifically we examine the

3. Methods

We train SOMs using four different topologies: *rectangular*, *hexagonal*, *geodesic sphere* and *spherical*. The spherical topology is based on a method, developed by [7], for distributing an arbitrary number of points on to the surface of a sphere. Delaunay triangulation is then applied to these points, producing a topological structure. To yield meaningful results these SOMs must be trained with comparable parameters. The literature provides many rules of thumb for training a SOM: each SOM is trained in two stages, the first of which uses a larger initial learning rate and neighborhood search radius with a small number of training steps; the second stage uses a lower initial learning rate and neighborhood search radius, but extends the length of training.

First Stage Parameters:

- Initial neighborhood search radius of 50%, which decreases during training.
- Initial learning rate of 0.04 which decreases during training.
- 100,000 training steps.

Second Stage Parameters:

- Initial neighborhood search radius of 33%, which decreases during training.
- Initial learning rate of 0.03 which decreases during training.
- 1,000,000 training steps.

As shown in Figure 2, topologies differ in terms of achievable network size. For comparability, the network size of each SOM needs to be as close as possible. The achievable network size for the geodesic SOM is the most limiting of the topologies we test. We chose the eighth frequency geodesic sphere, which has 642 nodes, which is relatively close to the 644-node hexagonal and rectangular topologies achieved when the dimensions are set to 28×23 . Finally, the spherical topology was set to 642 nodes.


3.1. Language

All manuscripts must be in English.

3.2. Printing your paper

Print your properly formatted text on high-quality, 8.5×11 -inch white printer paper. A4 paper is also acceptable, but please leave the extra 0.5 inch (1.27 cm) at the BOTTOM of the page.

Figure 2. SOM Size and spherical topologies.

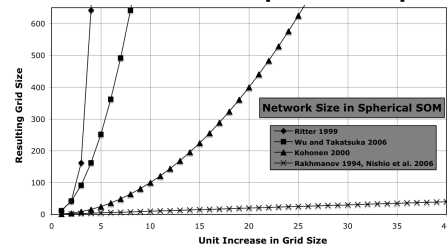

3.3. Margins and page numbering

All printed material, including text, illustrations, and charts, must be kept within a print area 6-7/8 inches (17.5 cm) wide by 8-7/8 inches (22.54 cm) high. Do not write or print anything outside the print area. Number your pages lightly, in pencil, on the upper right-hand corners of the BACKS of the pages (for example, 1/10, 2/10, or 1 of 10, 2 of 10, and so forth). Please do not write on the fronts of the pages, nor on the lower halves of the backs of the pages.

3.4. Formatting your paper

All text must be in a two-column format. The total allowable width of the text area is 6-7/8 inches (17.5 cm) wide by 8-7/8 inches (22.54 cm) high. Columns are to be 3-1/4 inches (8.25 cm) wide, with a 5/16 inch (0.8 cm) space between them. The main title (on the first page) should begin 1.0 inch (2.54 cm) from the top edge of the page. The second and following pages should begin 1.0 inch (2.54 cm) from the top edge. On all pages, the bottom margin should be 1-1/8 inches (2.86 cm) from the bottom edge of the page for 8.5×11 -inch paper; for A4 paper, approximately 1-5/8 inches (4.13 cm) from the bottom edge of the page.

3.5. Type-style and fonts

Wherever Times is specified, Times Roman may also be used. If neither is available on your word processor, please use the font closest in appearance to Times that you have access to.

MAIN TITLE. Center the title 1-3/8 inches (3.49 cm) from the top edge of the first page. The title should be in Times 14-point, boldface type. Capitalize the first letter of nouns, pronouns, verbs, adjectives, and adverbs; do not capitalize articles, coordinate conjunctions, or prepositions (unless the title begins with such a word). Leave two blank lines after the title.

AUTHOR NAME(s) and AFFILIATION(s) are to be centered beneath the title and printed in Times 12-point,

non-boldface type. This information is to be followed by two blank lines.

The ABSTRACT and MAIN TEXT are to be in a two-column format.

MAIN TEXT. Type main text in 10-point Times, single-spaced. Do NOT use double-spacing. All paragraphs should be indented 1 pica (approx. 1/6 inch or 0.422 cm). Make sure your text is fully justified—that is, flush left and flush right. Please do not place any additional blank lines between paragraphs. Figure and table captions should be 10-point Helvetica boldface type as in

Figure 3. Example of caption.

Long captions should be set as in

Figure 4. Example of long caption requiring more than one line. It is not typed centered but aligned on both sides and indented with an additional margin on both sides of 1 pica.

Callouts should be 9-point Helvetica, non-boldface type. Initially capitalize only the first word of section titles and first-, second-, and third-order headings.

FIRST-ORDER HEADINGS. (For example, **1. Introduction**) should be Times 12-point boldface, initially capitalized, flush left, with one blank line before, and one blank line after.

SECOND-ORDER HEADINGS. (For example, **1.1. Database elements**) should be Times 11-point boldface, initially capitalized, flush left, with one blank line before, and one after. If you require a third-order heading (we discourage it), use 10-point Times, boldface, initially capitalized, flush left, preceded by one blank line, followed by a period and your text on the same line.

3.6. Footnotes

Please use footnotes sparingly¹ and place them at the bottom of the column on the page on which they are referenced. Use Times 8-point type, single-spaced.

3.7. References

List and number all bibliographical references in 9-point Times, single-spaced, at the end of your paper. When referenced in the text, enclose the citation number in square brackets, for example [?]. Where appropriate, include the name(s) of editors of referenced books.

¹Or, better still, try to avoid footnotes altogether. To help your readers, avoid using footnotes altogether and include necessary peripheral observations in the text (within parentheses, if you prefer, as in this sentence).

3.8. Illustrations, graphs, and photographs

All graphics should be centered. Your artwork must be in place in the article (preferably printed as part of the text rather than pasted up). If you are using photographs and are able to have halftones made at a print shop, use a 100- or 110-line screen. If you must use plain photos, they must be pasted onto your manuscript. Use rubber cement to affix the images in place. Black and white, clear, glossy-finish photos are preferable to color. Supply the best quality photographs and illustrations possible. Penciled lines and very fine lines do not reproduce well. Remember, the quality of the book cannot be better than the originals provided. Do NOT use tape on your pages!

3.9. Color

The use of color on interior pages (that is, pages other than the cover) is prohibitively expensive. We publish interior pages in color only when it is specifically requested and budgeted for by the conference organizers. DO NOT SUBMIT COLOR IMAGES IN YOUR PAPERS UNLESS SPECIFICALLY INSTRUCTED TO DO SO.

3.10. Symbols

If your word processor or typewriter cannot produce Greek letters, mathematical symbols, or other graphical elements, please use pressure-sensitive (self-adhesive) rub-on symbols or letters (available in most stationery stores, art stores, or graphics shops).

3.11. Copyright forms

You must include your signed IEEE copyright release form when you submit your finished paper. We MUST have this form before your paper can be published in the proceedings.

3.12. Conclusions

Please direct any questions to the production editor in charge of these proceedings at the IEEE Computer Society Press: Phone (714) 821-8380, or Fax (714) 761-1784.

References

- [1] F. Boudjemai, P. B. Enberg, and J. G. Postaire. Surface modeling by using self organizing maps of Kohonen. In *Systems, Man and Cybernetics, 2003. IEEE International Conference on*, volume 3, pages 2418–2423 vol.3, 2003.
- [2] J. M. Harris, J. L. Hirst, and M. J. Mossinghoff. *Combinatorics and graph theory*. Springer, New York, 2000.

- [3] M. Ito, T. Miyoshi, and H. Masuyama. The characteristics of the torus self organizing map. In *Proceedings of 6th International Conference ON Soft Computing (IIZUKA2000)*, volume A-7-2, pages pp.239–244, Iizuka, Fukuoka, Japan, October 2000.
- [4] T. Kohonen. *Self-Organizing Maps*. Springer, 3rd edition, 2000.
- [5] X. Li, J. Gasteiger, and J. Zupan. On the topology distortion in self-organizing feature maps. *Biological Cybernetics*, V70(2):189–198, 1993.
- [6] H. Nishio, M. Altaf-Ul-Amin, K. Kurokawa, and S. Kanaya. Spherical SOM and arrangement of neurons using helix on sphere. *IPSJ Digital Courier*, 2:133–137, March 2006.
- [7] E. A. Rakhmanov, E. B. Saff, and Y. M. Zhou. Minimal discrete energy on the sphere. *Mathematical Research Letters*, 1:647–662, 1994.
- [8] H. Ritter. Self-organizing maps on non-euclidean spaces. In S. Oja, E. & Kaski, editor, *Kohonen Maps*, pages 97–110. Elsevier, Amsterdam, 1999.
- [9] A. Sangole and G. K. Knopf. Visualization of randomly ordered numeric data sets using spherical self-organizing feature maps. *Computers & Graphics*, 27(6):963–976, 2003.
- [10] A. Skupin and P. Agarwal. (In preparation) Introduction: What is a self-organizing map? In P. Agarwal and A. Skupin, editors, *Self-Organizing Maps: Applications in Geographic Information Science*. In preparation for publication by Wiley, 2007.
- [11] Y. Wu and M. Takatsuka. Geodesic self-organizing map. In R. F. Erbacher, J. C. Roberts, M. T. Grohn, and K. Borner, editors, *Proc. SPIE Vol. 5669*, volume 5669 of *Visualization and Data Analysis 2005*, pages 21–30. SPIE, March 2005.
- [12] Y. Wu and M. Takatsuka. Spherical self-organizing map using efficient indexed geodesic data structure. *Neural Networks*, 19(6-7):900–910, 2006.