



Three questions this deep dive answers

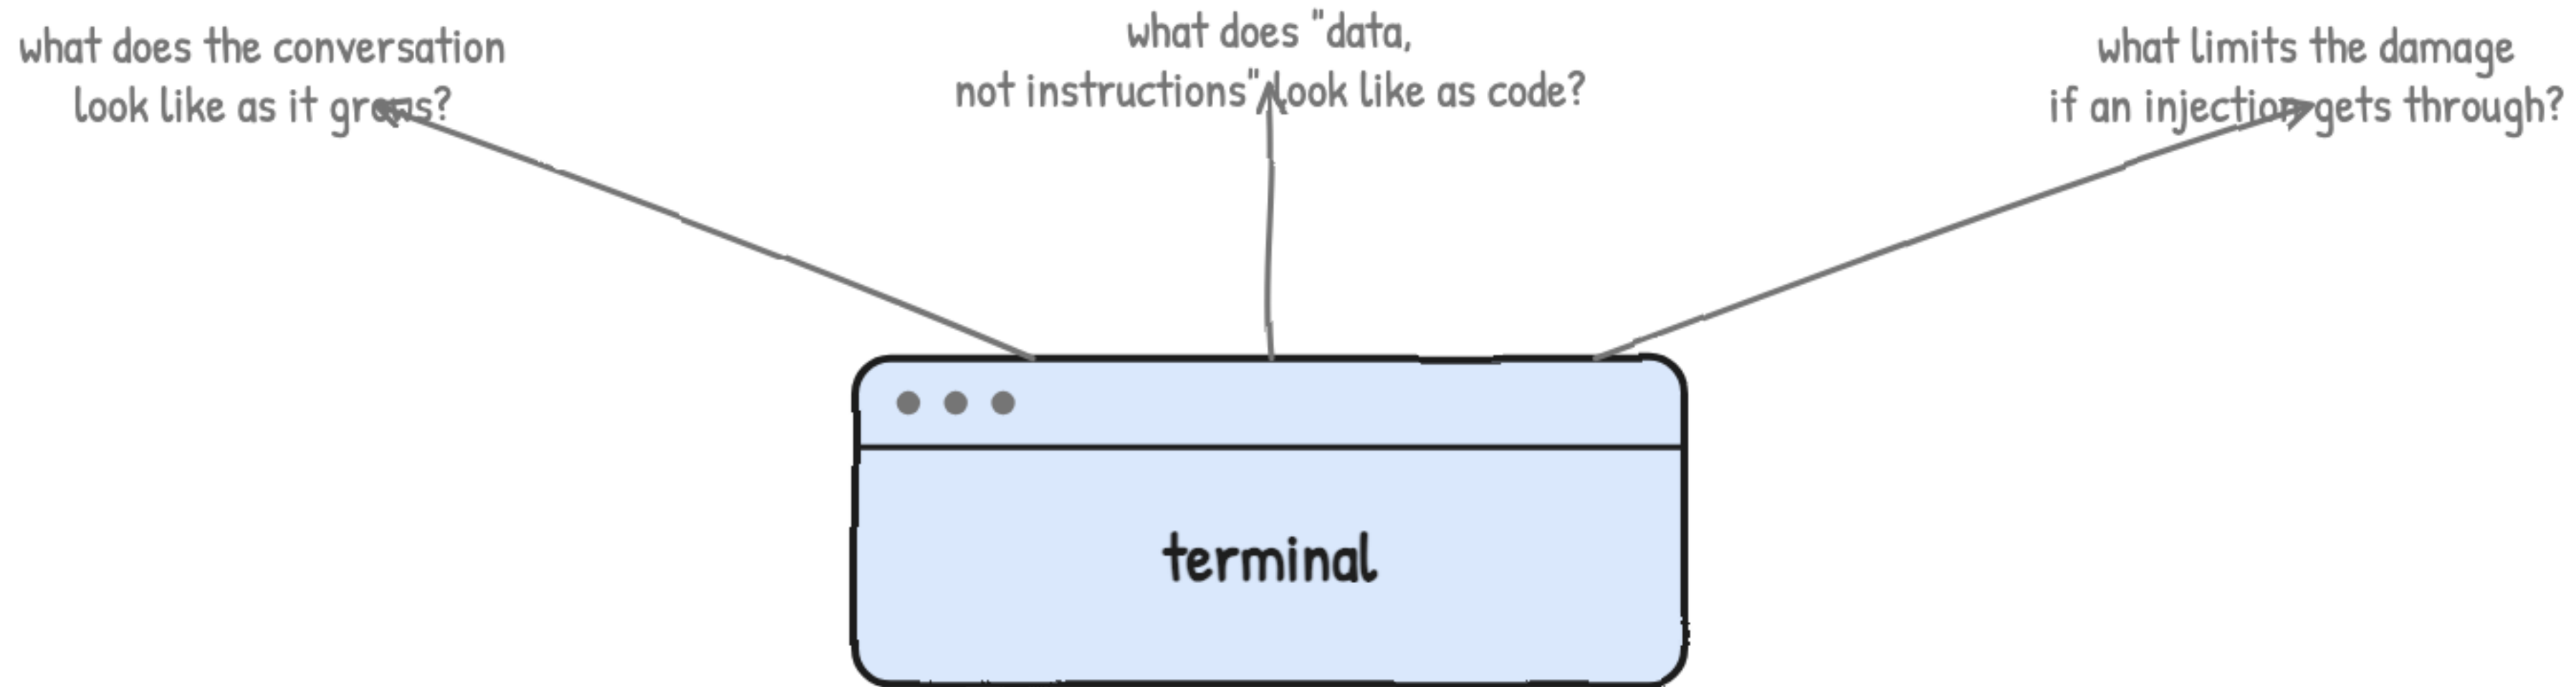

What the terminal is about to prove


Gourav Shah · School of DevOps & AI · Deep Dive (Part 2)

The message list grows by three entries, every single turn

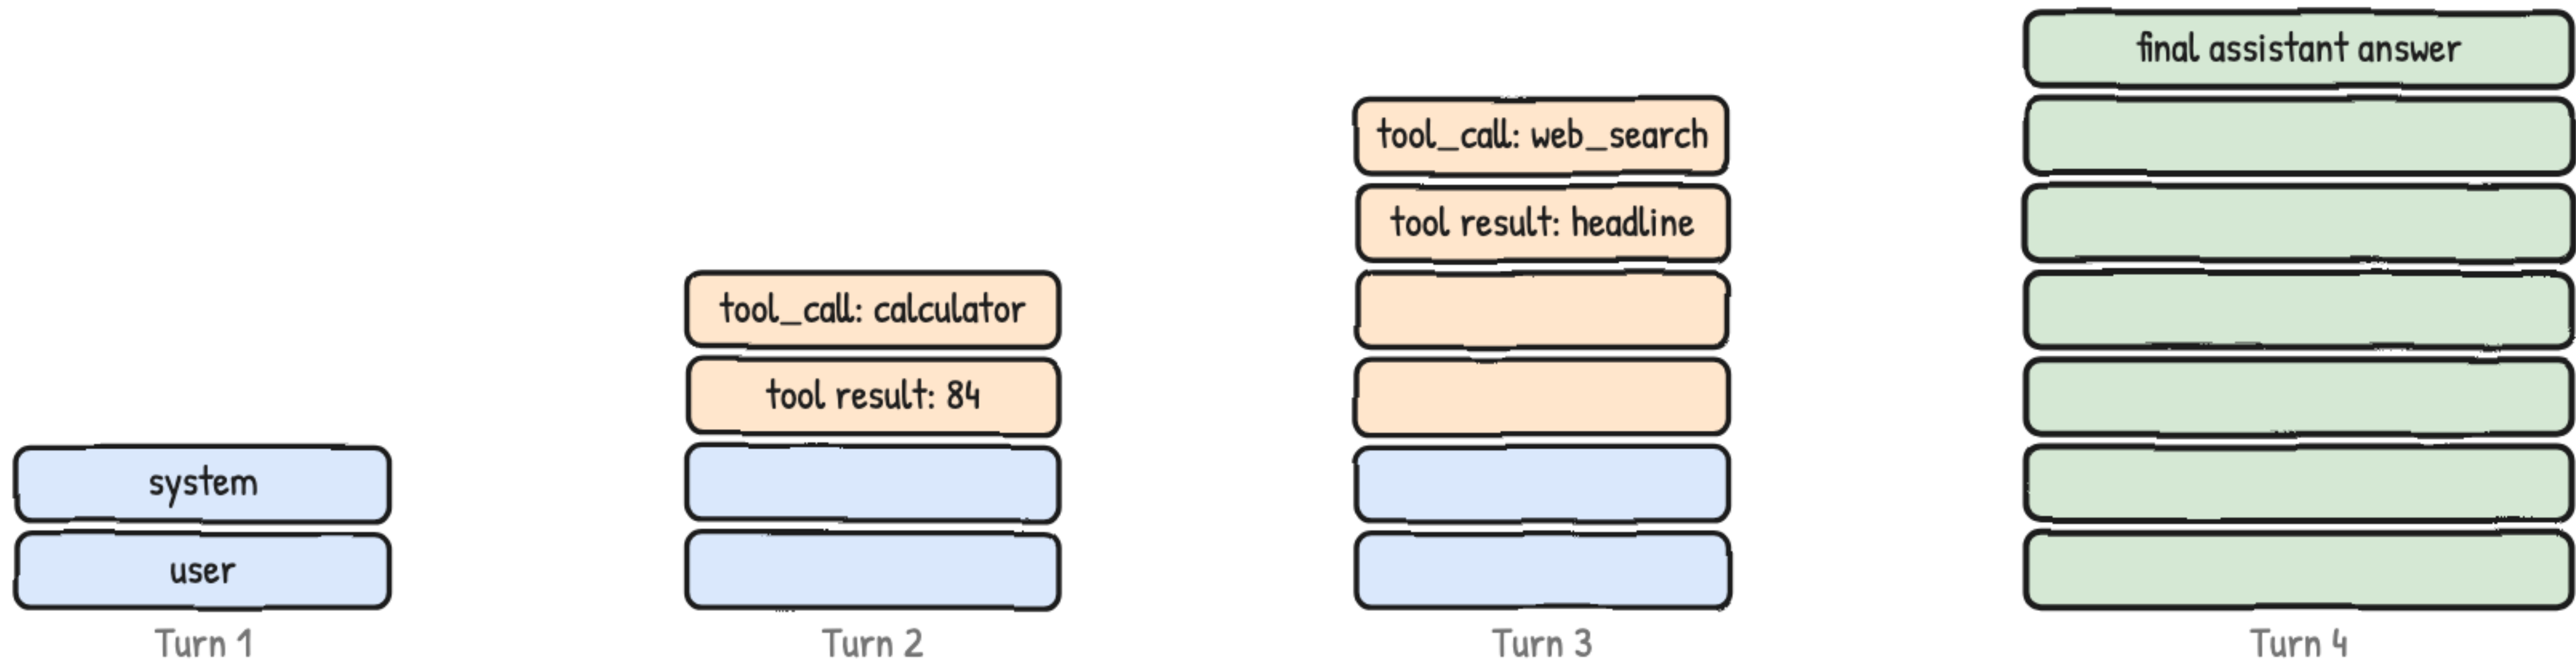


No entry ever gets removed

Cost grows roughly with the square of the turn count

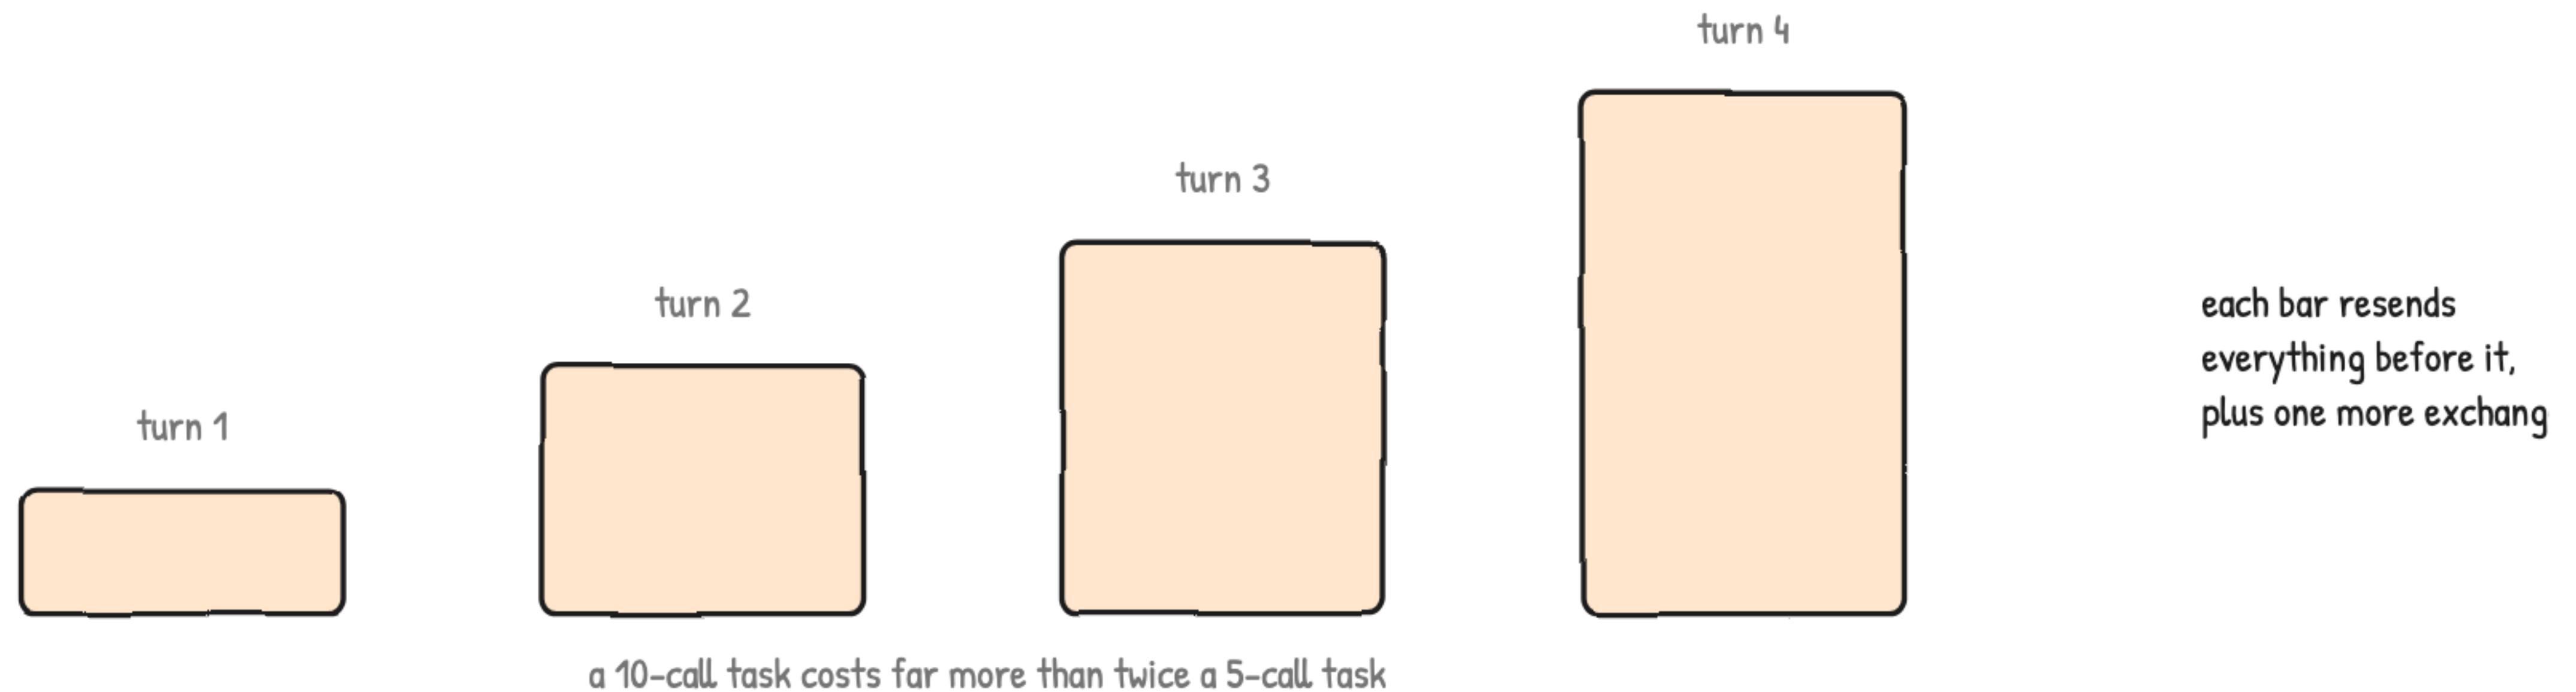

Every round-trip re-sends everything already sent

Two defenses, and they catch different things

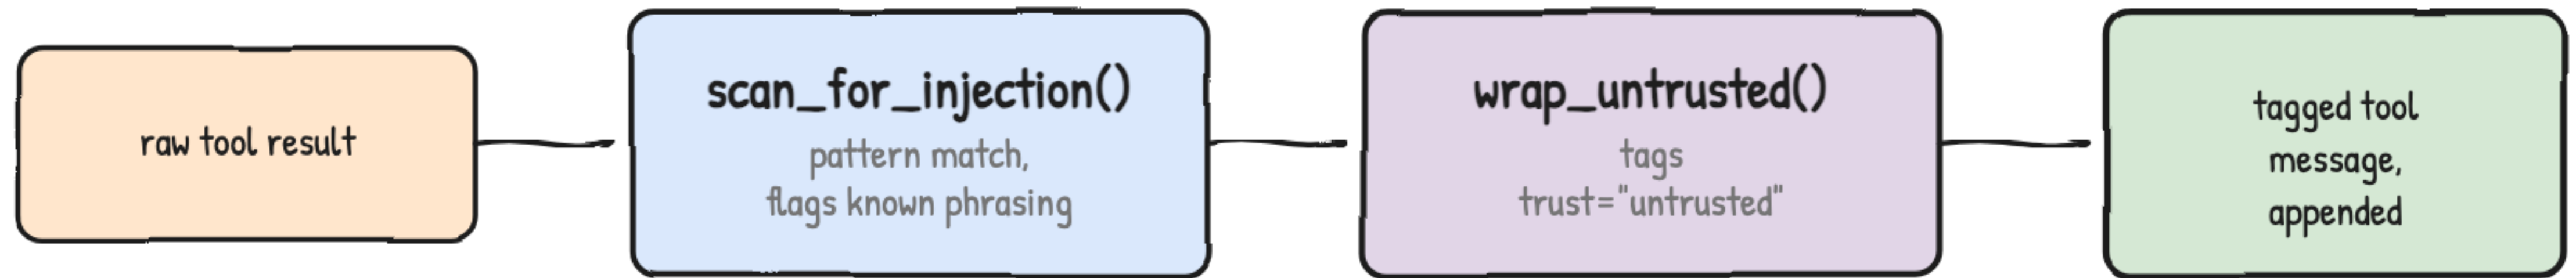

A cheap scan, then a durable tag

The blast radius is set by what the tool is allowed to do

TOOL_FUNCTIONS

exactly 2 named functions,
hardcoded

no path to eval(), a shell,
or anything not in this dict

send_email(to, subject, body)

ALLOWED_RECIPIENTS gate

a write-capable tool needs an
allowlist, not just a scan

Scanning and wrapping aren't the whole defense

Now: run both scripts, watch this happen for real

- 1 the full wire trace — every turn, every message
- 2 the injection defense — scan, then wrap, on a real hijack

```
labs/m6 — python3 wire_trace.py
```

```
python3 injection_demo.py
```

Neither script needs a network for the second one · Gourav Shah · School of DevOps & AI