

COE Intro to R Workshop

Maria Schweer-Collins, PhD & Camille Cioffi, PhD

Fall 2020

Introduction to R Packages

Installing and Loading R Packages

```
# how to install R packages.  
# do this the first time you use the package  
install.packages("tidyverse")  
# each time you open a new R session, you have to load the package  
library(tidyverse)  
  
# check for a package update  
update.packages("tidyverse")  
  
# sometimes you may receive an error that a package is not available for your version of R  
  
# Installing Outdated Packages  
  
# remotes::install_version() allows to install an outdated version of a package automatically without h  
  
# here is an example  
# install_version("MplusAutomation", version = "0.7", lib = old_lib)
```

Set Working Directory

This will tell you where your files will be saved

```
# Wondering what your working directory is set at right now?  
  
getwd() # highlight this code and press ctrl+enter
```

```
## [1] "C:/Users/maria/Desktop/COE R Workshop/COEworkshops"
```

```
# to set your working directory you can use setwd("C:/FILE PATH")  
  
# Example  
# setwd("C:/Users/jah2ax/Box Sync/_R/workshops/intro_to_R_spring_2019")
```

Import Data into R

```
# example of importing a .csv SPSS file

data1 <- read.csv("data.csv")

# example of importing a .sav file using package Haven
# you can also import SAS and Stata files with Haven
# install.packages("haven")
library(haven)
data2 <- read_sav("data.sav")

# view the top 6 rows with function head
head(data2)
```

Viewing your Data / Descriptive Statistics

```
# use package "skimr" to get the mean, standard deviation, histogram,
# and percentiles of numeric data

# install.packages("skimr")
library(skimr)

# use skim function to review data
skim(data1)

# use the package "psych" to get the mean, SD, range, min, max, median,
# skewness, and kurtosis of variables in dataset

# install.packages("psych")
library(psych)

#use describe function to review data
describe(data1)
```

Ways of coding: so many ways!

```
data2 <- data2 %>%
  rename(weight = wt) # tidyverse way of renaming a variable name

data1$weight <- data1$wt # base R method for renaming a variable (adds a variable)
```


Vizualizing Your Data: Basics

```
# We will use "ggplot2" to visualize data
#install.packages("ggplot2")
library(ggplot2)

# The package ggplot2 comes with a dataset called mtcars already loaded

# Let's create a plot that describes the relationship between engine size (displ) and
# the variable fuel efficiency (hwy).


ggplot(data = mpg) +
  geom_point(mapping = aes(x = displ, y = hwy))
```

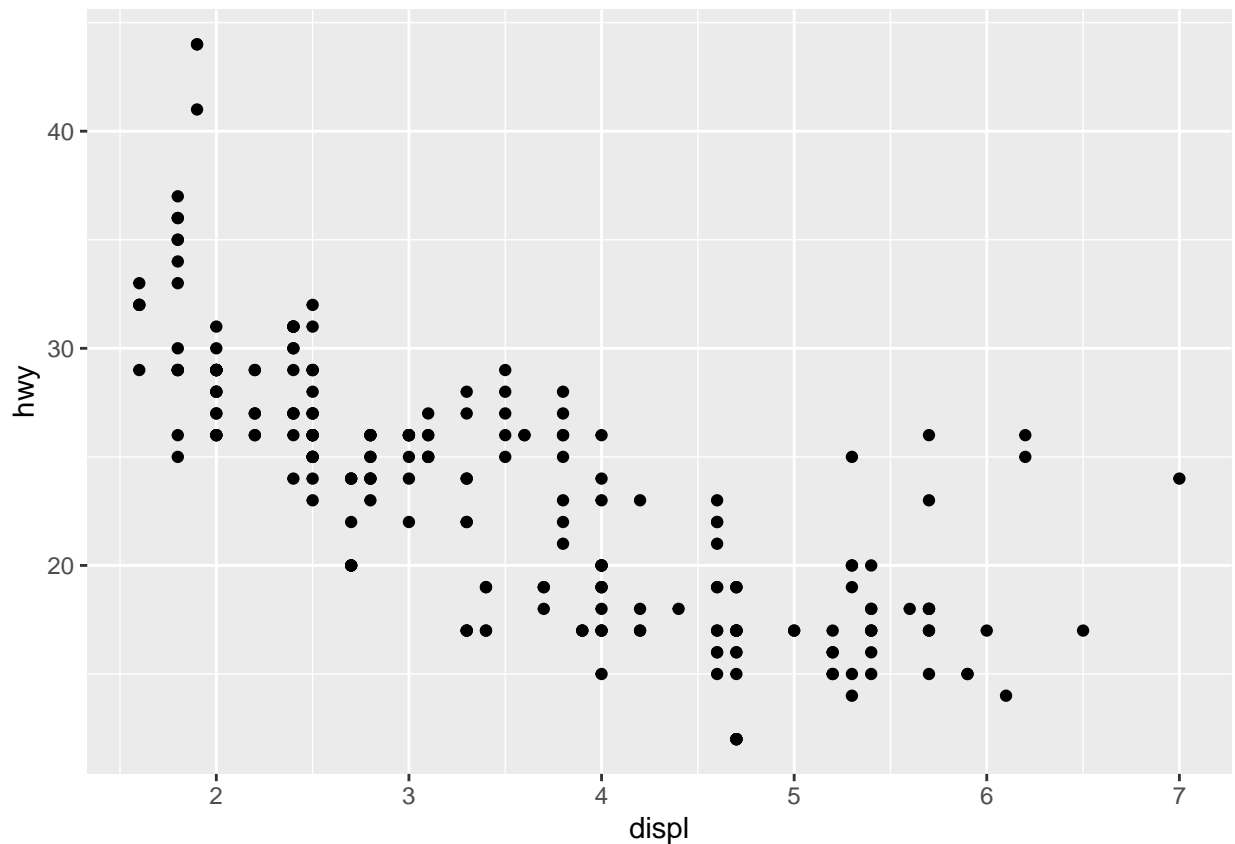

```
# Do cars with bigger engines use more fuel? Look at the Plots on the left to see
# if you think these data support that hypothesis


# here is a second example, which further divides the data by the type of vehicle (class)

ggplot(data = mpg) +
  geom_point(mapping = aes(x = displ, y = hwy, color = class))
```

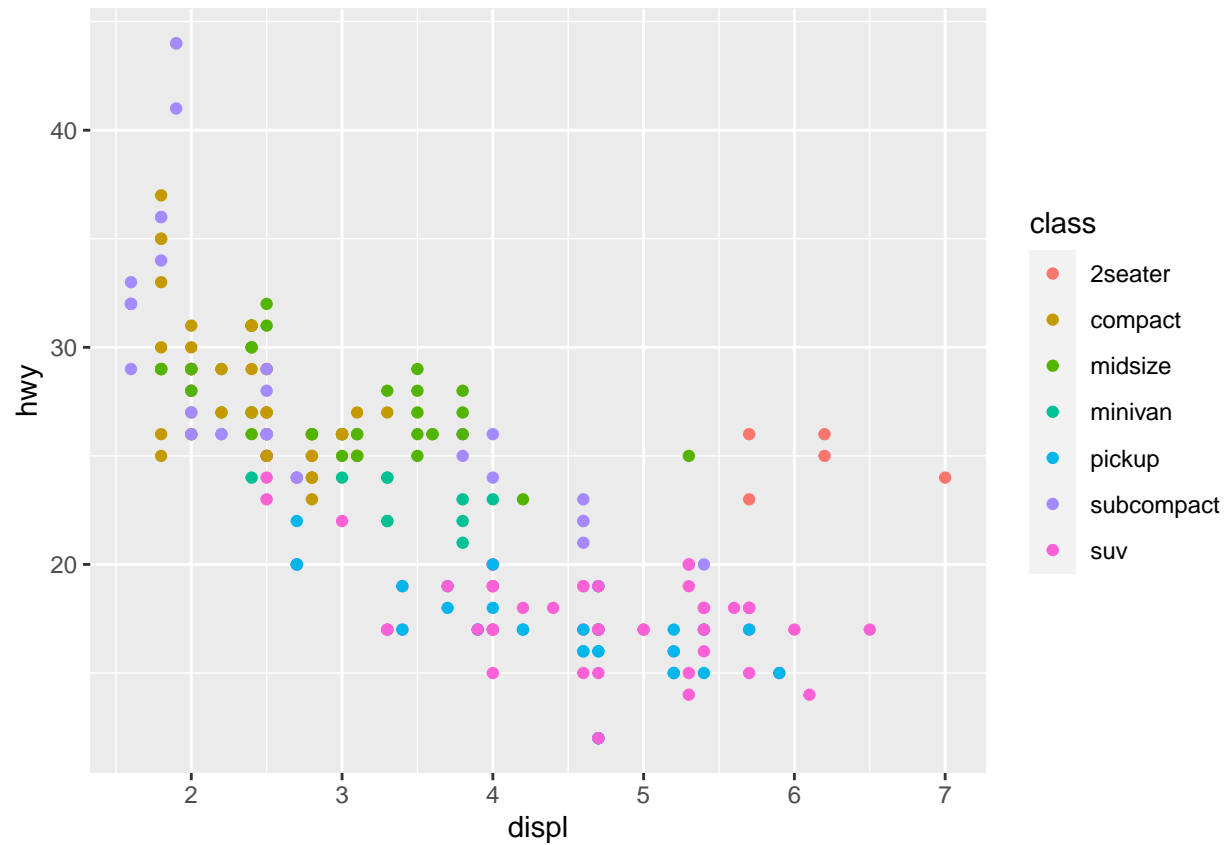

Finally, you can also plot data in different facets or graphs by using something called facet_wrap

```
ggplot(data = mpg) +  
  geom_point(mapping = aes(x = displ, y = hwy)) +  
  facet_wrap(~class)
```

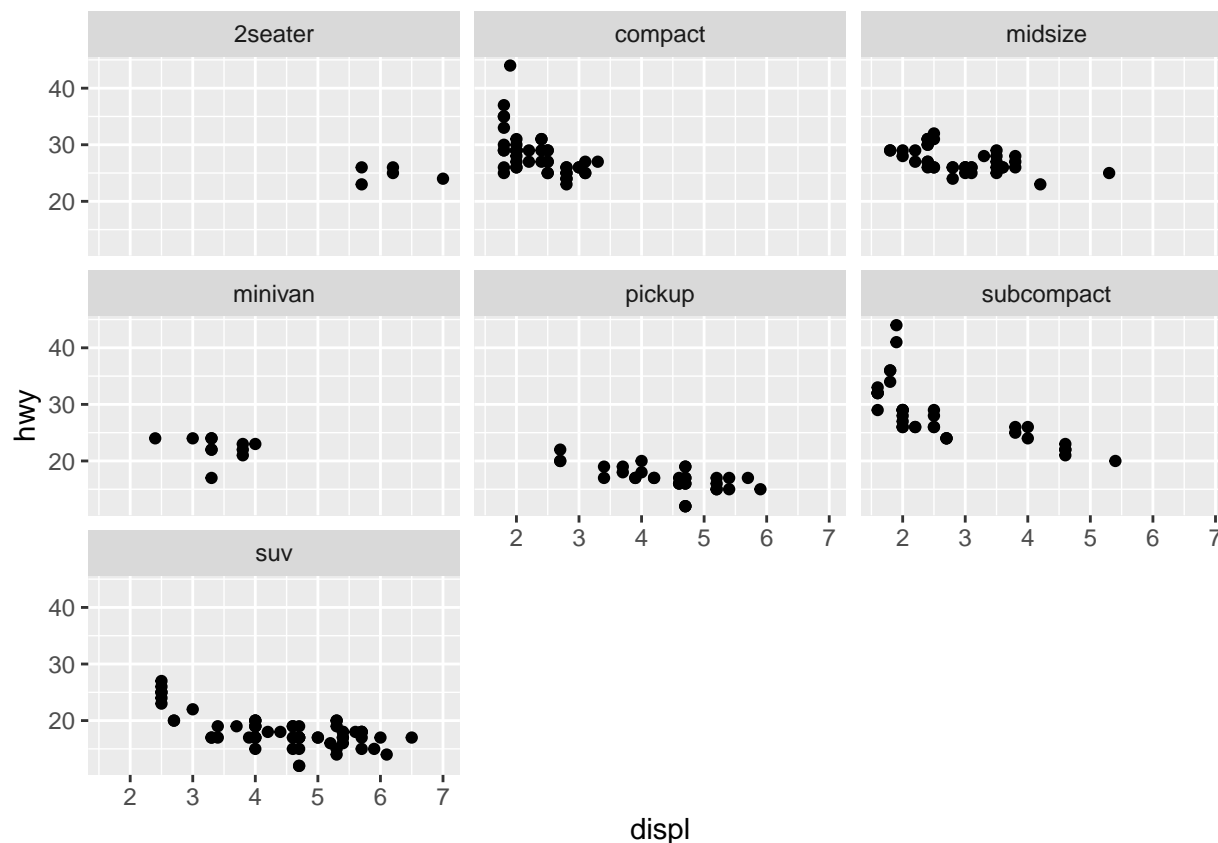

Useful R Packages

```
# data vizualization
library(tidyverse)
library(ggplot2)
# APA Tables and Documents
library(apaTables)
library(sjPlot)
library(papaja) # APA manuscripts
# Others
library(shiny) # interactive web applications
library(mice) # multiple imputation
library(lme4) # multilevel modeling
library(lavaan) # structural equation modeling

# if you would like to read about a package, you can simply use one ? followed by the package name

# example of finding tidyverse documentation

?tidyverse

# Wondering about a function, use one ? followed by the function
```

?distinct

Freely Available R Resources

Access free R tutorials here on DataCamp

Suggested DataCamp Tutorials

- Introduction to R
- Exploratory Data Analysis in R
- Data Vizualization in R

Review the workshop flow by clicking here (*credit to the University of Virginia Libraries*)