



PROJECT

TOP2121 – OBJECT-ORIENTED PROGRAMMING

TRIMESTER 1, 2023/2024 (TERM 2310)

**Project Title: Malaysian Medicinal Plants and Herbs Database
System**

Lab Section: 1B

Submission Date: 14 FEB 2024

NO	STUDENT ID	STUDENT NAME	MAJOR
1.	1221302732	Hani Hamizah binti Hamzan	ST
2.	1211305334	Siti Noorsyazwanie binti Ahmad Supiee	ST

Contents

Task Distribution	2
1. Introduction	3
2. Problem Statements	4
3. Objectives.....	5
4. Program Scope	6
5. Detailed Description	7
6. Screenshot of the program	13
7. Reference	23
8. Appendix	25

Task Distribution

No.	Student ID	Student Name	Tasks Completed
1.	1221302732	Hani Hamizah binti Hamzan	- Performed the coding and database - Program Scope - Use Case Diagram - Draft Interface Design and details - Provide the screenshot of the system and tagging - Citing references
2.	1211305334	Siti Noorsyazwanie binti Ahmad Supiee	- Introduction - Problem Statement - Objective - Class Diagram & State Diagram - Explanation for the screenshot - Provide pictures for system

1. Introduction

The Malaysian Medicinal Plants and Herbs Database System is a cutting-edge and all-encompassing platform created to organize and distribute information regarding the abundant variety of medicinal plants and herbs discovered in Malaysia. The purpose of this system is to facilitate access to accurate and current information regarding the traditional and modern applications of these valuable resources for researchers, healthcare professionals and the general public.

This approach offers unique insights on the traditional applications, scientific characteristics, and cultural importance of these plant gems. Malaysia possesses a diverse range of plants that possess powerful medicinal characteristics, which are closely tied to the country's abundant cultural legacy and traditional methods of healing. The Malaysian Medicinal Plants and Herbs Database functions as a digital repository, consolidating a wide array of information on these plants, facilitating convenient access for researchers, healthcare professionals, and enthusiasts.

2. Problem Statements

- i. **Incomplete database** - The system might not contain exhaustive information on all Malaysian medicinal plants and herbs, resulting in incomplete or erroneous data.
- ii. **Limited User Accessibility** - The system may not be readily accessible to a wide range of users, including persons with varying degrees of technical expertise or those with disabilities.
- iii. **Insufficient Multimedia Content** - The absence of visual aids such as photographs, videos, or illustrations may impede the comprehension of plant attributes and use.
- iv. **Inefficient Search and Navigation** - The website's search functionality and navigation system may lack effectiveness or user-friendliness, impeding users' ability to promptly locate pertinent information.
- v. **Limited Awareness of Conservation Practices** - There is a lack of awareness regarding the significance of protecting medicinal plant species and advancing sustainable procedures for harvesting and production.

3. Objectives

- i. To offer precise and current information regarding the identification, characteristics, traditional applications, and prospective therapeutic advantages of medicinal plants. It caters to a wide range of users, including researchers, healthcare practitioners, and the general public.
- ii. The database provides a credible source of information for researchers, students, and educators who are interested in herbal medicine and associated sciences. It facilitates the acquisition of knowledge and promotes academic progress in this field.
- iii. The system can contribute to the preservation of cultural traditions and the biodiversity of medicinal plant species by recording traditional applications of these plants and promoting sustainable harvesting practices.
- iv. To establish a platform that fosters collaboration between traditional medicine practitioners and modern healthcare experts, allowing for the coexistence of traditional and scientific knowledge.
- v. To educate users on responsible methods that promote the sustainable availability of medicinal plants while minimising harm to ecosystems and the risk of jeopardising plant species.

4. Program Scope

Features

This program needs a user to verify whether they will log in as a user or as an admin. Admin will have separate role that allows them to few other functions such as viewing the current user and their profile for security and documentation purpose. Meanwhile for users, they will be log in and only allow to some features in the program. This program consists of Home page, Browse Page, About page, Buy page and Quiz page.

Home page is consists of a brief introduction about this organization.

About page consists of the introduction to collaborated research centres

Browse section is the main section of this program. This is where users can find any traditional medicinal plants and herb from 3 main cultures in Malaysia which are Malay, Indian and Chinese.

In Buy section, users can buy plants they want by clicking the link that redirecting them to buying form.

In Game section, there are 6 simple questions about plants' name. Users can choose using radio button and click submit button to check their answer.

Functions

Functions in this program including users can register as new users, or existing users, users can browse plants and playing quiz to measure their knowledge of plant's name.

Meanwhile for admin, there a few additional functions such as viewing all users's information and record.

Constraints

There are some constraints in this program such as:

1. Starting from the beginning of the program, there is no back button for user to return after choosing whether to login as an admin or as a user. Thus, if the user accidentally chose admin login, they must exit the program and choose again.
2. Secondly, there is no auto updated user list after admin adding new user, so admin must close the user list panel after adding new user and open it again to see the new users added.
3. Lastly, the major constraint in our project is, the image icon set on JLabel is not working in jar file. However, they are working well when running on compiler (Netbeans 17).

5. Detailed Description

Use Case Diagram

Use case diagram is used to show the simplify version of how our system works. In our system, admin is a subclass of browser which mean the admin can do all browser do but with an additional feature which the admin can manipulate data of user such as create and delete the user when not needed anymore. As from general functionalities, browser can browse the plants, can create user as for new user, can buy palnts from farmer, and can play the quiz. When user is create or when user is deleted, the system will access user database. As for browsing plants, when users are browsing plants, they can opt to see 3 types of traditional herbs whether from Malay, Indian or Chinese traditional herbs. Our system is called Malaysia Herbs.

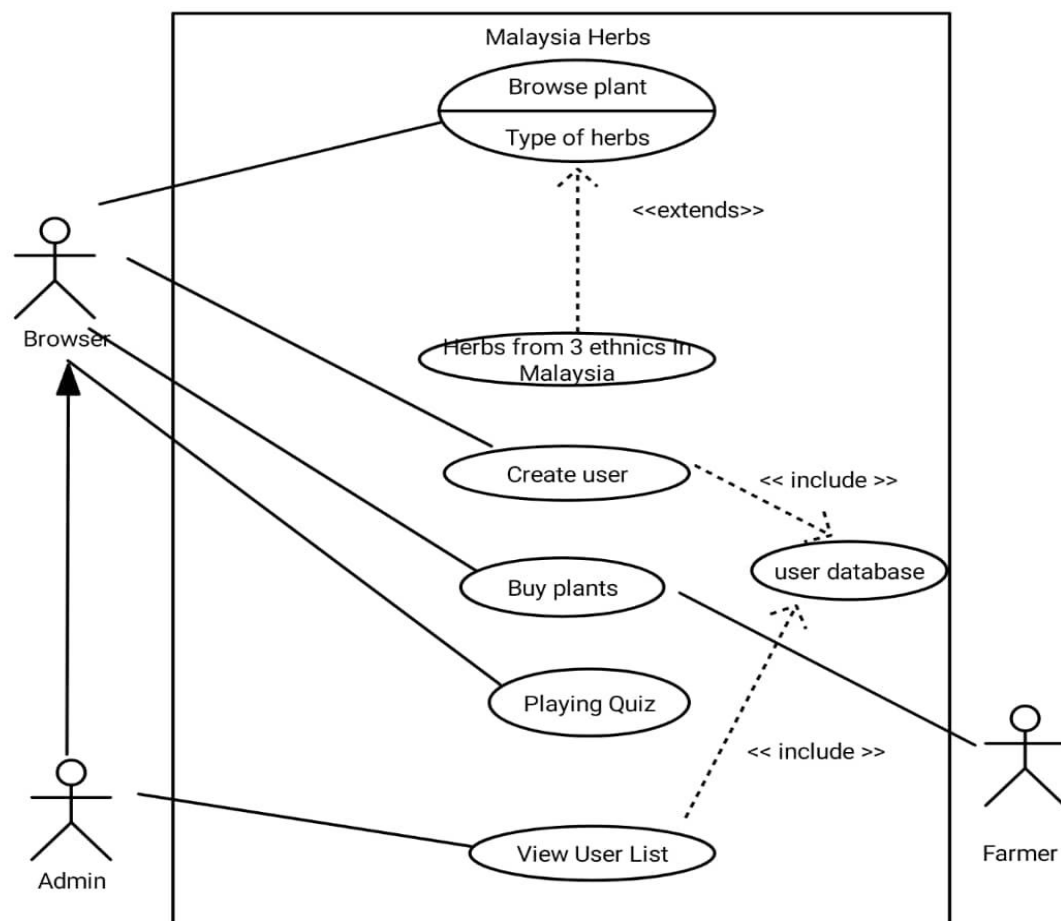


Figure 1. Use case Diagram of Malaysia Herb System

Class Diagram

Class Diagram is a type of UML that shows static structure diagram of the system by showing classes involved in the system, attributes, systems and interaction between classes.

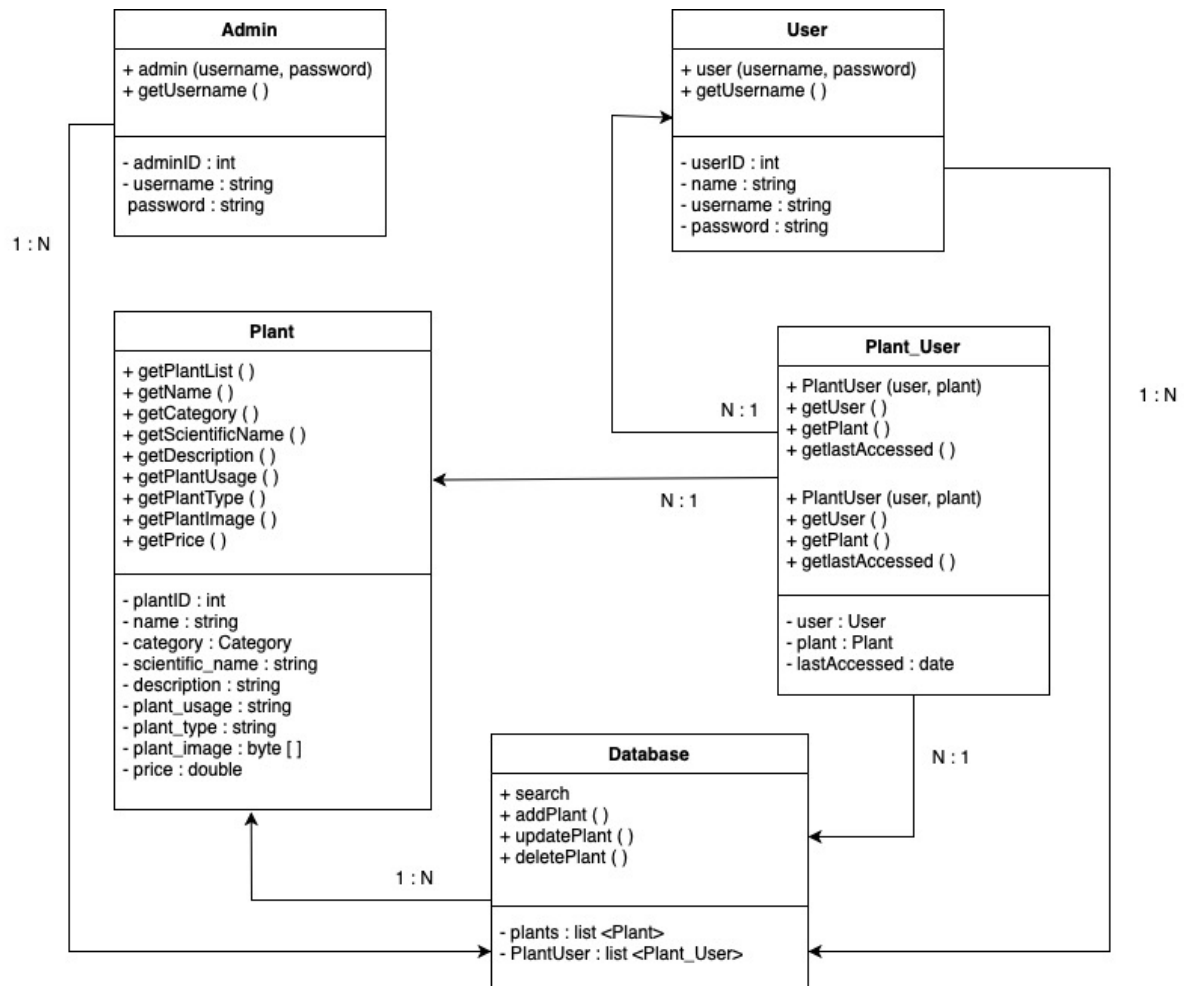


Figure 2 Class Diagram of Malaysia Herb system

State Diagram

State diagram is a behavioral diagram that shows how the system starts until the end of the system. Our system starts with Login and will end at the game page for the user.

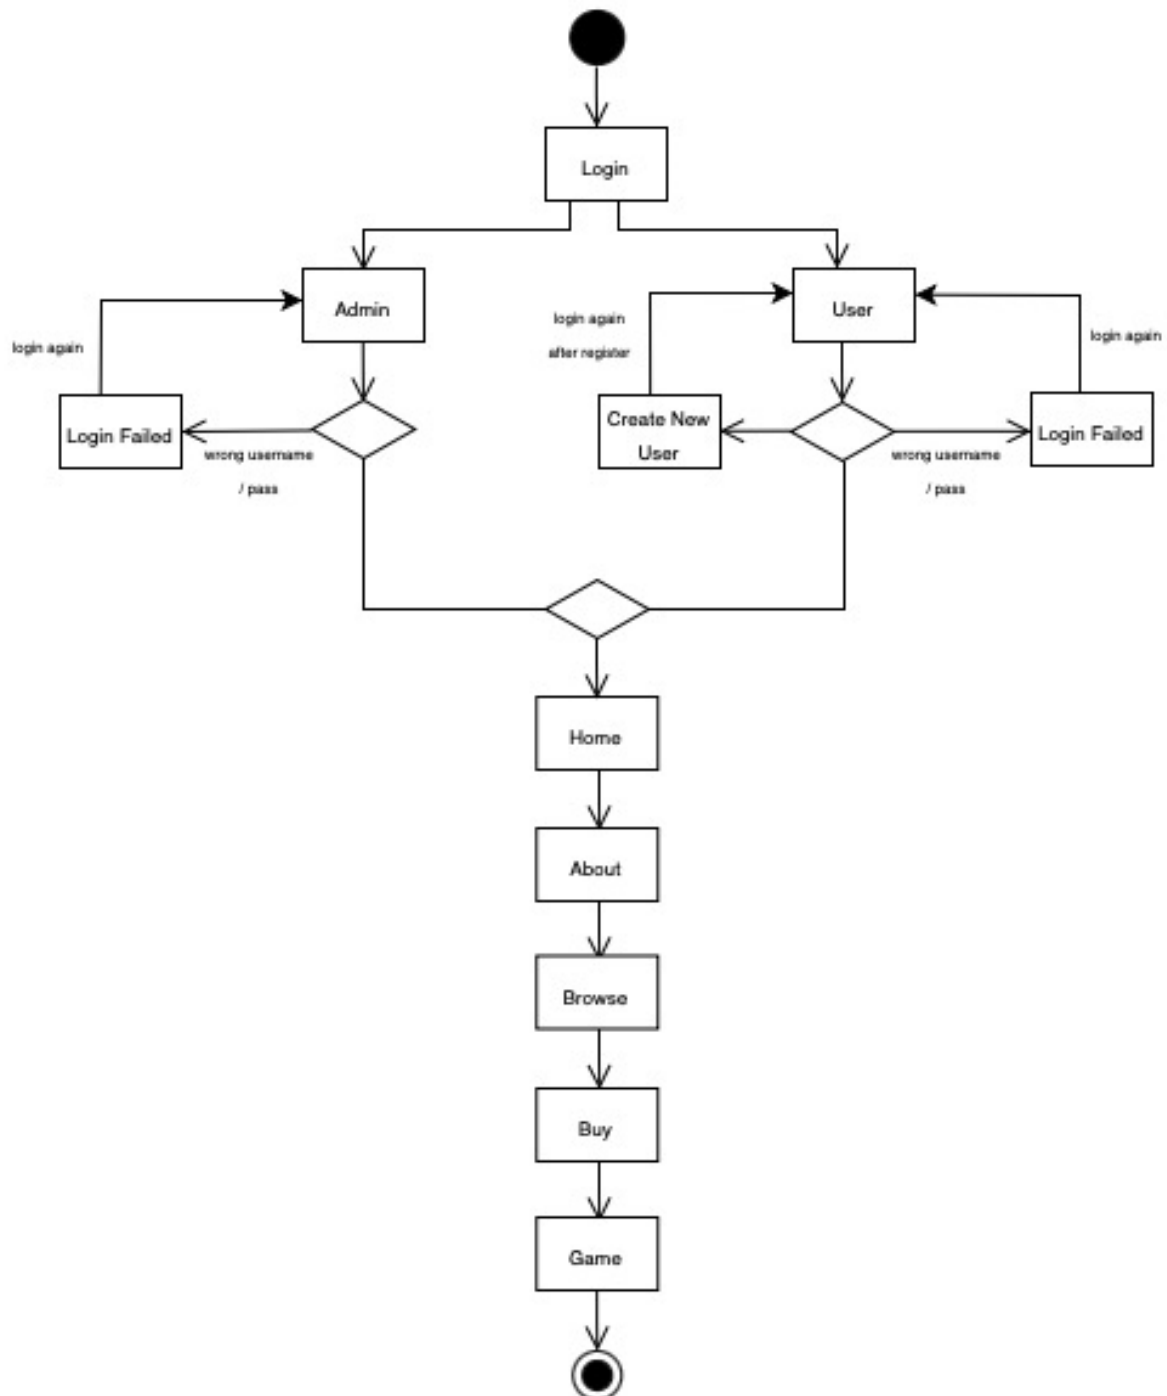


Figure 3 State Diagram of Malaysia Herb system

Draft Interface Design

For draft interface design, we are planning to use sql file to store all data because sql file supporting picture format which is a need in our system. At first, we are also planning to make hyperlink text to take user to their our collaborators and research centre. For browse page, the intial design is to separate each pane and table according to what traditional herbs are they. Users also should be able to download pdf file of plants information.

Our draft design discussion also includes recognizing entities involves in the system. We are also planning to make a buy page where users can buy their own plants. As for login, initially we were planning to make this system available without login as a user, instead only admin needed to login into the system.

A for additional features, we are planning to make search field so users can easily find any plants or herbs. Our draft interfaces are shown in figure 4 until figure 6.

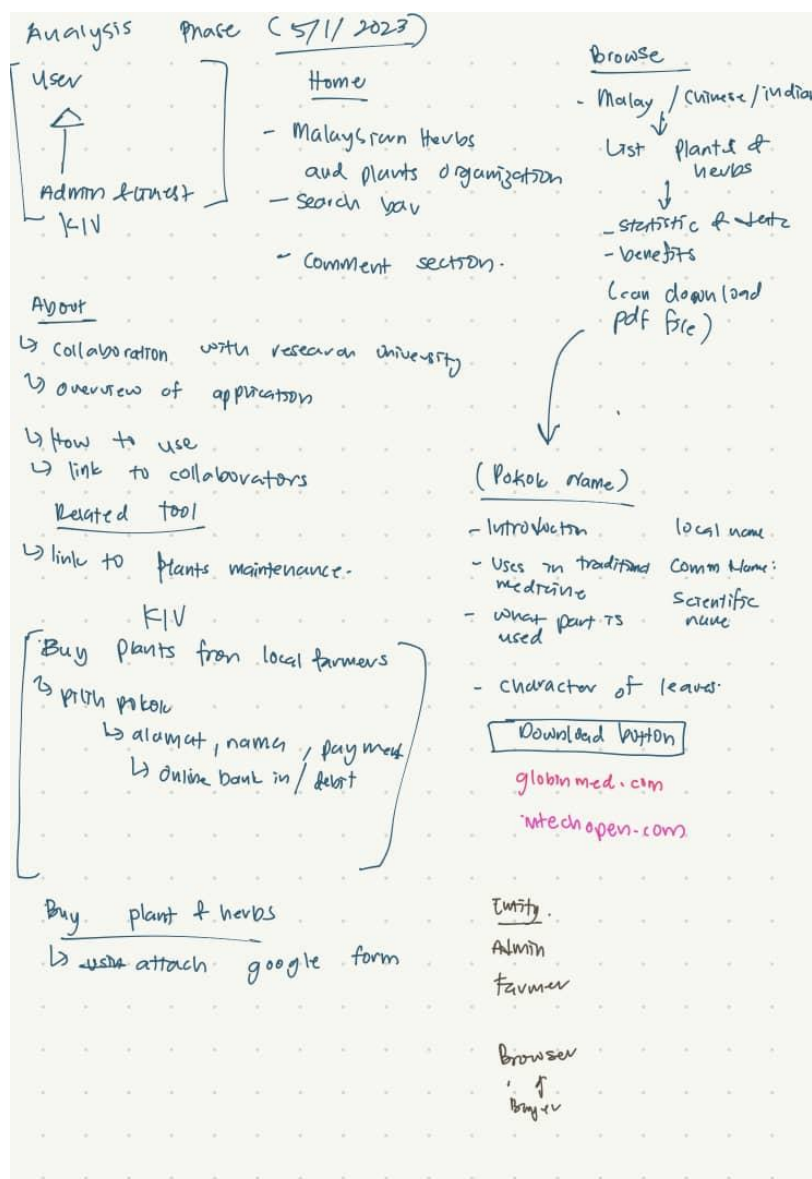


Figure 4 Draft of discussion on 5th January 2024

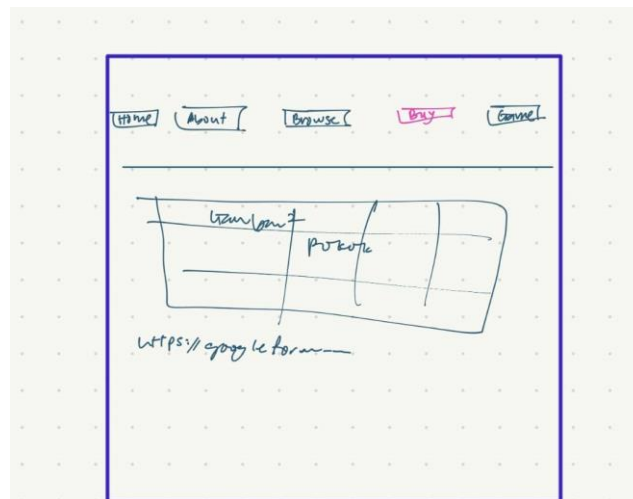


Figure 5 Draft interface for buy page

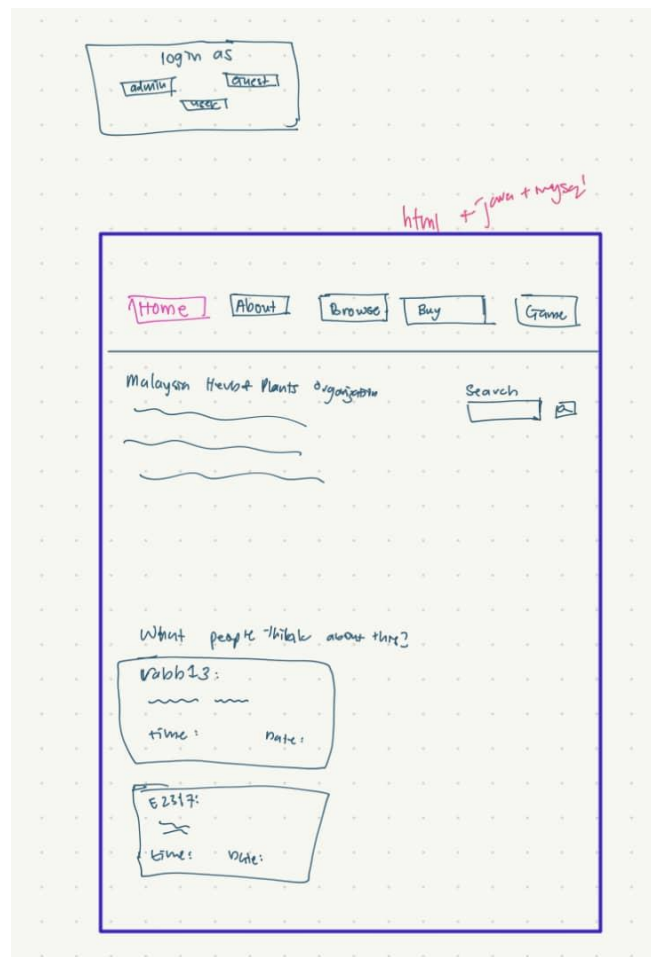


Figure 6 Draft interface for home page after login

Detail Final Program

In this final program, there are 3 main classes used to interact and get information.

- **Database.java**

This class is used to connect to the database so that everytime any class need to connect to database, this class will be called upon. In this database class, username, password, database name and connection is established. Error handling here is to handle the error if connection cannot be established.

- **Plant_User.java**

In this class users name and details are declared to be called upon. For example, attribute in this class will be called in userlogin.java when users want to login into system. Set or get method also will be used when displaying list user for admin and when admin want to delete or create new users

- **Plant.java**

In this class, plants' detail will be declared so that any other class can call the attributes in it. This class is connected to plants table in malaysiaherbs database. Get method and set method in this class is used to display plants' details in MAIN_WINDOW.java

For our final design, we demolish search function and displaced text on about page with picture talking about our collaborators in research instead. We also displayed the list of plants in a list with type of traditional herbs instead of making different pane for each section. As we are using tabbedpane in java swing, I figure it is not possible for one button (previous and next button) when browsing the plants to access different plants.

We also taking users' convenience into account when designing this program so that users do not need to open too many panel instead they can stay on the main window. As for sql, I figure we can store picture in the longblob type and to make it display in the java program, we must use byte[] type.

Get methods in each class is used to return the data value from the database. Meanwhile the set methos in each class is used to display the value from the database into java program.

As for user interface, we are using java swing because as it is lighter and faster than java applet. Pictures in our program are displayed using JLabel as icon using ImageIcon class. As for tabbed pane, JPanel is used as containers. Colours for each containers are determined by using rgb pixels value. JDialog are also used to show messages such as "New User Created" or "delete this user?" or any error message such as "Invalid password".

6. Screenshot of the program

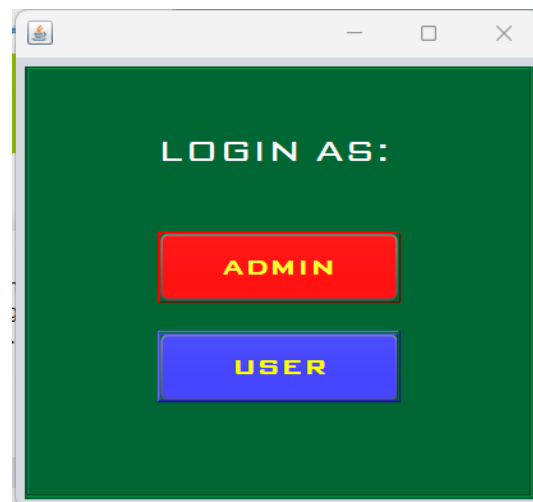


Figure 7 Initial Login Page

"Login" page serves as the entry point for users to access the Malaysian Medicinal Herbs & Plants Database System. Users are presented with the option to log in as either an administrator (admin) or a regular user.

1. User Login

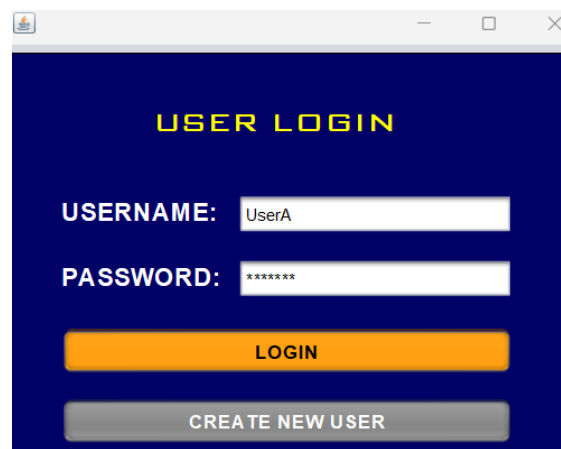


Figure 8 User Login panel

"User Login" Interface is designed to authenticate individual users and grant access to the Malaysian Medicinal Herbs & Plants Database System. This interface prompts users to provide their login credentials, consisting of a username and password. Users are required to enter their unique username and corresponding password in the designated input fields.

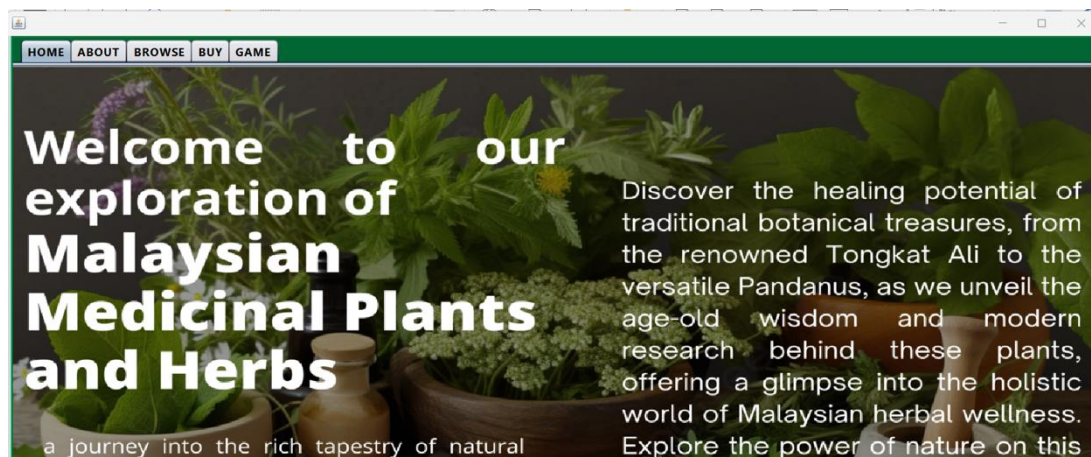


Figure 9 Homepage of the system

There's a "Home" page that users are redirected to after successfully logging in. Home Page serves as the central hub of the Malaysian Medicinal Herbs & Plants Database System, providing users with an overview and quick access to key functionalities.

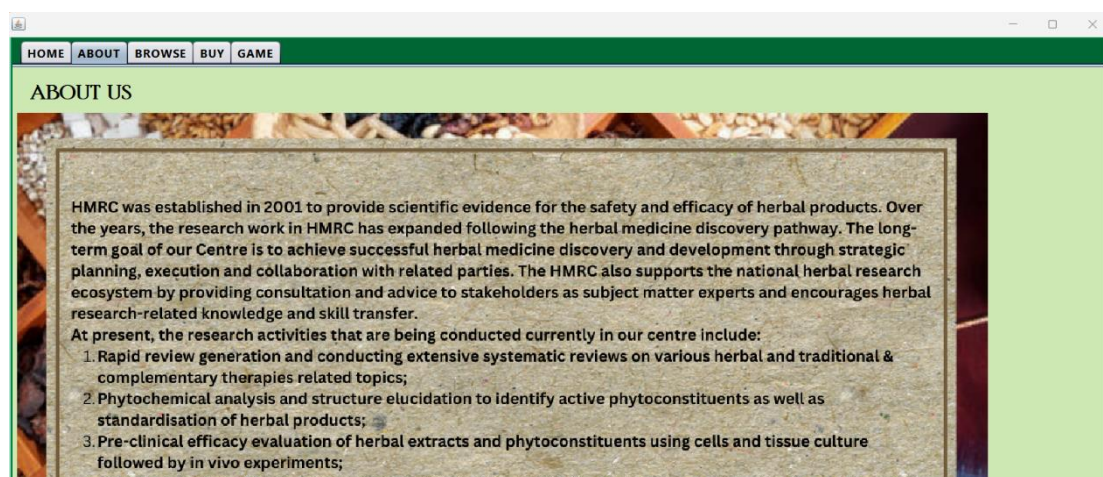


Figure 10 About us page

There's an "About" page that provides information about the project and the team behind it. This page offers users insights into the Malaysian Medicinal Herbs & Plants Database System, providing a glimpse into the project's purpose, goals, and the individuals or team responsible for its development.

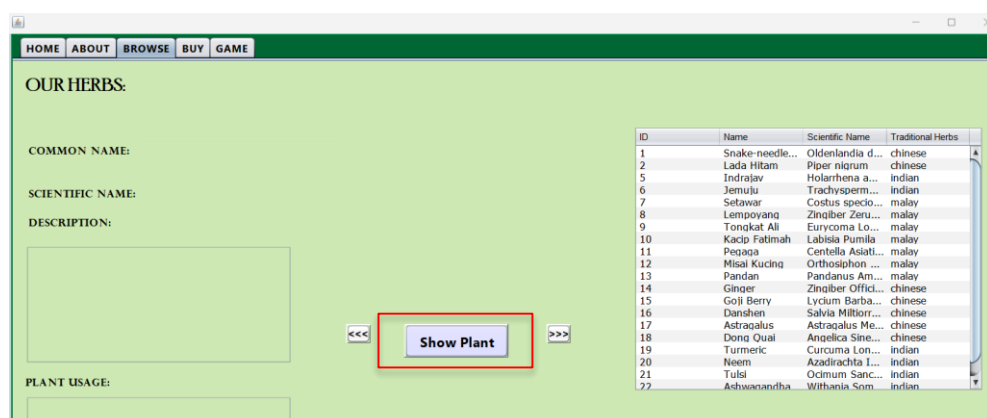


Figure 11 Browse page

There's a Browse page that displays information about different herbs, including their common name, scientific name, description, and plant usage. The red square is a button for user to go to the first plants in the list.



Figure 12 Browse page showing picture when you clicked on the name in the list

The "Browse" page is a comprehensive catalog within the Malaysian Medicinal Herbs & Plants Database System, allowing users to explore and learn about various herbs.

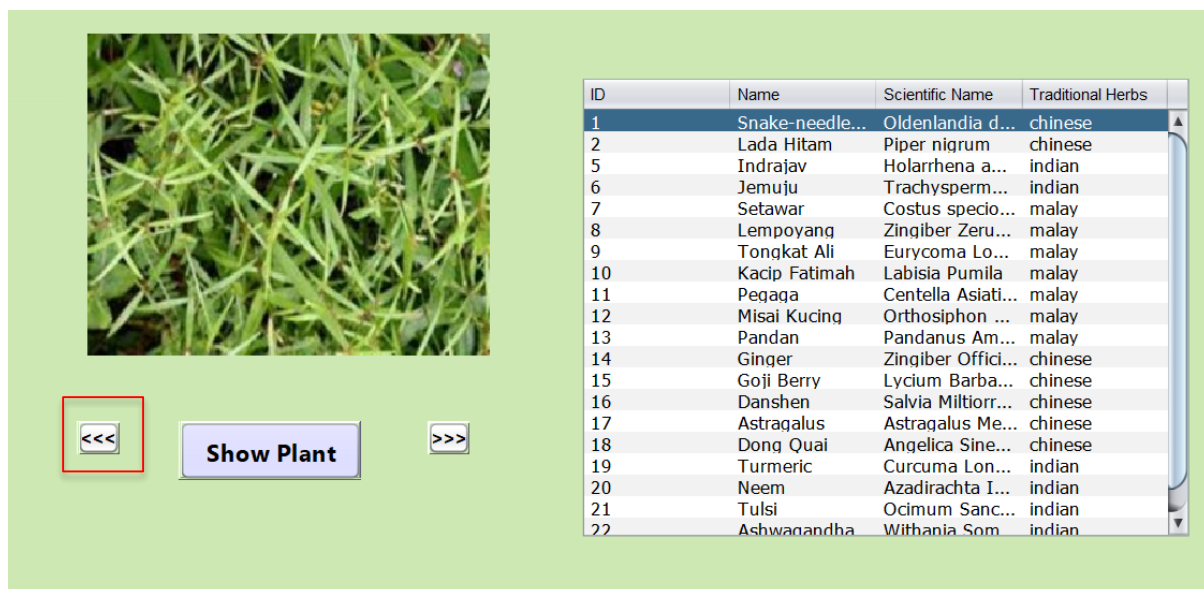


Figure 13 showing the plant list with previous and next button for users to browse one by one plants

The page presents a list of herbs with essential details such as image, common name, scientific name, description, and plant usage. Users can use this page to gain knowledge about the diverse range of medicinal herbs and plants available in the database. The red square is previous button for user to click when to see one by one plants in the list.

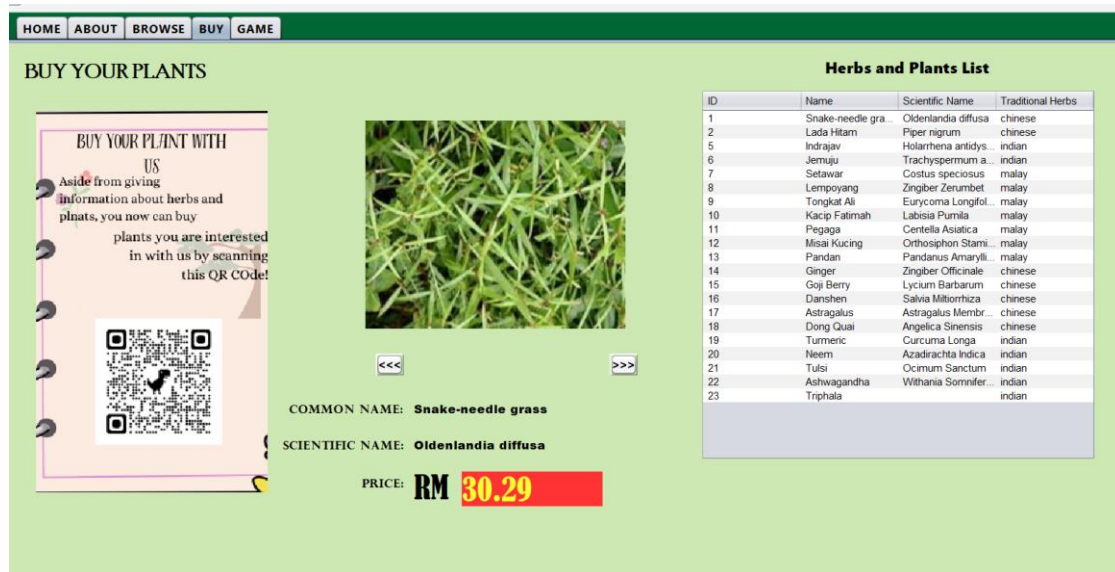


Figure 14 BUy page showing the price of plants

The “Buy” page facilitates the purchase of plants within the system by utilizing QR codes. Users can scan the provided QR codes to access detailed information about specific plants, including their prices. The page provides a seamless and interactive shopping experience for users interested in acquiring medicinal plants.

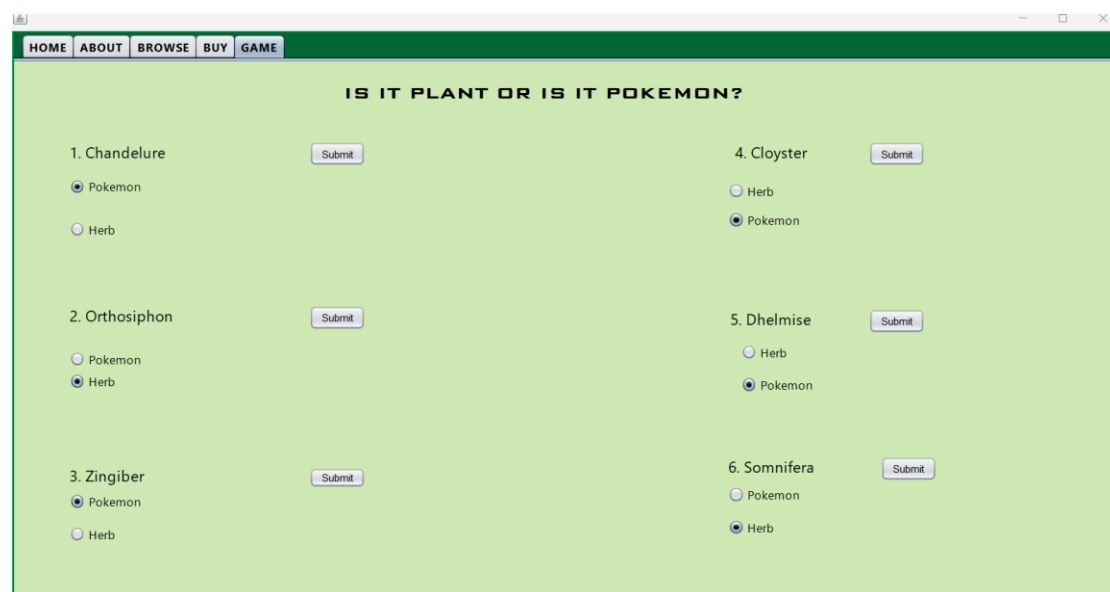


Figure 15 Initial state of Game page


The “Game” page provides an interactive and educational experience by offering users a simple quiz about plants featured in the database.



Figure 16 Game page after submit button is clicked

Users can test their knowledge about medicinal herbs and plants through a series of questions and challenges related to their characteristics, uses, or other relevant information.


2. Admin Login

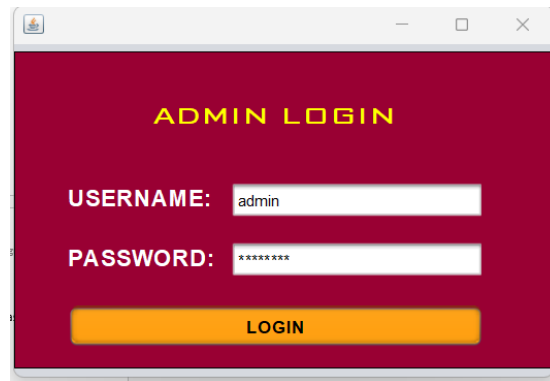

The screenshot shows a web browser window with a dark red background. At the top, the text "ADMIN LOGIN" is displayed in yellow. Below this, there are two input fields: "USERNAME:" with the value "admin" and "PASSWORD:" with the value "*****". A yellow "LOGIN" button is positioned at the bottom of the form.

Figure 17 admin login page

There's a separate "Admin Login" page for administrators to access the administrative functionalities of the Malaysian Medicinal Herbs & Plants Database System. This is secure access to the administrative features and controls of the system.

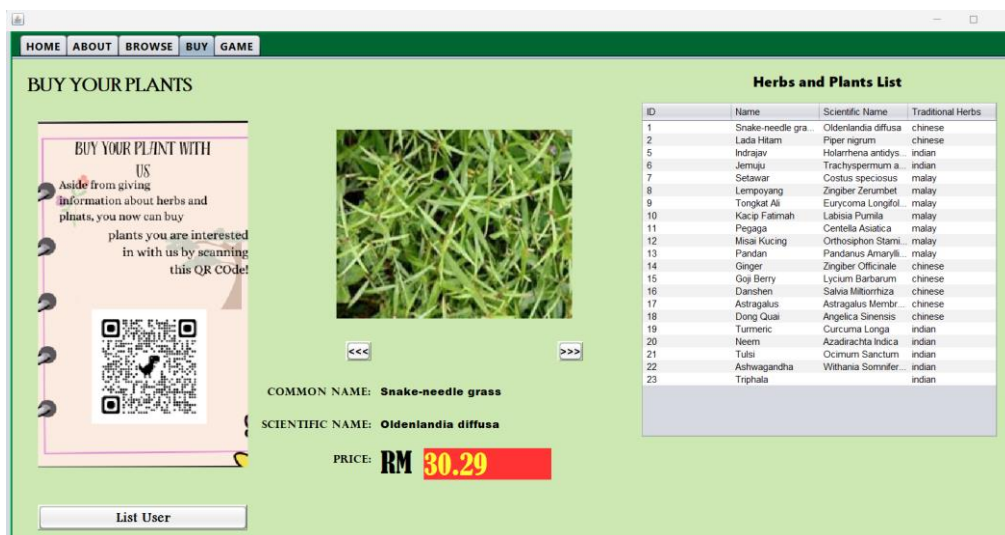

The screenshot shows a web browser window with a green header and a light green background. The header contains navigation links: HOME, ABOUT, BROWSE, BUY, and GAME. The main content area is titled "BUY YOUR PLANTS". On the left, there is a section titled "BUY YOUR PLANT WITH US" with a QR code and text: "Aside from giving information about herbs and plants, you now can buy plants you are interested in with us by scanning this QR CODE!". In the center, there is a photograph of a plant. Below the photo, the text reads: "COMMON NAME: Snake-needle grass" and "SCIENTIFIC NAME: Oldenlandia diffusa". The price is displayed as "PRICE: RM 30.29". On the right, there is a table titled "Herbs and Plants List" with columns: ID, Name, Scientific Name, and Traditional Herbs. The table lists 23 items.


ID	Name	Scientific Name	Traditional Herbs
1	Snake-needle gra	Oldenlandia diffusa	chinese
2	Lada Hitam	Piper nigrum	chinese
5	Indrajav	Holarrhena antidys	indian
6	Jemuju	Trachyspermum a	indian
7	Setawar	Costus speciosus	malay
8	Lempoyang	Zingiber Zerumbet	malay
9	Tongkat Ali	Eurycoma Longfol	malay
10	Kacip Fatimah	Labisia Pumila	malay
11	Pegaga	Centella Asiatica	malay
12	Misa Kucing	Orthosiphon Stami	malay
13	Pandan	Pandanus Amaryll	malay
14	Ginger	Zingiber Officinale	chinese
15	Gogi Berry	Lycium Barbarum	chinese
16	Danshen	Salvia Miltiorhiza	chinese
17	Astragalus	Astragalus Membr	chinese
18	Dong Quai	Angelica Sinensis	chinese
19	Turmeric	Curcuma Longa	indian
20	Neem	Azadirachta indica	indian
21	Tulasi	Ocimum Sanctum	indian
22	Ashwagandha	Withania Somnifer	indian
23	Triphala		indian

At the bottom left, there is a button labeled "List User".

Figure 18 In buy page for admin, there is List User

There's an additional functionality on the "Buy" page that allows administrators to access and manage the list of users, including creating and deleting users. The Buy page not only serves as the platform for users to purchase plants through QR codes but also includes an administrative feature allowing administrators to manage user accounts.

Admin can click on the List User button to see the current users. One window will be shown as in Figure 19.

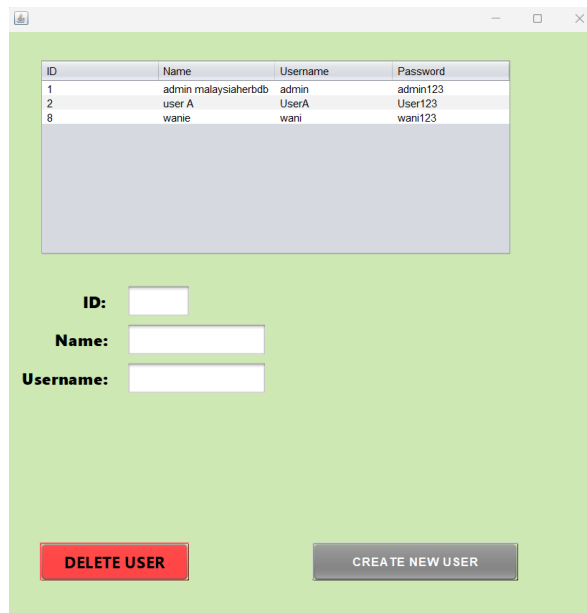

A screenshot of a web application window titled "List User". The window has a light green background. At the top, there is a table with four columns: ID, Name, Username, and Password. The table contains three rows of data. Below the table is a large, empty light gray rectangular area. Underneath this area are three input fields labeled "ID:", "Name:", and "Username:". At the bottom of the window, there are two buttons: a red button labeled "DELETE USER" and a gray button labeled "CREATE NEW USER".

ID	Name	Username	Password
1	admin malaysiaherbdb	admin	admin123
2	user A	UserA	User123
8	wanie	wani	wani123


ID:

Name:

Username:

DELETE USER **CREATE NEW USER**

Figure 19 Initial state of panel after admin clicked on List User

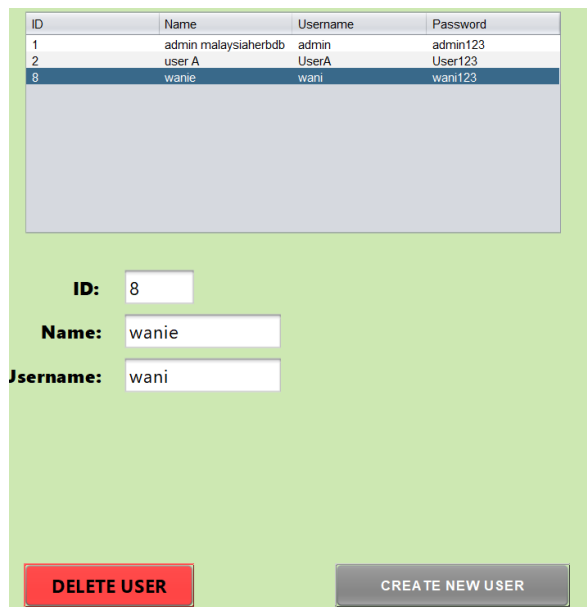

A screenshot of the same web application window, but now the third row of the table (ID 8, Name wanie, Username wani, Password wani123) is highlighted in blue. The input fields below the table now contain the data from the selected row: "ID:" is 8, "Name:" is wanie, and "Username:" is wani. The "DELETE USER" and "CREATE NEW USER" buttons remain at the bottom.

ID	Name	Username	Password
1	admin malaysiaherbdb	admin	admin123
2	user A	UserA	User123
8	wanie	wani	wani123

ID:

Name:

Username:

DELETE USER **CREATE NEW USER**

Figure 20 After admin selected on user from the list

Admin can create and delete new user from this page.

ID	Name	Username	Password
1	admin malaysiaherbdb	admin	admin123
2	user A	UserA	User123

ID:

Name:

Username:

DELETE USER **CREATE NEW USER**

Figure 21 Notice the previous is no longer there after admin deleting it

As admin click on the create new user button, Create user panel will be displayed. This is the same panel that is shown when user want to create new user too.

CREATE USER


NAME:

USERNAME:

PASSWORD:

CREATE NEW USER

Figure 22 Create User page

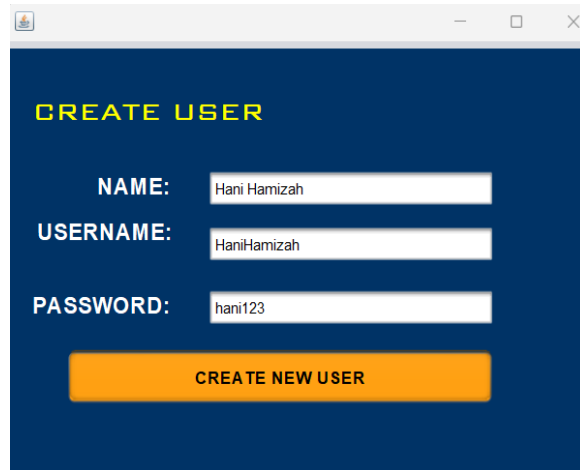

A screenshot of a web application window titled "CREATE USER". The window has a dark blue background. At the top, the title "CREATE USER" is displayed in yellow. Below the title, there are three input fields: "NAME:" with the value "Hani Hamizah", "USERNAME:" with the value "HaniHamizah", and "PASSWORD:" with the value "hani123". Below these fields is an orange button labeled "CREATE NEW USER".

Figure 23 Fill in with all required details

A message dialog will be displayed to tell that new user is successfully created

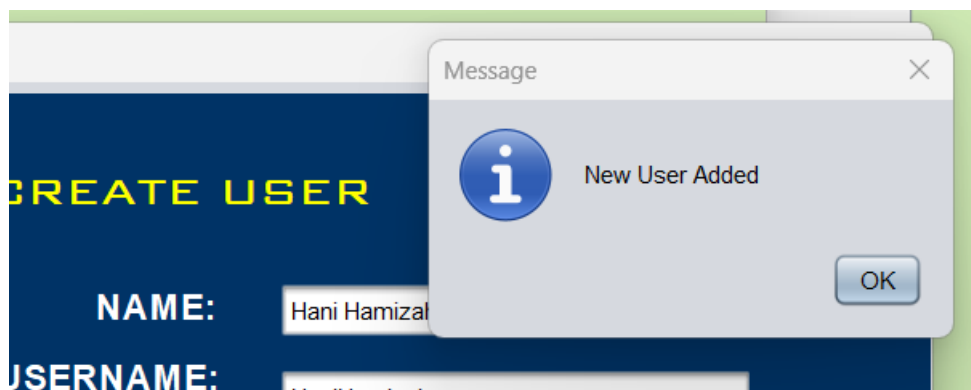


Figure 24 Confirmation message appears

It now displays an updated list that includes the newly created user. The list provides essential information about each user, including their User ID, Name, Username, and Password

ID	Name	Username	Password
1	admin malaysiaherbdb	admin	admin123
2	user A	UserA	User123
9	Hani Hamizah	HaniHamizah	hani123

ID:

Figure 25 New user is added

7. Reference

- 1BestCsharpBlog. (2016, July 13). *Java And Mysql Project Example - Simple Java And MySQL Database Program [With Source Code]*. Retrieved from Youtube:
<https://www.youtube.com/watch?v=Jt62k0kyZDw&list=PLFDH5bKmoNqwOYnwOmljGuivo4a9EelvC&index=5&t=707s>
- A. Thahira Banu, M. A. (2023). Role of Piper nigrum in functional food and nutraceuticals. *Herbs, Spices and their Roles in Nutraceuticals and Functional Foods*, 41-60.
- Arefin, N. S. (2023, May 10). *Misai kucing leaves among the most nutritious and tasty herbs*. Retrieved from Universit Putra Malaysia:
https://www.upm.edu.my/news/misai_kucing_leaves_among_the_most_nutritious_and_tasty_herbs-66688
- Berry, P. E. (2023, June 23). *Piperales plant order*. Retrieved from Britannica:
<https://www.britannica.com/plant/Piperaceae>
- Bodhare, D. A. (2023, August 22). *Kutaja Benefits, Side Effects, Precautions & more!* Retrieved from PharmEasy: <https://pharmeasy.in/blog/ayurveda-benefits-side-effects-precautions-of-kutaja/#:~:text=The%20shrub%20Holarrhena%20antidysenterica%20Linn,has%20traditional%20and%20folklore%20values.>
- Clapham, P. (2016, March 9). *SWING / AWT / SWT*. Retrieved from JavaRanch:
<https://coderanch.com/t/663120/java/JText-Component>
- Kusler, H. B. (2022, May 19). *Goji Berries (Lycium barbarum) in Chinese Medicine & Its Usage in Acupuncture Clinic*. Retrieved from CITM Inspire Change: <https://citcm.com/goji-berries-lycium-barbarum-in-chinese-medicine-its-usage-in-acupuncture-clinic/#:~:text=In%20Acupuncture%20%26%20Chinese%20Medicine%2C%20Goji,the%20uriary%20and%20reproductive%20systems.>
- Lal, N. (2022, May 22). *What is neem? The health benefits of what Ayurveda calls the world's most versatile medicinal plant, from boosting immunity to fighting cancer*. Retrieved from South China Morning Post: <https://www.scmp.com/lifestyle/health-wellness/article/3178624/what-neem-health-benefits-what-ayurveda-calls-worlds-most>
- N. J. Yob, S. Mohd. Jofry, M. M. R. Meor. Mohd. Affandi, L. K. Teh, M. Z. Salleh, and Z. A. Zakaria . (2011, March 22). *Zingiber zerumbet (L.) Smith: A Review of Its Ethnomedicinal, Chemical, and Pharmacological Uses*. Retrieved from National Library of Medicine:
<https://www.ncbi.nlm.nih.gov/pmc/articles/PMC3092606/#:~:text=zerumbet%2C%20particularly%2C%20have%20been%20regularly,%2C%20worm%20infestation%20and%20diarrhea>
- Negar Jamshidi, M. M. (2017, March 16). *The Clinical Efficacy and Safety of Tulsi in Humans: A Systematic Review of the Literature*. Retrieved from National Library of Medicine:
<https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5376420/#:~:text=In%20the%20Ayurveda%20system%20tulsi,%2C%20and%20pyrexia%20%5B1%5D.>
- Nparks | *Hedyotis diffusa*. (2024, February 1). Retrieved from National Parks Flora & Fauna Web:
<https://www.nparks.gov.sg/florafaunaweb/flora/5/2/5248>

Poonam Sachdev, M. (2022, September 14). *Health Benefits of Pandan*. Retrieved from WebMD:
<https://www.webmd.com/diet/health-benefits-pandan>

Sudhir, C. W. (2023, September 17). *How to connect MySql Database 8.0.34 & Java NetBeans IDE 19 Using Connector-j Driver || JDBC in java*. Retrieved from Youtube:
<https://www.youtube.com/watch?v=Wd-rJSkpySs>

Trachyspermum ammi. (2024). Retrieved from Mountain Herb Estate:
<https://www.herbgarden.co.za/mountainherb/herbinfo.php?id=592>

Webmaster. (2022, February 14). *Consumption of medicinal plants in Malaysia*. Retrieved from GlobinMed: https://globinmed.com/trade_business/consumption-of-medicinal-plants-in-malaysia/

webmaster. (2024, February 14). *Pegaga*. Retrieved from Jabatan Perhutanan Semenanjung Malaysia: <https://www.forestry.gov.my/my/pengumuman-berita/97-herba/521-pegaga>

8. Appendix

Database.java

```
package ClassAll;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.SQLException;

/**
 *
 * @author Hani Hamizah
 */
public class database {

    private static String databasename = "malaysiaherbs";
    private static String username = "root";
    private static String passwd= "";

    static Connection connect=null;
    public static Connection getConnection()
    {
        if (connect != null)
            return connect;
        return getConnection(databasename,username,passwd);
    }

    private static Connection getConnection(String
database_name, String user_name, String password)
    {
        try{
```

```

        Class.forName("com.mysql.cj.jdbc.Driver");

        connect =
DriverManager.getConnection("jdbc:mysql://localhost/"+database
_name+"?user="+user_name+"&password="+password);

        System.out.println("connected");
    }
    catch (Exception e)
    {
        e.printStackTrace();
    }
    return connect;
}
}

```

Plant.java

```

package ClassAll;

import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.Connection;
import java.sql.SQLException;
import java.sql.Statement;
import java.util.ArrayList;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.ImageIcon;
import malaysiaherb.MAIN_WINDOW;

/**
 *
 * @author Hani Hamizah
 */

```

```
public class Plant {
    private int id;
    private String Name;
    private String Scientific_name;
    private String Description;
    private String Plant_Usage;
    private byte[] plantimg;
    private String plantype;
    private double price;
    Connection connect;

    public Plant(int pid, String pName, String pSN, String pD,
String pUse, String pT, byte[] pimg, double pprice) {
        this.id = pid;
        this.Name = pName;
        this.Scientific_name = pSN;
        this.Plant_Usage = pUse;
        this.Description = pD;
        this.plantimg = pimg;
        this.plantype = pT;
        this.price=pprice;
    }
    public Plant() {}

    // Getters and setters for all fields
    public double getPrice() {
        return price;
    }

    public void setprice(double price) {
        this.price = price;
    }
}
```

```
    }

    public int getId() {
        return id;
    }

    public void setId(int id) {
        this.id = id;
    }

    public String getName() {
        return Name;
    }

    public void setName(String Name) {
        this.Name = Name;
    }

    public String getSN() {
        return Scientific_name;
    }

    public void setSN(String Scientific_name) {
        this.Scientific_name = Scientific_name;
    }

    public String getDesc() {
        return Description;
    }

    public void setDesc(String Description) {
```

```
        this.Description = Description;
    }

    public String getPS() {
        return Plant_Usage;
    }

    public void setPS(String Plant_Usage) {
        this.Plant_Usage = Plant_Usage;
    }

    public String getPT() {
        return plantype;
    }

    public void setPT(String plantype) {
        this.plantype = plantype;
    }

    public byte[] getImage() {
        return plantimg;
    }

    public void setImage(byte[] plantimg) {
        this.plantimg = plantimg;
    }

    public ArrayList<Plant> getPlantlist(String plantname){

        ArrayList<Plant> plant_list = new ArrayList<>();
```

```
connect = database.getConnection();

ResultSet rs;

PreparedStatement ps;

        String query = "SELECT `ID`, `Name`,
`Scientific_Name`, `Description`,
`Plant_Usage`, `Plant_type`, `Plant_Image` FROM `plants`";

try {
    ps = connect.prepareStatement(query);
    rs = ps.executeQuery();

    Plant plant;

    while(rs.next()){
        plant = new Plant(rs.getInt("id"),
                           rs.getString("Name"),
rs.getString("Scientfic_name"),
                           rs.getString("Description"),
                           rs.getString("Plant_Usage"),

                           rs.getString("plantype"),
                           rs.getBytes("plantimg"),
                           rs.getDouble("price")

                           );

        plant_list.add(plant);
    }
}
```

```

        } catch (SQLException ex) {

Logger.getLogger(Plant.class.getName()).log(Level.SEVERE,
null, ex);

        }

        return plant_list;

    }

}

/*public void ShowPlant(int index, String planttype)
{

        malaysiaherb.MAIN_WINDOW                                mainwindow=new
malaysiaherb.MAIN_WINDOW();

mainwindow.jTextField_commonname.setString(getPlantlist().get(
index).getName(),planttype);

}*/

```

Plant User.java

```

package ClassAll;

import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.sql.Statement;
import java.util.ArrayList;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.JOptionPane;

```

```
/**
 *
 * @author Hani Hamizah
 */
public class Plant_User{
    Connection connect;
    private String name;
    private String username;
    private String passwd;
    private int ID;
    private String usertype;

    public Plant_User (int id, String FName, String UName,
String Pass, String user_type)
    {
        this.name=FName;
        this.ID=id;
        this.username=UName;
        this.passwd=Pass;
        this.usertype=user_type;
    }

    public Plant_User(Object object, String name, String
username, String password, String user) {

        throw new UnsupportedOperationException("Not supported
yet.");
    }

    public int getID()
    {
        return ID;
    }
}
```

```
public String getName(String name)
{
    return name;
}
public String getName()
{
    return name;
}

public String getUName(String username)
{
    return username;
}

public String getUName()
{
    return username;
}

public String getPass(String passwd)
{
    return passwd;
}

public String getPass()
{
    return passwd;
}

public static void insertuser(Plant_User user)
{

```

```

        Connection c = database.getConnection();

        PreparedStatement PS;

        try {
            // Exclude the ID column from the INSERT statement
            PS = c.prepareStatement("INSERT INTO `users`(`NAME`,
`Username`, `Password`, `Uertype`) VALUES (?, ?, ?, ?)");
            PS.setString(1, user.name);
            PS.setString(2, user.username);
            PS.setString(3, user.passwd);
            PS.setString(4, user.ustertype);

            if (PS.executeUpdate() != 0) {
                JOptionPane.showMessageDialog(null, "New User
Added");
            } else {
                JOptionPane.showMessageDialog(null, "Something
Wrong");
            }
        } catch (SQLException ex) {

            Logger.getLogger(Plant_User.class.getName()).log(Level.SEVERE,
            null, ex);
        }

    }

    public static void deleteuser(int id)
    {
        Connection c = database.getConnection();
        PreparedStatement PS;

```

```

        try {
            // Exclude the ID column from the INSERT statement

            PS = c.prepareStatement("DELETE FROM `users` WHERE
`id`=?");

            PS.setInt(1,id);

            int confirmation = JOptionPane.showConfirmDialog(null,
"Do you want to delete this user?", "Deleting User",
JOptionPane.YES_NO_CANCEL_OPTION);

            if (confirmation ==0)
            {
                if (PS.executeUpdate() != 0) {
                    JOptionPane.showMessageDialog(null, "User
Deleted");
                } else {
                    JOptionPane.showMessageDialog(null, "Something
Wrong");
                }
            }
        } catch (SQLException ex) {

            Logger.getLogger(Plant_User.class.getName()).log(Level.SEVERE,
            null, ex);
        }
    }
}

```

Loginpage.java

```

package malaysiaherb;

import java.awt.Event;

/**
 *

```

```
* @author Hani Hamizah
*/
public class loginpage extends javax.swing.JFrame {

    /**
     * Creates new form loginpage
     */
    public loginpage() {
        initComponents();
    }

    /**
     * This method is called from within the constructor to
     initialize the form.
     * WARNING: Do NOT modify this code. The content of this
     method is always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
    // <editor-fold defaultstate="collapsed" desc="Generated
    Code">//GEN-BEGIN: initComponents
    private void initComponents() {

        jPanel1 = new javax.swing.JPanel();
        jLabel1 = new javax.swing.JLabel();
        jButton1 = new javax.swing.JButton();
        jButton2 = new javax.swing.JButton();

        setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_C
        LOSE);
    }
}
```

```
jPanell1.setBackground(new java.awt.Color(0, 102, 51));

jPanell1.setBorder(javax.swing.BorderFactory.createEtchedBorder
());

jPanell1.setToolTipText("");

jPanell1.setFont(new java.awt.Font("BankGothic Lt BT",
1, 24)); // NOI18N

jPanell1.setInheritsPopupMenu(true);

jLabel1.setFont(new java.awt.Font("BankGothic Lt BT",
1, 24)); // NOI18N

jLabel1.setForeground(new java.awt.Color(255, 255,
255));

jLabel1.setText("LOGIN AS:");

jButton1.setBackground(new java.awt.Color(255, 0, 0));

jButton1.setFont(new java.awt.Font("BankGothic Md BT",
1, 18)); // NOI18N

jButton1.setForeground(new java.awt.Color(255, 255,
51));

jButton1.setText("ADMIN");

jButton1.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBor
der.RAISED));

jButton1.addActionListener(new
java.awt.event.ActionListener() {

    public void
actionPerformed(java.awt.event.ActionEvent evt) {

        jButton1ActionPerformed(evt);

    }

});

jButton2.setBackground(new java.awt.Color(51, 51,
255));
```

```

        jButton2.setFont(new java.awt.Font("BankGothic Md BT",
1, 18)); // NOI18N

        jButton2.setForeground(new java.awt.Color(255, 255,
0));

        jButton2.setText("USER");

jButton2.setBorder(javax.swing.BorderFactory.createBevelBorder
(javax.swing.border.BevelBorder.RAISED));

        jButton2.addActionListener(new
java.awt.event.ActionListener() {

            public void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton2ActionPerformed(evt);

            }

        });

        javax.swing.GroupLayout jPanel1Layout = new
javax.swing.GroupLayout(jPanel1);

        jPanel1.setLayout(jPanel1Layout);
        jPanel1Layout.setHorizontalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

            .addGroup(jPanel1Layout.createSequentialGroup()

                .addGap(81, 81, 81)

                .addGroup(jPanel1Layout.createParallelGroup(javax.s
wing.GroupLayout.Alignment.LEADING)

                    .addComponent(jLabel1,
javax.swing.GroupLayout.PREFERRED_SIZE, 158,
javax.swing.GroupLayout.PREFERRED_SIZE)

                    .addComponent(jButton2,
javax.swing.GroupLayout.PREFERRED_SIZE, 152,
javax.swing.GroupLayout.PREFERRED_SIZE)

                    .addComponent(jButton1,
javax.swing.GroupLayout.PREFERRED_SIZE, 152,
javax.swing.GroupLayout.PREFERRED_SIZE))

```

```

        .addContainerGap(75, Short.MAX_VALUE))

    );

    jPanel1Layout.setVerticalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

        .addGroup(jPanel1Layout.createSequentialGroup())

            .addContainerGap()

                .addComponent(jLabel1,
javax.swing.GroupLayout.PREFERRED_SIZE,      89,
javax.swing.GroupLayout.PREFERRED_SIZE)

                    .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

                        .addComponent(jButton1,
javax.swing.GroupLayout.PREFERRED_SIZE,      45,
javax.swing.GroupLayout.PREFERRED_SIZE)

                            .addGap(18, 18, 18)

                                .addComponent(jButton2,
javax.swing.GroupLayout.PREFERRED_SIZE,      45,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                    .addContainerGap(58, Short.MAX_VALUE))

        );

    javax.swing.GroupLayout layout = new
javax.swing.GroupLayout(getContentPane());

    getContentPane().setLayout(layout);

    layout.setHorizontalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
EADING)

        .addGroup(layout.createSequentialGroup())

            .addContainerGap()

                .addComponent(jPanel1,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

```

```

        .addContainerGap())
    );
    layout.setVerticalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

        .addGroup(layout.createSequentialGroup()

            .addContainerGap()

            .addComponent(jPanel1,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

            .addContainerGap())

        );

    pack();
} // </editor-fold> // GEN-END: initComponents

private void
jButton1ActionPerformed(java.awt.event.ActionEvent evt) { // GEN-
FIRST:event_jButton1ActionPerformed
    // TODO add your handling code here:
    AdminLogin a=new AdminLogin();

    a.setVisible(true);
    this.dispose();

} // GEN-LAST:event_jButton1ActionPerformed

private void
jButton2ActionPerformed(java.awt.event.ActionEvent evt) { // GEN-
FIRST:event_jButton2ActionPerformed
    // TODO add your handling code here:

```

```

        UseLogin b=new UseLogin();

        b.setVisible(true);
        this.dispose();
    } //GEN-LAST:event_jButton2ActionPerformed

    /**
     * @param args the command line arguments
     */
    public static void main(String args[]) {
        /* Set the Nimbus look and feel */
        //<editor-fold defaultstate="collapsed" desc=" Look and
        feel setting code (optional) ">

        /* If Nimbus (introduced in Java SE 6) is not available,
        stay with the default look and feel.

           *           For           details           see
        http://download.oracle.com/javase/tutorial/uiswing/lookandfeel
        /plaf.html

           */
        try {
            for (javax.swing.UIManager.LookAndFeelInfo info :
                javax.swing.UIManager.getInstalledLookAndFeels()) {
                if ("Nimbus".equals(info.getName())) {

                    javax.swing.UIManager.setLookAndFeel(info.getClassName());
                    break;

                }
            }
        } catch (ClassNotFoundException ex) {

            java.util.logging.Logger.getLogger(loginpage.class.getName()).
            log(java.util.logging.Level.SEVERE, null, ex);

        } catch (InstantiationException ex) {

```

```

java.util.logging.Logger.getLogger(loginpage.class.getName()).
log(java.util.logging.Level.SEVERE, null, ex);

        } catch (IllegalAccessException ex) {

java.util.logging.Logger.getLogger(loginpage.class.getName()).
log(java.util.logging.Level.SEVERE, null, ex);

        } catch (javax.swing.UnsupportedLookAndFeelException
ex) {

java.util.logging.Logger.getLogger(loginpage.class.getName()).
log(java.util.logging.Level.SEVERE, null, ex);

        }

//</editor-fold>

/* Create and display the form */
java.awt.EventQueue.invokeLater(new Runnable() {
    public void run() {
        new loginpage().setVisible(true);
    }
});
}

// Variables declaration - do not modify//GEN-BEGIN:variables
private javax.swing.JButton jButton1;
private javax.swing.JButton jButton2;
private javax.swing.JLabel jLabel1;
private javax.swing.JPanel jPanel1;
// End of variables declaration//GEN-END:variables
}

```

UseLogin.java

```
package malaysiaherb;
```

```
import java.awt.Dimension;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.JFrame;
import javax.swing.JOptionPane;

/**
 *
 * @author Hani Hamizah
 */
public class UseLogin extends javax.swing.JFrame {

    /**
     * Creates new form UseLogin
     */
    public UseLogin() {
        initComponents();
    }

    /**
     * This method is called from within the constructor to
     initialize the form.
     * WARNING: Do NOT modify this code. The content of this
     method is always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
```

```
// <editor-fold defaultstate="collapsed" desc="Generated
Code">//GEN-BEGIN:initComponents

private void initComponents() {

    jPanel1 = new javax.swing.JPanel();
    jLabel1 = new javax.swing.JLabel();
    jTextField1 = new javax.swing.JTextField();
    jTextField2 = new javax.swing.JTextField();
    jLabel2 = new javax.swing.JLabel();
    jLabel3 = new javax.swing.JLabel();
    jPanel2 = new javax.swing.JPanel();
    jLabel4 = new javax.swing.JLabel();
    jTextField_username = new javax.swing.JTextField();
    jLabel5 = new javax.swing.JLabel();
    jLabel6 = new javax.swing.JLabel();
    jButton1_USER_Login = new javax.swing.JButton();
    jPasswordField1 = new javax.swing.JPasswordField();
    jButton3_createuser = new javax.swing.JButton();

    jPanel1.setBackground(new java.awt.Color(153, 0, 51));

    jPanel1.setBorder(javax.swing.BorderFactory.createLineBorder(n
ew java.awt.Color(0, 0, 0)));

    jLabel1.setBackground(new java.awt.Color(255, 255,
255));
    jLabel1.setFont(new java.awt.Font("BankGothic Lt BT",
1, 24)); // NOI18N
    jLabel1.setForeground(new java.awt.Color(255, 255, 0));
    jLabel1.setText("ADMIN LOGIN");

    jTextField1.setText("USERNAMEHERE");
```

```

        jTextField1.addActionListener(new
java.awt.event.ActionListener() {
            public void
actionPerformed(java.awt.event.ActionEvent evt) {
                jTextField1ActionPerformed(evt);
            }
        });

        jTextField2.setText("PASSWORDHERE");
        jTextField2.setToolTipText("");

        jLabel2.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel2.setForeground(new java.awt.Color(255, 255,
255));
        jLabel2.setText("USERNAME:");

        jLabel3.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel3.setForeground(new java.awt.Color(255, 255,
255));
        jLabel3.setText("PASSWORD:");

        javax.swing.GroupLayout jPanel1Layout = new
javax.swing.GroupLayout(jPanel1);
        jPanel1.setLayout(jPanel1Layout);
        jPanel1Layout.setHorizontalGroup(

        jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

            .addGroup(jPanel1Layout.createSequentialGroup()

                .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

```

```

.addGroup(jPanell1Layout.createSequentialGroup()
            .addGap(41, 41, 41)

.addGroup(jPanell1Layout.createParallelGroup(javax.swing.GroupLayout.
Layout.Alignment.LEADING, false)
            .addComponent(jLabel2,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
            .addComponent(jLabel3,
javax.swing.GroupLayout.DEFAULT_SIZE, 120, Short.MAX_VALUE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

.addGroup(jPanell1Layout.createParallelGroup(javax.swing.GroupLayout.
Layout.Alignment.LEADING)
            .addComponent(jTextField2,
javax.swing.GroupLayout.PREFERRED_SIZE,          196,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(jTextField1,
javax.swing.GroupLayout.PREFERRED_SIZE,          196,
javax.swing.GroupLayout.PREFERRED_SIZE)))

.addGroup(jPanell1Layout.createSequentialGroup()
            .addGap(106, 106, 106)
            .addComponent(jLabel1))
        .addGap(0, 54, Short.MAX_VALUE))
    );
jPanell1Layout.setVerticalGroup(

jPanell1Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)
        .addGroup(jPanell1Layout.createSequentialGroup()
            .addGap(18, 18, 18)

```

```
        .addComponent(jLabel1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.BASELINE)

        .addComponent(jLabel2,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(jTextField1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

        .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.BASELINE)

        .addComponent(jLabel3,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(jTextField2,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addContainerGap(66, Short.MAX_VALUE))

    );

setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_C
LOSE);

jPanel2.setBackground(new java.awt.Color(0, 0, 102));
```

```

jPanel2.setBorder(javax.swing.BorderFactory.createLineBorder(new
java.awt.Color(0, 0, 0)));

        jLabel4.setBackground(new java.awt.Color(255, 255,
255));
        jLabel4.setFont(new java.awt.Font("BankGothic Lt BT",
1, 24)); // NOI18N
        jLabel4.setForeground(new java.awt.Color(255, 255, 0));
        jLabel4.setText("USER LOGIN");

        jTextField_username.setText("USERNAMEHERE");
        jTextField_username.addActionListener(new
java.awt.event.ActionListener() {
            public void
actionPerformed(java.awt.event.ActionEvent evt) {
                jTextField_usernameActionPerformed(evt);
            }
        });

        jLabel5.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel5.setForeground(new java.awt.Color(255, 255,
255));
        jLabel5.setText("USERNAME:");

        jLabel6.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel6.setForeground(new java.awt.Color(255, 255,
255));
        jLabel6.setText("PASSWORD:");

        jButton1_USER_Login.setBackground(new
java.awt.Color(255, 153, 0));

```

```
        jButton1_USER_Login.setFont(new java.awt.Font("Arial",
1, 14)); // NOI18N

        jButton1_USER_Login.setText("LOGIN");

jButton1_USER_Login.setBorder(javax.swing.BorderFactory.create
TitledBorder(""));

        jButton1_USER_Login.addActionListener(new
java.awt.event.ActionListener() {

            public void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton1_USER_LoginActionPerformed(evt);

            }

        });

        jPasswordField1.setText("jPasswordField1");

        jButton3_createuser.setBackground(new
java.awt.Color(102, 102, 102));

        jButton3_createuser.setFont(new java.awt.Font("Arial",
1, 14)); // NOI18N

        jButton3_createuser.setForeground(new
java.awt.Color(255, 255, 255));

        jButton3_createuser.setText("CREATE NEW USER");

jButton3_createuser.setBorder(javax.swing.BorderFactory.create
TitledBorder(""));

        jButton3_createuser.addActionListener(new
java.awt.event.ActionListener() {

            public void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton3_createuserActionPerformed(evt);

            }

        });
```



```

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.
ayout.Alignment.LEADING)

.addComponent(jTextField_username,
javax.swing.GroupLayout.PREFERRED_SIZE,          196,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addComponent(jPasswordField1))

                .addComponent(jButton3_createuser,
javax.swing.GroupLayout.PREFERRED_SIZE,          322,
javax.swing.GroupLayout.PREFERRED_SIZE)))

                .addGap(0, 54, Short.MAX_VALUE))

        );

jPanel2Layout.setVerticalGroup(

jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

                .addGroup(jPanel2Layout.createSequentialGroup())

                .addGap(18, 18, 18)

                .addComponent(jLabel4,
javax.swing.GroupLayout.PREFERRED_SIZE,          61,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)

                .addComponent(jLabel5,
javax.swing.GroupLayout.PREFERRED_SIZE,          44,
javax.swing.GroupLayout.PREFERRED_SIZE)

                .addComponent(jTextField_username,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

```

```

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)

        .addComponent(jLabel6,
javax.swing.GroupLayout.PREFERRED_SIZE,          37,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(jPasswordField1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGap(18, 18, 18)

        .addComponent(jButton1_USER_Login,
javax.swing.GroupLayout.PREFERRED_SIZE,          32,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addGap(18, 18, 18)

        .addComponent(jButton3_createuser,
javax.swing.GroupLayout.PREFERRED_SIZE,          32,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addContainerGap(javax.swing.GroupLayout.DEFAULT_SIZE,
Short.MAX_VALUE))

    );

    javax.swing.GroupLayout layout = new
javax.swing.GroupLayout(getContentPane());

    getContentPane().setLayout(layout);

    layout.setHorizontalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
EADING)

        .addComponent(jPanel2,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

    );

    layout.setVerticalGroup(

```

```
layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
```

```
        .addGroup(layout.createSequentialGroup()
            .addContainerGap()
            .addComponent(jPanel2,
                javax.swing.GroupLayout.DEFAULT_SIZE,
                javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
            .addContainerGap())
        );
```

```
        pack();
    } // </editor-fold> // GEN-END: initComponents
```

```
        private void
        jTextField1ActionPerformed(java.awt.event.ActionEvent evt)
        { // GEN-FIRST:event_jTextField1ActionPerformed
            // TODO add your handling code here:
        } // GEN-LAST:event_jTextField1ActionPerformed
```

```
        private void
        jTextField_usernameActionPerformed(java.awt.event.ActionEvent
        evt) { // GEN-FIRST:event_jTextField_usernameActionPerformed
            // TODO add your handling code here:
        } // GEN-LAST:event_jTextField_usernameActionPerformed
```

```
        private void
        jButton1_USER_LoginActionPerformed(java.awt.event.ActionEvent
        evt) { // GEN-FIRST:event_jButton1_USER_LoginActionPerformed
```

```
            PreparedStatement input = null;
            ResultSet rs;
```

```
        try {
```

```
            input=ClassAll.database.getConnection().prepareStatement("Sele
```

```
ct `Username`,`Password`,`Uertype` FROM `users` WHERE
`Username`=? AND `Password`=?");
```

```
input.setString(1, jTextField_username.getText());
```

```
input.setString(2,String.valueOf(jPasswordField1.getPassword()
));
```

```
rs=input.executeQuery();
```

```
if (rs.next())
```

```
{
```

```
    MAIN_WINDOW mainwindow =new MAIN_WINDOW();
```

```
    if (rs.getString("Uertype").equals("admin"))
```

```
    {
```

```
        JOptionPane.showMessageDialog(null, "Not A
User!", "Login Error", 2);
```

```
//mainwindow.jPanel7_userlist.setVisible(false);
```

```
}
```

```
else
```

```
{
```

```
    mainwindow.pack();
```

```
    mainwindow.jButton1Userlist.setVisible(false);
```

```
//
```

```
mainwindow.setExtendedState(mainwindow.getExtendedState() |
JFrame.MAXIMIZED_BOTH);
```

```
    Dimension r = mainwindow.getBounds().getSize();
```

```
    mainwindow.jLabel13.setPreferredSize(r);
```

```
    mainwindow.setVisible(true);
```

```
mainwindow.setLocationRelativeTo(null);
```

```

mainwindow.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        this.dispose();
    }
}
else
{
    JOptionPane.showMessageDialog(null, "invalid
username or password", "Login Error", 2);
}
}
catch (SQLException ex)
{

Logger.getLogger(UseLogin.class.getName()).log(Level.SEVERE,
null, ex);

    }

this.dispose();

    } //GEN-LAST:event_jButton1_USER_LoginActionPerformed

private void
jButton3_createuserActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_jButton3_createuserActionPerformed

    // TODO add your handling code here:

    CreateUser create =new CreateUser();

    create.setVisible(true);

create.setDefaultCloseOperation(JFrame.DISPOSE_ON_CLOSE);

} //GEN-LAST:event_jButton3_createuserActionPerformed

```

```

/**
 * @param args the command line arguments
 */
public static void main(String args[]) {
    /* Set the Nimbus look and feel */
    //<editor-fold defaultstate="collapsed" desc=" Look and
    feel setting code (optional) ">

    /* If Nimbus (introduced in Java SE 6) is not available,
    stay with the default look and feel.

        *           For           details           see
    http://download.oracle.com/javase/tutorial/uiswing/lookandfeel
    /plaf.html

        */

    try {
        for (javax.swing.UIManager.LookAndFeelInfo info :
        javax.swing.UIManager.getInstalledLookAndFeels()) {
            if ("Nimbus".equals(info.getName())) {

                javax.swing.UIManager.setLookAndFeel(info.getClassName());

                break;

            }
        }
    } catch (ClassNotFoundException ex) {

        java.util.logging.Logger.getLogger(UseLogin.class.getName()).l
        og(java.util.logging.Level.SEVERE, null, ex);

        } catch (InstantiationException ex) {

        java.util.logging.Logger.getLogger(UseLogin.class.getName()).l
        og(java.util.logging.Level.SEVERE, null, ex);

        } catch (IllegalAccessException ex) {

        java.util.logging.Logger.getLogger(UseLogin.class.getName()).l
        og(java.util.logging.Level.SEVERE, null, ex);

```

```

        } catch (javax.swing.UnsupportedLookAndFeelException
ex) {

java.util.logging.Logger.getLogger(UseLogin.class.getName()).l
og(java.util.logging.Level.SEVERE, null, ex);

    }

//</editor-fold>

/* Create and display the form */
java.awt.EventQueue.invokeLater(new Runnable() {
    public void run() {
        new UseLogin().setVisible(true);
    }
});
}

// Variables declaration - do not modify//GEN-
BEGIN:variables

private javax.swing.JButton jButton1_USER_Login;
private javax.swing.JButton jButton3_createuser;
private javax.swing.JLabel jLabel1;
private javax.swing.JLabel jLabel2;
private javax.swing.JLabel jLabel3;
private javax.swing.JLabel jLabel4;
private javax.swing.JLabel jLabel5;
private javax.swing.JLabel jLabel6;
private javax.swing.JPanel jPanel1;
private javax.swing.JPanel jPanel2;
private javax.swing.JPasswordField jPasswordField1;
private javax.swing.JTextField jTextField1;
private javax.swing.JTextField jTextField2;
private javax.swing.JTextField jTextField_username;

```

```
        // End of variables declaration//GEN-END:variables
    }
```

AdminLogin.java

```
package malaysiaherb;

import java.awt.Dimension;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.util.Map;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.JFrame;
import javax.swing.JOptionPane;

/**
 *
 * @author Hani Hamizah
 */
public class AdminLogin extends javax.swing.JFrame {

    /**
     * Creates new form AdminLogin
     */
    public AdminLogin() {
        initComponents();
    }

    /**
```

```

    * This method is called from within the constructor to
    initialize the form.

    * WARNING: Do NOT modify this code. The content of this
    method is always
    * regenerated by the Form Editor.
    */

    @SuppressWarnings("unchecked")
    // <editor-fold defaultstate="collapsed" desc="Generated
    Code">//GEN-BEGIN: initComponents
    private void initComponents() {

        jDialog1 = new javax.swing.JDialog();
        jPanel1 = new javax.swing.JPanel();
        jLabel1 = new javax.swing.JLabel();
        jTextField1 = new javax.swing.JTextField();
        jLabel2 = new javax.swing.JLabel();
        jLabel3 = new javax.swing.JLabel();
        jButton1 = new javax.swing.JButton();
        jPasswordField1 = new javax.swing.JPasswordField();

        javax.swing.GroupLayout jDialog1Layout = new
        javax.swing.GroupLayout(jDialog1.getContentPane());
        jDialog1.getContentPane().setLayout(jDialog1Layout);
        jDialog1Layout.setHorizontalGroup(

jDialog1Layout.createParallelGroup(javax.swing.GroupLayout.Ali
gnment.LEADING)
            .addGroup(jDialog1Layout.createSequentialGroup()
                .addGap(0, 400, Short.MAX_VALUE)
            )
        );
        jDialog1Layout.setVerticalGroup(

jDialog1Layout.createParallelGroup(javax.swing.GroupLayout.Ali
gnment.LEADING)
            .addGroup(jDialog1Layout.createSequentialGroup()
                .addGap(0, 300, Short.MAX_VALUE)

```

```

    );

setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_CLOSE);

jPanel1.setBackground(new java.awt.Color(153, 0, 51));

jPanel1.setBorder(javax.swing.BorderFactory.createLineBorder(new java.awt.Color(0, 0, 0)));

jLabel1.setBackground(new java.awt.Color(255, 255, 255));
jLabel1.setFont(new java.awt.Font("BankGothic Lt BT", 1, 24)); // NOI18N
jLabel1.setForeground(new java.awt.Color(255, 255, 0));
jLabel1.setText("ADMIN LOGIN");

jTextField1.setText("admin");
jTextField1.addActionListener(new java.awt.event.ActionListener() {
    public void
    actionPerformed(java.awt.event.ActionEvent evt) {
        jTextField1ActionPerformed(evt);
    }
});

jLabel2.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
jLabel2.setForeground(new java.awt.Color(255, 255, 255));
jLabel2.setText("USERNAME:");

jLabel3.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N

```

```

255));
jLabel3.setForeground(new java.awt.Color(255, 255,
255));
jLabel3.setText("PASSWORD:");

jButton1.setBackground(new java.awt.Color(255, 153,
0));
jButton1.setFont(new java.awt.Font("Arial", 1, 14)); //
NOI18N
jButton1.setText("LOGIN");

jButton1.setBorder(javax.swing.BorderFactory.createTitledBorde
r(""));

jButton1.addActionListener(new
java.awt.event.ActionListener() {
    public void
actionPerformed(java.awt.event.ActionEvent evt) {
        jButton1ActionPerformed(evt);
    }
});

jPasswordField1.setText("admin123");
jPasswordField1.addActionListener(new
java.awt.event.ActionListener() {
    public void
actionPerformed(java.awt.event.ActionEvent evt) {
        jPasswordField1ActionPerformed(evt);
    }
});

javax.swing.GroupLayout jPanel1Layout = new
javax.swing.GroupLayout(jPanel1);
jPanel1.setLayout(jPanel1Layout);
jPanel1Layout.setHorizontalGroup(

```

```
jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

    .addGroup(jPanel1Layout.createSequentialGroup())

    .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

    .addGroup(jPanel1Layout.createSequentialGroup())

        .addGap(106, 106, 106)

        .addComponent(jLabel1))

    .addGroup(jPanel1Layout.createSequentialGroup())

        .addGap(41, 41, 41)

    .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

        .addComponent(jButton1,
javax.swing.GroupLayout.PREFERRED_SIZE, 322,
javax.swing.GroupLayout.PREFERRED_SIZE)

    .addGroup(jPanel1Layout.createSequentialGroup())

    .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING, false)

        .addComponent(jLabel2,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

        .addComponent(jLabel3,
javax.swing.GroupLayout.DEFAULT_SIZE, 120, Short.MAX_VALUE))

    .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)

    .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING, false)

        .addComponent(jTextField1,
javax.swing.GroupLayout.DEFAULT_SIZE, 196, Short.MAX_VALUE)
```

```

.addComponent(jPasswordField1))))))
        .addGap(0, 54, Short.MAX_VALUE))
    );
    jPanel1Layout.setVerticalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

        .addGroup(jPanel1Layout.createSequentialGroup())
            .addGap(18, 18, 18)
            .addComponent(jLabel1,
javax.swing.GroupLayout.PREFERRED_SIZE,          61,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)
            .addComponent(jLabel2,
javax.swing.GroupLayout.PREFERRED_SIZE,          44,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(jTextField1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

        .addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)
            .addComponent(jLabel3,
javax.swing.GroupLayout.PREFERRED_SIZE,          37,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(jPasswordField1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

```

```

        .addGap(18, 18, 18)

        .addComponent(jButton1,
javax.swing.GroupLayout.PREFERRED_SIZE,          32,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addContainerGap(16, Short.MAX_VALUE))

    );

    javax.swing.GroupLayout layout = new
javax.swing.GroupLayout(getContentPane());

    getContentPane().setLayout(layout);

    layout.setHorizontalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
EADING)

        .addComponent(jPanel1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

    );

    layout.setVerticalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
EADING)

        .addGroup(layout.createSequentialGroup())

            .addContainerGap()

            .addComponent(jPanel1,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

            .addContainerGap())

    );

    pack();

} // </editor-fold> // GEN-END: initComponents

```

```

        private void
jTextField1ActionPerformed(java.awt.event.ActionEvent evt)
{//GEN-FIRST:event_jTextField1ActionPerformed

    // TODO add your handling code here:

}//GEN-LAST:event_jTextField1ActionPerformed


        private void
jButton1ActionPerformed(java.awt.event.ActionEvent evt) {//GEN-
FIRST:event_jButton1ActionPerformed

    // TODO add your handling code here:

    PreparedStatement input = null;

    ResultSet rs;

    try {

input=ClassAll.database.getConnection().prepareStatement("Sele
ct  `Username`,`Password`,`Usertype`  FROM  `users`  WHERE
`Username`=? AND `Password`=?" );

        input.setString(1, jTextField1.getText());

input.setString(2,String.valueOf(jPasswordField1.getPassword()
));

        rs=input.executeQuery();

        if (rs.next())
        {

            MAIN_WINDOW mainwindow =new MAIN_WINDOW();

            if (rs.getString("Usertype").equals("user"))
            {

                JOptionPane.showMessageDialog(null, "invalid
username or password","Login Error",2);

```

```
        }
        else
        {
            mainwindow.pack();

//mainwindow.setExtendedState(mainwindow.getExtendedState() |
JFrame.MAXIMIZED_BOTH);

            Dimension r = mainwindow.getBounds().getSize();
            mainwindow.jLabel13.setPreferredSize(r);
            mainwindow.setVisible(true);

            mainwindow.setLocationRelativeTo(null);

mainwindow.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

            this.dispose();
        }
    }
    else
    {

JOptionPane.showMessageDialog(null, "invalid username or
password", "Login Error", 2);

    }

    }
    catch (SQLException ex)
    {

Logger.getLogger(AdminLogin.class.getName()).log(Level.SEVERE,
null, ex);

    }

    this.dispose();

    } //GEN-LAST:event_jButton1ActionPerformed
```

```

        private void
jPasswordField1ActionPerformed(java.awt.event.ActionEvent evt)
{ //GEN-FIRST:event_jPasswordField1ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_jPasswordField1ActionPerformed

/**
 * @param args the command line arguments
 */
public static void main(String args[]) {
    /* Set the Nimbus look and feel */
    //<editor-fold defaultstate="collapsed" desc=" Look and
feel setting code (optional) ">

    /* If Nimbus (introduced in Java SE 6) is not available,
stay with the default look and feel.

        *           For           details           see
http://download.oracle.com/javase/tutorial/uiswing/lookandfeel
/plaf.html
        */

    try {
        for (javax.swing.UIManager.LookAndFeelInfo info :
javax.swing.UIManager.getInstalledLookAndFeels()) {
            if ("Nimbus".equals(info.getName())) {

javax.swing.UIManager.setLookAndFeel(info.getClassName());

                break;

            }
        }
    } catch (ClassNotFoundException ex) {

java.util.logging.Logger.getLogger(AdminLogin.class.getName())
.log(java.util.logging.Level.SEVERE, null, ex);

        } catch (InstantiationException ex) {

```

```

java.util.logging.Logger.getLogger(AdminLogin.class.getName())
.log(java.util.logging.Level.SEVERE, null, ex);

        } catch (IllegalAccessException ex) {

java.util.logging.Logger.getLogger(AdminLogin.class.getName())
.log(java.util.logging.Level.SEVERE, null, ex);

        } catch (javax.swing.UnsupportedLookAndFeelException
ex) {

java.util.logging.Logger.getLogger(AdminLogin.class.getName())
.log(java.util.logging.Level.SEVERE, null, ex);

        }

//</editor-fold>

/* Create and display the form */
java.awt.EventQueue.invokeLater(new Runnable() {
    public void run() {
        new AdminLogin().setVisible(true);
    }
});
}

// Variables declaration - do not modify//GEN-BEGIN:variables
private javax.swing.JButton jButton1;
private javax.swing.JDialog jDialog1;
private javax.swing.JLabel jLabel1;
private javax.swing.JLabel jLabel2;
private javax.swing.JLabel jLabel3;
private javax.swing.JPanel jPanel1;
private javax.swing.JPasswordField jPasswordField1;
private javax.swing.JTextField jTextField1;
// End of variables declaration//GEN-END:variables

```

```
}
```

CreateUser.java

```
package malaysiaherb;
```

```
/**
```

```
 *
```

```
 * @author Hani Hamizah
```

```
 */
```

```
public class CreateUser extends javax.swing.JFrame {
```

```
    /**
```

```
     * Creates new form CreateUser
```

```
    */
```

```
    public CreateUser() {
```

```
        initComponents();
```

```
    }
```

```
    /**
```

```
     * This method is called from within the constructor to
    initialize the form.
```

```
     * WARNING: Do NOT modify this code. The content of this
    method is always
```

```
     * regenerated by the Form Editor.
```

```
    */
```

```
    @SuppressWarnings("unchecked")
```

```
    // <editor-fold defaultstate="collapsed" desc="Generated
    Code">//GEN-BEGIN: initComponents
```

```
    private void initComponents() {
```

```
        jPanel1 = new javax.swing.JPanel();
```

```
        jDialog1 = new javax.swing.JDialog();
```

```

jDialog2 = new javax.swing.JDialog();
jTextField3 = new javax.swing.JTextField();
jPanel3 = new javax.swing.JPanel();
jLabel5 = new javax.swing.JLabel();
jTextField4 = new javax.swing.JTextField();
jLabel6 = new javax.swing.JLabel();
jLabel7 = new javax.swing.JLabel();
jButton3 = new javax.swing.JButton();
jPasswordField2 = new javax.swing.JPasswordField();
jPanel2 = new javax.swing.JPanel();
jTextField1_username = new javax.swing.JTextField();
jTextField2_Name = new javax.swing.JTextField();
jLabel8 = new javax.swing.JLabel();
jLabel9 = new javax.swing.JLabel();
jLabel10 = new javax.swing.JLabel();
jLabel11 = new javax.swing.JLabel();
jButton5createuser = new javax.swing.JButton();
jTextField_passwordfield = new
javax.swing.JTextField();

javax.swing.GroupLayout jPanel1Layout = new
javax.swing.GroupLayout(jPanel1);
jPanel1.setLayout(jPanel1Layout);
jPanel1Layout.setHorizontalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

.addGap(0, 473, Short.MAX_VALUE)

);
jPanel1Layout.setVerticalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

```

```
        .addGap(0, 457, Short.MAX_VALUE)
    );

    javax.swing.GroupLayout jDialog1Layout = new
    javax.swing.GroupLayout(jDialog1.getContentPane());
    jDialog1.getContentPane().setLayout(jDialog1Layout);
    jDialog1Layout.setHorizontalGroup(

jDialog1Layout.createParallelGroup(javax.swing.GroupLayout.Ali
gnment.LEADING)
        .addGap(0, 400, Short.MAX_VALUE)
    );
    jDialog1Layout.setVerticalGroup(

jDialog1Layout.createParallelGroup(javax.swing.GroupLayout.Ali
gnment.LEADING)
        .addGap(0, 300, Short.MAX_VALUE)
    );

    javax.swing.GroupLayout jDialog2Layout = new
    javax.swing.GroupLayout(jDialog2.getContentPane());
    jDialog2.getContentPane().setLayout(jDialog2Layout);
    jDialog2Layout.setHorizontalGroup(

jDialog2Layout.createParallelGroup(javax.swing.GroupLayout.Ali
gnment.LEADING)
        .addGap(0, 400, Short.MAX_VALUE)
    );
    jDialog2Layout.setVerticalGroup(

jDialog2Layout.createParallelGroup(javax.swing.GroupLayout.Ali
gnment.LEADING)
        .addGap(0, 300, Short.MAX_VALUE)
    );
```

```

        jTextField3.setText("Your name here");

        jTextField3.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jTextField3ActionPerformed(evt);

            }

        });

jPanel3.setBackground(new java.awt.Color(153, 0, 51));

jPanel3.setBorder(javax.swing.BorderFactory.createLineBorder(n
ew java.awt.Color(0, 0, 0)));

        jLabel5.setBackground(new java.awt.Color(255, 255,
255));

        jLabel5.setFont(new java.awt.Font("BankGothic Lt BT",
1, 24)); // NOI18N

        jLabel5.setForeground(new java.awt.Color(255, 255, 0));

        jLabel5.setText("ADMIN LOGIN");

        jTextField4.setText("USERNAMEHERE");

        jTextField4.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jTextField4ActionPerformed(evt);

            }

        });

        jLabel6.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N

```

```

jLabel6.setForeground(new java.awt.Color(255, 255,
255));

jLabel6.setText("USERNAME:");

jLabel7.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
jLabel7.setForeground(new java.awt.Color(255, 255,
255));

jLabel7.setText("PASSWORD:");

jButton3.setBackground(new java.awt.Color(255, 153,
0));

jButton3.setFont(new java.awt.Font("Arial", 1, 14)); //
NOI18N
jButton3.setText("LOGIN");

jButton3.setBorder(javax.swing.BorderFactory.createTitledBorder(""));

jButton3.addActionListener(new
java.awt.event.ActionListener() {

    public void
actionPerformed(java.awt.event.ActionEvent evt) {

        jButton3ActionPerformed(evt);

    }

});

jPasswordField2.setText("jPasswordField1");

javax.swing.GroupLayout jPanel3Layout = new
javax.swing.GroupLayout(jPanel3);

jPanel3.setLayout(jPanel3Layout);

jPanel3Layout.setHorizontalGroup(

jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

```

```
.addGroup(jPanel3Layout.createSequentialGroup())

.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

.addGroup(jPanel3Layout.createSequentialGroup())
                .addGap(106, 106, 106)
                .addComponent(jLabel5))

.addGroup(jPanel3Layout.createSequentialGroup())
                .addGap(41, 41, 41)

.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
                .addComponent(jButton3,
javax.swing.GroupLayout.PREFERRED_SIZE,          322,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addGroup(jPanel3Layout.createSequentialGroup())

.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING, false)
                .addComponent(jLabel6,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
                .addComponent(jLabel7,
javax.swing.GroupLayout.DEFAULT_SIZE, 120, Short.MAX_VALUE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)

.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING, false)
                .addComponent(jTextField4,
javax.swing.GroupLayout.DEFAULT_SIZE, 196, Short.MAX_VALUE)

.addComponent(jPasswordField2))))))

.addGap(0, 54, Short.MAX_VALUE))
```

```
    );

    jPanel3Layout.setVerticalGroup(

jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

        .addGroup(jPanel3Layout.createSequentialGroup())
            .addGap(18, 18, 18)
            .addComponent(jLabel15,
javax.swing.GroupLayout.PREFERRED_SIZE,          61,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)
            .addComponent(jLabel16,
javax.swing.GroupLayout.PREFERRED_SIZE,          44,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(jTextField4,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

        .addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)
            .addComponent(jLabel17,
javax.swing.GroupLayout.PREFERRED_SIZE,          37,
javax.swing.GroupLayout.PREFERRED_SIZE)
            .addComponent(jPasswordField2,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))
            .addGap(18, 18, 18)
```

```

        .addComponent(jButton3,
javax.swing.GroupLayout.PREFERRED_SIZE,          32,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addContainerGap(16, Short.MAX_VALUE))

    );

setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_C
LOSE);

jPanel2.setBackground(new java.awt.Color(0, 51, 102));
jPanel2.setForeground(new java.awt.Color(255, 153, 0));

jTextField1_username.setText("username");
jTextField1_username.addActionListener(new
java.awt.event.ActionListener() {

    public void
actionPerformed(java.awt.event.ActionEvent evt) {

        jTextField1_usernameActionPerformed(evt);

    }

});

jTextField2_Name.setText("Your name here");
jTextField2_Name.addActionListener(new
java.awt.event.ActionListener() {

    public void
actionPerformed(java.awt.event.ActionEvent evt) {

        jTextField2_NameActionPerformed(evt);

    }

});

jLabel8.setBackground(new java.awt.Color(255, 255,
255));

```

```

        jLabel8.setFont(new java.awt.Font("BankGothic Lt BT",
1, 24)); // NOI18N
        jLabel8.setForeground(new java.awt.Color(255, 255, 0));
        jLabel8.setText("CREATE USER");

        jLabel9.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel9.setForeground(new java.awt.Color(255, 255,
255));
        jLabel9.setText("NAME:");

        jLabel10.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel10.setForeground(new java.awt.Color(255, 255,
255));
        jLabel10.setText("USERNAME:");

        jLabel11.setFont(new java.awt.Font("Arial", 1, 18)); //
NOI18N
        jLabel11.setForeground(new java.awt.Color(255, 255,
255));
        jLabel11.setText("PASSWORD:");

        jButton5createuser.setBackground(new
java.awt.Color(255, 153, 0));
        jButton5createuser.setFont(new java.awt.Font("Arial",
1, 14)); // NOI18N
        jButton5createuser.setText("CREATE NEW USER");

        jButton5createuser.setBorder(javax.swing.BorderFactory.createT
itledBorder(""));

        jButton5createuser.addActionListener(new
java.awt.event.ActionListener() {

            public void
actionPerformed(java.awt.event.ActionEvent evt) {

```

```

        jButton5createuserActionPerformed(evt);
    }
});

jTextField_passwordfield.setText("your password");
jTextField_passwordfield.addActionListener(new
java.awt.event.ActionListener() {

    public void
actionPerformed(java.awt.event.ActionEvent evt) {

        jTextField_passwordfieldActionPerformed(evt);
    }

});

javax.swing.GroupLayout jPanel2Layout = new
javax.swing.GroupLayout(jPanel2);

jPanel2.setLayout(jPanel2Layout);
jPanel2Layout.setHorizontalGroup(

jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

.addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
jPanel2Layout.createSequentialGroup()

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.TRAILING)

.addGroup(jPanel2Layout.createSequentialGroup()

.addGap(75, 75, 75)

.addComponent(jLabel19,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

```

```
                .addComponent(jTextField2_Name,
javax.swing.GroupLayout.PREFERRED_SIZE,          236,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGroup(jPanel2Layout.createSequentialGroup())

        .addContainerGap(javax.swing.GroupLayout.DEFAULT_SIZE,
Short.MAX_VALUE)

                .addComponent(jTextField1_username,
javax.swing.GroupLayout.PREFERRED_SIZE,          236,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGroup(javax.swing.GroupLayout.Alignment.LEADING,
jPanel2Layout.createSequentialGroup())

                .addGap(22, 22, 22)

        .addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

        .addGroup(jPanel2Layout.createSequentialGroup())

                .addComponent(jLabel8)

                .addGap(0, 0, Short.MAX_VALUE))

        .addGroup(jPanel2Layout.createSequentialGroup())

                .addComponent(jLabel11,
javax.swing.GroupLayout.DEFAULT_SIZE, 139, Short.MAX_VALUE)

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

        .addComponent(jTextField_passwordfield,
javax.swing.GroupLayout.PREFERRED_SIZE,          236,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
jPanel2Layout.createSequentialGroup())

                .addGap(0, 0, Short.MAX_VALUE)
```

```

.addComponent(jButton5createuser,
javax.swing.GroupLayout.PREFERRED_SIZE,           353,
javax.swing.GroupLayout.PREFERRED_SIZE))))
        .addGap(90, 90, 90))

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(jPanel2Layout.createSequentialGroup())
        .addGap(26, 26, 26)
        .addComponent(jLabel10,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
        .addGap(356, 356, 356)))
    );
jPanel2Layout.setVerticalGroup(

jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.Alig
nment.LEADING)
        .addGroup(jPanel2Layout.createSequentialGroup())
            .addGap(18, 18, 18)
            .addComponent(jLabel18,
javax.swing.GroupLayout.PREFERRED_SIZE,           61,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)
        .addComponent(jTextField2_Name,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
        .addComponent(jLabel19,
javax.swing.GroupLayout.PREFERRED_SIZE,           44,
javax.swing.GroupLayout.PREFERRED_SIZE))

```

```

        .addGap(8, 8, 8)

        .addComponent(jTextField1_username,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)

        .addComponent(jLabel11,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(jTextField_passwordfield,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addComponent(jButton5_createuser,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addContainerGap(74, Short.MAX_VALUE))

.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(jPanel2Layout.createSequentialGroup())

        .addGap(120, 120, 120)

        .addComponent(jLabel10,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addContainerGap(179, Short.MAX_VALUE)))

);

```

```

        javax.swing.GroupLayout layout = new
javax.swing.GroupLayout ( getContentPane() );

        getContentPane().setLayout(layout);

        layout.setHorizontalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

            .addComponent(jPanel2,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

        );

        layout.setVerticalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

            .addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
layout.createSequentialGroup()

                .addGap(0, 6, Short.MAX_VALUE)

                .addComponent(jPanel2,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

        );

        pack();

    } // </editor-fold> // GEN-END: initComponents

    private void
jTextField1_usernameActionPerformed(java.awt.event.ActionEvent
evt) { // GEN-FIRST:event_jTextField1_usernameActionPerformed

        // TODO add your handling code here:

    } // GEN-LAST:event_jTextField1_usernameActionPerformed

```

```

        private                                                    void
jTextField2_NameActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_jTextField2_NameActionPerformed

        // TODO add your handling code here:

    } //GEN-LAST:event_jTextField2_NameActionPerformed


        private                                                    void
jTextField3ActionPerformed(java.awt.event.ActionEvent      evt)
{ //GEN-FIRST:event_jTextField3ActionPerformed

        // TODO add your handling code here:

    } //GEN-LAST:event_jTextField3ActionPerformed


        private                                                    void
jTextField4ActionPerformed(java.awt.event.ActionEvent      evt)
{ //GEN-FIRST:event_jTextField4ActionPerformed

        // TODO add your handling code here:

    } //GEN-LAST:event_jTextField4ActionPerformed


        private                                                    void
jButton3ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
FIRST:event_jButton3ActionPerformed

        // TODO add your handling code here:

    } //GEN-LAST:event_jButton3ActionPerformed


        private                                                    void
jButton5createuserActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_jButton5createuserActionPerformed

        // TODO add your handling code here:


        // TODO add your handling code here:

        String name = jTextField2_Name.getText();
        String username = jTextField1_username.getText();
        String password = jTextField_passwordfield.getText();
        String usertype = "user";
    
```

```

    // You don't need to provide a value for the ID field, as
    it's auto-generated

    // Pass -1 or any other value that signifies it's not set
    int id = -1;

    ClassAll.Plant_User user = new ClassAll.Plant_User(id,
name, username, password, usertype);

    ClassAll.Plant_User.insertuser(user);

    this.dispose();

} //GEN-LAST:event_jButton5createuserActionPerformed

private void
jTextField_passwordfieldActionPerformed(java.awt.event.ActionE
vent evt) { //GEN-
FIRST:event_jTextField_passwordfieldActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_jTextField_passwordfieldActionPerformed

/**
 * @param args the command line arguments
 */
public static void main(String args[]) {
    /* Set the Nimbus look and feel */

    //<editor-fold defaultstate="collapsed" desc=" Look and
feel setting code (optional) ">

    /* If Nimbus (introduced in Java SE 6) is not available,
    stay with the default look and feel.

        * For details see
http://download.oracle.com/javase/tutorial/uiswing/lookandfeel/plaf.html

```

```

        */

        try {
            for (javax.swing.UIManager.LookAndFeelInfo info :
                javax.swing.UIManager.getInstalledLookAndFeels()) {
                if ("Nimbus".equals(info.getName())) {

                    javax.swing.UIManager.setLookAndFeel(info.getClassName());

                    break;
                }
            }
        } catch (ClassNotFoundException ex) {

            java.util.logging.Logger.getLogger(CreateUser.class.getName())
                .log(java.util.logging.Level.SEVERE, null, ex);

        } catch (InstantiationException ex) {

            java.util.logging.Logger.getLogger(CreateUser.class.getName())
                .log(java.util.logging.Level.SEVERE, null, ex);

        } catch (IllegalAccessException ex) {

            java.util.logging.Logger.getLogger(CreateUser.class.getName())
                .log(java.util.logging.Level.SEVERE, null, ex);

        } catch (javax.swing.UnsupportedLookAndFeelException
            ex) {

            java.util.logging.Logger.getLogger(CreateUser.class.getName())
                .log(java.util.logging.Level.SEVERE, null, ex);

        }
    }

    //</editor-fold>

    /* Create and display the form */
    java.awt.EventQueue.invokeLater(new Runnable() {
        public void run() {
            new CreateUser().setVisible(true);
        }
    }

```

```
        });  
    }  
  
    // Variables declaration - do not modify//GEN-BEGIN:variables  
    private javax.swing.JButton jButton3;  
    private javax.swing.JButton jButton5createuser;  
    private javax.swing.JDialog jDialog1;  
    private javax.swing.JDialog jDialog2;  
    private javax.swing.JLabel jLabel10;  
    private javax.swing.JLabel jLabel11;  
    private javax.swing.JLabel jLabel5;  
    private javax.swing.JLabel jLabel6;  
    private javax.swing.JLabel jLabel7;  
    private javax.swing.JLabel jLabel8;  
    private javax.swing.JLabel jLabel9;  
    private javax.swing.JPanel jPanel1;  
    private javax.swing.JPanel jPanel2;  
    private javax.swing.JPanel jPanel3;  
    private javax.swing.JPasswordField jPasswordField2;  
    private javax.swing.JTextField jTextField1_username;  
    private javax.swing.JTextField jTextField2_Name;  
    private javax.swing.JTextField jTextField3;  
    private javax.swing.JTextField jTextField4;  
    private javax.swing.JTextField jTextField_passwordfield;  
    // End of variables declaration//GEN-END:variables  
  
}
```

Userlist.java

```
package malaysiaherb;

import ClassAll.Plant_User;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.util.ArrayList;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.table.DefaultTableModel;

/**
 *
 * @author Hani Hamizah
 */
public class Userlist extends javax.swing.JFrame {

    /**
     * Creates new form Userlist
     */
    public Userlist() {
        initComponents();
        usertable();
    }

    public ArrayList<Plant_User> getUserList() {
        ArrayList<Plant_User> userlist = new ArrayList<>();
        //Connection connect = ClassAll.database.getConnection();
        PreparedStatement input = null;
    }
}
```

```
ResultSet rs = null;

try {
    input
    ClassAll.database.getConnection().prepareStatement("SELECT
`ID`,`Name`,`Username`,`Password`,`Uertype` FROM `users`");

    rs = input.executeQuery();

    while (rs.next()) {
        Plant_User user = new Plant_User(
            rs.getInt("ID"),
            rs.getString("Name"),
            rs.getString("Username"),
            rs.getString("Password"),
            rs.getString("Uertype")

        );
        userlist.add(user);
    }
} catch (SQLException ex) {

    Logger.getLogger(MAIN_WINDOW.class.getName()).log(Level.SEVERE
, null, ex);

    } finally {
        // Close resources in finally block
        if (rs != null) {
            try {
                rs.close();
            } catch (SQLException e) {

                Logger.getLogger(MAIN_WINDOW.class.getName()).log(Level.SEVERE
, null, e);
            }
        }
    }
}
```

```

        }
    }
    if (input != null) {
        try {
            input.close();
        } catch (SQLException e) {

Logger.getLogger(MAIN_WINDOW.class.getName()).log(Level.SEVERE
, null, e);

        }
    }
}
return userlist;
}

public void usertable()
{

    ArrayList<Plant_User> userlist = getUsererList();
    DefaultTableModel      table      =      (DefaultTableModel)
 jTable1.getModel();
    table.setRowCount(0);
    for (Plant_User user : userlist) {
        Object[] row = new Object[4];
        row[0] = user.getID();
        row[1] = user.getName();
        row[2] = user.getUName();
        row[3] = user.getPass();
        // Add the rest of the columns if needed
        table.addRow(row);
    }
}
}

```

```
/**
 * This method is called from within the constructor to
 initialize the form.
 * WARNING: Do NOT modify this code. The content of this
 method is always
 * regenerated by the Form Editor.
 */
@SuppressWarnings("unchecked")
// <editor-fold defaultstate="collapsed" desc="Generated
Code">//GEN-BEGIN: initComponents
private void initComponents() {

    jPanel7_userlist = new javax.swing.JPanel();
    jScrollPane1 = new javax.swing.JScrollPane();
    jTable1 = new javax.swing.JTable();
    deletebutton = new javax.swing.JButton();
    jButton9 = new javax.swing.JButton();
    jLabel11 = new javax.swing.JLabel();
    jLabel12 = new javax.swing.JLabel();
    jLabel13 = new javax.swing.JLabel();
    idfield = new javax.swing.JTextField();
    namefield = new javax.swing.JTextField();
    usernamefield = new javax.swing.JTextField();

    setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_C
LOSE);

    jPanel7_userlist.setBackground(new java.awt.Color(205,
232, 178));

    jTable1.setBorder(javax.swing.BorderFactory.createEmptyBorder(
1, 1, 1, 1));
```

```

        jTable1.setModel(new
javax.swing.table.DefaultTableModel(
            new Object [][] {

                },
            new String [] {
                "ID", "Name", "Username", "Password"
            }
        ));

        jTable1.addMouseListener(new
java.awt.event.MouseAdapter() {
            public void mouseClicked(java.awt.event.MouseEvent
evt) {
                jTable1MouseClicked(evt);
            }
        });
        jScrollPane1.setViewportViewView(jTable1);

        deletebutton.setBackground(new java.awt.Color(255, 51,
51));

        deletebutton.setFont(new java.awt.Font("Segoe UI", 1,
18)); // NOI18N
        deletebutton.setText("DELETE USER");
        deletebutton.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBor
der.RAISED));

        deletebutton.addActionListener(new
java.awt.event.ActionListener() {
            public
void
actionPerformed(java.awt.event.ActionEvent evt) {
                deletebuttonActionPerformed(evt);
            }
        });
    });

```

```

        jButton9.setBackground(new java.awt.Color(102, 102,
102));

        jButton9.setFont(new java.awt.Font("Arial", 1, 14)); //
NOI18N

        jButton9.setForeground(new java.awt.Color(255, 255,
255));

        jButton9.setText("CREATE NEW USER");

        jButton9.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBor
der.RAISED));

        jButton9.addActionListener(new
java.awt.event.ActionListener() {

            public void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton9ActionPerformed(evt);

            }

        });

        jLabel1.setFont(new java.awt.Font("Segoe UI Black", 0,
18)); // NOI18N

        jLabel1.setText("ID:");

        jLabel2.setFont(new java.awt.Font("Segoe UI Black", 0,
18)); // NOI18N

        jLabel2.setText("Name:");

        jLabel3.setFont(new java.awt.Font("Segoe UI Black", 0,
18)); // NOI18N

        jLabel3.setText("Username:");

        idfield.setFont(new java.awt.Font("Segoe UI", 0, 18));
// NOI18N

        idfield.addActionListener(new
java.awt.event.ActionListener() {

```

```

        public                                                    void
        actionPerformed(java.awt.event.ActionEvent evt) {
            idfieldActionPerformed(evt);
        }
    });

    namefield.setFont(new java.awt.Font("Segoe UI", 0,
18)); // NOI18N

    usernamefield.setFont(new java.awt.Font("Segoe UI", 0,
18)); // NOI18N

    javax.swing.GroupLayout jPanel7_userlistLayout = new
    javax.swing.GroupLayout(jPanel7_userlist);
    jPanel7_userlist.setLayout(jPanel7_userlistLayout);
    jPanel7_userlistLayout.setHorizontalGroup(

jPanel7_userlistLayout.createParallelGroup(javax.swing.GroupLa
yout.Alignment.LEADING)

.addGroup(jPanel7_userlistLayout.createSequentialGroup()
        .addGap(36, 36, 36)

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swi
ng.GroupLayout.Alignment.LEADING)

.addGroup(jPanel7_userlistLayout.createSequentialGroup()
        .addComponent(deletebutton,
        javax.swing.GroupLayout.PREFERRED_SIZE,          167,
        javax.swing.GroupLayout.PREFERRED_SIZE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, 137, Short.MAX_VALUE)

        .addComponent(jButton9,
        javax.swing.GroupLayout.PREFERRED_SIZE,          230,
        javax.swing.GroupLayout.PREFERRED_SIZE))

```

```

        .addComponent(jScrollPane1,
javax.swing.GroupLayout.PREFERRED_SIZE,          527,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addContainerGap(93, Short.MAX_VALUE))

.addGroup(jPanel7_userlistLayout.createSequentialGroup())

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swi
ng.GroupLayout.Alignment.LEADING)

.addGroup(jPanel7_userlistLayout.createSequentialGroup())

        .addGap(16, 16, 16)

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swi
ng.GroupLayout.Alignment.TRAILING)

        .addComponent(jLabel13)
        .addComponent(jLabel12))

.addGroup(jPanel7_userlistLayout.createSequentialGroup())

        .addGap(84, 84, 84)

        .addComponent(jLabel11,
javax.swing.GroupLayout.PREFERRED_SIZE,          37,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swi
ng.GroupLayout.Alignment.LEADING)

        .addComponent(idfield,
javax.swing.GroupLayout.PREFERRED_SIZE,          71,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(usernamefield,
javax.swing.GroupLayout.PREFERRED_SIZE,          156,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(namefield,
javax.swing.GroupLayout.PREFERRED_SIZE,          156,
javax.swing.GroupLayout.PREFERRED_SIZE))

```

```
.addContainerGap(javax.swing.GroupLayout.DEFAULT_SIZE,
Short.MAX_VALUE))

    );

    jPanel7_userlistLayout.setVerticalGroup(

jPanel7_userlistLayout.createParallelGroup(javax.swing.GroupLa
yout.Alignment.LEADING)

.addGroup(jPanel7_userlistLayout.createSequentialGroup())

        .addGap(30, 30, 30)

        .addComponent(jScrollPane1,
javax.swing.GroupLayout.PREFERRED_SIZE,                220,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addGap(32, 32, 32)

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swi
ng.GroupLayout.Alignment.BASELINE)

        .addComponent(jLabel1)

        .addComponent(idfield,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swi
ng.GroupLayout.Alignment.BASELINE)

        .addComponent(jLabel2)

        .addComponent(namefield,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)
```

```

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swing.
GroupLayout.Alignment.BASELINE)

        .addComponent(jLabel13)

        .addComponent(usernamefield,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, 165, Short.MAX_VALUE)

.addGroup(jPanel7_userlistLayout.createParallelGroup(javax.swing
GroupLayout.Alignment.LEADING, false)

        .addComponent(deletebutton,
javax.swing.GroupLayout.DEFAULT_SIZE, 43, Short.MAX_VALUE)

        .addComponent(jButton9,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE))

        .addGap(43, 43, 43))

);

        javax.swing.GroupLayout layout = new
javax.swing.GroupLayout(getContentPane());

        getContentPane().setLayout(layout);

        layout.setHorizontalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
EADING)

                .addGap(0, 663, Short.MAX_VALUE)

.addGroup(layout.createParallelGroup(javax.swing.GroupLayout.A
lignment.LEADING)

        .addGroup(layout.createSequentialGroup()

                .addGap(0, 0, Short.MAX_VALUE)

                .addComponent(jPanel7_userlist,
javax.swing.GroupLayout.PREFERRED_SIZE,

```

```

javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addGap(0, 0, Short.MAX_VALUE)))

    );

    layout.setVerticalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

        .addGap(0, 638, Short.MAX_VALUE)

.addGroup(layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

        .addGroup(layout.createSequentialGroup()

            .addGap(0, 0, Short.MAX_VALUE)

            .addComponent(jPanel7_userlist,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

            .addGap(0, 0, Short.MAX_VALUE)))

        );

    pack();

} // </editor-fold> // GEN-END: initComponents

private void
deletebuttonActionPerformed(java.awt.event.ActionEvent evt)
{ // GEN-FIRST: event_deletebuttonActionPerformed

    // TODO add your handling code here:

    int id = Integer.valueOf(idfield.getText());

    ClassAll.Plant_User.deleteuser(id);

    usertable();

} // GEN-LAST: event_deletebuttonActionPerformed

```

```

        private void
jButton9ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
FIRST:event_jButton9ActionPerformed

        CreateUser create =new CreateUser();

        create.setVisible(true); // TODO add your handling code
here:

} //GEN-LAST:event_jButton9ActionPerformed


        private void
idfieldActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
FIRST:event_idfieldActionPerformed

        // TODO add your handling code here:

} //GEN-LAST:event_idfieldActionPerformed


        private void jTable1MouseClicked(java.awt.event.MouseEvent
evt) { //GEN-FIRST:event_jTable1MouseClicked

        // TODO add your handling code here:

        int index = jTable1.getSelectedRow();

        // ArrayList <Plant_User> user = ArrayList<>;

        idfield.setText(jTable1.getValueAt(index,
0).toString());

        namefield.setText(jTable1.getValueAt(index,
1).toString());

        usernamefield.setText(jTable1.getValueAt(index,
2).toString());

} //GEN-LAST:event_jTable1MouseClicked


/**
 * @param args the command line arguments
 */
public static void main(String args[]) {

    /* Set the Nimbus look and feel */

```

```

//<editor-fold defaultstate="collapsed" desc=" Look and
feel setting code (optional) ">

    /* If Nimbus (introduced in Java SE 6) is not available,
    stay with the default look and feel.

        *                               For                details                see
http://download.oracle.com/javase/tutorial/uiswing/lookandfeel
/plaf.html
        */

    try {

        for (javax.swing.UIManager.LookAndFeelInfo info :
javax.swing.UIManager.getInstalledLookAndFeels()) {

            if ("Nimbus".equals(info.getName())) {

javax.swing.UIManager.setLookAndFeel(info.getClassName());

                break;

            }

        }

    } catch (ClassNotFoundException ex) {

java.util.logging.Logger.getLogger(Userlist.class.getName()).l
og(java.util.logging.Level.SEVERE, null, ex);

        } catch (InstantiationException ex) {

java.util.logging.Logger.getLogger(Userlist.class.getName()).l
og(java.util.logging.Level.SEVERE, null, ex);

        } catch (IllegalAccessException ex) {

java.util.logging.Logger.getLogger(Userlist.class.getName()).l
og(java.util.logging.Level.SEVERE, null, ex);

        } catch (javax.swing.UnsupportedLookAndFeelException
ex) {

java.util.logging.Logger.getLogger(Userlist.class.getName()).l
og(java.util.logging.Level.SEVERE, null, ex);

        }

    }
//</editor-fold>

```

```
        /* Create and display the form */
        java.awt.EventQueue.invokeLater(new Runnable() {
            public void run() {
                new Userlist().setVisible(true);
            }
        });
    }

    // Variables declaration - do not modify//GEN-BEGIN:variables
    private javax.swing.JButton deletebutton;
    private javax.swing.JTextField idfield;
    private javax.swing.JButton jButton9;
    private javax.swing.JLabel jLabel1;
    private javax.swing.JLabel jLabel2;
    private javax.swing.JLabel jLabel3;
    public javax.swing.JPanel jPanel7_userlist;
    private javax.swing.JScrollPane jScrollPane1;
    private javax.swing.JTable jTable1;
    private javax.swing.JTextField namefield;
    private javax.swing.JTextField usernamefield;
    // End of variables declaration//GEN-END:variables
}
```

MAIN_WINDOW.java

```
package malaysiaherb;

import ClassAll.Plant;
import ClassAll.database;
import static ClassAll.database.getConnection;
import com.sun.jdi.connect.spi.Connection;
```

```
import java.awt.Image;
import java.sql.Statement;
import java.sql.PreparedStatement;
import javax.swing.ImageIcon;
import javax.swing.JFrame;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.util.ArrayList;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.table.DefaultTableModel;

/**
 *
 * @author Hani Hamizah
 */
public class MAIN_WINDOW extends javax.swing.JFrame{

    /**
     * Creates new form MAIN_WINDOW
     */
    public MAIN_WINDOW() {
        initComponents();
        ImageIcon backgroundimage = new ImageIcon
("src\\img\\home1.png");
        ImageIcon aboutphoto = new ImageIcon
("src\\img\\about.png");
        ImageIcon buy = new ImageIcon ("src\\img\\Buy Your Plant
With Us.png");
        jLabel13.setIcon(backgroundimage);
        aboutlbl.setIcon(aboutphoto);
        buylbl.setIcon(buy);
    }
}
```

```

        ClassAll.database.getConnection();

        selectedtable("");
        selectedtable2();
        Showplanttobuy(imageindex);

    }

    /**
     * This method is called from within the constructor to
     initialize the form.
     * WARNING: Do NOT modify this code. The content of this
     method is always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
    // <editor-fold defaultstate="collapsed" desc="Generated
    Code">//GEN-BEGIN: initComponents
    private void initComponents() {

        jPopupMenu1 = new javax.swing.JPopupMenu();
        jMenuItem1 = new javax.swing.JMenuItem();
        jMenu1 = new javax.swing.JMenu();
        buttonGroup1 = new javax.swing.ButtonGroup();
        buttonGroup2 = new javax.swing.ButtonGroup();
        buttonGroup3 = new javax.swing.ButtonGroup();
        buttonGroup4 = new javax.swing.ButtonGroup();
        buttonGroup5 = new javax.swing.ButtonGroup();
        buttonGroup6 = new javax.swing.ButtonGroup();
    }

```

```
buttonGroup7 = new javax.swing.ButtonGroup();
mainwindowtab = new javax.swing.JTabbedPane();
jPanel3 = new javax.swing.JPanel();
jLabel13 = new javax.swing.JLabel();
About = new javax.swing.JPanel();
jLabel2 = new javax.swing.JLabel();
aboutlbl1 = new javax.swing.JLabel();
jPanel1_browsepanel = new javax.swing.JPanel();
jButton_previousplant = new javax.swing.JButton();
jButton_nextplant = new javax.swing.JButton();
jLabel1 = new javax.swing.JLabel();
jLabel4 = new javax.swing.JLabel();
jLabel5 = new javax.swing.JLabel();
jLabel6 = new javax.swing.JLabel();
jLabel7 = new javax.swing.JLabel();
jTextField_commonname = new javax.swing.JTextField();
jTextField_scientificname = new
javax.swing.JTextField();
jLabel_plantimg = new javax.swing.JLabel();
jScrollPane1 = new javax.swing.JScrollPane();
desc_area = new javax.swing.JTextArea();
jScrollPane2 = new javax.swing.JScrollPane();
plantusage_area = new javax.swing.JTextArea();
showbutton = new javax.swing.JButton();
jScrollPane5 = new javax.swing.JScrollPane();
jTable2_Plant = new javax.swing.JTable();
jPanel4 = new javax.swing.JPanel();
jLabel8 = new javax.swing.JLabel();
jLabel_plantimg1buypage = new javax.swing.JLabel();
jButton_previousplant1 = new javax.swing.JButton();
jButton_nextplant2 = new javax.swing.JButton();
```

```
jLabel9 = new javax.swing.JLabel();
jLabel10 = new javax.swing.JLabel();
jLabel11 = new javax.swing.JLabel();
jTextField_commonnamebuypage = new
javax.swing.JTextField();
jTextField_scientificnamebuypage = new
javax.swing.JTextField();
jLabel_priceLabel = new javax.swing.JLabel();
jScrollPane6 = new javax.swing.JScrollPane();
jTablebuypage = new javax.swing.JTable();
jLabel3 = new javax.swing.JLabel();
jLabel12 = new javax.swing.JLabel();
jButton1Userlist = new javax.swing.JButton();
buylbl = new javax.swing.JLabel();
cloylbl = new javax.swing.JPanel();
jLabel14 = new javax.swing.JLabel();
jPanel6 = new javax.swing.JPanel();
jPanel9 = new javax.swing.JPanel();
jLabel15 = new javax.swing.JLabel();
Pk1 = new javax.swing.JRadioButton();
Hb1 = new javax.swing.JRadioButton();
jButton1 = new javax.swing.JButton();
Hb2 = new javax.swing.JRadioButton();
Pk2 = new javax.swing.JRadioButton();
Hb3 = new javax.swing.JRadioButton();
Pk3 = new javax.swing.JRadioButton();
Hb4 = new javax.swing.JRadioButton();
Pk6 = new javax.swing.JRadioButton();
Pk5 = new javax.swing.JRadioButton();
Hb5 = new javax.swing.JRadioButton();
Hb6 = new javax.swing.JRadioButton();
```

```
Pk4 = new javax.swing.JRadioButton();
jButton2 = new javax.swing.JButton();
jButton3 = new javax.swing.JButton();
jButton4 = new javax.swing.JButton();
jButton5 = new javax.swing.JButton();
jButton6 = new javax.swing.JButton();
jLabel16 = new javax.swing.JLabel();
jLabel17 = new javax.swing.JLabel();
jLabel18 = new javax.swing.JLabel();
jLabel19 = new javax.swing.JLabel();
jLabel20 = new javax.swing.JLabel();
Cloyster = new javax.swing.JLabel();
Chandelure2 = new javax.swing.JLabel();
Zingiber = new javax.swing.JLabel();
Dhelmise = new javax.swing.JLabel();
Somnifera = new javax.swing.JLabel();
Chandelure5 = new javax.swing.JLabel();
Chandelurelbl = new javax.swing.JLabel();
Zingiberlbl = new javax.swing.JLabel();
Ortholbl = new javax.swing.JLabel();
Somniferalbl = new javax.swing.JLabel();
Chelmiselbl = new javax.swing.JLabel();
Cloysterlbl = new javax.swing.JLabel();

jMenuItem1.setText("jMenuItem1");

jMenu1.setText("jMenu1");
```

```
setDefaultCloseOperation(javax.swing.WindowConstants.EXIT_ON_C
LOSE);
```

```
mainwindowtab.setBackground(new java.awt.Color(0, 102,
51));

mainwindowtab.setBorder(javax.swing.BorderFactory.createBevelB
order(javax.swing.border.BevelBorder.RAISED));

mainwindowtab.setForeground(new java.awt.Color(255,
255, 255));

mainwindowtab.setCursor(new
java.awt.Cursor(java.awt.Cursor.DEFAULT_CURSOR));

mainwindowtab.setFont(new java.awt.Font("Segoe UI", 1,
14)); // NOI18N

mainwindowtab.setName(""); // NOI18N

mainwindowtab.setOpaque(true);

jPanel3.setBackground(new java.awt.Color(0, 102, 0));

jLabel13.setText("jLabel13");

jLabel13.setOpaque(true);

javax.swing.GroupLayout jPanel3Layout = new
javax.swing.GroupLayout(jPanel3);

jPanel3.setLayout(jPanel3Layout);

jPanel3Layout.setHorizontalGroup(

jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

    .addComponent(jLabel13,
javax.swing.GroupLayout.DEFAULT_SIZE, 1288, Short.MAX_VALUE)

);

jPanel3Layout.setVerticalGroup(

jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)
```

```

        .addComponent(jLabel13,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
    );

mainwindowtab.addTab("HOME", jPanel3);

About.setBackground(new java.awt.Color(205, 232, 178));

jLabel2.setBackground(new java.awt.Color(0, 153, 51));
jLabel2.setFont(new java.awt.Font("Poor Richard", 1,
24)); // NOI18N
jLabel2.setText("ABOUT US");

aboutlbl.setText("jLabel21");

javax.swing.GroupLayout AboutLayout = new
javax.swing.GroupLayout(About);

About.setLayout(AboutLayout);

AboutLayout.setHorizontalGroup(

AboutLayout.createParallelGroup(javax.swing.GroupLayout.Alignm
ent.LEADING)

    .addGroup(AboutLayout.createSequentialGroup()

        .addGroup(AboutLayout.createParallelGroup(javax.swing.GroupLay
out.Alignment.LEADING)

            .addGroup(AboutLayout.createSequentialGroup()

                .addGap(21, 21, 21)

                .addComponent(jLabel2,
javax.swing.GroupLayout.PREFERRED_SIZE, 130,
javax.swing.GroupLayout.PREFERRED_SIZE))

            .addGroup(AboutLayout.createSequentialGroup()

                .addContainerGap()

```

```

        .addComponent(aboutlbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          1142,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addContainerGap(140, Short.MAX_VALUE))

    );

    AboutLayout.setVerticalGroup(

AboutLayout.createParallelGroup(javax.swing.GroupLayout.Alignm
ent.LEADING)

        .addGroup(AboutLayout.createSequentialGroup())

            .addGap(12, 12, 12)

            .addComponent(jLabel2,
javax.swing.GroupLayout.PREFERRED_SIZE,          35,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

            .addComponent(aboutlbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          551,
javax.swing.GroupLayout.PREFERRED_SIZE)

            .addContainerGap(27, Short.MAX_VALUE))

    );

    mainwindowtab.addTab("ABOUT", About);

    jPanel1_browsepanel.setBackground(new
java.awt.Color(205, 232, 178));

    jButton_previousplant.setBackground(new
java.awt.Color(204, 204, 204));

    jButton_previousplant.setFont(new
java.awt.Font("Century Gothic", 1, 14)); // NOI18N

    jButton_previousplant.setText("<<<");

    jButton_previousplant.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBor
der.RAISED));

```

```

        jButton_previousplant.addActionListener(new
java.awt.event.ActionListener() {
            public void
actionPerformed(java.awt.event.ActionEvent evt) {
                jButton_previousplantActionPerformed(evt);
            }
        });

        jButton_nextplant.setBackground(new
java.awt.Color(204, 204, 204));

        jButton_nextplant.setFont(new java.awt.Font("Century
Gothic", 1, 14)); // NOI18N

        jButton_nextplant.setText(">>>");

        jButton_nextplant.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBor
der.RAISED));

        jButton_nextplant.addActionListener(new
java.awt.event.ActionListener() {
            public void
actionPerformed(java.awt.event.ActionEvent evt) {
                jButton_nextplantActionPerformed(evt);
            }
        });

        jLabel1.setBackground(new java.awt.Color(0, 153, 51));

        jLabel1.setFont(new java.awt.Font("Poor Richard", 1,
24)); // NOI18N

        jLabel1.setText("OUR HERBS:");

        jLabel4.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N

        jLabel4.setText("Common Name:");

        jLabel5.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N

```

```
jLabel5.setText("Scientific name:");

jLabel6.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N
jLabel6.setText("Description:");

jLabel7.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N
jLabel7.setText("Plant Usage:");

jTextField_commonname.setEditable(false);
jTextField_commonname.setBackground(new
java.awt.Color(205, 232, 178));

jTextField_commonname.setFont(new java.awt.Font("Arial
Black", 0, 12)); // NOI18N
jTextField_commonname.setAutoscrolls(false);
jTextField_commonname.setBorder(null);

jTextField_commonname.addInputMethodListener(new
java.awt.event.InputMethodListener() {

    public void
caretPositionChanged(java.awt.event.InputMethodEvent evt) {

    }

    public void
inputMethodTextChanged(java.awt.event.InputMethodEvent evt) {

jTextField_commonnameInputMethodTextChanged(evt);

    }

});

jTextField_commonname.addActionListener(new
java.awt.event.ActionListener() {

    public void
actionPerformed(java.awt.event.ActionEvent evt) {

        jTextField_commonnameActionPerformed(evt);

    }

}
```

```
    });

    jTextField_scientificname.setEditable(false);
    jTextField_scientificname.setBackground(new
java.awt.Color(205, 232, 178));

    jTextField_scientificname.setFont(new
java.awt.Font("Arial Black", 0, 12)); // NOI18N
    jTextField_scientificname.setBorder(null);

    jLabel_plantimg.setBackground(new java.awt.Color(255,
255, 255));

    jLabel_plantimg.setBorder(javax.swing.BorderFactory.createComp
oundBorder());

    jLabel_plantimg.setMaximumSize(new
java.awt.Dimension(360, 302));

    jLabel_plantimg.setMinimumSize(new
java.awt.Dimension(360, 302));

    jLabel_plantimg.setPreferredSize(new
java.awt.Dimension(360, 302));

    jLabel_plantimg.setVerifyInputWhenFocusTarget(false);

    desc_area.setEditable(false);
    desc_area.setBackground(new java.awt.Color(205, 232,
178));

    desc_area.setColumns(20);
    desc_area.setFont(new java.awt.Font("Arial", 0, 14));
// NOI18N
    desc_area.setRows(5);
    desc_area.setBorder(null);
    jScrollPane1.setViewportViewView(desc_area);

    plantusage_area.setEditable(false);
    plantusage_area.setBackground(new java.awt.Color(205,
232, 178));
```

```

        plantusage_area.setColumns(20);
        plantusage_area.setFont(new java.awt.Font("Arial", 0,
14)); // NOI18N
        plantusage_area.setRows(5);
        plantusage_area.setBorder(null);
        jScrollPane2.setViewportViewView(plantusage_area);

        showbutton.setBackground(new java.awt.Color(204, 204,
255));

        showbutton.setFont(new java.awt.Font("Segoe UI", 1,
18)); // NOI18N
        showbutton.setText("Show Plant");

        showbutton.setBorder(javax.swing.BorderFactory.createBevelBord
er(javax.swing.border.BevelBorder.RAISED));

        showbutton.addActionListener(new
java.awt.event.ActionListener() {

            public void
actionPerformed(java.awt.event.ActionEvent evt) {

                showbuttonActionPerformed(evt);

            }

        });

        jTable2_Plant.setFont(new java.awt.Font("Tahoma", 0,
14)); // NOI18N
        jTable2_Plant.setModel(new
javax.swing.table.DefaultTableModel(

            new Object [][] {

                ,

                new String [] {

                    "ID", "Name", "Scientific Name", "Traditional
Herbs"

                }

            }

```

```
        ));  
        jTable2_Plant.addMouseListener(new  
java.awt.event.MouseAdapter() {  
            public void mouseClicked(java.awt.event.MouseEvent  
evt) {  
                jTable2_PlantMouseClicked(evt);  
            }  
        });  
        jScrollPane5.setViewportView(jTable2_Plant);  
  
        javax.swing.GroupLayout jPanel1_browsepanelLayout = new  
javax.swing.GroupLayout(jPanel1_browsepanel);  
  
jPanel1_browsepanel.setLayout(jPanel1_browsepanelLayout);  
jPanel1_browsepanelLayout.setHorizontalGroup(  
  
jPanel1_browsepanelLayout.createParallelGroup(javax.swing.Grou  
pLayout.Alignment.LEADING)  
  
.addGroup(jPanel1_browsepanelLayout.createSequentialGroup())  
    .addGap(17, 17, 17)  
  
.addGroup(jPanel1_browsepanelLayout.createParallelGroup(javax.  
swing.GroupLayout.Alignment.LEADING)  
  
.addGroup(jPanel1_browsepanelLayout.createSequentialGroup())  
    .addGap(4, 4, 4)  
  
.addGroup(jPanel1_browsepanelLayout.createParallelGroup(javax.  
swing.GroupLayout.Alignment.LEADING)  
    .addComponent(jLabel6)  
  
.addGroup(jPanel1_browsepanelLayout.createSequentialGroup())  
    .addComponent(jLabel5)
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)
```

```
.addComponent(jTextField_scientificname,
javax.swing.GroupLayout.PREFERRED_SIZE,                263,
javax.swing.GroupLayout.PREFERRED_SIZE)))
```

```
.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())
```

```
.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
```

```
        .addComponent(jLabel11,
javax.swing.GroupLayout.PREFERRED_SIZE,                130,
javax.swing.GroupLayout.PREFERRED_SIZE)
```

```
.addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
jPanell1_browsepanelLayout.createSequentialGroup())
```

```
        .addGap(4, 4, 4)
```

```
        .addComponent(jLabel4,
javax.swing.GroupLayout.PREFERRED_SIZE,                132,
javax.swing.GroupLayout.PREFERRED_SIZE)))
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UNRELATED)
```

```
        .addComponent(jTextField_commonname,
javax.swing.GroupLayout.PREFERRED_SIZE,                264,
javax.swing.GroupLayout.PREFERRED_SIZE))
```

```
        .addComponent(jLabel7)
```

```
.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.TRAILING, false)
```

```
        .addComponent(jScrollPane2,
javax.swing.GroupLayout.Alignment.LEADING,
javax.swing.GroupLayout.DEFAULT_SIZE, 347, Short.MAX_VALUE)
```

```
        .addComponent(jScrollPane1,
javax.swing.GroupLayout.Alignment.LEADING)))
```

```
.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
```

```

.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())
        .addGap(0, 18, Short.MAX_VALUE)
        .addComponent(jLabel_plantimg,
javax.swing.GroupLayout.PREFERRED_SIZE,          361,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
        .addComponent(jButton_previousplant)
        .addGap(44, 44, 44)
        .addComponent(showbutton,
javax.swing.GroupLayout.PREFERRED_SIZE,          136,
javax.swing.GroupLayout.PREFERRED_SIZE)
        .addGap(49, 49, 49)
        .addComponent(jButton_nextplant)
        .addGap(76, 76, 76)))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

        .addComponent(jScrollPane5,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
        .addGap(47, 47, 47))
    );
    jPanell1_browsepanelLayout.setVerticalGroup(

jPanell1_browsepanelLayout.createParallelGroup(javax.swing.Grou
pLayout.Alignment.LEADING)

.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())

.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.
swing.GroupLayout.Alignment.LEADING)

```

```
.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())
    .addGap(22, 22, 22)
    .addComponent(jLabel_plantimg,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
    .addGap(18, 18, 18)

.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.
swing.GroupLayout.Alignment.LEADING)
    .addComponent(showbutton,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
    .addComponent(jButtonon_previousplant)
    .addComponent(jButtonon_nextplant))

.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())
    .addGap(14, 14, 14)

.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.
swing.GroupLayout.Alignment.TRAILING)
    .addComponent(jScrollPane5,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGroup(jPanell1_browsepanelLayout.createSequentialGroup())
    .addComponent(jLabel1,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
    .addGap(52, 52, 52)

.addGroup(jPanell1_browsepanelLayout.createParallelGroup(javax.
swing.GroupLayout.Alignment.BASELINE)
    .addComponent(jLabel14)

.addComponent(jTextField_commonname,
```

```

javax.swing.GroupLayout.PREFERRED_SIZE,                                31,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGap(26, 26, 26)

.addGroup(jPanel1_browsepanelLayout.createParallelGroup(javax.
swing.GroupLayout.Alignment.BASELINE)

        .addComponent(jLabel5)

.addComponent(jTextField_scientificname,
javax.swing.GroupLayout.PREFERRED_SIZE,                                28,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGap(18, 18, 18)

        .addComponent(jLabel6)

        .addGap(18, 18, 18)

        .addComponent(jScrollPane1,
javax.swing.GroupLayout.PREFERRED_SIZE,                                154,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addGap(18, 18, 18)

        .addComponent(jLabel7)))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED)

        .addComponent(jScrollPane2,
javax.swing.GroupLayout.PREFERRED_SIZE,                                172,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addContainerGap(23, Short.MAX_VALUE))

);

mainwindowtab.addTab("BROWSE", jPanel1_browsepanel);

jPanel4.setBackground(new java.awt.Color(205, 232,
178));

jLabel8.setBackground(new java.awt.Color(0, 153, 51));

jLabel8.setFont(new java.awt.Font("Poor Richard", 1,
24)); // NOI18N

```

```

jLabel8.setText("BUY YOUR PLANTS");

jLabel_plantimg1buypage.setBackground(new
java.awt.Color(102, 255, 255));

jButton_previousplant1.setBackground(new
java.awt.Color(204, 204, 204));

jButton_previousplant1.setFont(new
java.awt.Font("Century Gothic", 1, 14)); // NOI18N

jButton_previousplant1.setText("<<<");

jButton_previousplant1.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBorder.RAISED));

jButton_previousplant1.addActionListener(new
java.awt.event.ActionListener() {

    public void
    actionPerformed(java.awt.event.ActionEvent evt) {

        jButton_previousplant1ActionPerformed(evt);

    }

});

jButton_nextplant2.setBackground(new
java.awt.Color(204, 204, 204));

jButton_nextplant2.setFont(new java.awt.Font("Century
Gothic", 1, 14)); // NOI18N

jButton_nextplant2.setText(">>>");

jButton_nextplant2.setBorder(new
javax.swing.border.SoftBevelBorder(javax.swing.border.BevelBorder.RAISED));

jButton_nextplant2.addActionListener(new
java.awt.event.ActionListener() {

    public void
    actionPerformed(java.awt.event.ActionEvent evt) {

        jButton_nextplant2ActionPerformed(evt);

    }

});

```

```

    });

    jLabel9.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N

    jLabel9.setText("Common Name:");

    jLabel10.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N

    jLabel10.setText("Scientific name:");

    jLabel11.setFont(new java.awt.Font("Perpetua Titling
MT", 1, 14)); // NOI18N

    jLabel11.setText("PRICE:");

    jTextField_commonnamebuypage.setEditable(false);

    jTextField_commonnamebuypage.setBackground(new
java.awt.Color(205, 232, 178));

    jTextField_commonnamebuypage.setFont(new
java.awt.Font("Arial Black", 0, 14)); // NOI18N

    jTextField_commonnamebuypage.setAutoscrolls(false);

    jTextField_commonnamebuypage.setBorder(null);

    jTextField_commonnamebuypage.addInputMethodListener(new
java.awt.event.InputMethodListener() {

        public void
caretPositionChanged(java.awt.event.InputMethodEvent evt) {

        }

        public void
inputMethodTextChanged(java.awt.event.InputMethodEvent evt) {

    jTextField_commonnamebuypageInputMethodTextChanged(evt);

        }

    });

    jTextField_commonnamebuypage.addActionListener(new
java.awt.event.ActionListener() {

```

```

        public                                                    void
        actionPerformed(java.awt.event.ActionEvent evt) {

        jTextField_commonnamebuypageActionPerformed(evt);

        }

    });

        jTextField_scientificnamebuypage.setEditable(false);
        jTextField_scientificnamebuypage.setBackground(new
        java.awt.Color(205, 232, 178));

        jTextField_scientificnamebuypage.setFont(new
        java.awt.Font("Arial Black", 0, 14)); // NOI18N

        jTextField_scientificnamebuypage.setBorder(null);

        jLabel_priceLabel.setBackground(new
        java.awt.Color(255, 51, 51));

        jLabel_priceLabel.setFont(new java.awt.Font("Bernard MT
        Condensed", 0, 36)); // NOI18N

        jLabel_priceLabel.setForeground(new
        java.awt.Color(255, 255, 51));

        jLabel_priceLabel.setOpaque(true);

        jTablebuypage.setModel(new
        javax.swing.table.DefaultTableModel(

            new Object [][] {

                },

            new String [] {

                "ID", "Name", "Scientific Name", "Traditional
        Herbs"

            }

        ));

        jTablebuypage.addMouseListener(new
        java.awt.event.MouseAdapter() {

```

```

        public void mouseClicked(java.awt.event.MouseEvent
evt) {

            jTablebuypageMouseClicked(evt);

        }

    });

    jScrollPane6.setViewportViewView(jTablebuypage);

    jLabel3.setFont(new java.awt.Font("Segoe UI Black", 0,
18)); // NOI18N
    jLabel3.setText("Herbs and Plants List");

    jLabel12.setFont(new java.awt.Font("Bernard MT
Condensed", 0, 36)); // NOI18N
    jLabel12.setText("RM");

    jButton1Userlist.setBackground(new java.awt.Color(204,
204, 204));

    jButton1Userlist.setFont(new java.awt.Font("Andalus",
1, 18)); // NOI18N
    jButton1Userlist.setText("List User");

    jButton1Userlist.setBorder(javax.swing.BorderFactory.createBev
elBorder(javax.swing.border.BevelBorder.RAISED));

    jButton1Userlist.addActionListener(new
java.awt.event.ActionListener() {

        public void
actionPerformed(java.awt.event.ActionEvent evt) {

            jButton1UserlistActionPerformed(evt);

        }

    });

    javax.swing.GroupLayout jPanel4Layout = new
javax.swing.GroupLayout(jPanel4);
    jPanel4.setLayout(jPanel4Layout);

```

```
jPanel4Layout.setHorizontalGroup(  
  
jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Align  
ment.LEADING)  
  
    .addGroup(jPanel4Layout.createSequentialGroup())  
        .addGap(19, 19, 19)  
  
    .addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL  
ayout.Alignment.LEADING)  
  
    .addGroup(jPanel4Layout.createSequentialGroup())  
        .addGap(14, 14, 14)  
  
    .addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL  
ayout.Alignment.LEADING, false)  
        .addComponent(jButton1Userlist,  
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)  
        .addComponent(buylbl,  
javax.swing.GroupLayout.DEFAULT_SIZE,  
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE))  
  
    .addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL  
ayout.Alignment.LEADING)  
  
    .addGroup(jPanel4Layout.createSequentialGroup())  
        .addGap(18, 18, 18)  
  
    .addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL  
ayout.Alignment.LEADING)  
  
    .addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL  
ayout.Alignment.TRAILING)  
  
    .addComponent(jButton_previousplant1)  
  
    .addComponent(jLabel110)
```

```
                                .addComponent(jLabel19,
javax.swing.GroupLayout.PREFERRED_SIZE,          132,
javax.swing.GroupLayout.PREFERRED_SIZE))

                                .addComponent(jLabel11,
javax.swing.GroupLayout.Alignment.TRAILING))

.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(jPanel4Layout.createSequentialGroup())

                                .addGap(238, 238, 238)

.addComponent(jButton_nextplant2))

.addGroup(jPanel4Layout.createSequentialGroup())

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING, false)

.addGroup(jPanel4Layout.createSequentialGroup())

.addComponent(jLabel12,
javax.swing.GroupLayout.PREFERRED_SIZE,          43,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addGap(12,
12, 12)

.addComponent(jLabel_priceLabel,
javax.swing.GroupLayout.PREFERRED_SIZE,          163,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addComponent(jTextField_scientificnamebuypage,
javax.swing.GroupLayout.DEFAULT_SIZE, 308, Short.MAX_VALUE)

.addComponent(jTextField_commonnamebuypage)))
```

```

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, 27, Short.MAX_VALUE))

.addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
jPanel4Layout.createSequentialGroup())

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

.addComponent(jLabel_planting1buypage,
javax.swing.GroupLayout.PREFERRED_SIZE, 320,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGap(67, 67, 67))

.addComponent(jScrollPane6,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGap(32, 32, 32))

.addGroup(jPanel4Layout.createSequentialGroup())

.addComponent(jLabel18)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

.addComponent(jLabel13,
javax.swing.GroupLayout.PREFERRED_SIZE, 201,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGap(144, 144, 144)))

);

jPanel4Layout.setVerticalGroup(

jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alig
nment.LEADING)

.addGroup(jPanel4Layout.createSequentialGroup())

.addGap(15, 15, 15)

```

```
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.TRAILING)

.addGroup(jPanel4Layout.createSequentialGroup())

.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

                                .addComponent(jLabel8,
javax.swing.GroupLayout.PREFERRED_SIZE,                               35,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGroup(jPanel4Layout.createSequentialGroup())

                                .addComponent(jLabel13)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UNRELATED)

.addComponent(jScrollPane6,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)))

                                .addGap(75, 75, 75))

.addGroup(jPanel4Layout.createSequentialGroup())

                                .addComponent(jLabel11)

                                .addGap(37, 37, 37)))

.addGroup(jPanel4Layout.createSequentialGroup())

                                .addGap(63, 63, 63)

.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
```

```

                                .addComponent (buylbl,
javax.swing.GroupLayout.PREFERRED_SIZE,                440,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGroup (jPanel4Layout.createSequentialGroup ())

.addComponent (jLabel_planting1buypage,
javax.swing.GroupLayout.PREFERRED_SIZE,                262,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addGap (18, 18, 18)

.addGroup (jPanel4Layout.createParallelGroup (javax.swing.GroupL
ayout.Alignment.TRAILING)

.addGroup (jPanel4Layout.createSequentialGroup ())

.addGroup (jPanel4Layout.createParallelGroup (javax.swing.GroupL
ayout.Alignment.BASELINE)

.addComponent (jButton_previousplant1)

.addComponent (jButton_nextplant2))

                                .addGap (23, 23, 23)

.addGroup (jPanel4Layout.createParallelGroup (javax.swing.GroupL
ayout.Alignment.BASELINE)

.addComponent (jLabel9)

.addComponent (jTextField_commonnamebuypage,
javax.swing.GroupLayout.PREFERRED_SIZE,                31,
javax.swing.GroupLayout.PREFERRED_SIZE) )

.addPreferredGap (javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

.addGroup (jPanel4Layout.createParallelGroup (javax.swing.GroupL
ayout.Alignment.BASELINE)

```

```

.addComponent(jLabel10)

.addComponent(jTextField_scientificnamebuypage,
javax.swing.GroupLayout.PREFERRED_SIZE,          28,
javax.swing.GroupLayout.PREFERRED_SIZE))

                                .addGap(17, 17, 17)

.addComponent(jLabel_priceLabel,
javax.swing.GroupLayout.PREFERRED_SIZE,          40,
javax.swing.GroupLayout.PREFERRED_SIZE))

                                .addComponent(jLabel12)))

                                .addGap(32, 32, 32))

                                .addComponent(jButton1Userlist)

                                .addContainerGap(33, Short.MAX_VALUE))

);

mainwindowtab.addTab("BUY", jPanel4);

cloylbl.setBackground(new java.awt.Color(205, 232,
178));

cloylbl.setCursor(new
java.awt.Cursor(java.awt.Cursor.DEFAULT_CURSOR));

jLabel14.setBackground(new java.awt.Color(0, 153, 51));
jLabel14.setFont(new java.awt.Font("BankGothic Md BT",
1, 24)); // NOI18N
jLabel14.setText("IS IT PLANT OR IS IT POKEMON?");

javax.swing.GroupLayout jPanel6Layout = new
javax.swing.GroupLayout(jPanel6);
jPanel6.setLayout(jPanel6Layout);
jPanel6Layout.setHorizontalGroup(

```

```

jPanel6Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

    .addGap(0, 0, Short.MAX_VALUE)

);

jPanel6Layout.setVerticalGroup(

jPanel6Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

    .addGap(0, 100, Short.MAX_VALUE)

);

javax.swing.GroupLayout    jPanel9Layout    =    new
javax.swing.GroupLayout(jPanel9);

jPanel9.setLayout(jPanel9Layout);

jPanel9Layout.setHorizontalGroup(

jPanel9Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

    .addGap(0, 0, Short.MAX_VALUE)

);

jPanel9Layout.setVerticalGroup(

jPanel9Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)

    .addGap(0, 112, Short.MAX_VALUE)

);

jLabel15.setFont(new java.awt.Font("Segoe UI", 0, 18));
// NOI18N

jLabel15.setText("1. Chandelure");

buttonGroup1.add(Pk1);

Pk1.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N

```

```

        Pk1.setText("Pokemon");

        Pk1.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                Pk1ActionPerformed(evt);

            }

        });

        buttonGroup1.add(Hb1);

        Hb1.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N

        Hb1.setText("Herb");

        jButton1.setText("Submit");

        jButton1.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton1ActionPerformed(evt);

            }

        });

        buttonGroup2.add(Hb2);

        Hb2.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N

        Hb2.setText("Herb");

        Hb2.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                Hb2ActionPerformed(evt);

            }

        });

```

```

        buttonGroup2.add(Pk2);

        Pk2.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N

        Pk2.setText("Pokemon");

        Pk2.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                Pk2ActionPerformed(evt);

            }

        });

        buttonGroup3.add(Hb3);

        Hb3.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N

        Hb3.setText("Herb");

        Hb3.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                Hb3ActionPerformed(evt);

            }

        });

        buttonGroup3.add(Pk3);

        Pk3.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N

        Pk3.setText("Pokemon");

        Pk3.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                Pk3ActionPerformed(evt);

```

```

        }
    });

    buttonGroup4.add(Hb4);
    Hb4.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N
    Hb4.setText("Pokemon");
    Hb4.addActionListener(new
java.awt.event.ActionListener() {
        public void
actionPerformed(java.awt.event.ActionEvent evt) {
            Hb4ActionPerformed(evt);
        }
    });

    buttonGroup6.add(Pk6);
    Pk6.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N
    Pk6.setText("Pokemon");
    Pk6.addActionListener(new
java.awt.event.ActionListener() {
        public void
actionPerformed(java.awt.event.ActionEvent evt) {
            Pk6ActionPerformed(evt);
        }
    });

    buttonGroup5.add(Pk5);
    Pk5.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N
    Pk5.setText("Pokemon");
    Pk5.addActionListener(new
java.awt.event.ActionListener() {

```

```

        public                                                    void
actionPerformed(java.awt.event.ActionEvent evt) {
    Pk5ActionPerformed(evt);
}
});

    buttonGroup5.add(Hb5);
    Hb5.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N
    Hb5.setText("Herb");
    Hb5.addActionListener(new
java.awt.event.ActionListener() {
        public                                                    void
actionPerformed(java.awt.event.ActionEvent evt) {
            Hb5ActionPerformed(evt);
        }
    });

    buttonGroup6.add(Hb6);
    Hb6.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N
    Hb6.setText("Herb");
    Hb6.addActionListener(new
java.awt.event.ActionListener() {
        public                                                    void
actionPerformed(java.awt.event.ActionEvent evt) {
            Hb6ActionPerformed(evt);
        }
    });

    buttonGroup4.add(Pk4);
    Pk4.setFont(new java.awt.Font("Segoe UI", 0, 14)); //
NOI18N
    Pk4.setText("Herb");

```

```
        Pk4.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                Pk4ActionPerformed(evt);

            }

        });

        jButton2.setText("Submit");

        jButton2.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton2ActionPerformed(evt);

            }

        });

        jButton3.setText("Submit");

        jButton3.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton3ActionPerformed(evt);

            }

        });

        jButton4.setText("Submit");

        jButton4.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton4ActionPerformed(evt);

            }

        });
```

```
        jButton5.setText("Submit");

        jButton5.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton5ActionPerformed(evt);

            }

        });

        jButton6.setText("Submit");

        jButton6.addActionListener(new
java.awt.event.ActionListener() {

            public                                void
actionPerformed(java.awt.event.ActionEvent evt) {

                jButton6ActionPerformed(evt);

            }

        });

        jLabel16.setFont(new java.awt.Font("Segoe UI", 0, 18));
// NOI18N
        jLabel16.setText("2. Orthosiphon");

        jLabel17.setFont(new java.awt.Font("Segoe UI", 0, 18));
// NOI18N
        jLabel17.setText("3. Zingiber ");

        jLabel18.setFont(new java.awt.Font("Segoe UI", 0, 18));
// NOI18N
        jLabel18.setText("4. Cloyster");

        jLabel19.setFont(new java.awt.Font("Segoe UI", 0, 18));
// NOI18N
        jLabel19.setText("6. Somnifera ");
```

```
        jLabel20.setFont(new java.awt.Font("Segoe UI", 0, 18));  
// NOI18N  
        jLabel20.setText("5. Dhelmise");  
  
        Cloyster.setBackground(new java.awt.Color(205, 232,  
178));  
        Cloyster.setOpaque(true);  
  
        Chandelure2.setBackground(new java.awt.Color(205, 232,  
178));  
        Chandelure2.setOpaque(true);  
  
        Zingiber.setBackground(new java.awt.Color(205, 232,  
178));  
        Zingiber.setOpaque(true);  
  
        Dhelmise.setBackground(new java.awt.Color(205, 232,  
178));  
        Dhelmise.setOpaque(true);  
  
        Somnifera.setBackground(new java.awt.Color(205, 232,  
178));  
        Somnifera.setOpaque(true);  
  
        Chandelure5.setBackground(new java.awt.Color(205, 232,  
178));  
        Chandelure5.setOpaque(true);  
  
        Chandelurelbl.setText(" ");  
  
        Zingiberlbl.setText(" ");
```

```

Ortholbl.setText(" ");

Somniferalbl.setText(" ");

Chelmiselbl.setText(" ");

Cloysterlbl.setText(" ");

    javax.swing.GroupLayout    cloylblLayout    =    new
javax.swing.GroupLayout(cloylbl);

    cloylbl.setLayout(cloylblLayout);

    cloylblLayout.setHorizontalGroup(

cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

.addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(cloylblLayout.createSequentialGroup())

                .addGap(385, 385, 385)

                .addComponent(jLabel14,

javax.swing.GroupLayout.PREFERRED_SIZE,                533,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addGroup(cloylblLayout.createSequentialGroup())

                .addGap(65, 65, 65)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(cloylblLayout.createSequentialGroup())

```

```

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

                                .addComponent(Pk1,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Hb1,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Hb2,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGroup(cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

                                .addComponent(Pk2,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addComponent(jLabel17,
javax.swing.GroupLayout.PREFERRED_SIZE,          124,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addComponent(jLabel16,
javax.swing.GroupLayout.PREFERRED_SIZE,          124,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addComponent(jLabel15,
javax.swing.GroupLayout.PREFERRED_SIZE,          124,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addGap(156, 156, 156)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addComponent(jButton1)

.addComponent(jButton3)

```

```

.addComponent(jButton2)))

                                .addGap(42, 42, 42)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

                                .addComponent(Zingiber,
javax.swing.GroupLayout.PREFERRED_SIZE,          106,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Chandelure2,
javax.swing.GroupLayout.PREFERRED_SIZE,          106,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Chandelure5,
javax.swing.GroupLayout.PREFERRED_SIZE,          106,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addComponent(Chandelurelbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          95,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Zingiberlbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          95,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Ortholbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          95,
javax.swing.GroupLayout.PREFERRED_SIZE)))

                                .addComponent(Hb3,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                .addComponent(Pk3,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, 262, Short.MAX_VALUE)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING, false)

```

```

        .addComponent (Hb4,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent (Pk6,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGroup (javax.swing.GroupLayout.Alignment.TRAILING,
cloylblLayout.createSequentialGroup ())

.addGroup (cloylblLayout.createParallelGroup (javax.swing.GroupL
ayout.Alignment.TRAILING)

.addGroup (javax.swing.GroupLayout.Alignment.LEADING,
cloylblLayout.createSequentialGroup ())

        .addComponent (Pk4,
javax.swing.GroupLayout.PREFERRED_SIZE,          98,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addGap (0,          0,
Short.MAX_VALUE))

.addGroup (cloylblLayout.createSequentialGroup ())

        .addGap (0,          2,
Short.MAX_VALUE)

.addGroup (cloylblLayout.createParallelGroup (javax.swing.GroupL
ayout.Alignment.TRAILING)

.addGroup (cloylblLayout.createSequentialGroup ())

.addComponent (jLabel18,
javax.swing.GroupLayout.PREFERRED_SIZE,          124,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGap (32, 32, 32)

.addComponent (jButton4))

.addGroup (cloylblLayout.createSequentialGroup ())

```

```
.addComponent(jLabel20,
javax.swing.GroupLayout.PREFERRED_SIZE,          124,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addGap(38, 38, 38)

.addComponent(jButton5)))

.addGroup(cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.TRAILING)

.addGroup(cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.TRAILING)

.addComponent(Pk5, javax.swing.GroupLayout.PREFERRED_SIZE, 98,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addComponent(Hb5, javax.swing.GroupLayout.PREFERRED_SIZE, 98,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED))

.addGroup(javax.swing.GroupLayout.Alignment.LEADING,
cloylblLayout.createSequentialGroup())

.addComponent(Hb6, javax.swing.GroupLayout.PREFERRED_SIZE, 98,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)))

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING, false)
```

```

.addComponent(jPanel6,    javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

.addComponent(jPanel9,    javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE))

                                                .addGap(110,    110,
110)))

                                                .addGap(9, 9, 9)))

.addGroup(cloylblLayout.createSequentialGroup())

                                                .addComponent(jLabel19,
javax.swing.GroupLayout.PREFERRED_SIZE,          124,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                                .addGap(54, 54, 54)

                                                .addComponent(jButton6))))))

.addGap(65, 65, 65)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

        .addComponent(Chelmiselbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          95,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(Dhelmise,
javax.swing.GroupLayout.PREFERRED_SIZE,          106,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(Cloyster,
javax.swing.GroupLayout.PREFERRED_SIZE,          106,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(Somnifera,
javax.swing.GroupLayout.PREFERRED_SIZE,          106,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(Somniferalbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          95,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addComponent(Cloysterlbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          95,
javax.swing.GroupLayout.PREFERRED_SIZE))

```

```

        .addGap(40, 40, 40))

    );

    cloylblLayout.setVerticalGroup(

cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Align
ment.LEADING)

        .addGroup(cloylblLayout.createSequentialGroup())

            .addGap(19, 19, 19)

                .addComponent(jLabel14,
javax.swing.GroupLayout.PREFERRED_SIZE,          35,
javax.swing.GroupLayout.PREFERRED_SIZE)

                    .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

                        .addComponent(Chandelurelbl)

                            .addGap(10, 10, 10)

                                .addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

                                    .addGroup(cloylblLayout.createSequentialGroup())

                                        .addGap(10, 10, 10)

                                            .addComponent(Cloyster,
javax.swing.GroupLayout.PREFERRED_SIZE,          113,
javax.swing.GroupLayout.PREFERRED_SIZE)

                                                .addGap(47, 47, 47)

                                                    .addComponent(Chelmiselbl)

                                                        .addGroup(cloylblLayout.createSequentialGroup())

                                                            .addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

                                                                .addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)

                                                                    .addComponent(jLabel18)

```

```

        .addComponent(jButton4,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE))

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.TRAILING)

        .addComponent(Hb1)

        .addComponent(Chandelure2,
javax.swing.GroupLayout.PREFERRED_SIZE,          113,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addGroup(cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)

        .addComponent(jLabel15)

        .addComponent(jButton1))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addComponent(Pk1,
javax.swing.GroupLayout.PREFERRED_SIZE,          25,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGap(45, 45, 45)

        .addComponent(Ortholbl)

        .addGap(12, 12, 12)))

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.TRAILING)

        .addComponent(Chandelure5,
javax.swing.GroupLayout.PREFERRED_SIZE,          113,
javax.swing.GroupLayout.PREFERRED_SIZE)

```

```

        .addComponent(Dhelmise,
javax.swing.GroupLayout.PREFERRED_SIZE,          113,
javax.swing.GroupLayout.PREFERRED_SIZE))

        .addGap(54, 54, 54)

        .addComponent(Somniferalbl)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addComponent(Somnifera,
javax.swing.GroupLayout.PREFERRED_SIZE,          113,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addContainerGap())

.addGroup(cloylblLayout.createSequentialGroup())

        .addGap(9, 9, 9)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.TRAILING)

.addGroup(cloylblLayout.createSequentialGroup())

        .addComponent(Zingiberlbl,
javax.swing.GroupLayout.PREFERRED_SIZE,          22,
javax.swing.GroupLayout.PREFERRED_SIZE)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addComponent(Zingiber,
javax.swing.GroupLayout.PREFERRED_SIZE,          113,
javax.swing.GroupLayout.PREFERRED_SIZE)

        .addGap(43, 43, 43))

.addGroup(cloylblLayout.createSequentialGroup())

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.BASELINE)

        .addComponent(jLabel20)

```

```

        .addComponent(jButton5,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupL
ayout.Alignment.LEADING)

.addGroup(cloylblLayout.createSequentialGroup())

        .addComponent(Hb5)
        .addGap(18, 18, 18)
        .addComponent(Pk5))

        .addComponent(jPanel6,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
LATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)

        .addComponent(jPanel9,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))))))

        .addGroup(cloylblLayout.createSequentialGroup())

            .addGap(75, 75, 75)

            .addComponent(Cloysterlbl)

            .addGap(49, 49, 49)

            .addComponent(Pk4)

.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UN
RELATED)

        .addComponent(Hb4,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
25,

```

```
.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING)
```

```
.addGroup(cloylblLayout.createSequentialGroup())
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
```

```
.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.BASELINE)
```

```
    .addComponent(jLabel16)
```

```
    .addComponent(jButton3))
```

```
    .addGap(24, 24, 24)
```

```
    .addComponent(pk2)
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)
```

```
    .addComponent(hb2)
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED, javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
```

```
.addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.Alignment.BASELINE)
```

```
    .addComponent(jLabel17)
```

```
    .addComponent(jButton2,
javax.swing.GroupLayout.PREFERRED_SIZE, 23,
javax.swing.GroupLayout.PREFERRED_SIZE))
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATED)
```

```
    .addComponent(pk3)
```

```
    .addGap(18, 18, 18)
```

```
    .addComponent(hb3))
```

```
.addGroup(cloylblLayout.createSequentialGroup())
```

```

        .addGap(262, 262, 262)

        .addGroup(cloylblLayout.createParallelGroup(javax.swing.GroupLayout.
            Alignment.BASELINE)

            .addComponent(jLabel19)

            .addComponent(jButton6))

        .addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RE
            LATED)

            .addComponent(Pk6)

            .addGap(18, 18, 18)

            .addComponent(Hb6))

        .addGap(68, 68, 68))

    );

    mainwindowtab.addTab("GAME", cloylbl);

    javax.swing.GroupLayout layout = new
    javax.swing.GroupLayout(getContentPane());

    getContentPane().setLayout(layout);

    layout.setHorizontalGroup(

    layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
        EADING)

        .addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
            layout.createSequentialGroup())

        .addContainerGap(javax.swing.GroupLayout.DEFAULT_SIZE,
            Short.MAX_VALUE)

            .addComponent(mainwindowtab,

            javax.swing.GroupLayout.PREFERRED_SIZE, 1292,
            javax.swing.GroupLayout.PREFERRED_SIZE)

            .addContainerGap())

    );

```

```

        layout.setVerticalGroup(

layout.createParallelGroup(javax.swing.GroupLayout.Alignment.L
EADING)

        .addComponent(mainwindowtab,
javax.swing.GroupLayout.PREFERRED_SIZE,           666,
javax.swing.GroupLayout.PREFERRED_SIZE)

        );

        pack();
} // </editor-fold> // GEN-END: initComponents

String ImgPath=null;
int imageindex=0;
public ImageIcon ResizeImg(String imgpath, byte[] plantimg)
{
    ImageIcon image=null;

    if (imgpath !=null)
    {
        image = new ImageIcon(imgpath);
    }
    else {
        image = new ImageIcon(plantimg);
    }
    Image img = image.getImage();
    Image img2 =
img.getScaledInstance(jLabel_plantimg.getWidth(),jLabel_planti
mg.getHeight(), JLabel_plantimg.getWidth());
    ImageIcon imagenow= new ImageIcon(img2);

```

```

        return image;
    }

    public ArrayList<Plant> getPlantList(String plantname) {
        ArrayList<Plant> plantlist = new ArrayList<>();
        //connect = database.getConnection();
        PreparedStatement input = null;
        ResultSet rs = null;

        try {
            input =
ClassAll.database.getConnection().prepareStatement("SELECT
`ID`,`Name`,`Scientific_name`,`Description`,`Plant_Usage`,
`Plant_type`,`Plant_Image`,`Price` FROM `plants`");

            rs = input.executeQuery();

            while (rs.next()) {
                Plant plant = new Plant(
                    rs.getInt("id"),
                    rs.getString("Name"),
                    rs.getString("Scientific_name"),
                    rs.getString("Description"),
                    rs.getString("Plant_Usage"),
                    rs.getString("plant_type"),
                    rs.getBytes("plant_image"),
                    rs.getDouble("Price")
                );
                plantlist.add(plant);
            }
        } catch (SQLException ex) {

```

```
Logger.getLogger(MAIN_WINDOW.class.getName()).log(Level.SEVERE  
, null, ex);
```

```
    } finally {  
        // Close resources in finally block  
        if (rs != null) {  
            try {  
                rs.close();  
            } catch (SQLException e) {
```

```
Logger.getLogger(MAIN_WINDOW.class.getName()).log(Level.SEVERE  
, null, e);
```

```
        }  
    }  
    if (input != null) {  
        try {  
            input.close();  
        } catch (SQLException e) {
```

```
Logger.getLogger(MAIN_WINDOW.class.getName()).log(Level.SEVERE  
, null, e);
```

```
        }  
    }  
    }  
    return plantlist;  
}
```

```
    public void Showplant(int index) {  
        ArrayList<Plant> showplant = getPlantList("");
```

```
        if (index >= 0 && index < showplant.size()) {  
            Plant plant = showplant.get(index);
```

```

        jTextField_commonname.setText(plant.getName());
        jTextField_scientificname.setText(plant.getSN());
        desc_area.setText(plant.getDesc());
        desc_area.setLineWrap(true); // Enable line wrap
        desc_area.setWrapStyleWord(true); // Enable word wrap
        desc_area.setEditable(false);
        plantusage_area.setText(plant.getPS());
        plantusage_area.setLineWrap(true); // Enable line wrap
        plantusage_area.setWrapStyleWord(true); // Enable word
wrap
        plantusage_area.setEditable(false);
        jLabel_plantimg.setIcon(ResizeImg(null,
plant.getImage()));
        jTextField_commonname.setEditable(false);
        jTextField_scientificname.setEditable(false);
    } else {
        // Handle out of bounds index
        System.out.println("Index out of bounds");
    }
}

public void Showplanttobuy (int index) {
    ArrayList<Plant> showplant = getPlantList("");
    if (index >= 0 && index < showplant.size()) {
        Plant plant = showplant.get(index);
        jTextField_commonnamebuypage.setText(plant.getName());

jTextField_scientificnamebuypage.setText(plant.getSN());

jLabel_priceLabel.setText(Double.toString(plant.getPrice()));
        jLabel_plantimg1buypage.setIcon(ResizeImg(null,
plant.getImage()));
    }
}

```

```

        jTextField_commonname.setEditable(false);
        jTextField_scientificname.setEditable(false);
    } else {
        // Handle out of bounds index
        System.out.println("Index out of bounds");
    }
}

public void selectedtable(String plant)
{
    DefaultTableModel table = (DefaultTableModel)
jTable2_Plant.getModel();
    table.setRowCount(0);
    ClassAll.Plant plantname= new ClassAll.Plant();
    ArrayList<Plant> plant_list = getPlantList(plant);
    for (int i = 0; i < plant_list.size(); i++) {
        Object[] row = new Object[4];
        row[0] = plant_list.get(i).getId();
        row[1] = plant_list.get(i).getName();
        row[2] = plant_list.get(i).getSN();
        row[3] =plant_list.get(i).getPT();
        // Add the rest of the columns if needed
        table.addRow(row);
    }
}

public void selectedtable2()
{

```

```

        ArrayList<Plant> plant_list = getPlantList("");

        DefaultTableModel table = (DefaultTableModel)
jTablebuypage.getModel();

        for (Plant plant : plant_list) {
            Object[] row = new Object[4];
            row[0] = plant.getId();
            row[1] = plant.getName();
            row[2] = plant.getSN();
            row[3] = plant.getPT();
            // Add the rest of the columns if needed
            table.addRow(row);
        }

    }

    private void
jTextField_commonnameActionPerformed(java.awt.event.ActionEvent
t evt) { //GEN-FIRST:event_jTextField_commonnameActionPerformed
        // TODO add your handling code here:
    } //GEN-LAST:event_jTextField_commonnameActionPerformed

    private void
jButton_nextplantActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_jButton_nextplantActionPerformed
        // TODO add your handling code here:
        imageindex++;
        if (imageindex >= getPlantList("").size())
        {
            imageindex = getPlantList("").size() - 1;
        }
    }

```

```

    }

    Showplant(imageindex);

} //GEN-LAST:event_jButton_nextplantActionPerformed

private void
jButton_previousplantActionPerformed(java.awt.event.ActionEvent
    evt) { //GEN-FIRST:event_jButton_previousplantActionPerformed

    // TODO add your handling code here:

    imageindex--;

    if (imageindex < 0)
    {
        imageindex=0;
    }

    Showplant(imageindex);

} //GEN-LAST:event_jButton_previousplantActionPerformed

private void
jTextField_commonnameInputMethodTextChanged(java.awt.event.Input
    MethodEvent evt) { //GEN-
    FIRST:event_jTextField_commonnameInputMethodTextChanged

    // TODO add your handling code here:

} //GEN-
    LAST:event_jTextField_commonnameInputMethodTextChanged

private void
showbuttonActionPerformed(java.awt.event.ActionEvent    evt)
{ //GEN-FIRST:event_showbuttonActionPerformed

    // TODO add your handling code here:

    imageindex=0;

    Showplant(imageindex);

} //GEN-LAST:event_showbuttonActionPerformed

```

```

        private                                                    void
jTable2_PlantMouseClicked(java.awt.event.MouseEvent            evt)
{ //GEN-FIRST:event_jTable2_PlantMouseClicked

    // TODO add your handling code here:

    int index = jTable2_Plant.getSelectedRow();

    Showplant(index);

} //GEN-LAST:event_jTable2_PlantMouseClicked


        private                                                    void
jButton_previousplant1ActionPerformed(java.awt.event.ActionEve
nt                                                    evt)          { //GEN-
FIRST:event_jButton_previousplant1ActionPerformed

    // TODO add your handling code here:

    imageindex--;

    if (imageindex < 0)

    {

        imageindex=0;

    }

    Showplanttobuy(imageindex);

} //GEN-LAST:event_jButton_previousplant1ActionPerformed


        private                                                    void
jButton_nextplant2ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_jButton_nextplant2ActionPerformed

    // TODO add your handling code here:

    imageindex++;

    if (imageindex >=getPlantList("").size())

    {

        imageindex =getPlantList("").size()-1;

    }

    Showplanttobuy(imageindex);

} //GEN-LAST:event_jButton_nextplant2ActionPerformed

```

```

        private                                                    void
jTextField_commonnamebuypageInputMethodTextChanged(java.awt.ev
ent.InputMethodEvent          evt)                                { //GEN-
FIRST:event_jTextField_commonnamebuypageInputMethodTextChanged

        // TODO add your handling code here:

    } //GEN-
LAST:event_jTextField_commonnamebuypageInputMethodTextChanged


        private                                                    void
jTextField_commonnamebuypageActionPerformed(java.awt.event.Act
ionEvent                      evt)                                { //GEN-
FIRST:event_jTextField_commonnamebuypageActionPerformed

        // TODO add your handling code here:

    } //GEN-
LAST:event_jTextField_commonnamebuypageActionPerformed


        private                                                    void
jTablebuypageMouseClicked(java.awt.event.MouseEvent            evt)
{ //GEN-FIRST:event_jTablebuypageMouseClicked

        // TODO add your handling code here:

        int index = jTablebuypage.getSelectedRow();

        Showplanttobuy(index);

    } //GEN-LAST:event_jTablebuypageMouseClicked


        private                                                    void
jButton1UserlistActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_jButton1UserlistActionPerformed

        // TODO add your handling code here:

        Userlist userlist = new Userlist();

        userlist.setVisible(true);

        userlist.pack();

        userlist.setDefaultCloseOperation(JFrame.DISPOSE_ON_CLOSE);

    } //GEN-LAST:event_jButton1UserlistActionPerformed

```

```
private void Pk4ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Pk4ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_Pk4ActionPerformed


private void Hb6ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Hb6ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_Hb6ActionPerformed


private void Hb5ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Hb5ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_Hb5ActionPerformed


private void Pk5ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Pk5ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_Pk5ActionPerformed


private void Pk6ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Pk6ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_Pk6ActionPerformed


private void Hb4ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Hb4ActionPerformed

    // TODO add your handling code here:

} //GEN-LAST:event_Hb4ActionPerformed


private void Pk3ActionPerformed(java.awt.event.ActionEvent
evt) { //GEN-FIRST:event_Pk3ActionPerformed

    // TODO add your handling code here:
```

```

    }//GEN-LAST:event_Pk3ActionPerformed

    private void Hb3ActionPerformed(java.awt.event.ActionEvent
    evt) { //GEN-FIRST:event_Hb3ActionPerformed

        // TODO add your handling code here:

    }//GEN-LAST:event_Hb3ActionPerformed

    private void Pk2ActionPerformed(java.awt.event.ActionEvent
    evt) { //GEN-FIRST:event_Pk2ActionPerformed

        // TODO add your handling code here:

    }//GEN-LAST:event_Pk2ActionPerformed

    private void Hb2ActionPerformed(java.awt.event.ActionEvent
    evt) { //GEN-FIRST:event_Hb2ActionPerformed

        // TODO add your handling code here:

    }//GEN-LAST:event_Hb2ActionPerformed

    private void Pk1ActionPerformed(java.awt.event.ActionEvent
    evt) { //GEN-FIRST:event_Pk1ActionPerformed

        // TODO add your handling code here:

    }//GEN-LAST:event_Pk1ActionPerformed

    private void jButton1ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
    FIRST:event_jButton1ActionPerformed

        // TODO add your handling code here:

        ImageIcon Chandelurepic =new ImageIcon
        ("src\\img\\Chandelure.png");

        if (Pk1.isSelected())
        {
            Chandelurelbl.setText("Correct!!");
        }

        else

```

```

        {
            Chandelure1b1.setText("Wrong!!");
        }

        Chandelure2.setIcon(Chandelurepic);
    } //GEN-LAST:event_jButton1ActionPerformed

private void
jButton3ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
FIRST:event_jButton3ActionPerformed
    // TODO add your handling code here:
    ImageIcon misaikucing =new ImageIcon ("src\\img\\Misai
Kucing.jpg");
    if (Hb2.isSelected())
    {
        Ortholb1.setText("Correct!!");
    }
    else
    {
        Ortholb1.setText("Wrong!!");
    }

    Chandelure5.setIcon(misaikucing);
} //GEN-LAST:event_jButton3ActionPerformed

private void
jButton2ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
FIRST:event_jButton2ActionPerformed
    // TODO add your handling code here:
    ImageIcon lempoyang =new ImageIcon
("src\\img\\lempoyang.jpg");
    if (Hb3.isSelected())
    {

```

```

        Zingiberlbl.setText("Correct!!");
    }
    else
    {
        Zingiberlbl.setText("Wrong!!");
    }

    Zingiber.setIcon(lemboyang);
} //GEN-LAST:event_jButton2ActionPerformed

private void
jButton4ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-FIRST:event_jButton4ActionPerformed
    // TODO add your handling code here:

    ImageIcon cloyster =new ImageIcon
("src\\img\\Cloyster.png");

    if (Hb4.isSelected())
    {
        Cloysterlbl.setText("Correct!!");
    }
    else
    {
        Cloysterlbl.setText("Wrong!!");
    }

    Cloyster.setIcon(cloyster);
} //GEN-LAST:event_jButton4ActionPerformed

private void
jButton5ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-FIRST:event_jButton5ActionPerformed
    // TODO add your handling code here:

```

```

        ImageIcon dhelmise = new ImageIcon
("src\\img\\Dhelmise.png");
        if (Pk5.isSelected())
        {
            Chelmiselbl.setText("Correct!!");
        }
        else
        {
            Chelmiselbl.setText("Wrong!!");
        }
        Dhelmise.setIcon(dhelmise);
    } //GEN-LAST:event_jButton5ActionPerformed

private void
jButton6ActionPerformed(java.awt.event.ActionEvent evt) { //GEN-
FIRST:event_jButton6ActionPerformed
    // TODO add your handling code here:
        ImageIcon somni = new ImageIcon
("src\\img\\Ashwaganda.jpg");
        if (Hb6.isSelected())
        {
            Somniferalbl.setText("Correct!!");
        }
        else
        {
            Somniferalbl.setText("Wrong!!");
        }
        Somnifera.setIcon(somni);
    } //GEN-LAST:event_jButton6ActionPerformed

```

```

/**
 * @param args the command line arguments
 */
public static void main(String args[]) {
    /* Set the Nimbus look and feel */
    //<editor-fold defaultstate="collapsed" desc=" Look and
    feel setting code (optional) ">

    /* If Nimbus (introduced in Java SE 6) is not available,
    stay with the default look and feel.

        *           For           details           see
    http://download.oracle.com/javase/tutorial/uiswing/lookandfeel
    /plaf.html

        */

    try {
        for (javax.swing.UIManager.LookAndFeelInfo info :
        javax.swing.UIManager.getInstalledLookAndFeels()) {
            if ("Nimbus".equals(info.getName())) {

                javax.swing.UIManager.setLookAndFeel(info.getClassName());

                break;

            }
        }
    } catch (ClassNotFoundException ex) {

        java.util.logging.Logger.getLogger(MAIN_WINDOW.class.getName()
        ).log(java.util.logging.Level.SEVERE, null, ex);

        } catch (InstantiationException ex) {

        java.util.logging.Logger.getLogger(MAIN_WINDOW.class.getName()
        ).log(java.util.logging.Level.SEVERE, null, ex);

        } catch (IllegalAccessException ex) {

        java.util.logging.Logger.getLogger(MAIN_WINDOW.class.getName()
        ).log(java.util.logging.Level.SEVERE, null, ex);

```

```

        } catch (javax.swing.UnsupportedLookAndFeelException
ex) {

java.util.logging.Logger.getLogger(MAIN_WINDOW.class.getName()
).log(java.util.logging.Level.SEVERE, null, ex);

    }

//</editor-fold>

/* Create and display the form */
java.awt.EventQueue.invokeLater(new Runnable() {
    public void run() {
        new MAIN_WINDOW().setVisible(true);
    }
});
}

// Variables declaration - do not modify//GEN-BEGIN:variables
private javax.swing.JPanel About;
private javax.swing.JLabel Chandelure2;
private javax.swing.JLabel Chandelure5;
private javax.swing.JLabel Chandelurelbl;
private javax.swing.JLabel Chelmiselbl;
private javax.swing.JLabel Cloyster;
private javax.swing.JLabel Cloysterlbl;
private javax.swing.JLabel Dhelmise;
private javax.swing.JRadioButton Hb1;
private javax.swing.JRadioButton Hb2;
private javax.swing.JRadioButton Hb3;
private javax.swing.JRadioButton Hb4;
private javax.swing.JRadioButton Hb5;
private javax.swing.JRadioButton Hb6;

```

```
private javax.swing.JLabel Ortholbl;  
private javax.swing.JRadioButton Pk1;  
private javax.swing.JRadioButton Pk2;  
private javax.swing.JRadioButton Pk3;  
private javax.swing.JRadioButton Pk4;  
private javax.swing.JRadioButton Pk5;  
private javax.swing.JRadioButton Pk6;  
private javax.swing.JLabel Somnifera;  
private javax.swing.JLabel Somniferalbl;  
private javax.swing.JLabel Zingiber;  
private javax.swing.JLabel Zingiberlbl;  
private javax.swing.JLabel aboutlbl;  
private javax.swing.ButtonGroup buttonGroup1;  
private javax.swing.ButtonGroup buttonGroup2;  
private javax.swing.ButtonGroup buttonGroup3;  
private javax.swing.ButtonGroup buttonGroup4;  
private javax.swing.ButtonGroup buttonGroup5;  
private javax.swing.ButtonGroup buttonGroup6;  
private javax.swing.ButtonGroup buttonGroup7;  
private javax.swing.JLabel buylbl;  
private javax.swing.JPanel cloylbl;  
private javax.swing.JTextArea desc_area;  
private javax.swing.JButton jButton1;  
protected javax.swing.JButton jButton1Userlist;  
private javax.swing.JButton jButton2;  
private javax.swing.JButton jButton3;  
private javax.swing.JButton jButton4;  
private javax.swing.JButton jButton5;  
private javax.swing.JButton jButton6;  
private javax.swing.JButton jButton_nextplant;  
private javax.swing.JButton jButton_nextplant2;
```

```
private javax.swing.JButton jButton_previousplant;  
private javax.swing.JButton jButton_previousplant1;  
private javax.swing.JLabel jLabel1;  
private javax.swing.JLabel jLabel10;  
private javax.swing.JLabel jLabel11;  
private javax.swing.JLabel jLabel12;  
public javax.swing.JLabel jLabel13;  
private javax.swing.JLabel jLabel14;  
private javax.swing.JLabel jLabel15;  
private javax.swing.JLabel jLabel16;  
private javax.swing.JLabel jLabel17;  
private javax.swing.JLabel jLabel18;  
private javax.swing.JLabel jLabel19;  
private javax.swing.JLabel jLabel2;  
private javax.swing.JLabel jLabel20;  
private javax.swing.JLabel jLabel3;  
private javax.swing.JLabel jLabel4;  
private javax.swing.JLabel jLabel5;  
private javax.swing.JLabel jLabel6;  
private javax.swing.JLabel jLabel7;  
private javax.swing.JLabel jLabel8;  
private javax.swing.JLabel jLabel9;  
private javax.swing.JLabel jLabel_plantimg;  
private javax.swing.JLabel jLabel_plantimg1buypage;  
private javax.swing.JLabel jLabel_priceLabel;  
private javax.swing.JMenu jMenu1;  
private javax.swing.JMenuItem jMenuItem1;  
private javax.swing.JPanel jPanel1_browsepanel;  
private javax.swing.JPanel jPanel3;  
private javax.swing.JPanel jPanel4;  
private javax.swing.JPanel jPanel6;
```

```
private javax.swing.JPanel jPanel9;
private javax.swing.JPopupMenu jPopupMenu1;
private javax.swing.JScrollPane jScrollPane1;
private javax.swing.JScrollPane jScrollPane2;
private javax.swing.JScrollPane jScrollPane5;
private javax.swing.JScrollPane jScrollPane6;
private javax.swing.JTable jTable2_Plant;
private javax.swing.JTable jTablebuypage;
javax.swing.JTextField jTextField_commonname;
javax.swing.JTextField jTextField_commonnamebuypage;
private javax.swing.JTextField jTextField_scientificname;
private                                javax.swing.JTextField
jTextField_scientificnamebuypage;
private javax.swing.JTabbedPane mainwindowtab;
private javax.swing.JTextArea plantusage_area;
private javax.swing.JButton showbutton;
// End of variables declaration//GEN-END:variables
}
```