

# **A APPENDIX: TEST VECTOR GENERATION PIPELINE**

This document is part of the CDR deliverables produced by the SKA Time Domain Team (TDT) for the Central Signal Processor (CSP) consortia. Members of the team belong to the University of Manchester, Oxford and MPI Bonn.

## **A1 Overview**

This appendix describes a software pipeline that generates gold standard test vectors. When used in conjunction with the PSS MatLab Model [A-A-RD1], PSS Test Specification [A-A-RD2], and prototype PSS cluster known as ProtoNIP, these allow realizations (i.e. prototype implementations) of the detailed CSP.PSS design [A-A-RD3], such as *Cheetah* [A-A-RD3] (revision 4), to be verified against requirements. The scope of this appendix is restricted to describing i) the software pipeline used to generate test vectors, and ii) the hardware used to generate them.

## **1.2 Pipeline Description**

To verify that CSP.PSS prototype software correctly meets functional and performance requirements, we require a gold standard set of pulsar examples to test with. This document describes a software system [A-A-RD12] designed to generate such examples in a reproducible way. We refer to the gold standard examples as ‘test vectors’ (TVs). The system used to generate them is referred to as the ‘test vector generation pipeline’ (TVGP).

The TVGP can create example detections of over 1,000 unique pulsar sources, recorded in the EPN database [A-A-RD4,A-A-RD5]. Through attuning TV generation parameters, many more valid permutations of these detections can be created. The pipeline is therefore able to generate an almost infinite number of TVs in practice.

The TVGP is also able to generate ‘simulated’ pulsar examples. These are realistic pulsar examples (i.e. observationally valid) which do not correspond to any known source. Simulated examples fill the pulsar search parameter space not covered by EPN database entries. Using a combination of known and simulated sources, the pipeline is able to generate a variety of examples describing a large proportion of the Galactic pulsar population. This allows the signal recovery capabilities of prototype CSP.PSS modules to be probed on common, rare, and unusual sources.

The pipeline has been packaged for distribution inside a Docker image [A-A-RD10,A-A-RD11]. This is an immutable snapshot of a virtualized software container. It contains all the prerequisites required to execute the TVGP, and the pipeline itself. It is highly recommended that those wishing to use the pipeline obtain the Docker image [A-A-RD11]. Use of the image guarantees that all TVs are generated by a working and identical software environment. Furthermore, by using the ‘dockerised’ pipeline distribution, geographically disjoint teams can generate identical test vectors for cross-group verification. This is the case irrespective of the underlying computing resources used to execute the Docker container. Reproducible test vectors are crucial to ensuring consistency between teams developing and/or testing

CSP.PSS modules. Note that the pipeline, and associated software, are available to download [A-A-RD12].


## 1.3 Sub-element Technology

The pipeline consists of a combination of python scripts, pre-existing pulsar search tools, and data collected from the ATNF and EPN pulsar databases. The purpose of each of these pipeline sub-elements is summarized below:

1. The Python scripts act as wrappers. These either i) read and manipulate data from ATNF / EPN data sources, or ii) automate the execution of existing pulsar tools to produce test vectors. Primary user interaction with the pipeline is achieved via the Python scripts. The scripts check the validity of user supplied parameters, and simplify pipeline interactions.
2. The pulsar tools perform three crucial tasks. They i) generate noise files which serve as the basis for each test vector, ii) generate pulsar signals which can be inserted into the noise files simulating a genuine telescope observation, and iii) insert the generated pulsar signals into the noise files, to create an observation file ready for CSP.PSS processing. Three separate tools are used to undertake these tasks.
  - a. `fast_fake` - generates a single filterbank file containing Gaussian distributed noise (see [A-A-RD6] which provides more detail on the filterbank file format). The `fast_fake` application [A-A-RD7] was created from a fork of the Sigproc software suite [A-A-RD6].
  - b. `Tempo2` - generates a polynomial file that describes the pulse arrival times for a pulsar (i.e. a timing model). `Tempo2` is a software suite used primarily for pulsar timing applications [A-A-RD8,A-A-RD9].
  - c. `inject_pulsar` - takes the model pulse arrival times computed by `Tempo2` for a specific pulsar, and injects the corresponding signal into a filterbank file. The injection process is applied to the noise filterbank file by the pipeline. This produces a new file containing a realistic pulsar signal. Note that the injection process implemented by `inject_pulsar`, assumes a pulse profile which doesn't change over time. It injects an integrated profile (see Figure 3-2-1), which represents the average pulse recorded over many pulsar rotations (often thousands of rotations). In reality the pulse profile varies greatly with each pulsar rotation, thus this injection method is unrealistic. However, for testing purposes this simplified model is sufficient. It produces realistic test vectors when combined with the noise filterbank file (the noise introduces variation). The `inject_pulsar` application was created from a fork of the Sigproc software suite [A-A-RD7].
3. The ATNF pulsar catalog [A-A-RD13]. This catalog describes all known pulsar sources. The catalog is used to generate parameter files, more generally known as 'Par' files. These describe the key characteristics of a pulsar, i.e. pulse period, pulse frequency, dispersion measure, and sky position. Par files are used by the `Tempo2` tool to create a polynomial timing model, which describes pulse arrival times for individual pulsars.
4. The EPN database [A-A-RD4,A-A-RD5] describes the integrated pulse profiles of over 1,000 known pulsars. Pulse profiles represent a pulsar detection averaged through both frequency and time. Pulse profiles are useful, as they describe the shape of a pulse, and characterize the principle pulse components. An example profile is shown in Figure 3-2-1. The TVGP uses these integrated profiles to create

realistic detections. Profile data is passed to existing pulsar software, and injected into a noise file. Since the EPN database describes the pulse profiles of many pulsars, we can in principle generate examples covering a significant portion of the known pulsar population.

**Figure A-3-1 Example of an integrated pulse profile. This describes pulse intensity as a function of phase.**

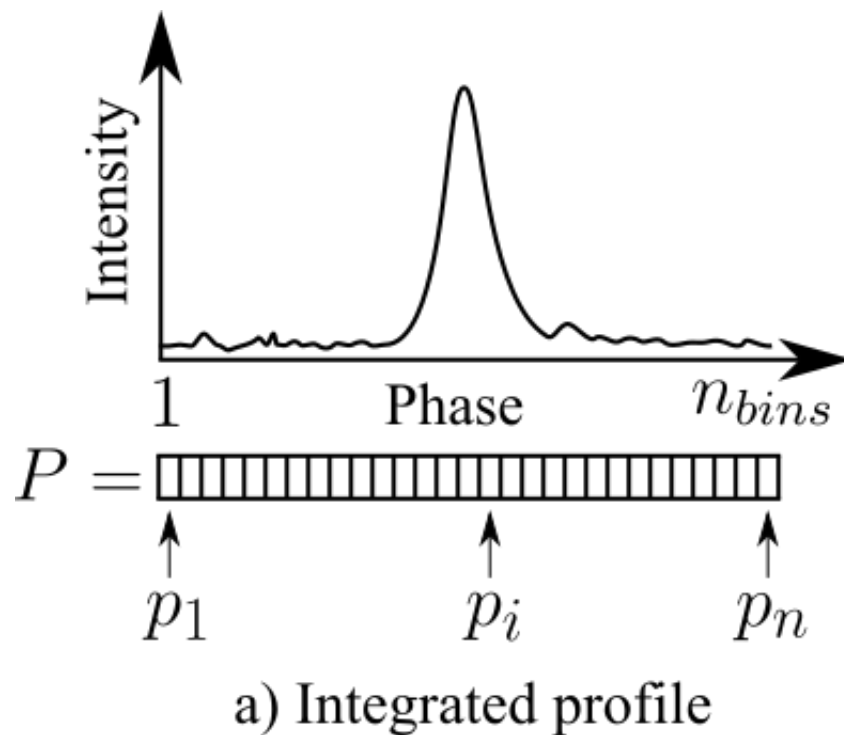

## 1.4 Test Vector Generation Procedure

The general test vector generation procedure is as follows:

1. Create a single filterbank file containing only Gaussian distributed white noise. We call this the *noise file*. This is created using the C software tool `fast_fake`, using the observational parameters we expect for a standard SKA pulsar search operation. The parameters can be varied according to a user's own requirements. However for CSP.PSS testing, the following parameter values are assumed:
  - a. Observation length  $T_{obs} = 600$  seconds.
  - b. Sampling interval  $T_{samp} = 64$  microseconds.
  - c. Frequency of channel one,  $f_{ch1} = 1350$  MHz
  - d. Channel bandwidth  $\Delta\nu = 78.12500$  KHz.
  - e. Overall bandwidth  $B = 320$  MHz
  - f. Number of channels,  $N_{chan} = 4096$ .
  - g. Output number of bits = 8.
  - h. Random seed for noise generation is 1.

The generated noise file serves as the basis for all test vectors with the same observational parameters (items a. through to h. above).

2. Before a pulsar signal can be injected into a noise file, some prerequisite files must first be chosen. These include:
  - a. A Par file (`.par` extension) that describes the characteristics of the pulsar whose signal is to be injected. The details are obtained from the ATNF pulsar catalog.
  - b. A Tempo2 predictor file (`.dat` extension). These can be generated by passing a valid Par file to Tempo2.
  - c. An ascii file that describes the shape of the pulse to be injected (`.asc` extension).

These files can be created manually by extracting data from the ATNF catalog (for the `.par` files), parsing the EPN database (for the `.asc` files), and by running Tempo2 with a `.par` file to create a `.dat` file. However these files can be found in the TVGP Docker image ready made. Both Par and Tempo2 predictor files have been generated for all pulsars in the ATNF catalog. Whilst `.asc` files have been created for all entries in the EPN database. Where possible, choose file combinations that correspond to the same pulsar. Where this is not possible (i.e. no EPN data available), either choose an appropriate substitute file, or create one manually (i.e. create a `.asc` file). **Note:** choosing files which do not correspond to the same pulsar, will create a new simulated pulsar test vector (as opposed to a known source example).

3. To inject a pulsar signal, the `inject_pulsar` tool is used. It requires i) a noise file, ii) a `.dat` file, and iii) a `.asc` file. When running `inject_pulsar` the random seed is **always** set to 1. This is done to ensure that test vectors are reproducible. All other injection parameters are assigned their default values. Once the `inject_pulsar` command has been executed, a new filterbank file is produced. This is the test vector ready for further analysis.

## 1.5 Architecture

The pipeline architecture is relatively simple. An overview is presented in Figure A-5-1. Here we see the pipeline hosted within a Docker container, running upon an arbitrary host OS. The container itself runs a minimal CentOS 7 environment. This environment includes a variety of software packages, required to run the pulsar tools that perform the test vector generation. User interaction with the pipeline is generally achieved via a collection of Python scripts. These interact with the pulsar tools and a variety of `.dat` and `.asc` files, to generate TVs. Note that the `.dat` and `.asc` files are used as inputs to the pulsar tools. These files are usually created manually. However the pipeline Docker image comes with these files pre-made. There are four data directories containing pre-made data worthy of note:

**ASC** - This directory contains files which describe pulse profiles extracted from the EPN database. Each file in the directory is named as follows:

```
<Pulsar name>_<Frequency>.asc
```

Where `<Pulsar name>` is the pulsar 'J' name, and `<Frequency>` the observation frequency of the EPN data. There is a single file per each unique entry in the EPN database, representing observations covering a wide range of frequencies. The files themselves are stored in comma separated value (CSV) format. They contain the total pulse intensity observed (the I stokes parameter) written to a single line of ascii text. For example:

0,1,2,3,11,29,67,180,71,39,9,2,1,1,1,0

has 16 bins, each describing total pulse intensity. Note that the intensity values stored in the files are scaled to a [0,255] range. This directory also contains a python script `EpnToAsc.py`. This converts files from the EPN database to `.asc` files. In total there are 3,698 `.asc` files available (~30 MB of data).

**EPN\_Raw** - This directory contains 3,698 files extracted from the EPN database. These describe pulsar profiles in plain text files. The files are named as follows:

`<Pulsar name>_<Freq.>.acn`

or

`<Pulsar name>_<Freq.>_<Number>.acn`

if there is more than one EPN file representing a pulsar observed at the specified frequency. These files are space delimited. More details about the files can be found online at:

<http://www.epta.eu.org/epndb/> .


The data in this directory were obtained from the EPN database under the Creative Commons Attribution 4.0 International license. We gratefully acknowledge the authors of the EPN database (past and present), and those who have contributed data to it over the years. Data was extracted from the EPN database on March 15th 2016. In total there are 3698 files available (~65 MB of data).

**PARS** - This directory contains Par files for real pulsars. These Par files were generated by the `CandidateParGenerator.py` script. To create these files, the script reads a valid ATNF pulsar catalog database file. It extracts the RA, DEC, period, and DM values per source, and stores these in a valid par file. The Par files were generated using pulsar catalog version 1.54. In total there are 2,536 par files available (~11 MB of data).

**PREDS** - This directory contains `Tempo2` predictor (`.dat`) files. The files it contains correspond to real pulsars. These files were generated by `Tempo2` version 2014.11.1, using the Par files in the `PARS` folder. In total there are 2,536 predictor files available (~425 MB of data).

Once the pulsar tools have generated a new TV file, it is persisted to a host disk drive. This ensures the TV persists after the software container has been discarded.


**Figure A-5-1 Test vector generation pipeline architecture.**

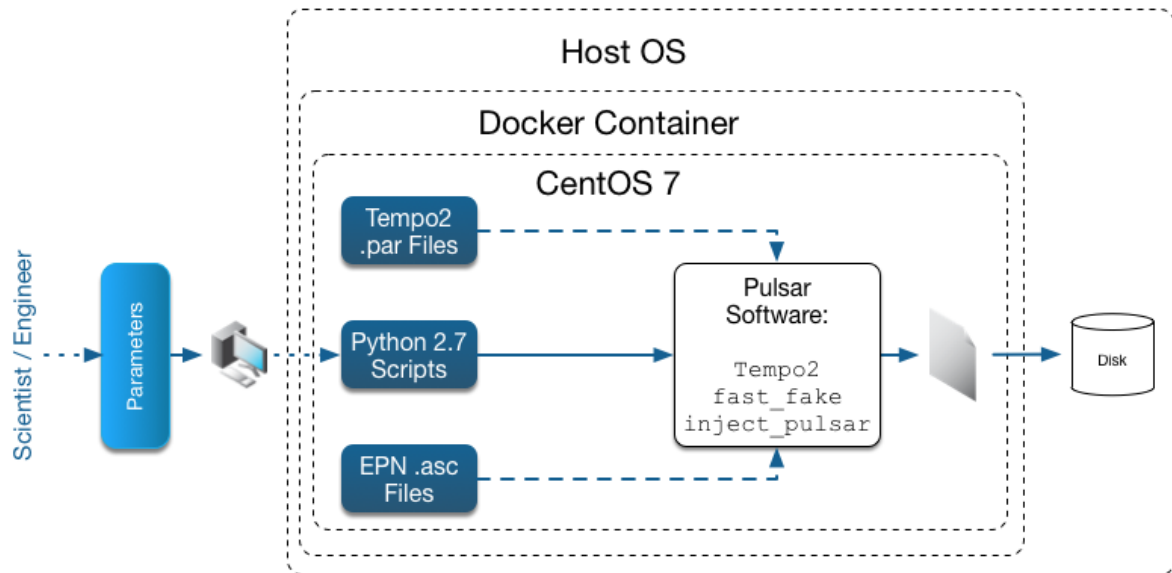

## 1.6 Noise File Generation

The first step in test vector generation involves creating a noise file. This is a one time only step. The noise file forms the basis of all subsequent test vectors. The noise file creation process is summarized in Figure A-6-1. This process is extremely simple. The user simply executes the `fast_fake` tool using their desired observation parameters. During this step RFI may also be inserted into the noise file using pulsar software in the Docker container.

**Figure A-6-1 Overview of noise file generation.**

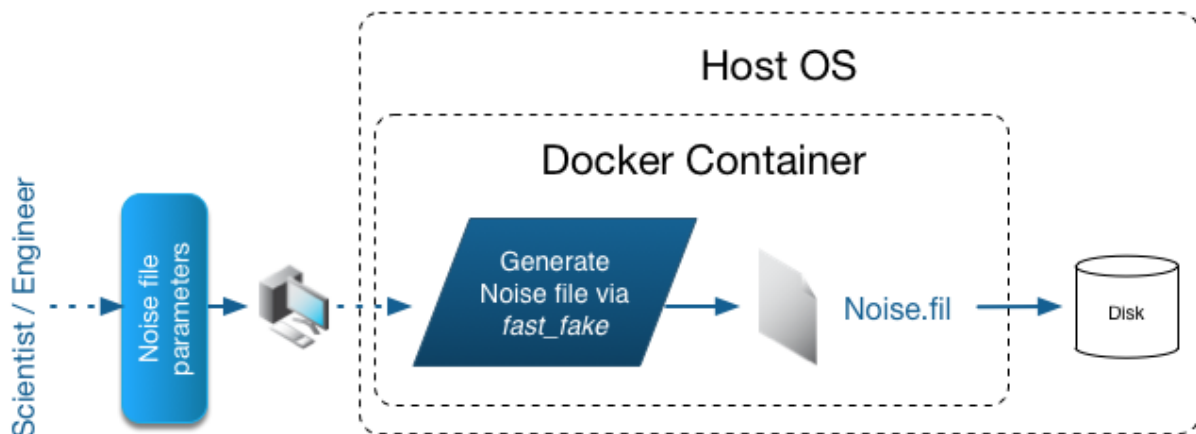


## 1.7 Prerequisite Generation

The prerequisite steps have already been undertaken for the TVGP. However the user may wish to regenerate these files, or generate new files to simulate more pulsars. The prerequisite generation steps are summarized in Figure A-7-1. The general steps are:

1. Create a Par file describing a pulsar or simulated pulsar source. Par files can either be generated manually, or using the `CandidateParGenerator.py` script bundled with the TVGP.

2. Create a predictor file for the new Par file using `Tempo2`. The Par file created in step 1 is given to `Tempo2`, and a new `.dat` predictor file is created. `Tempo2` can either be run manually, or via the script `GeneratePredictorFiles.py`.
3. Choose a `.asc` file describing a pulse profile. This file is used to describe the shape of the pulsar signal to be inserted into the test vector. The `.asc` files can be chosen manually. However it is better to use the `InjectPulsarCommandCreator.py` script to automatically choose the `.asc` files.


**Figure A-7-1 Overview of test vector prerequisite file generation.**

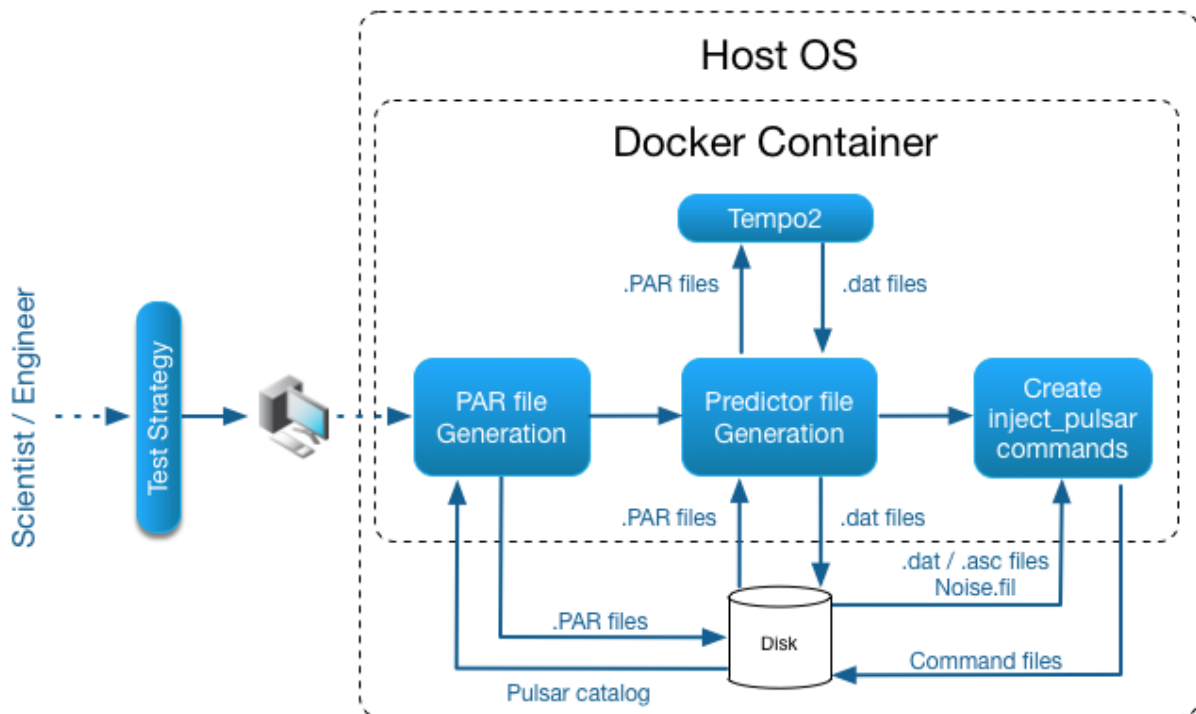

## 1.8 Pulsar Signal Injection

Once all the prerequisite files are available, pulsar signals can be injected into a new copy of the previously generated noise file. This involves running the `inject_pulsar` tool. The tool can be run manually, however it is recommended that the user run the `InjectPulsarAutomator.py` script instead. This script simply executes shell commands which invoke `inject_pulsar` using the correct input parameters. The shell commands are generated using the `InjectPulsarCommandCreator.py` script.

**Figure A-8-1 Overview of how pulsar signals are injected into noise files.**

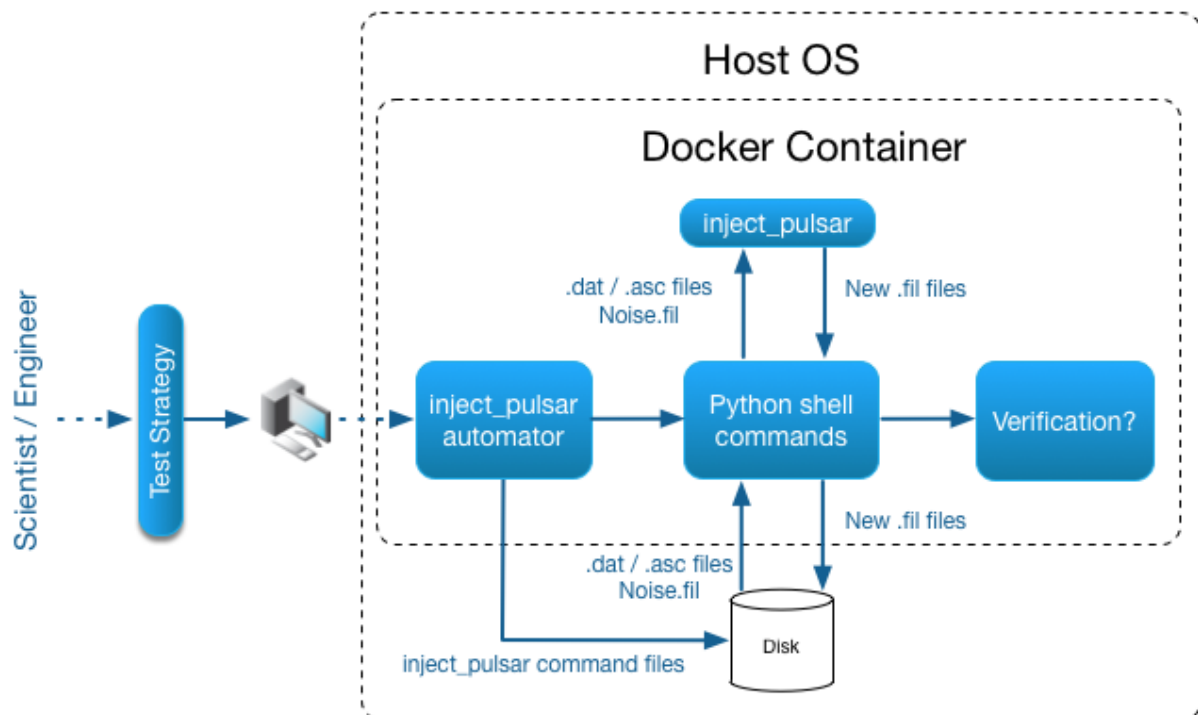

## 1.9 Hardware

A machine was purchased to support the generation of test vectors for CSP.PSS. This machine is a rack mounted server, equipped with multiple fast hard disk drives to support test vector creation and storage. The specification of the machine is provided in Table A-9-1 below. The machine has 512 GB of RAM, and 28.5 TB of total hard disk storage capacity. This allows over 1,000 SKA sized test vectors to be stored in full.

Of the available hard drive capacity, 4.5 TB is solid state drive (SSD) storage. The disk write speeds of SSDs are much higher than for regular hard disks. The SSDs therefore allow test vectors to be written to disk rapidly (at 500MB per second during testing) speeding up the generation process. The machine is also equipped with a 10GbE network adapter. This provides the flexibility to stream test vectors from the machine to a test infrastructure extremely quickly.

**Table A-9-1 Test vector machine hardware.**

Component	Quantity
Asus T50 Workstation 5U Tower including Z10PE-D16 WS Dual E5v3 Socket Motherboard, 16x DIMM Slots (8x per CPU), Aspeed AST2400 with 32MB VRAM, 7.1 HD Audio, Intel® C612 PCH Chipset, 3x 5.25" Media Bays, 8x H/S Drive Bays 2x Mini-SAS HD backplane, 2x 2.5 Hotswap (rear), 2 x Intel® I210AT + 1x Mgmt LAN (On-Board ASMB8-iKVM for KVM-over-Internet), Dual Redundant 800w 80+ Gold PSU's, 2x Heatsinks.	1
Intel Xeon E5-2630 v4, S 2011-3, Broadwell-EP, 10 Core, 2.2GHz, 3.1GHz Turbo, 20MB, 40 Lane, 8.0GT/s QPI, 85W	2



Kingston 32GB 2133MHz DDR4 ECC CL15 LRDIMM QR x4 w/TS (512 GB total RAM)	16
Samsung 2TB SSD 850 EVO Series 2.5	2
Seagate 6TB, 7200RPM SATA 3.5 6Gbps, 128 MB Enterprise	4
Plextor PX-G512M6e 512GB M.2 PCI Express SSD	1
Intel Converged 10GbE Dual Port Network Adapter PCIe Card X710-DA2 (PCIe v3.0)	1

## 1.10 Software

Scripts have been written to automate the creation of test vectors. These include:

- **CandidateParGenerator.py** - this script generates Par files for ATNF catalog sources, and Par files, for fake pulsars created via sampling user specified distributions over pulse period, S/N, and DM. The script is compatible with python version 2.7. It requires Scipy version 0.15 or later to function. Numpy 1.0 or later, and Matplotlib version 1.5 or later are also required.
- **GeneratePredictorFiles.py** - this automatically generates `Tempo2` (`Tempo2` version 2014.11.1) predictor files for any Par files found in a user supplied directory. The script is compatible with python version 2.7. It requires `Tempo2` version 2014.11.1, Scipy version 0.15 or later to function. Numpy 1.0 or later, and Matplotlib version 1.5 or later are also required.
- **InjectPulsarCommandCreator.py** - this generates a file containing `inject_pulsar` commands, useful for batching the creation of filterbank files containing pulsar signals. The script locates the correct `.asc` files for legitimate pulsars when creating the `inject_pulsar` commands. For fake pulsar Par files (generated by `CandidateParGenerator.py`), the script will randomly choose an available `.asc` file, thereby creating a fake pulsar example using realistic profile data. It is possible to audit which `.asc` files were allocated to fake pulsars. The script is compatible with python version 2.7. It requires Scipy version 0.15 or later to function. Numpy 1.0 or later, and Matplotlib version 1.5 or later are also required.
- **InjectPulsarAutomator.py** - this script reads the files output by `InjectPulsarCommandCreator.py` (version 1.0), and executes the commands. The script is compatible with python version 2.7. It requires Scipy version 0.15 or later to function. Numpy 1.0 or later, and Matplotlib version 1.5 or later are also required.

The software can be found in the `home` folder of the Docker image. The directory structure is as follows:

```
pulsar_injection_pipeline
| ____ASC
| | ____J0006+1834_430.asc
```

```

| | _____.
| | ____J2354+6155_10550.asc
| | ____inject_pulsar_pipeline_readme.txt
| | ____PARS
| | ____J0006+1834.par
| | _____.
| | ____J2354+6155.par
| | ____PREDS
| | ____J0006+1834.dat
| | _____.
| | ____J2354+6155.dat
| | ____src
| | ____ATNFDataExtractor.py
| | ____CandidateParGenerator.py
| | ____ExecuteInjectPulsar.sh
| | ____GeneratePredictorFiles.py
| | ____InjectPulsarAutomator.py
| | ____InjectPulsarCommandCreator.py
| | ____psrcat.db

```

## 1.11 Docker Image Software Environment

The test vector pipeline Docker image contains the software listed in Tables A-11-1, A11-2 and A2-1. The Docker image itself is based upon the CentOS 7 operating system image, with Python 2.7 installed.

**Table A-11-1 CentOS 7 OS packages.**

#	Package	Version
1.	tcsh	6.18.01
2.	unzip	6.0
3.	wget	1.14
4.	make	2.8.11
5.	autoconf	2.69
6.	automake	1.13.4
7.	gcc	4.8.5
8.	gcc-gfortran	4.8.5
9.	libtool	2.4.2
10.	gcc-c++	4.8.5
12.	cfitsio	3.370
13.	cfitsio-devel	3.370

<b>14.</b>	fftw-devel	3.3.3
<b>15.</b>	glibc	2.17
<b>16.</b>	glibc-devel	2.17

**Table A-11-2 Python 2.7 packages.**

#	Package
1.	numpy
2.	scipy
3.	fitsio
4.	astropy
5.	astroplan
6.	pyfits
7.	matplotlib
8.	pyephem

The Docker image contains a number of pulsar specific software packages. The Docker image contains their latest stable versions available on December 8th 2016.

The pulsar software can be found in the Docker image at: `/home/psr/soft`

**Table A-11-3 Pulsar software packages.**

#	Software Package	Version
1.	Tempo2	2016.11.3 (SNAPSHOT 08 12 2016) Uploaded on 2016-12-05 by M. J. Keith
2.	Sigproc	(Mike Keith's build) Latest commit 668de78 on 25 Oct 2016 (Master branch)
3.	Test vector generation code.	Commit 91d8472
4.	Elmarie van Heerden's code that inserts non-stationary noise and RFI into filterbank files.	N/A
5.	PRESTO	Commit bd3c0181
6.	Tempo	(Master branch) SNAPSHOT 08 12 2016

## Usage Guide

To execute Docker commands you have to use the `sudo` command. Below are examples of the main Docker commands available.

```
sudo docker login
```

The `login` command logs a user into the Docker hub. An account is required if a user wants to download the latest test vector pipeline image, or upload their own Docker images.

```
sudo docker images
```

This command prints out details of the Docker images available on the local machine. These are the images available to run locally.

```
sudo docker build -t <docker file>.
```

This command builds a new Docker software container, based on the user specified Docker file. Note the full stop at the end of the command - this is required and isn't a typo.

```
sudo docker push <docker file>
```

This command uploads the software container built using the specified Docker file, to the Docker hub (needs an account and valid user login credentials).

```
sudo docker rmi -f <image id>
```

This command deletes a local Docker image from the host machine. Useful if an image is faulty, or if disk space is low. To find the Docker image ID's, run the `sudo docker images` command.

```
sudo docker pull <docker file>
```

This command pulls a Docker image from the Docker hub.

```
sudo docker run -it -v <local dir path>:<docker image dir path>  
<docker file>
```

This command runs a Docker image locally. The `-v` flag tells the Docker engine to mount a host file directory, inside the Docker container. This allows files to be copied between the host, and a Docker container. The flags used above:

- i is the interactive flag
- t tells Docker to open a terminal
- v mounts a volume

The ordering of flags and parameters *matters*. Put all the flags and parameters **before** the Docker image is specified.

**Caveats:**

- When using the `-v` flag: if a `<path to create in image>` path is supplied that already exists in the Docker image, then any files there will be overwritten, if they exist in `<path to local folder>`.

## Example Usage

Here we list the available images:

```
[lyon@zeus ~]$ sudo docker images
[sudo] password for lyon:
REPOSITORY              TAG          IMAGE ID          CREATED
SIZE
my-docker-image         latest      19e0164251da     8 days ago
84.91MB
debian                  wheezy      34a0b91d4fe9     13 days ago
84.91 MB
scienceguyrob/docker    latest      44ddec452b70     2 weeks ago
3.521 GB
hello-world             latest      c54a2cc56cbb     4 months ago
1.848 kB
```

Here we run a Docker image:

```
[lyon@zeus ~]$ sudo docker run -it scienceguyrob/docker
root@3c6064b40e3b:~# ls
DockerImageReadme.txt  psr
root@3c6064b40e3b:~#
```

Here the directory loaded upon login is `home`. It contains a single text file and the folder `psr`. To create a test vector, we first generate a 10 second noise file. Note the following commands require some knowledge of pulsars, and pulsar searching. Such knowledge helps understand the parameters chosen, and the tools used to study the data. It is not within the scope of this document to provide such knowledge.

```
root@3c6064b40e3b:~# fast_fake --tobs 1 --tsamp 64 --fch1 1350 --
foff -0.078125 --nbits 8 --nchans 4096 --seed 1 > noise.fil
[fast_fake.c:101] FASTFAKE - M.Keith 2014
[fast_fake.c:110] tobs          = 1.000000s
[fast_fake.c:111] tsamp        = 64.000000us
[fast_fake.c:112] mjdstart     = 56000.000000
[fast_fake.c:113] freq chan 1  = 1350.000000MHz
[fast_fake.c:114] freq offset  = -0.078125MHz
[fast_fake.c:115] output nbits = 8
[fast_fake.c:116] random seed  = 1
[fast_fake.c:117] output file  = 'stdout'
[fast_fake.c:128] write header
[fast_fake.c:160] Generate 15625 samples, 0.060 GiB
Complete: 100%. Sample: 15600 Real time 4.0s, Sim time
1.0s. Speed 15.23MiB/ss
[fast_fake.c:246] Done!
```

```
root@3c6064b40e3b:~#
```

Next we insert a pulsar signal. We choose J0332+5434 (B0329+54) as our example pulsar. The signal inserted is based on data taken from the EPN database. This data describes an observation of the pulsar at 1400 MHz.


```
root@3c6064b40e3b:~# inject_pulsar --snr 15 --seed 1 --pred
/home/psr/soft/pulsar_injection_pipeline/PREDS/J0332+5434.dat --prof
/home/psr/soft/pulsar_injection_pipeline/ASC/J0332+5434_1400.asc
noise.fil > J0332+5434_1400.fil
[inject_pulsar.c:164] Disable scattering/scintillation
[inject_pulsar.c:177] input .fil file = 'noise.fil'
[inject_pulsar.c:178] Predicor      =
'/home/psr/soft/pulsar_injection_pipeline/PREDS/J0332+5434.dat'
[inject_pulsar.c:179] Profile      =
'/home/psr/soft/pulsar_injection_pipeline/ASC/J0332+5434_1400.asc'
[inject_pulsar.c:185] Target S/N   = 15.00
[inject_pulsar.c:186] Ref Freq     = 1400.00 MHz
[inject_pulsar.c:187] Spectrum    = f(-1.50)
[inject_pulsar.c:188] t_scatter    = (0 s) * f(-4.00)
[inject_pulsar.c:189] scint_bw     = 0 MHz
[inject_pulsar.c:190] Random Seed = 0x1
[inject_pulsar.c:224] Input Nsamples = 15625
[inject_pulsar.c:225] Input Tobs    = 1.000000
[inject_pulsar.c:226] Input Nchans  = 4096
[inject_pulsar.c:248] Initialising convolution plans.
[inject_pulsar.c:253] read profile file
[inject_pulsar.c:326] best_sum=693.42 scale=6.48957e-05, width=1
[inject_pulsar.c:370] Pulsar period ~714.52ms
[inject_pulsar.c:421] Tscatter@1400.0MHz = 0s
[inject_pulsar.c:422] Tscatter@1350.0MHz = 0s
[inject_pulsar.c:423] Tscatter@1030.1MHz = 0s
[inject_pulsar.c:483] Generated 1 ISM models
[inject_pulsar.c:490] Starting simulation
15360 samples, 1.0s
[inject_pulsar.c:598] Simulation ended.
[inject_pulsar.c:599] last sample=56000.00001157407407
[inject_pulsar.c:600] Setup took 0.11 s
[inject_pulsar.c:601] Process took 2.02 s
[inject_pulsar.c:602] >> Inner took 0.50 s
[inject_pulsar.c:603] >> Read took 0.37 s
[inject_pulsar.c:604] >> Write took 0.28 s
[inject_pulsar.c:605] Total was 2.1 times 'real' time
[inject_pulsar.c:606] Check last Random 329f47ba
root@3c6064b40e3b:~#
root@3c6064b40e3b:~# ls
DockerImageReadme.txt  J0332+5434_1400.fil  noise.fil  psr
root@3c6064b40e3b:~#
```

As can be seen above, a new filterbank file has been created called `J0332+5434_1400.fil`. This describes an observation of the pulsar J0332+5434. The following steps de-disperse the data, and create a file describing the pulse profile.

```
root@3c6064b40e3b:~# dedisperse J0332+5434_1400.fil -d 26.7641 -o
J0332+5434_1400.tim
root@3c6064b40e3b:~# /home/psr/soft/sigproc/install/bin/fold
J0332+5434_1400.tim -p 0.71451969972 -o J0332+5434_1400.prf
root@3c6064b40e3b:~# ls
DockerImageReadme.txt  J0332+5434_1400.fil  noise.fil
J0332+5434_1400.prf  J0332+5434_1400.tim  psr
root@3c6064b40e3b:~#
```

If the data stored in the file `J0332+5434_1400.prf` is repeated, and then plotted, we obtain the following integrated pulse profile.

**Figure A-11-1 Integrated profile for a test vector describing J0332+5434 at 1400 MHz.**

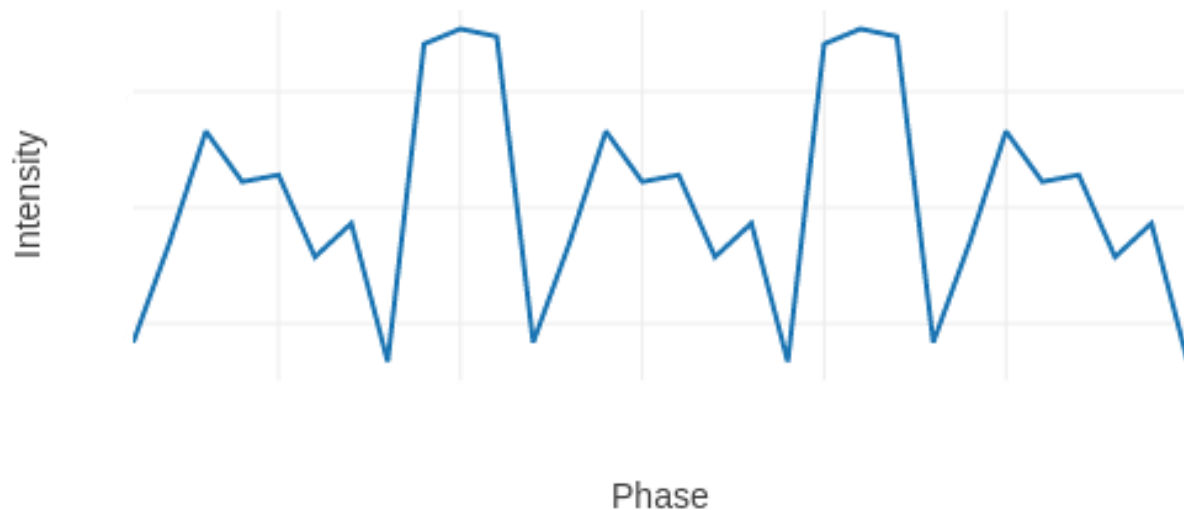

## Other Documentation

Here is the Docker user guide: <https://docs.docker.com/engine/userguide/> .

And the Docker command line reference:

<https://docs.docker.com/engine/reference/commandline/cli/> .

## 1.12 Reference Documents

The following documents provide useful reference information associated with this appendix. These documents are to be used for information only. Changes to the date and/or revision number do not make this appendix out of date.

**Table A-12-1 Reference Documents**

Ref No	Document Number	Document Title	Issue
A-A-RD1	SKA-TEL-CSP-000085	SKA1 CSP Pulsar Search Sub-element Signal Processing MatLab Model	Revision 3
A-A-RD2	SKA-TEL-CSP-000080	SKA CSP SKA1-Mid Array Pulsar Search Sub-element Test Specifications	Revision F
A-A-RD3	SKA-TEL-CSP-000082	SKA CSP Pulsar Search Sub-element Detailed Design Document	Revision 1
A-A-RD4	N/A	Lorimer, D.R., et. al., " <i>The European Pulsar Network Pulse Profile Database</i> ", <i>Joint European and National Astronomical Meeting, JENAM-97. 6th European and 3rd Hellenic Astronomical Conference, held in Thessaloniki, Greece, 2-5 July, 1997.</i>	N/A
A-A-RD5	N/A	Keith, M. J., " <i>The EPN database of pulsar profiles</i> ", <a href="http://www.epta.eu.org/epndb/">http://www.epta.eu.org/epndb/</a> .	N/A
A-A-RD6	N/A	Lorimer, D.R., " <i>SIGPROC: Pulsar Signal Processing Programs</i> ", Astrophysics Source Code Library, 2011, <a href="http://sigproc.sourceforge.net">http://sigproc.sourceforge.net</a> .	N/A
A-A-RD7	N/A	Keith, M. J., " <i>SixByNine/sigproc</i> ", <a href="https://github.com/SixByNine/sigproc">https://github.com/SixByNine/sigproc</a> .	N/A
A-A-RD8	N/A	Hobbs, G., Edwards, R., Manchester, R., " <i>Tempo2: a New Pulsar Timing Package</i> ", Chinese Journal of Astronomy and Astrophysics, vol. 6, S2, 2006.	N/A
A-A-RD9	N/A	Hobbs, G., Edwards, R., Manchester, R., " <i>Tempo2</i> ", <a href="http://www.atnf.csiro.au/research/pulsar/tempo2/">http://www.atnf.csiro.au/research/pulsar/tempo2/</a>	N/A
A-A-RD10	N/A	Docker, <a href="https://www.docker.com">https://www.docker.com</a> .	N/A
A-A-RD11	N/A	Lyon, R. J., " <i>scienceguyrob/docker</i> ", <a href="https://hub.docker.com/r/scienceguyrob/docker/">https://hub.docker.com/r/scienceguyrob/docker/</a> .	N/A
A-A-RD12	N/A	Lyon, R. J. " <i>SKA-TestVectorGenerationPipeline</i> ", <a href="https://github.com/scienceguyrob/SKA-TestVectorGenerationPipeline">https://github.com/scienceguyrob/SKA-TestVectorGenerationPipeline</a> .	N/A
A-A-RD13	N/A	ATNF Pulsar Catalog: <a href="http://www.atnf.csiro.au/people/pulsar/psrcat/">http://www.atnf.csiro.au/people/pulsar/psrcat/</a> .	N/A



