


Six-axis uncertainty across 15 symbolic regression methods

● NeurIPS original 12 ◆ Post-submission 3

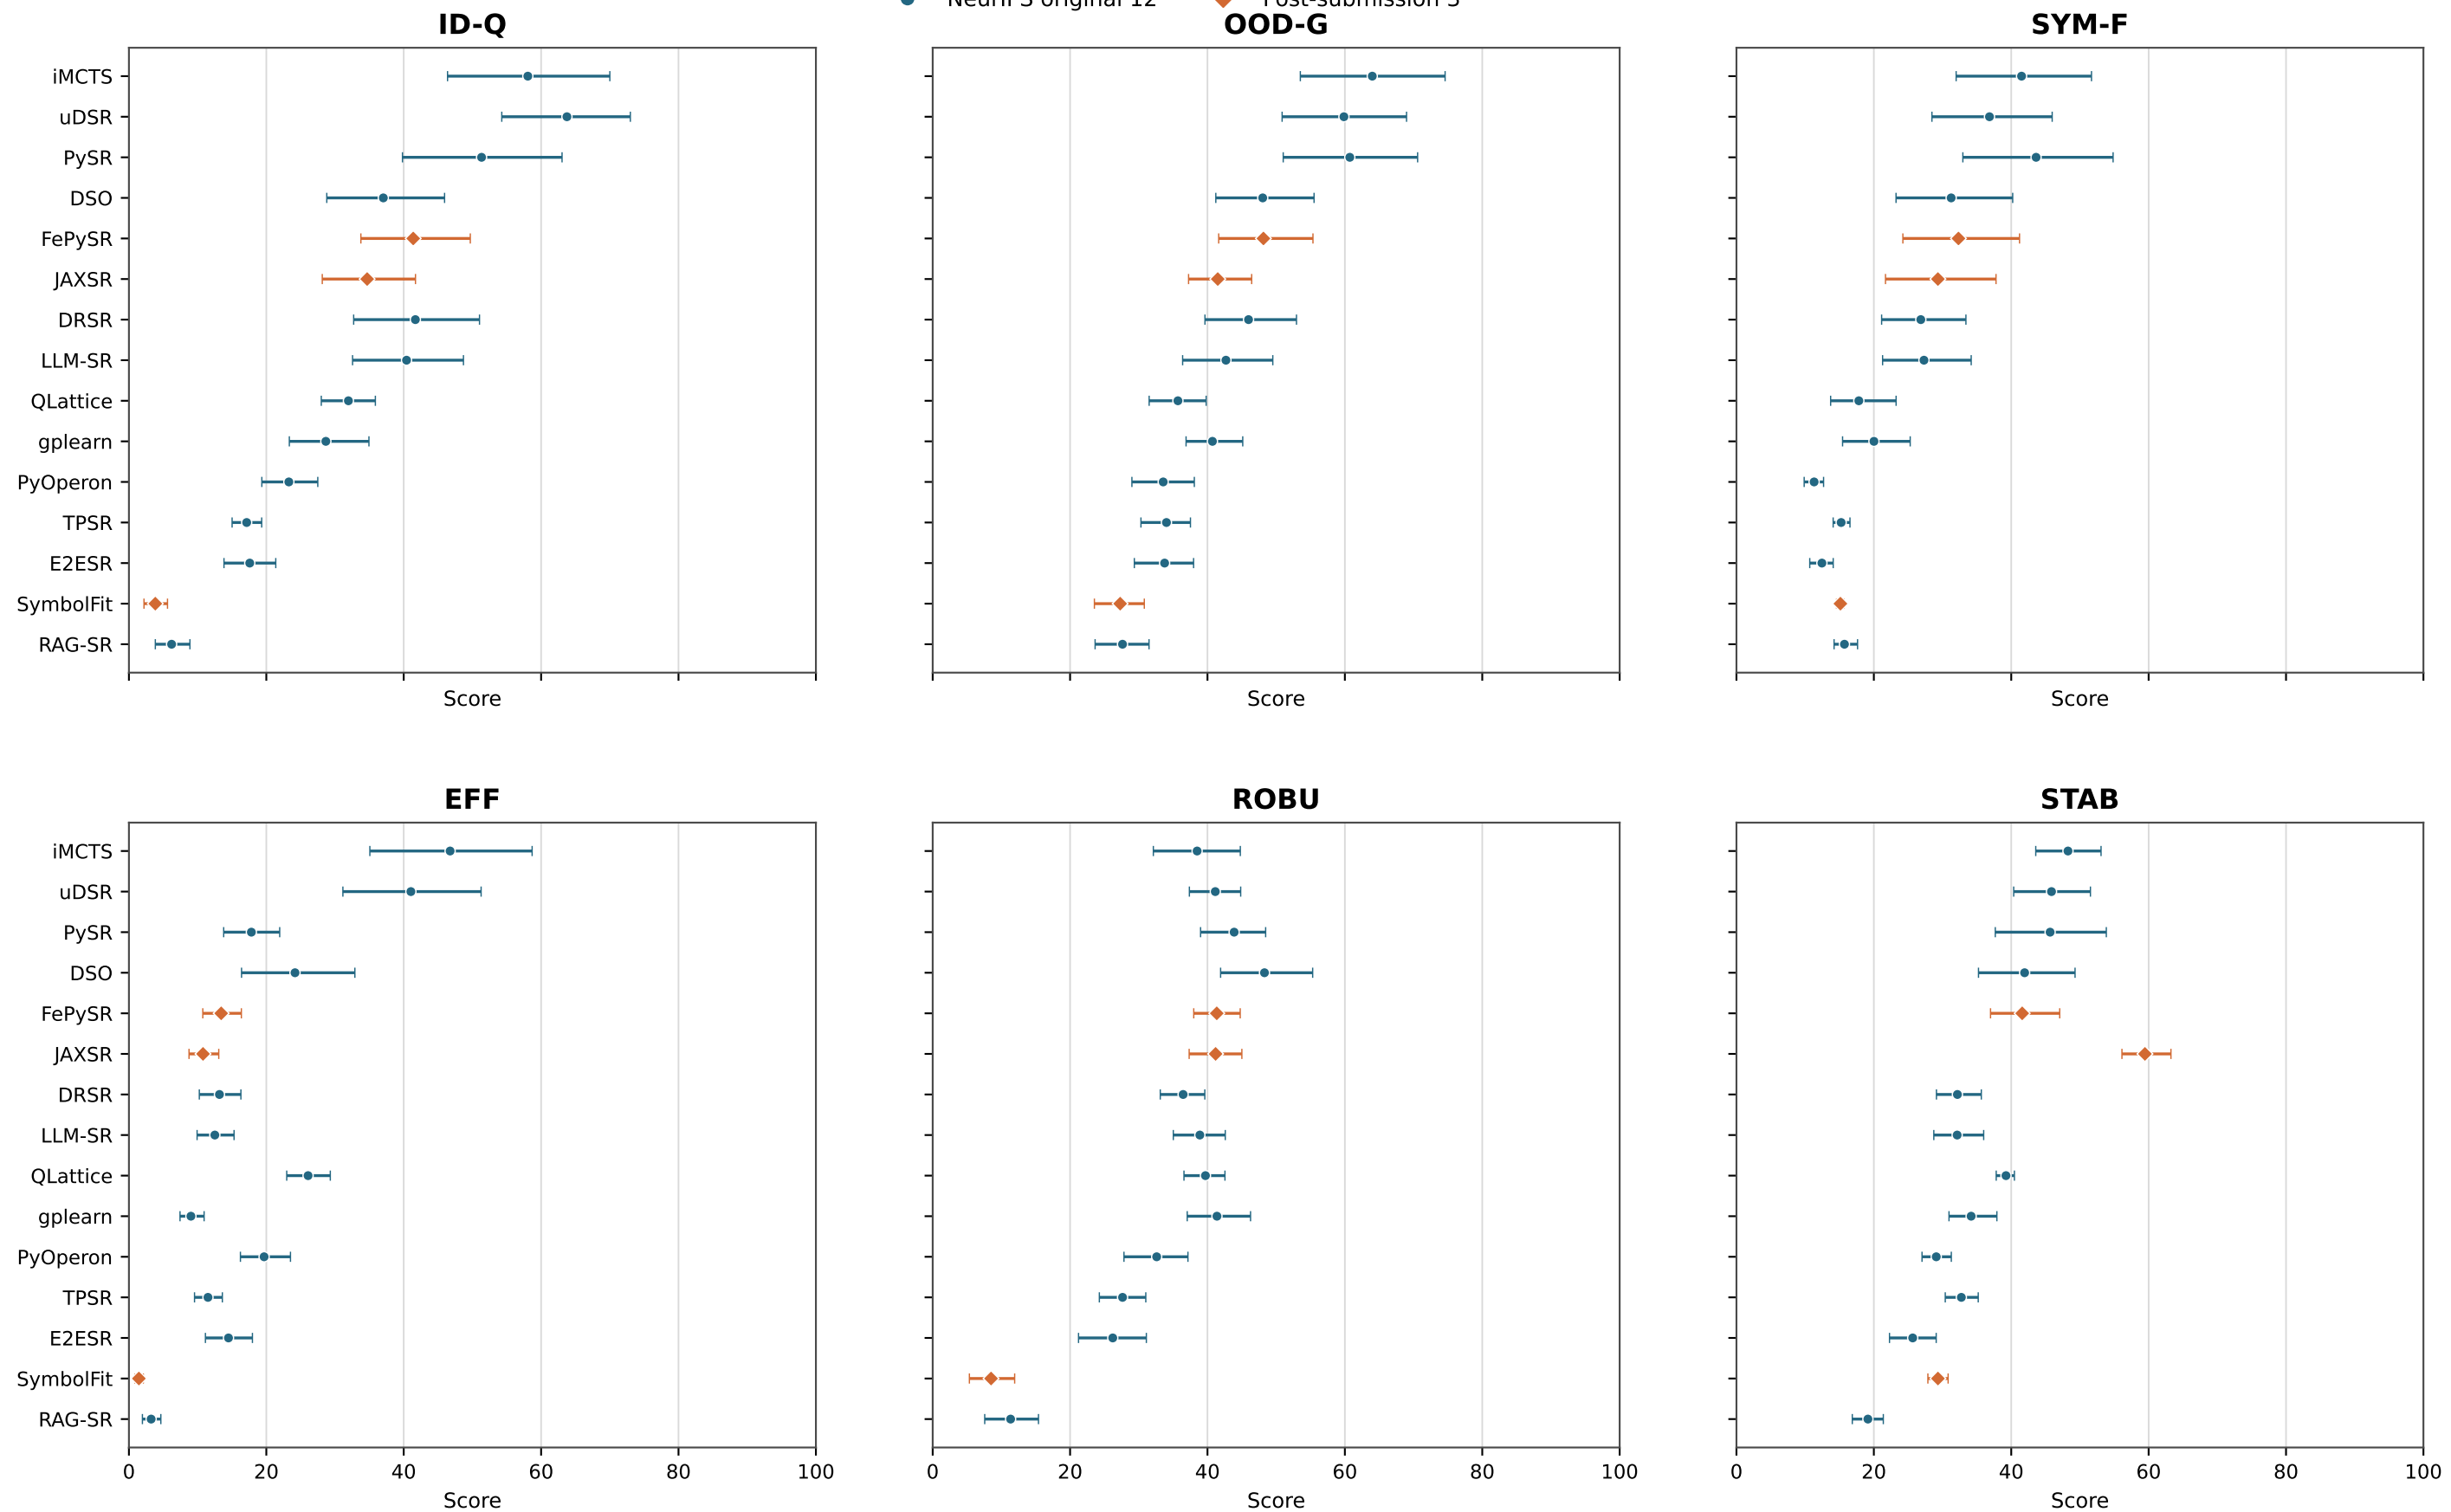

Points are task-level means; bars are 95% confidence intervals from 20,000 synchronized Core-50 task bootstrap resamples.
Original methods: NeurIPS 1h/5 seeds and ROBU at 1%, 5%, 10%; added methods: AAAI 3h trajectories truncated at 1h/3 seeds and ROBU at 1%, 5%.