


The following example will give a short impression of what the package does:

```

1 \glucose
2 \glucose[model={fischer=skeleton}]
3 \setatomsep{2.5em}
4 \glucose[model=haworth,ring]
5 \glucose[model=haworth,ring=furanose]

```

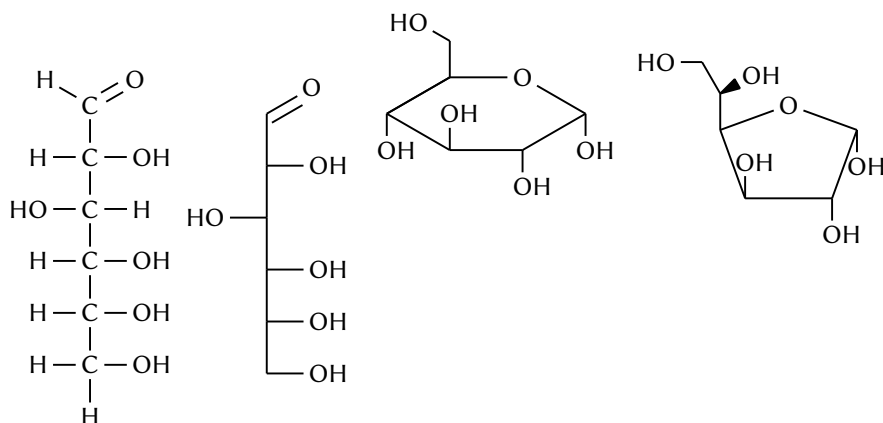

3 Usage

3.1 The Base Macro

`\carbohydrate[⟨options⟩]{⟨spec⟩}`

A generic macro for typesetting carbohydrates.

We will talk about the options in a bit. First let's see what *⟨spec⟩* means. This argument is a series of the tokens `r`, `l` and `0` denoting an hydroxy group placed to the right or the left in the Fischer projection of the carbohydrate. A `0` means that the hydroxy group is to be left out. The series of tokens is meant to describe the hydroxy groups at the chiral centers. The aldehyde group¹ and the hydroxy group at the end of the chain will be set automatically. Unless specified otherwise the command expects a hexose which means a series of *four* tokens.

```

1 \chemname{\carbohydrate{llrr}}{\iupac{D-Mannose}}
2 \chemname{\carbohydrate[model={fischer=skeleton}]{llrr}}{\iupac{D-Mannose}}
3 \setatomsep{2.5em}\chemnameinit{}
4 \chemname{\carbohydrate[model=chair]{llrr}}{\iupac{D-Mannose}}

```

1. Also the keto group once ketoses will be implemented.