

SimplePlusNord-BeamerTheme

A Beamer theme in the Nord colours



Nord colours: nordtheme.com, MIT licence

Name Surname

Organization

October 9, 2026

- Text and boxes
- Maths and code
- Data and citations
- References

Text and boxes

- Outline slides
- Extra section
- Bullet Points
- Step by step
- Multiple Columns
- Boxes of Highlighted Text
- Boxes: code and result

Maths and code

- Theorem
- Definitions and examples
- Theorems and proofs
- Without a box
- Formulas: code and result
- Code boxes
- Source code
- Pseudocode

Data and citations

- Table
- Table: code and result
- Figure: transparent
- Figure: opaque
- Citation
- Citation: code and result

► References

Outline slides

1. Choose when it appears

```
\usetheme[sectionsides]  
  {SimplePlusNord}
```

2. List the slides

```
\subsection{Title}
```

3. Optional

```
\tocnumbers
```

Text and boxes

Outline slides

Extra section

Bullet Points

Step by step

Multiple Columns

Boxes of Highlighted Text

Boxes: code and result

Maths and code

Data and citations

Outside the outline

1. Star the subsection

```
\subsection*{Backup}
```

This slide is the first case: it is not in the outline.

2. Or write none

```
% no \subsection before  
% the slide: it joins the  
% entry that comes before
```

The same star on a section hides the whole section.

Extra section

1. Use it for the references

```
\extrasection{References}
```

It takes the place of a normal section. The outline keeps it apart: last, in blue, as a line under the columns, and with no slide of its own to open it.

Look at the outline slides: it is "References".

Bullet Points

- ▶ A short point
- ▶ A second point, a little longer than the first
- ▶ A third point, long enough to wrap onto a second line, so that the hanging indent of the list shows
- ▶ A fourth point
- ▶ A fifth point, with nothing more to say
- ▶ Faded with `\fade`, and the blue inside is lightened too

Step by step

1. Reveal with a pause

```
First point.  
\pause  
Second point.  
\source{Verdi (2021)}
```

First point.

2. Code in a step

```
\begin{onlyenv}<2>  
  \begin{codeblock}{Python}  
    ...  
  \end{codeblock}  
\end{onlyenv}
```

Step by step

1. Reveal with a pause

```
First point.  
\pause  
Second point.  
\source{Verdi (2021)}
```

First point.

Second point, with its source.

```
1 print("second_step")
```

Python

2. Code in a step

```
\begin{onlyenv}<2>  
  \begin{codeblock}{Python}  
    ...  
  \end{codeblock}  
\end{onlyenv}
```

Multiple Columns

Steps

1. State the claim
2. Explain it
3. Give an example

Columns split the slide in parts of the width you choose, and each part flows as its own text, as in a newspaper. They are centred vertically here; [T] aligns them on their first line.

Boxes of Highlighted Text

A few words can stand out in **bold**; use it sparingly.

Box

Sample text

Alertbox

Sample text in a box that warns

Examplebox

Sample text in a box that illustrates

Boxes: code and result

1. A box

```
\begin{infobox}{Title}  
  Text  
\end{infobox}
```

Box

Sample text

2. Alert and example

```
\begin{alertbox}{Title}  
\begin{examplebox}{Title}
```

Alertbox

Sample text

Examplebox

Sample text

Text and boxes

- Outline slides
- Extra section
- Bullet Points
- Step by step
- Multiple Columns
- Boxes of Highlighted Text
- Boxes: code and result

Maths and code

- Theorem
- Definitions and examples
- Theorems and proofs
- Without a box
- Formulas: code and result
- Code boxes
- Source code
- Pseudocode

Data and citations

- Table
- Table: code and result
- Figure: transparent
- Figure: opaque
- Citation
- Citation: code and result

► References

Theorem

Theorem (Pythagoras)

$$a^2 + b^2 = c^2$$

Theorem (A formula for the stress test)

$$\mathcal{F}[f](\xi) = \int_{-\infty}^{\infty} f(x) e^{-2\pi i x \xi} dx, \quad \zeta(s) = \sum_{n=1}^{\infty} \frac{1}{n^s} = \prod_{p \text{ prime}} \frac{1}{1 - p^{-s}}$$

$$\hat{\beta} = (\mathbf{X}^{\top} \mathbf{X})^{-1} \mathbf{X}^{\top} \mathbf{y}, \quad \mathbf{A} = \begin{pmatrix} a_{11} & \cdots & a_{1n} \\ \vdots & \ddots & \vdots \\ a_{m1} & \cdots & a_{mn} \end{pmatrix}, \quad \binom{n}{k} = \frac{n!}{k! (n-k)!}$$

$$\lim_{n \rightarrow \infty} \Pr\left(\frac{\bar{X}_n - \mu}{\sigma/\sqrt{n}} \leq z\right) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^z e^{-t^2/2} dt = \Phi(z)$$

Definitions and examples

1. A definition

```
\begin{definition}[Title]
  Text with \alert{emphasis}
\end{definition}
```

Definition (Estimator)

A rule that turns a sample into a guess is an **estimator**.

2. An example

```
\begin{example}
  Text
\end{example}
```

Example

The sample mean $\bar{x}$ estimates μ .

Theorems and proofs

1. A lemma, with its proof

```
\begin{lemma}  
  Statement  
  \begin{proof}  
    Proof text  
  \end{proof}  
\end{lemma}
```

Lemma

$$\text{Var}(aX) = a^2 \text{Var}(X).$$

Proof. Expand and take a^2 out. $\square$

2. A theorem or a corollary

```
\begin{theorem}[Title]  
\begin{corollary}
```

Theorem (Pythagoras)

$$a^2 + b^2 = c^2.$$

Without a box

1. Add a star

```
\begin{theorem*}[Pythagoras]
  $a^2+b^2=c^2$.
  \begin{proof}
    Compare the areas.
  \end{proof}
\end{theorem*}
```

2. Also definitions and examples

```
\begin{definition*}[Estimator]
\begin{example*}
```

Lemmas and corollaries too.

Theorem (Pythagoras).

$$a^2 + b^2 = c^2.$$

Proof. Compare the areas.



Definition (Estimator). A rule that turns a sample into a guess.

Example. The sample mean $\bar{x}$ estimates μ .

Formulas: code and result

1. A theorem

```
\begin{theorem}[Title]
  $\bar{X}_n \xrightarrow{p} \mu$
\end{theorem}
```

Theorem (Large numbers)

$$\bar{X}_n \xrightarrow{p} \mu$$

2. A formula

```
\[
  t = \frac{\bar{x} - \mu_0}{s/\sqrt{n}}
\]
```

$$t = \frac{\bar{x} - \mu_0}{s/\sqrt{n}}$$

Code boxes

1. Show code without running it

```
\begin{codeonly}  
  \alert{some code}  
\end{codeonly}
```

```
\alert{some code}
```

2. Code in a sentence

The function `\code{mean(xs)}` returns the average, and in Python `\code[Python]{return sum(xs)}`.

The function `mean(xs)` returns the average, and in Python `return sum(xs)`.

Source code

1. A block per language

```
\begin{codeblock}{Python}  
    def mean(xs):  
        return sum(xs) / len(xs)  
\end{codeblock}
```

2. Any language of listings

C, C++, Python and Julia are set up. For another one, name it as listings does.

```
1 # the average of a list Python  
2 def mean(xs):  
3     return sum(xs) / len(xs)  
4  
5 print(mean([1, 2, 3])) # 2.0
```

Pseudocode

1. In the font of the deck

```
\begin{pseudocode}
  m  $\leftarrow$  A[1]
  for each a in A do
    if a > m then m  $\leftarrow$  a
\end{pseudocode}
```

Keywords are bold, $\leftarrow$ is an arrow, and a formula goes between dollar signs.

2. In typewriter, as a code box

```
\begin{codeblock}{Pseudocode}
  while lo <= hi do
    mid  $\leftarrow$   $\lfloor (lo+hi)/2 \rfloor$ 
\end{codeblock}
```

```
1 function max_of(A) Pseudocode
2   m  $\leftarrow$  A[1] // best so far
3   for each a in A do
4     if a > m then m  $\leftarrow$  a
5   return m
```

```
1 while lo  $\leq$  hi do Pseudocode
2   mid  $\leftarrow$   $\lfloor (lo + hi)/2 \rfloor$ 
```

Text and boxes

- Outline slides
- Extra section
- Bullet Points
- Step by step
- Multiple Columns
- Boxes of Highlighted Text
- Boxes: code and result

Maths and code

- Theorem
- Definitions and examples
- Theorems and proofs
- Without a box
- Formulas: code and result
- Code boxes
- Source code
- Pseudocode

Data and citations

- Table
- Table: code and result
- Figure: transparent
- Figure: opaque
- Citation
- Citation: code and result

► References

Table

Group	Mean	Deviation
Control	0.562	0.0123
Low dose	0.910	0.0456
High dose	0.296	0.0089

Table 1: Three groups of the experiment

Table: code and result

1. Header and rule

```
\textbf{Group} & \textbf{Mean} \\ \hline
```

2. Rows

```
Control & 0.562 \\ \hline  
Treated & 0.910 \\
```

3. Source

```
\source{Verdi (2021)}
```

Group	Mean
Control	0.562
Treated	0.910

Table 2: Group means

Figure: transparent

1. A figure with alpha

```
\begin{figure}  
  \includegraphics[height=4cm]  
    {graph.png}  
  \caption{Caption}  
\end{figure}
```

2. Name the source

```
\source{AVDLCZ, CC0}
```

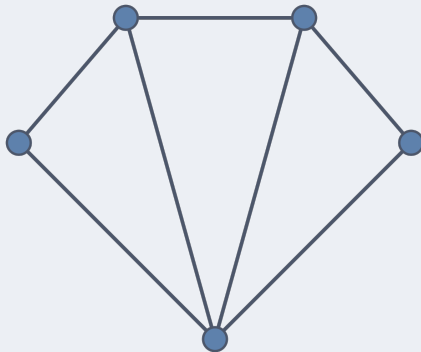


Figure 1: A PNG with a transparent background sits on the slide as it is

Figure: opaque

1. A photo, corners rounded

```
\begin{figure}  
  \roundedgraphics  
    [height=4cm]{photo.jpg}  
  \caption{Caption}  
\end{figure}
```

2. Name the source

```
\source{NASA / B. Anders}
```



Figure 2: A photo keeps its own background, with the corners slightly rounded

Citation

`\cite` gives the number of the entry in the list of references.
One work is cited like this [1], two at once like this [1, 2].

Citation: code and result

1. Cite

```
\cite{p1}  
\cite{p1,p2}
```

One source [1], two at once [1, 2], and
a faded remark.

2. Name the sources

```
\source{Verdi (2021)}  
\source{Rossi (2019)}
```

3. Lighten a remark

```
\fade{remark}
```

References

- [1] Ada Verdi.
A short study of nothing in particular.
Journal of Examples, 4(2):11–25, 2021.
- [2] Maria Rossi and Luca Bianchi.
A second work with a considerably longer title that has to wrap onto a second line.
Example Press, 2019.

Thank you

Questions?

This slide is not in the outline: \subsection* keeps it out.