

loop




server

daemon





handles
new connection,
send_auth_request()

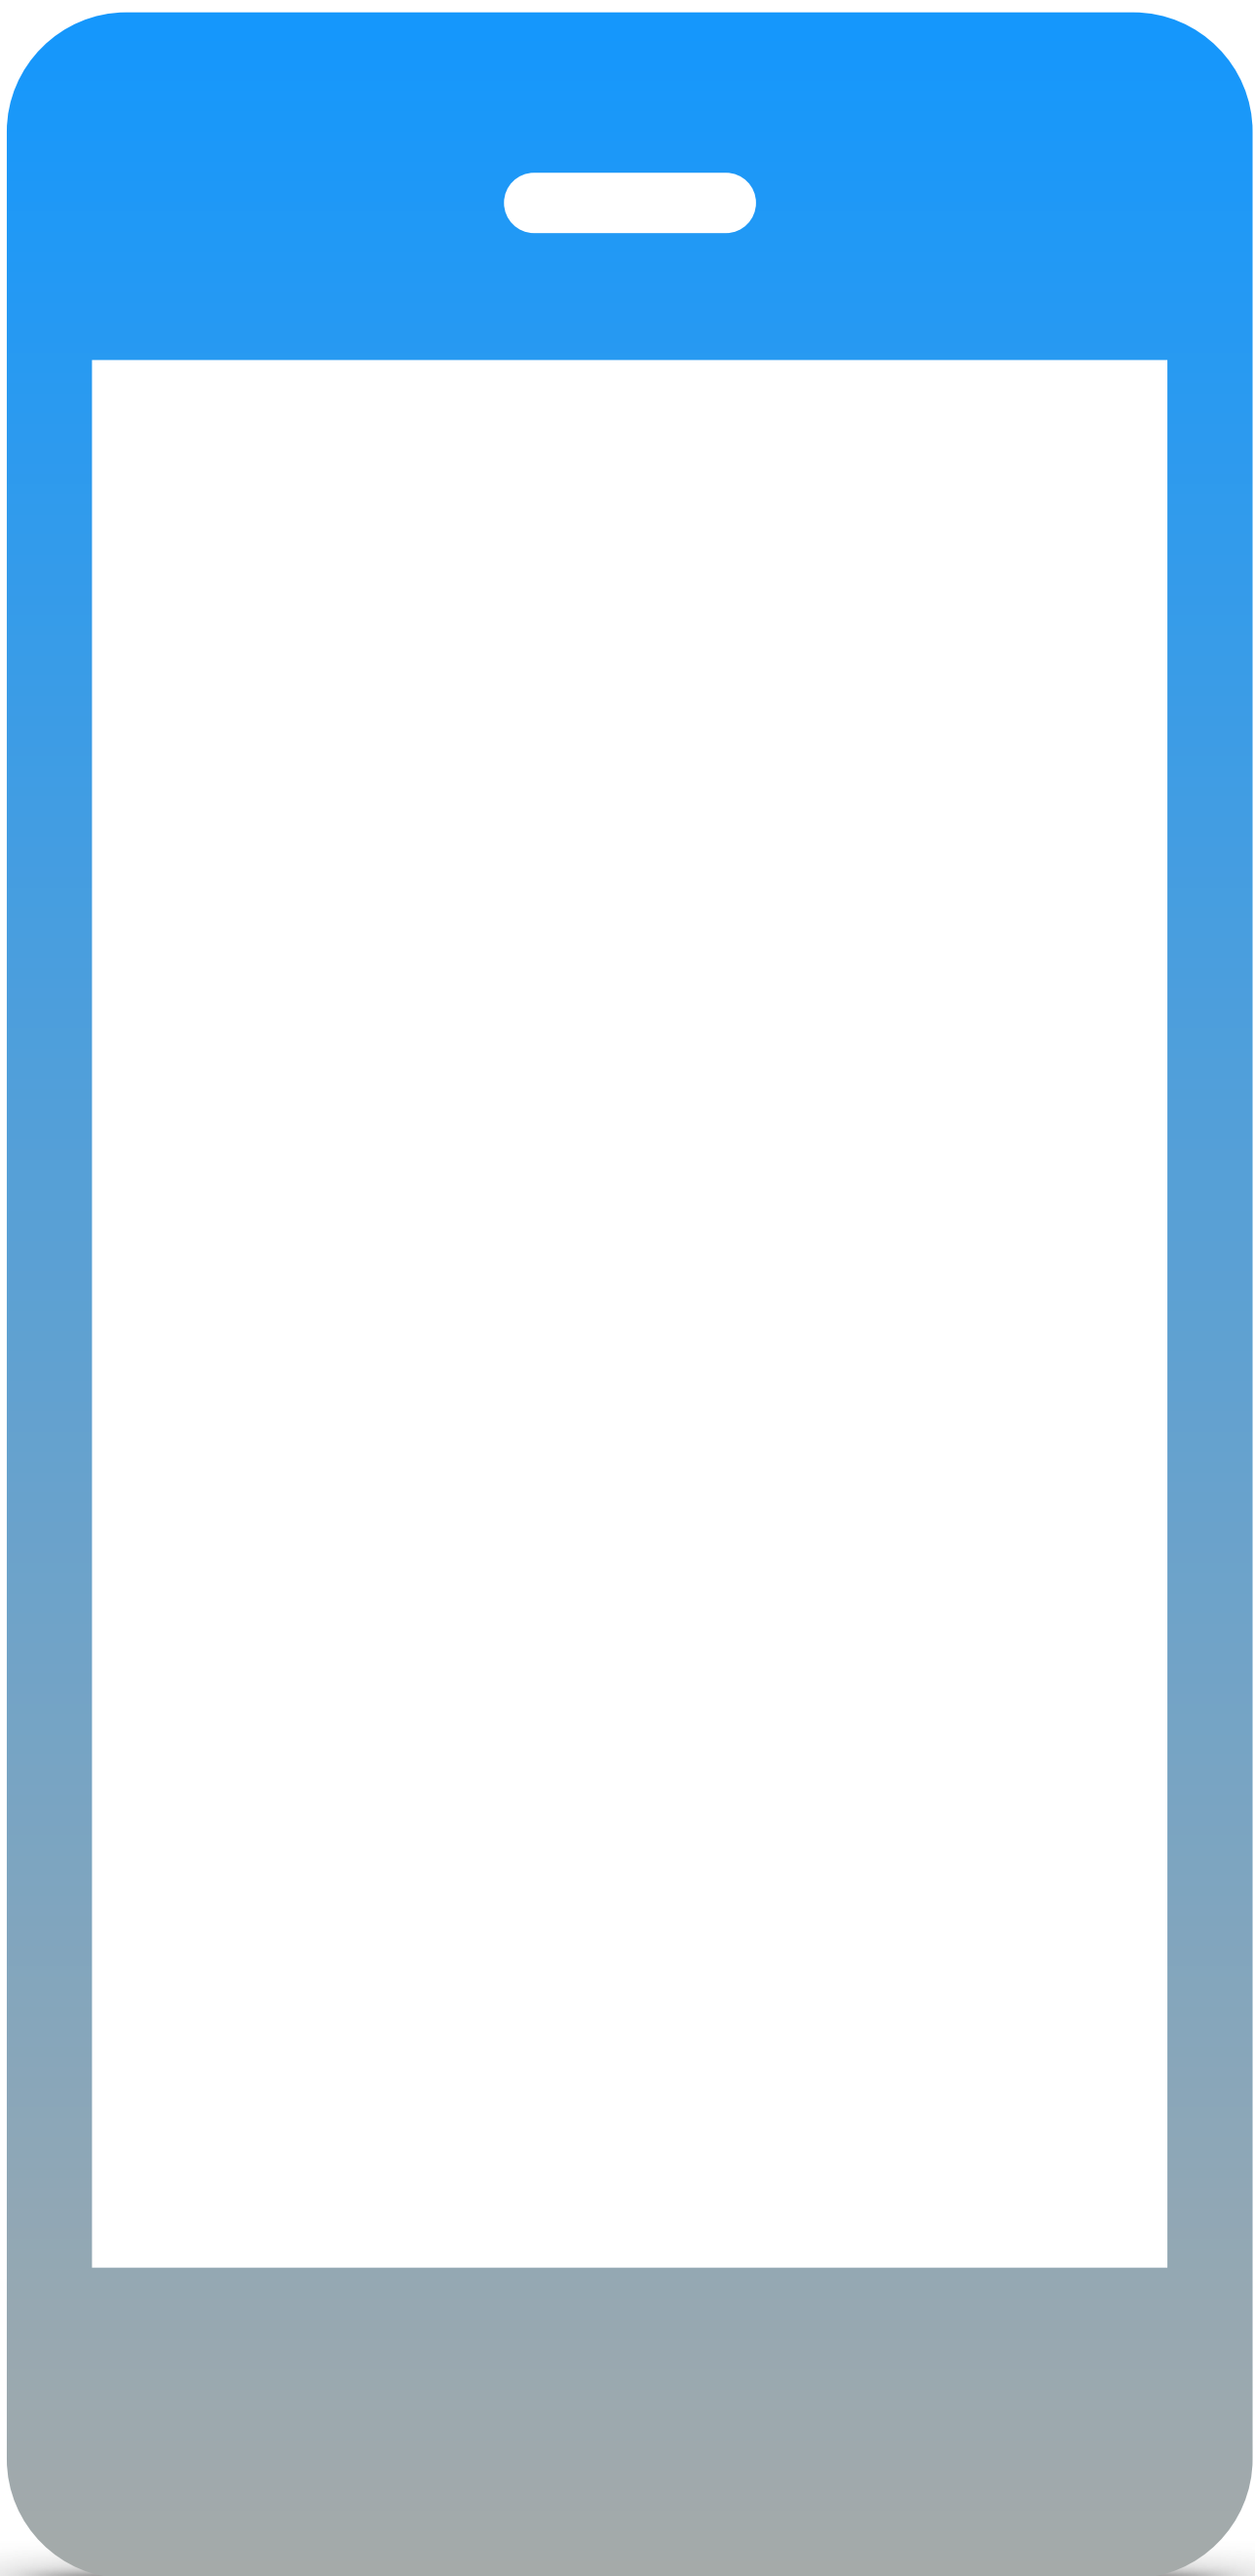



adbd_auth_verify() with
known PUBLIC key



sign token with known
PRIVATE key









`/data/misc/adb/adb_keys`



`/adb_keys`






No more keys, send
PUBLIC key





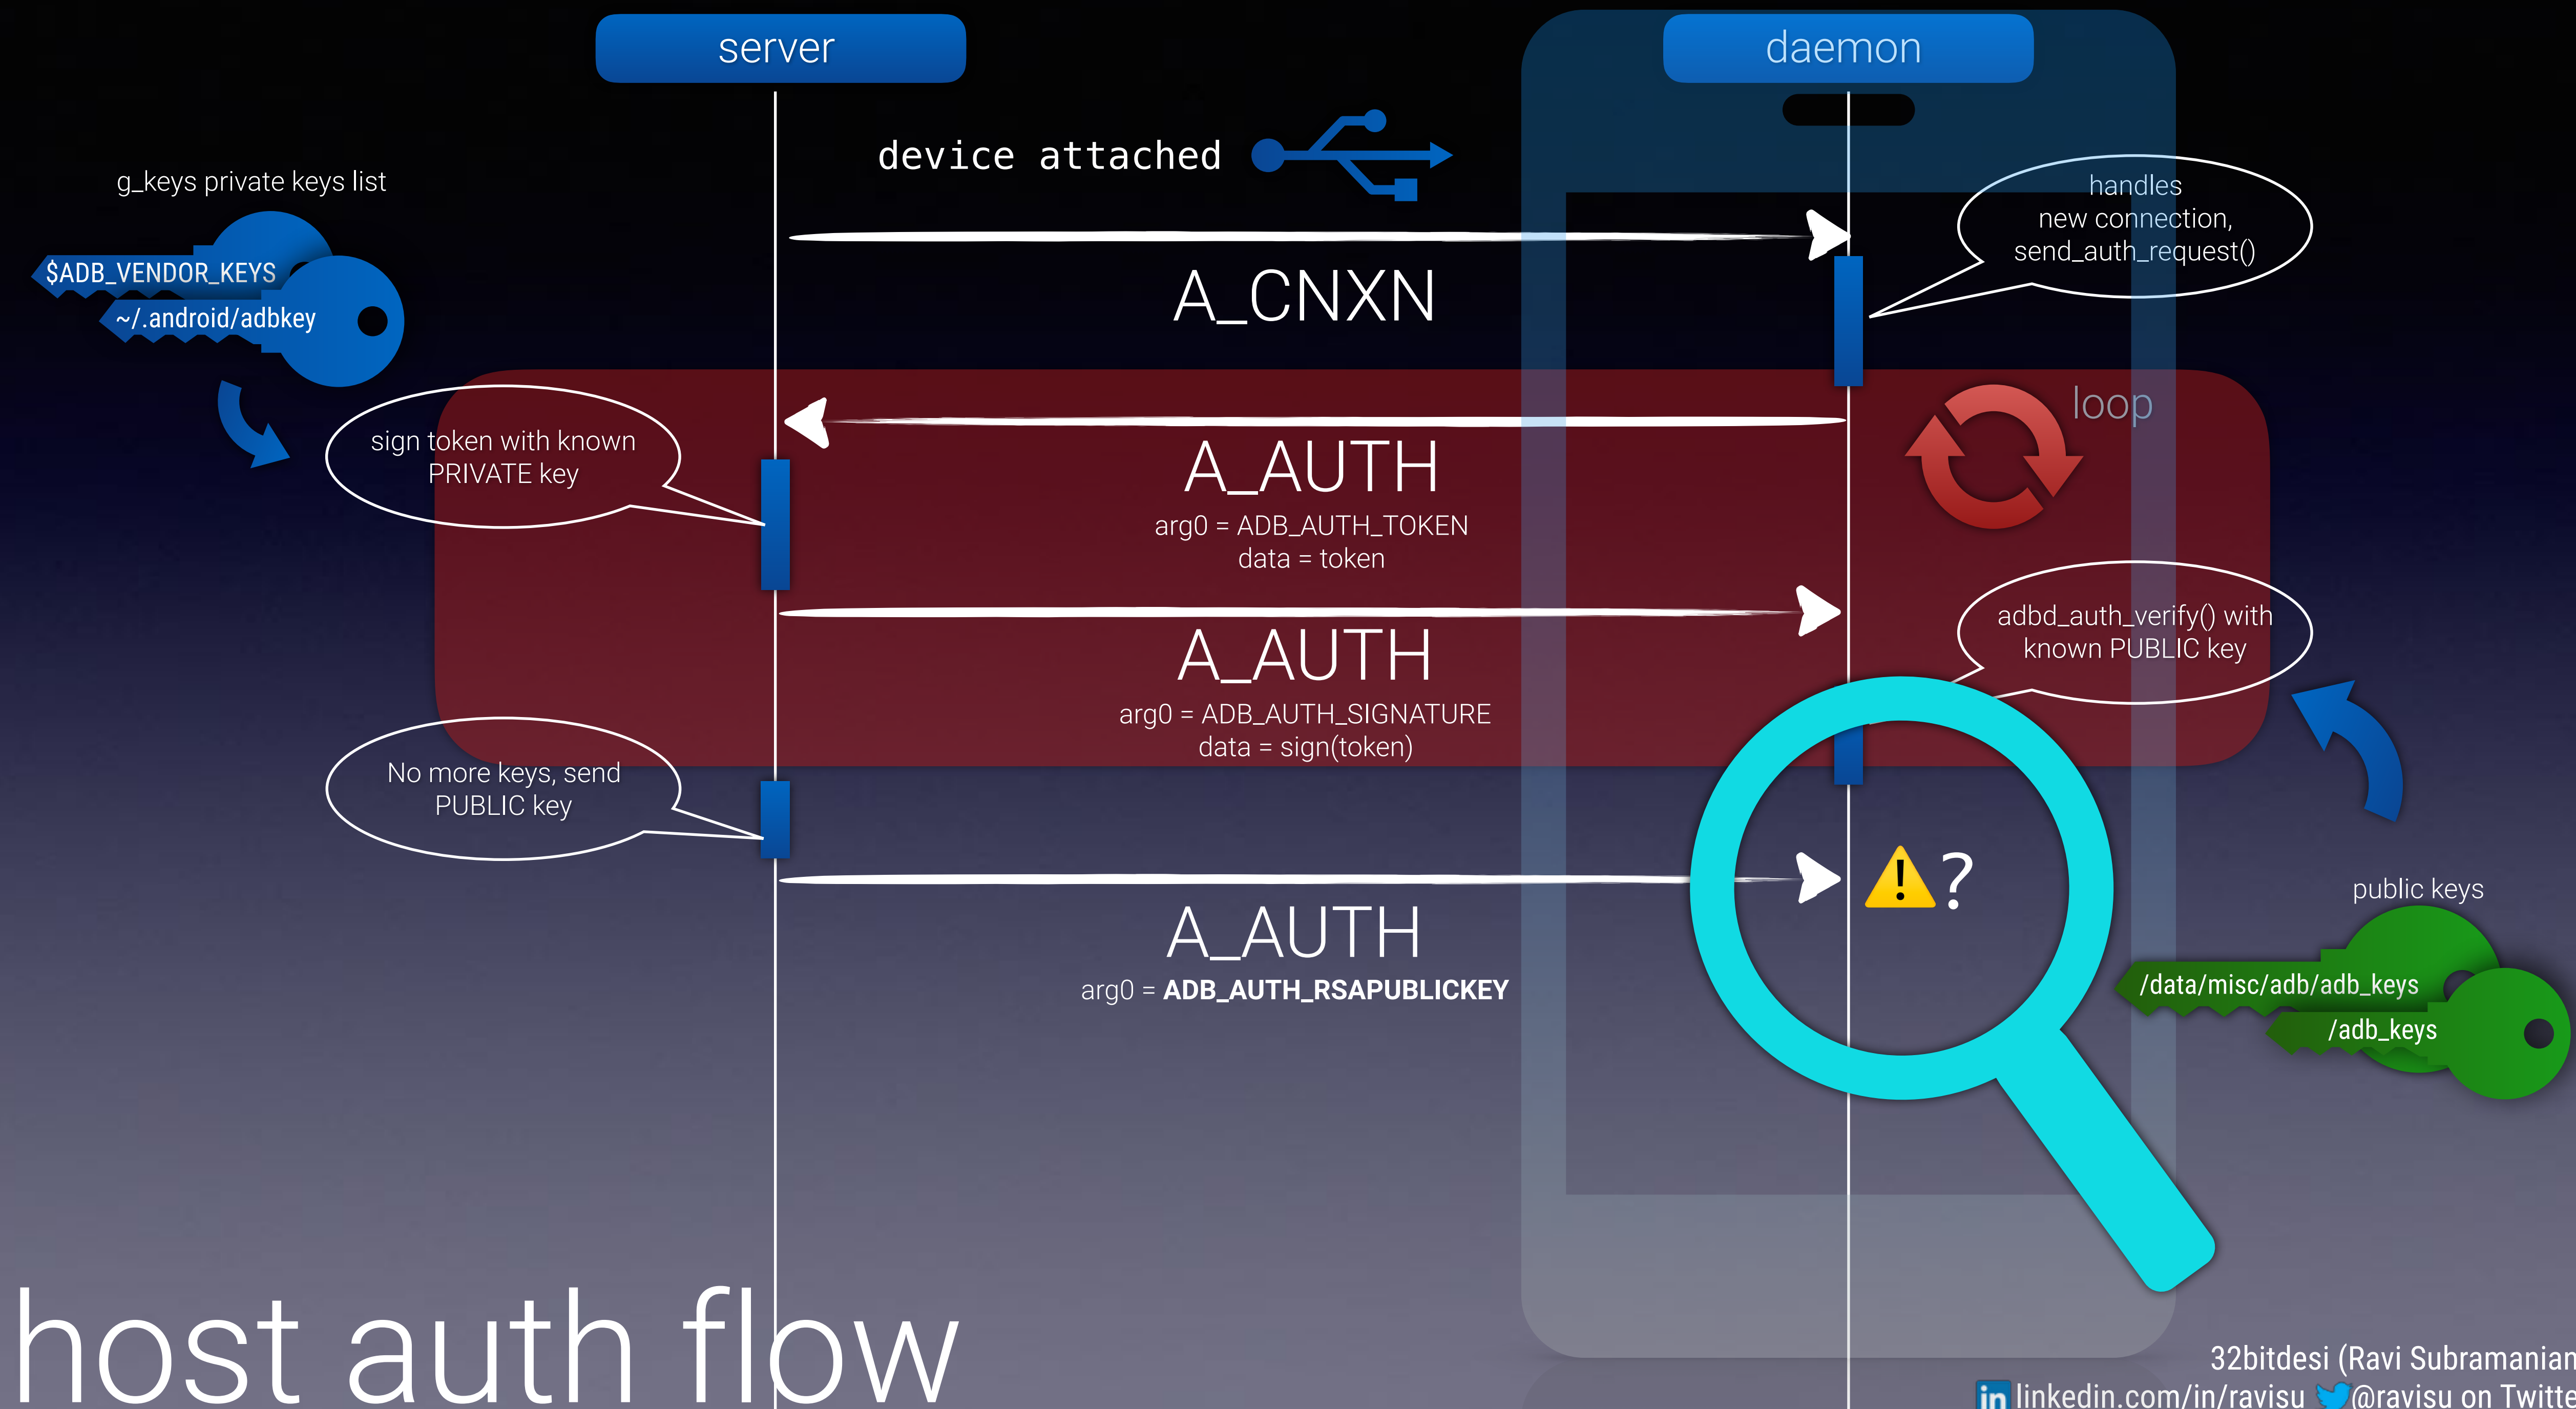

host auth flow

daemon

UsbManager



control socket



host auth flow