









adb_auth_confirm_key()



PK<public_key>









user prompt,


```
try {
130
                      byte[] buffer = new byte[BUFFER_SIZE];
131
                      while (true) {
132
                          int count = mInputStream.read(buffer);
133
                          if (count < 0) {</pre>
134
135
                               break;
136
137
                          if (buffer[0] == 'P' && buffer[1] == 'K') {
138
                               String key = new String(Arrays.copyOfRange(buffer, 2, count));
139
                               Slog.d(TAG, "Received public key: " + key);
140
                               Message msg = mHandler.obtainMessage(UsbDebuggingHandler.MESSAGE_ADB_CONFIRM);
141
                              msg.obj = key;
142
                              mHandler.sendMessage(msg);
143
144
                          } else {
                               Slog.e(TAG, "Wrong message: "
145
                                       + (new String(Arrays.copyOfRange(buffer, 0, 2))));
146
```

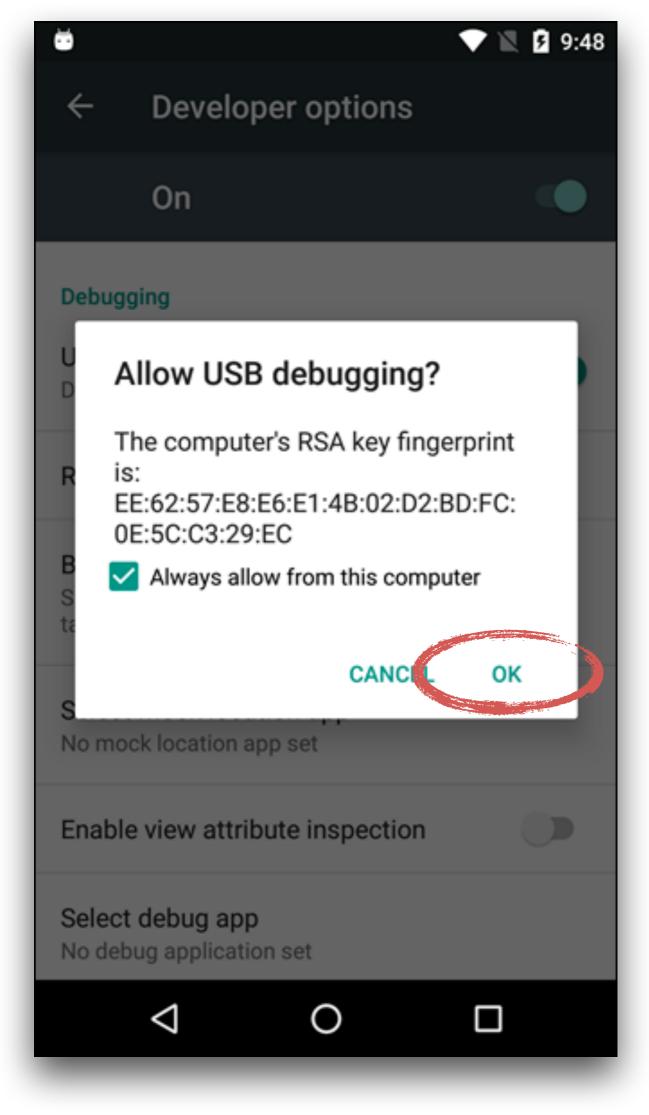

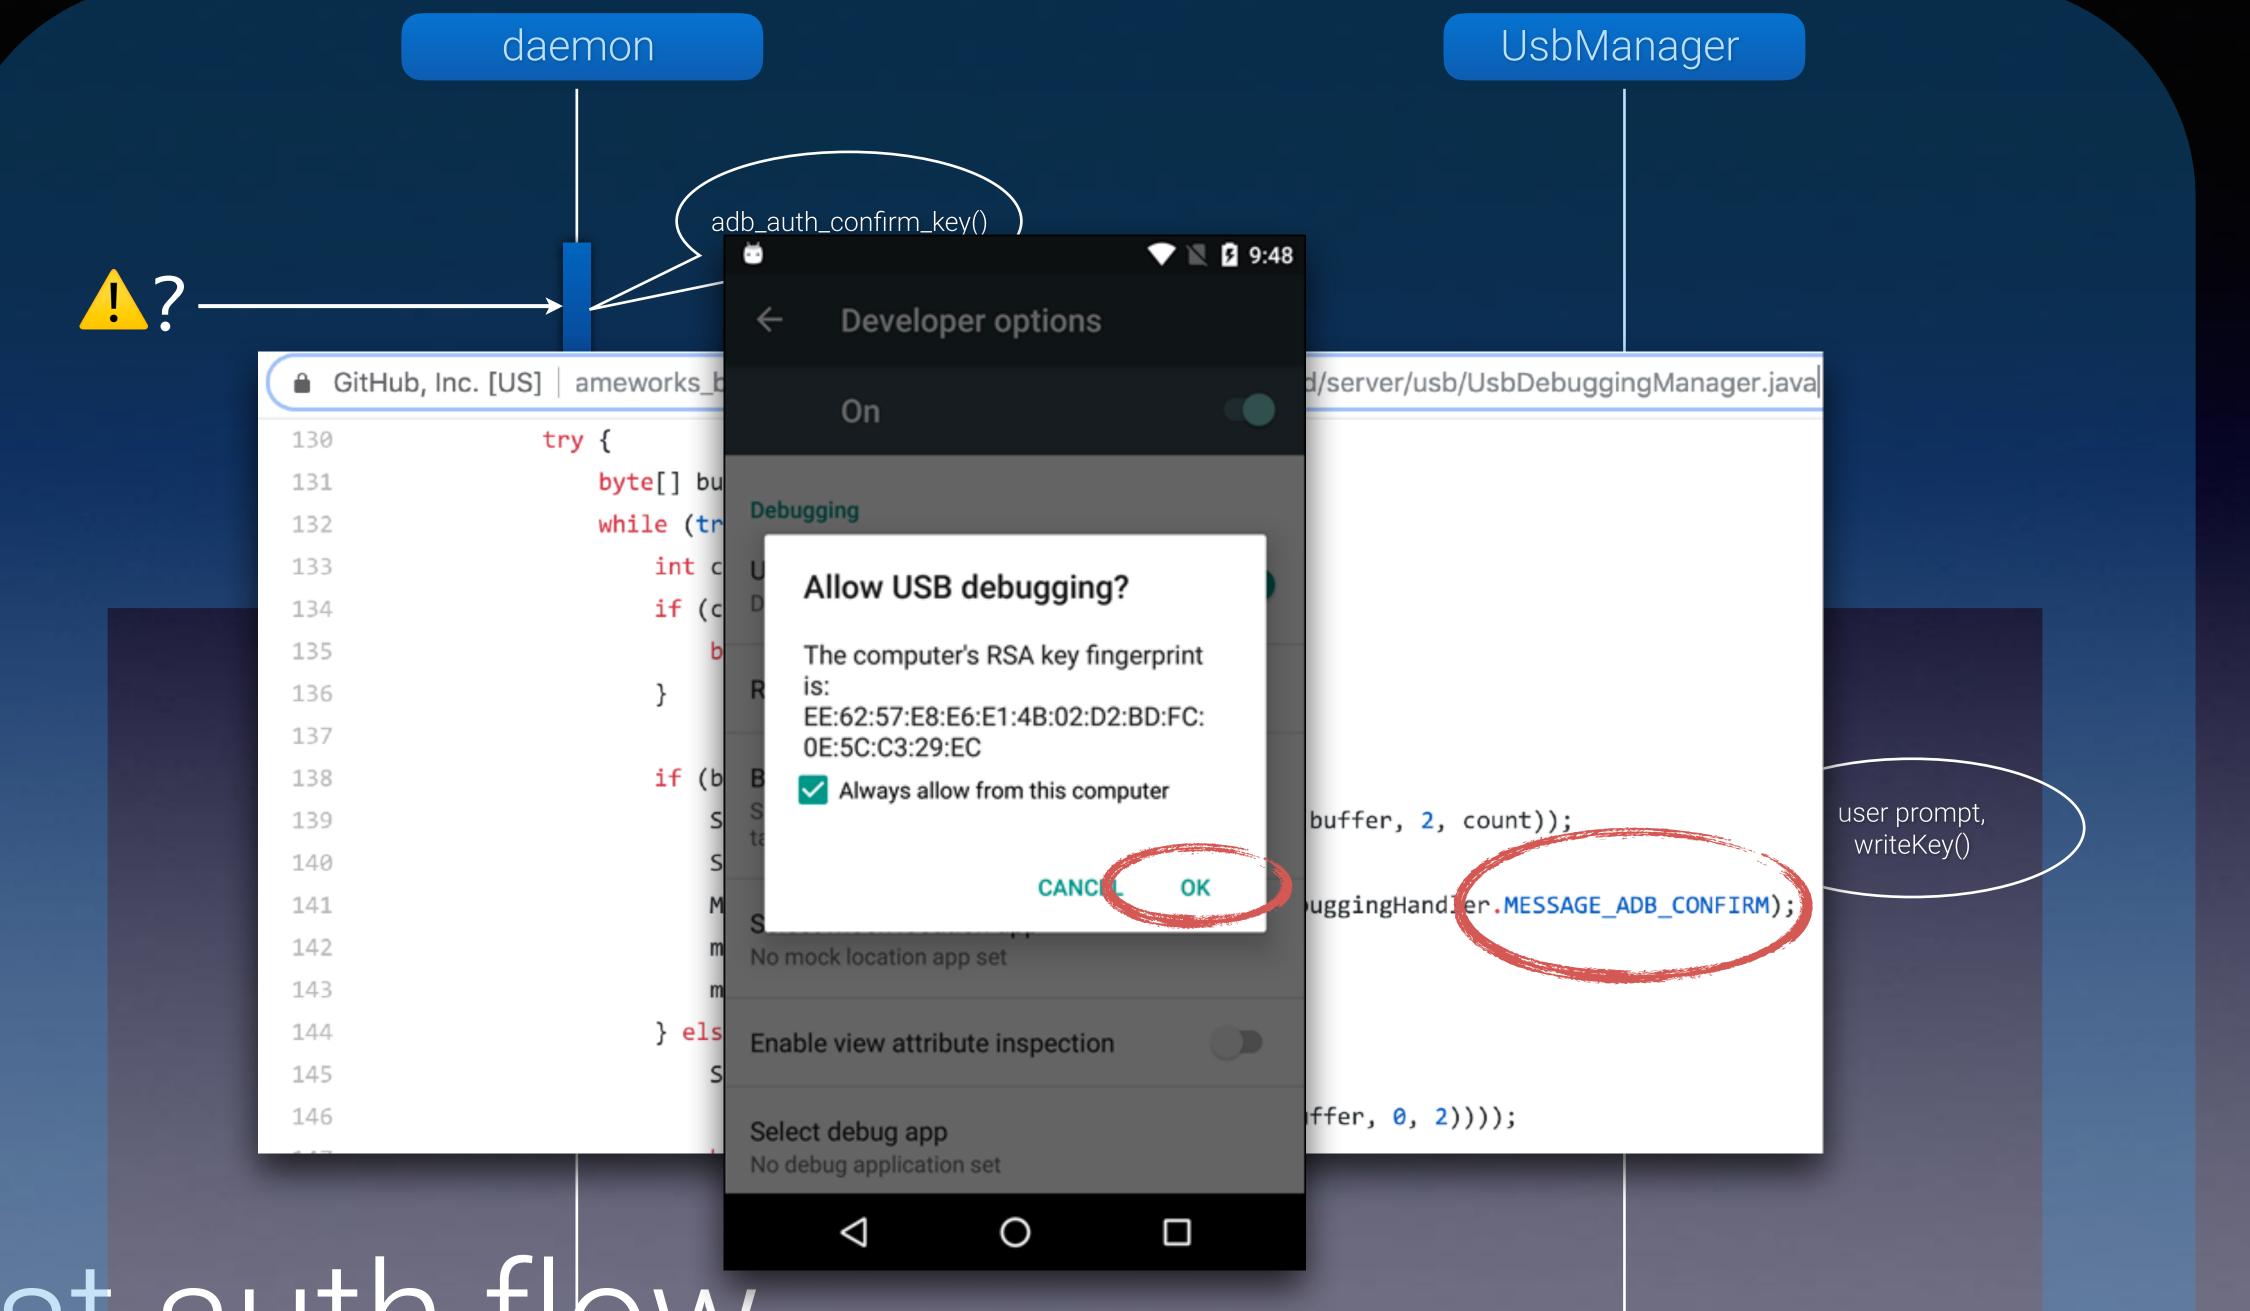

host auth flow

32bitdesi (Ravi Subramanian)
in linkedin.com/in/ravisu @ravisu on Twitter

