













transport registration



authinit





drop privileges



setup port and mDNS  
listeners



initjdwmp





run event loop
















# daemon startup

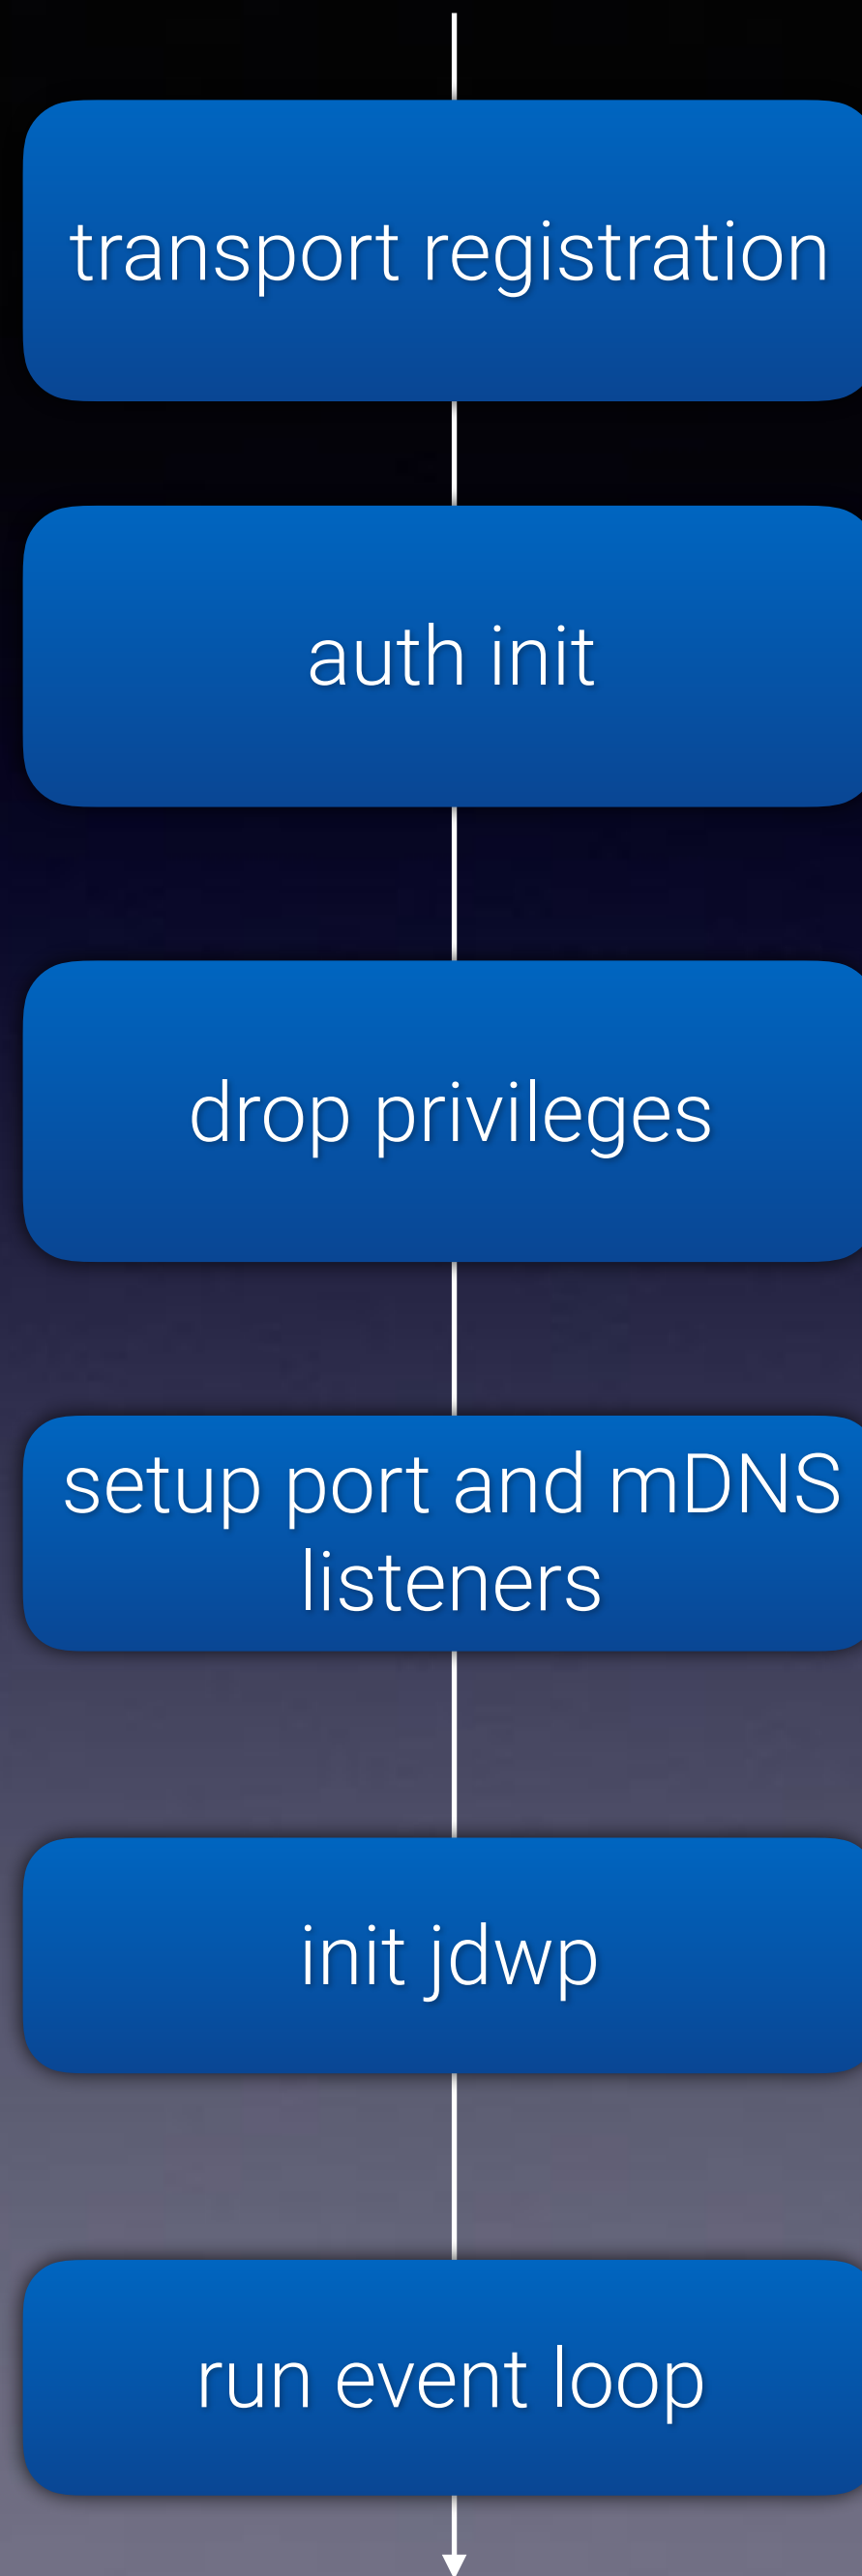

- Sets up detection mechanism for USB transport
- Creates “control socket” (/dev/socket/adbd) for authentication “OK” response
- If running in secure mode (default), don’t listen on tcp:5037 and don’t run as root
- Setup listeners for socket connections on a separate thread
- Setup JDWP control socket for debugging apps

```
5. Solarized Darcula (bash)  
ravisu@caramel:[~]$ adb lolcat
```

# protocol traces

