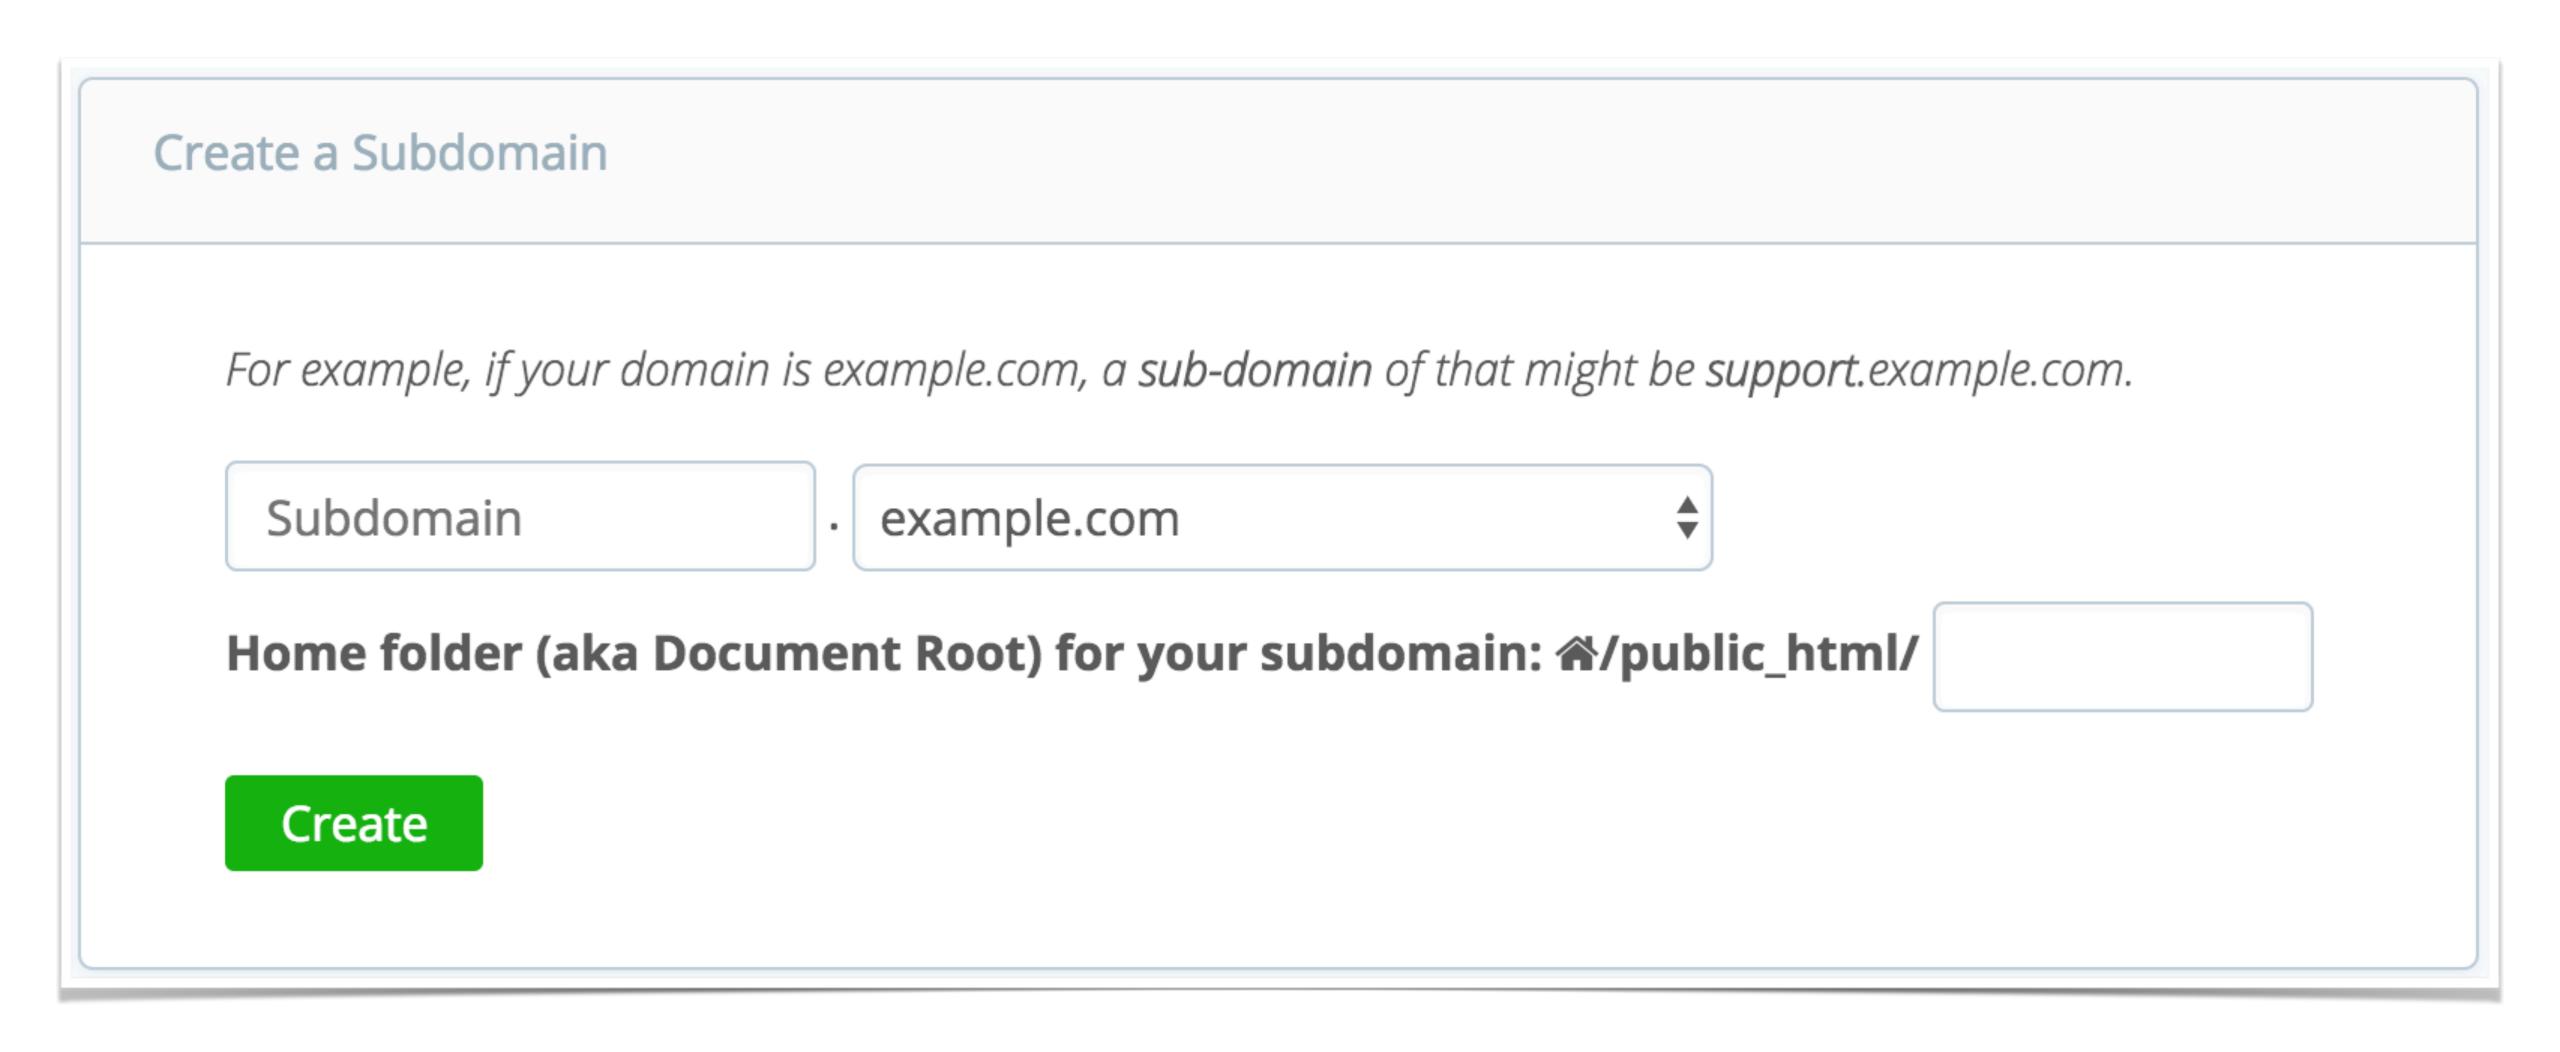View subdomain response

```
200 OK
Content-Type: application/json

{
  "domain": "example.com",
  "subdomain": "test1",
  "target-path": "/public-html/test1",
  "redirect": null
}
```

Create subdomain

Create a Subdomain

For example, if your domain is example.com, a sub-domain of that might be support.example.com.

| Subdomain | · | example.com ⏬ |

Home folder (aka Document Root) for your subdomain: ⌂/public_html/ [　　　　]

Create

View subdomain response

```
200 OK
Content-Type: application/json

{

  "domain": "example.com",
  "subdomain": "test1",
  "target-path": "/public-html/test1",
  "redirect": null

}
```