ASP.NET FORMS - IP

Purpose of work:

learn to write code in WEB-Forms

Exercise.

Develop an application using WEB form

.

工作目的：

學習在 **WEB** 表單中編寫程式碼。

鍛煉。

使用 **ASP.NET WEB** 表單開發應用程式

www.Confucius.bsite.net
Images
Projects
　1
　2
　3
　4
　5
　6
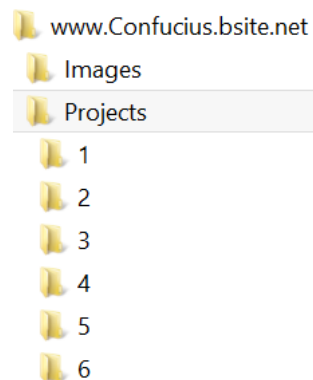
A copy of the site structure (subfolders) on your computer (hard drive or flash drive)
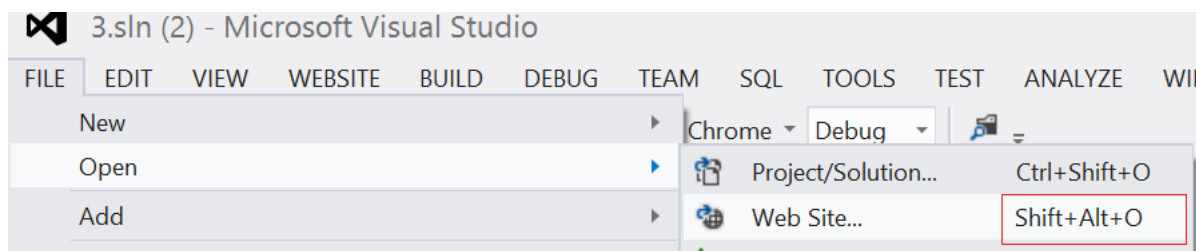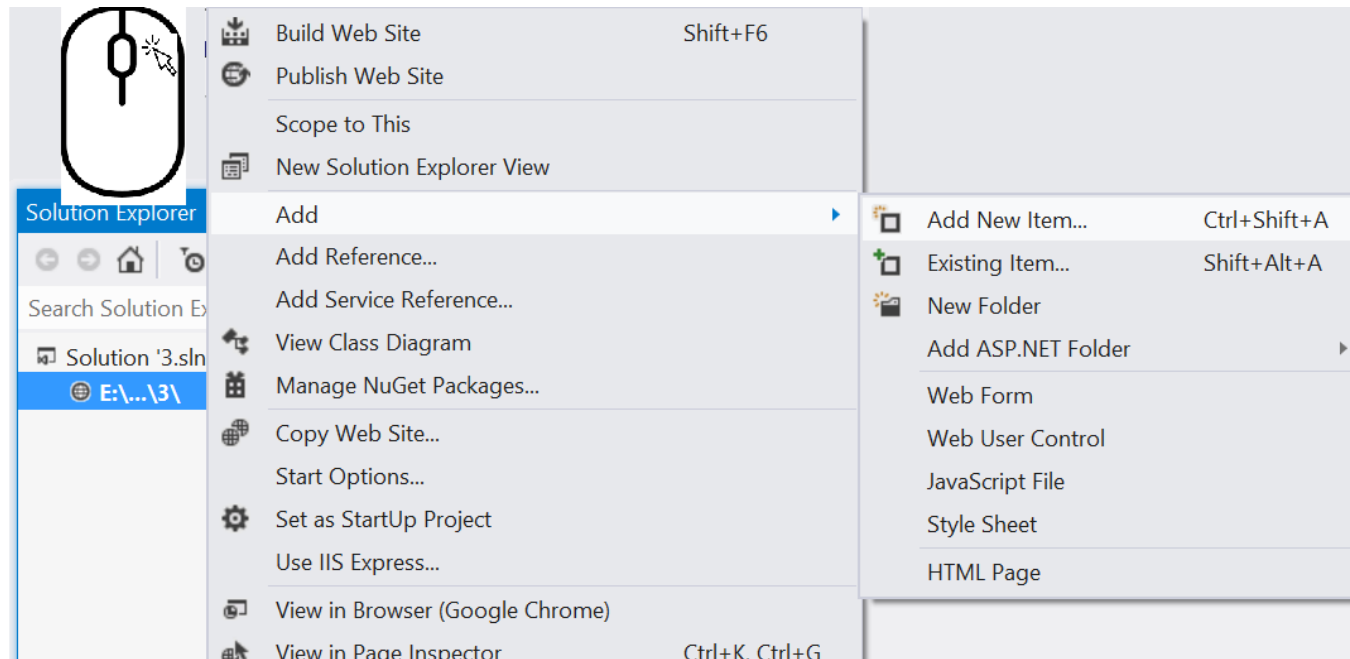
您的電腦（硬碟或 USB 快閃記憶體）上的網站結構（子資料夾）的副本

3.sln (2) - Microsoft Visual Studio

FILE　EDIT　VIEW　WEBSITE　BUILD　DEBUG　TEAM　SQL　TOOLS　TEST　ANALYZE　WIN

New   Chrome ▾ Debug ▾
Open   Project/Solution...   Ctrl+Shift+O
Add   Web Site...   Shift+Alt+O

Open directory

開啟目錄

Add WEB form to folder 3

E:\

www.confucius.bsite.net\Projects\6

as shown in the picture

Build Web Site   Shift+F6
Publish Web Site

Scope to This
New Solution Explorer View

Add   ▶

Add Reference...
Add Service Reference...

View Class Diagram
Manage NuGet Packages...

Copy Web Site...
Start Options...
Set as StartUp Project
Use IIS Express...

View in Browser (Google Chrome)
View in Page Inspector   Ctrl+K. Ctrl+G

Add New Item...   Ctrl+Shift+A
Existing Item...   Shift+Alt+A
New Folder
Add ASP.NET Folder   ▶
Web Form
Web User Control
JavaScript File
Style Sheet
HTML Page

Solution Explorer

Search Solution Ex

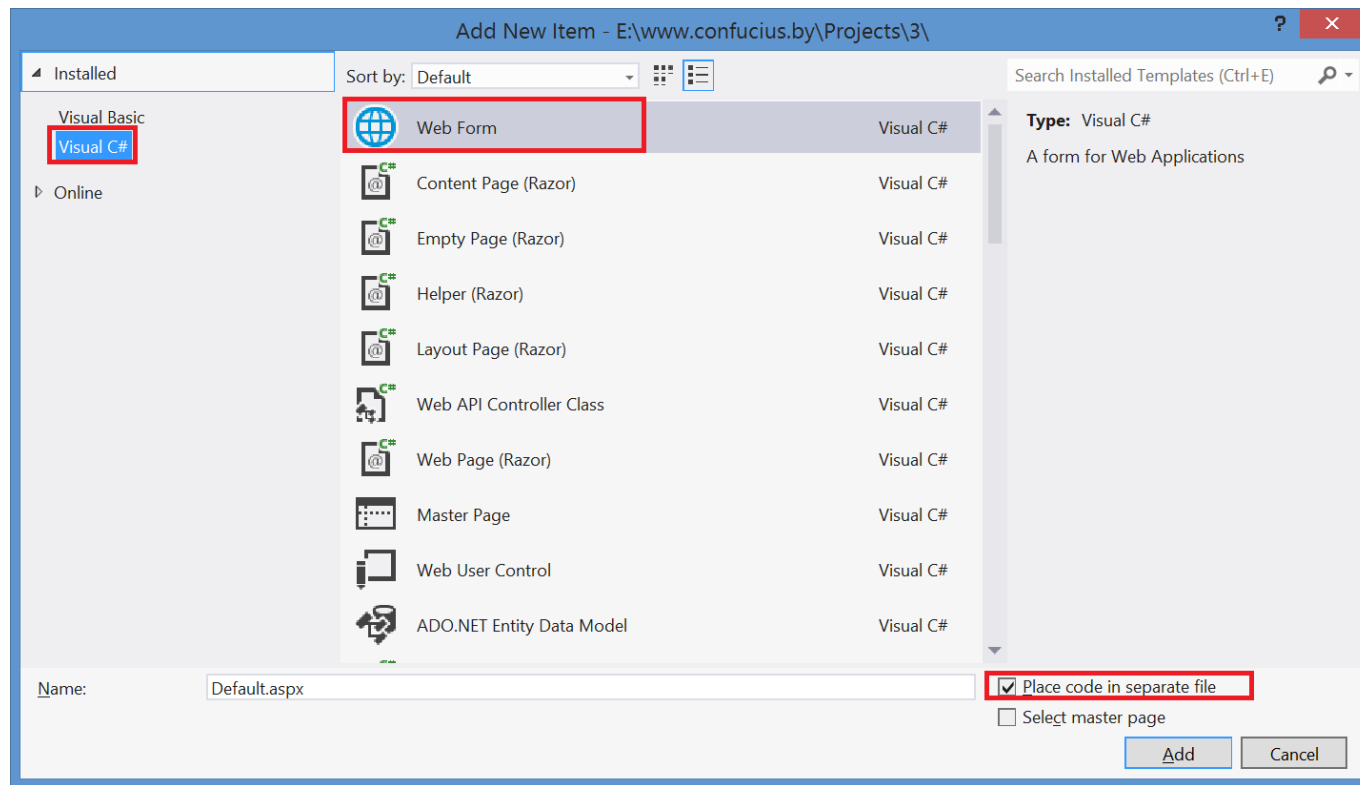Solution '3.sln
E:\...\3\

將WEB表單加入資料夾3

E:\

www.confucius.bsite.net
\Projects\6

如圖所示
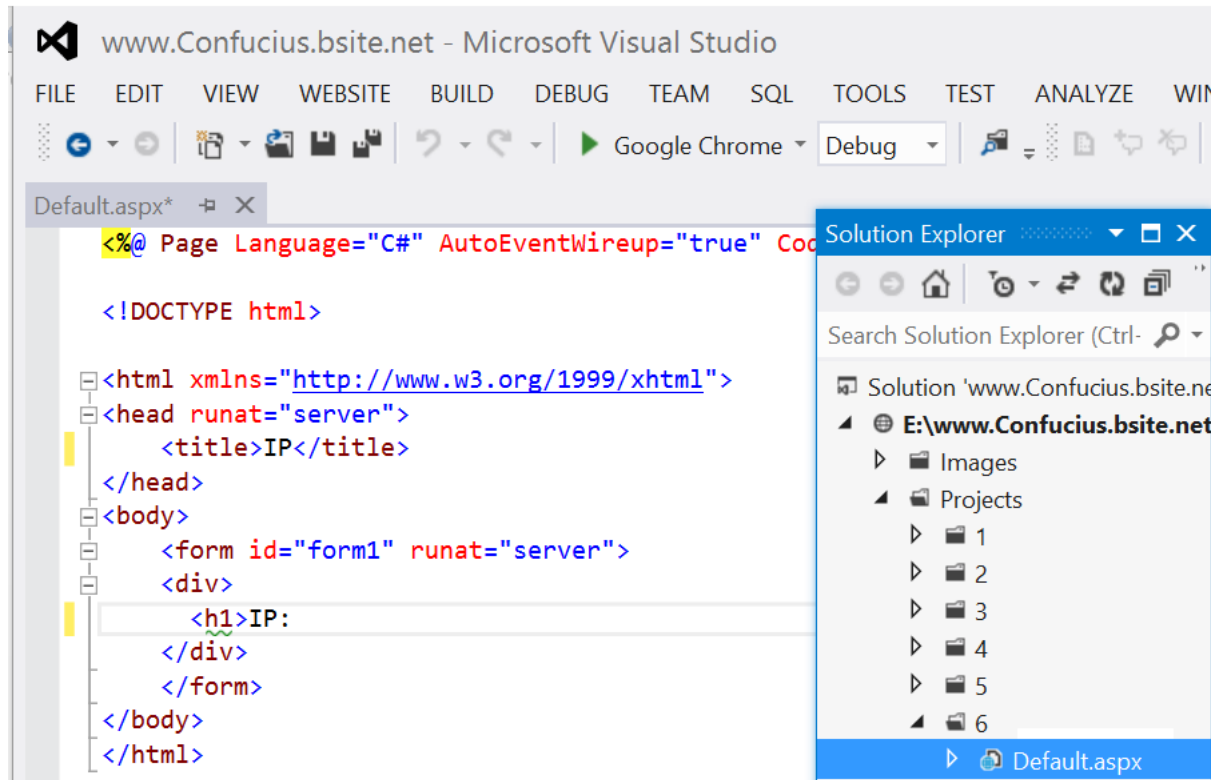
When adding a new
form, select the
programming language
Visual C#-sharp and
place the code in a
separate file

新增表單時，選擇程式語言 Visual C#-sharp 並將程式碼放在單獨的檔案中

As a result, the Default.aspx file will be added, which opens by default
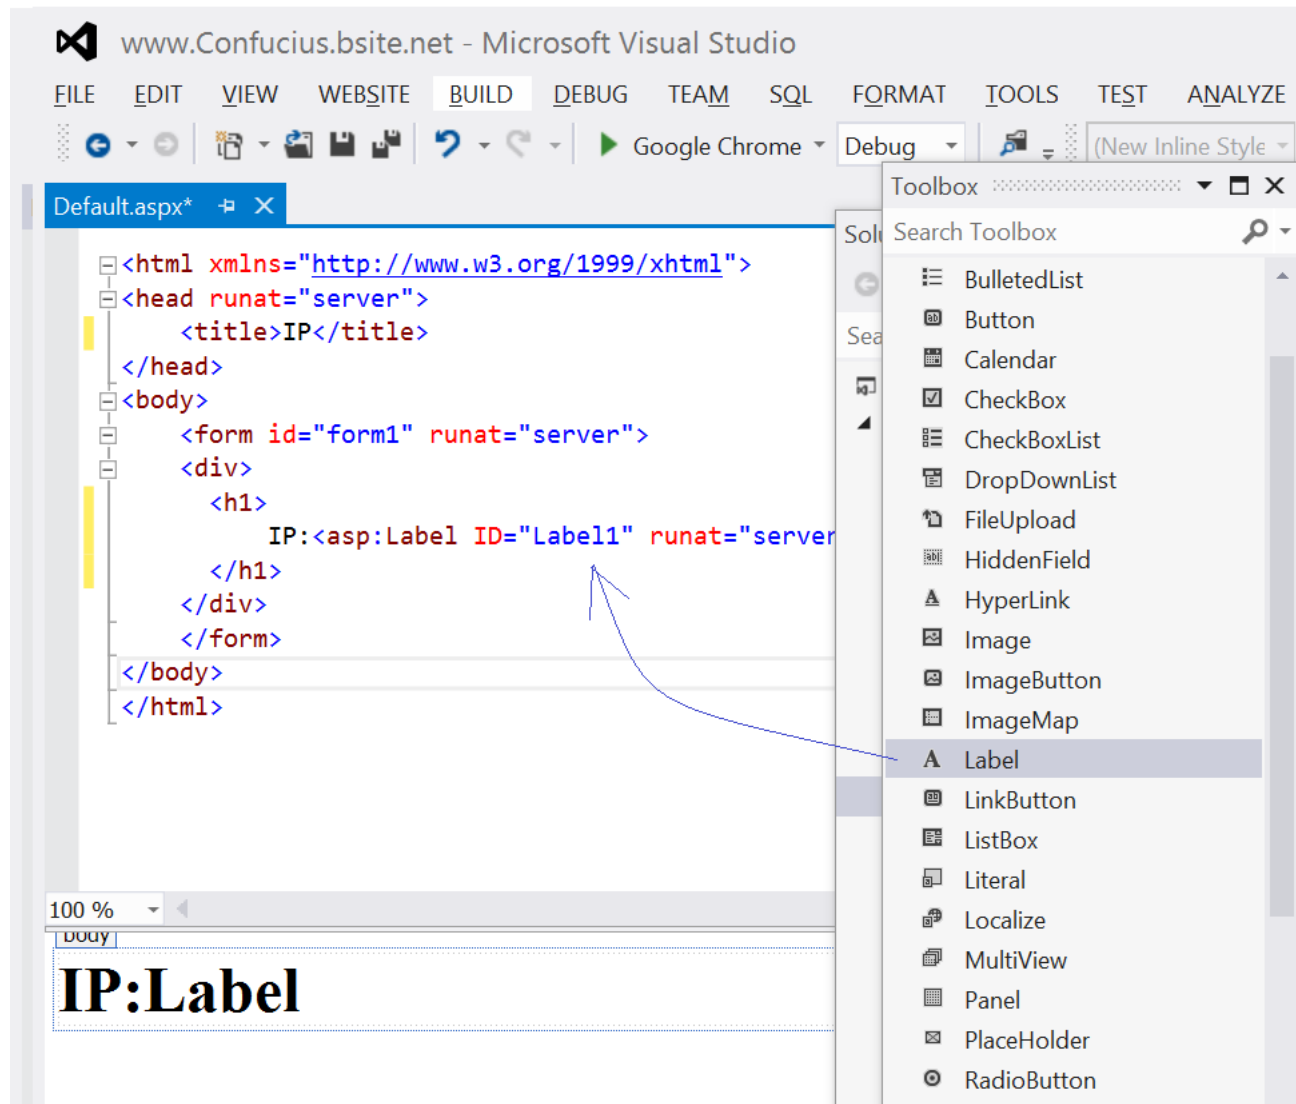
結果，

'**Default.aspx 檔案**'

文件將會被加入

預設會打開

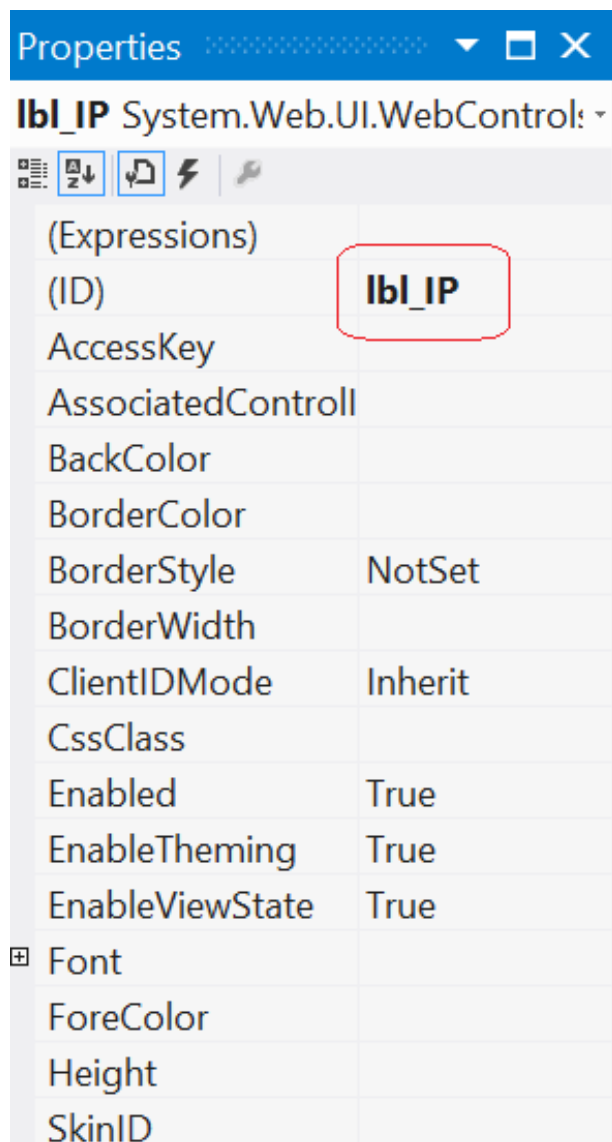Add 1 label
to WEB form
In design mode.

新增 1 個 Label
以WEB形式

在設計模式下。

Rename the names of Label according to Hungarian notation

(If you don't have time, you can skip this operation)

The resulting file **Default.aspx** should look like this

Properties ▼ □ ×	

lbl_IP System.Web.UI.WebControls ▾

(Expressions)	
(ID)	**lbl_IP**
AccessKey	
AssociatedControlI	
BackColor	
BorderColor	
BorderStyle	NotSet
BorderWidth	
ClientIDMode	Inherit
CssClass	
Enabled	True
EnableTheming	True
EnableViewState	True
⊞ Font	
ForeColor	
Height	
SkinID	

產生的文件
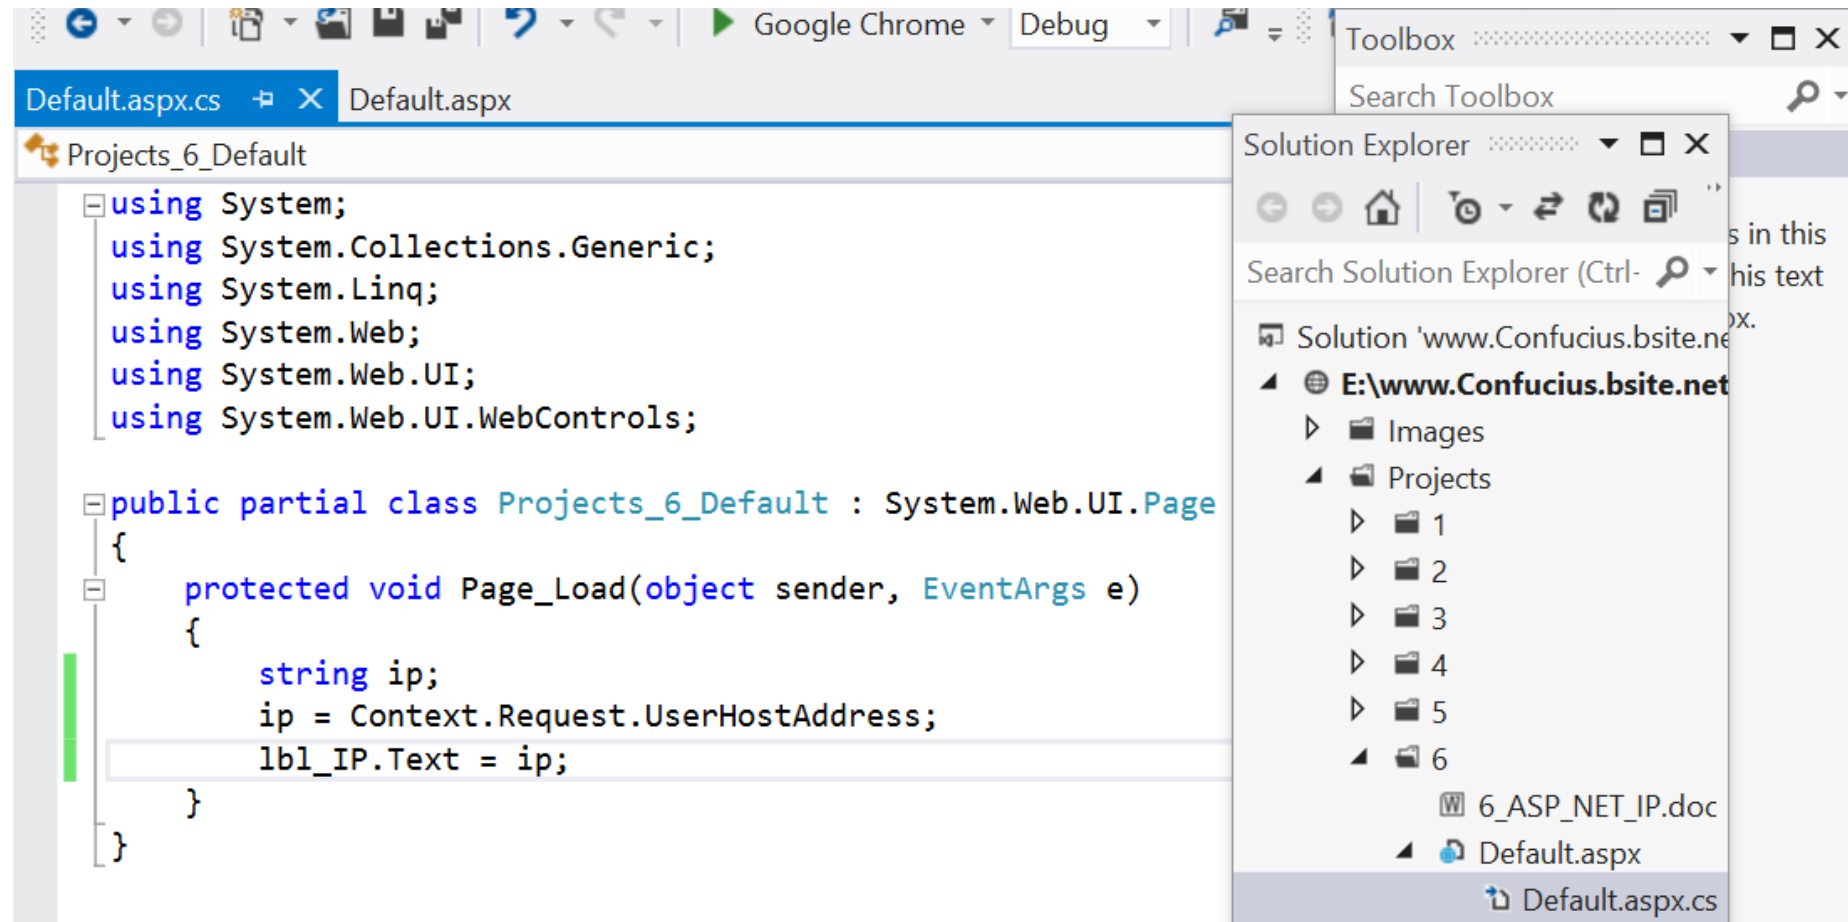
Default.aspx

應該看起來像這樣

← → C ⓘ localhost:55424/www...

IP:Label

在 Default.aspx.cs
檔案中，將程式碼加
入 Load() 方法

In the `Default.aspx.cs` file, add code to the `Load()` method

Uploading the folder

E:\www.Confucius.bsite.net\Projects\6

to the site and Run

https://confucius.bsite.net/Projects/6/

confucius.bsite.net/Projects/6/

IP:5.161.102.56

上傳資料夾

E:\www.Confucius.bsite.net\Projects\6

到站點並運行

https://confucius.bsite.net/Projects/6/