Next Greater Element :-

nums1 = [4,1,2]

nums2 = [1,3,4,2]



map → (2,-1), (4,-1), (3,4), (1,3)

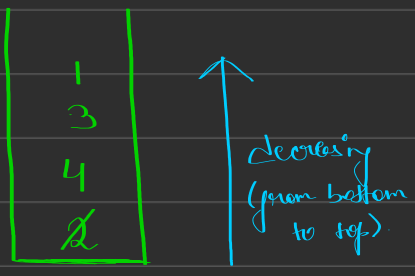

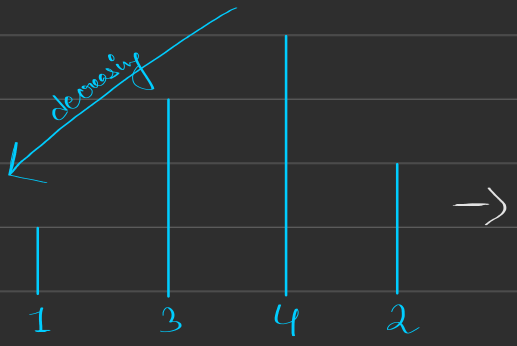

→ 2 is removed because, after a greater element comes in front of 2, there is no significance of keeping it, as it can never be greater again.

→ Use monotonic stack.

→ Traverse from the back of nums2.

→ If stack is empty, set the NGE as -1, else NGE is stack.peak()

→ If top element of stack is less than current element of arr, stack.pop()

→ Push the current element into the stack.

→ Then run a loop for nums1, and return an answer array.

TC → O(n+m)

SC → O(n) [stack + hashmap]