

React Day 2

File and Folder structure of React

☐ Package.json

- The package.json file is the most important file in the React project folder structure. It
- stores essential information about the project, such as the project name, version, and scripts.
- It also lists the dependencies and devDependencies required for the project to run and build properly.

Interview Question What is the difference between dependencies and devDependencies ??

As both store the version of library so what is difference between them ??

Dependencies

package required for app to run in production. for example react, react-dom, axios, they are installed in production, also we can install it through command `npm install <package_name>`

devDependencies

package required only during development and testing, for example vite, enlist, prettier, etc. They are not installed in production, we have to install it with command `npm install <package-name> --save-dev`

☐ package-lock.json

- Ye file bhi same package.json ki tarah jab hum npm i karte hai tab install hoti hai.
- this file locks the exact version of our package.
- by using these we ensure that all developer should install same version package

☐ README.md

- its mark down file that explain your project
 - its the first file that people see when they visit your project because this file explain our project.
1. 📌 **Gives an overview** of the project.
 2. 🚀 **Explains how to install** and run the project.
 3. 💻 **Shows how to use** the project (with commands and screenshots if needed).
 4. 📄 **Provides contribution guidelines** (if open source).

5. 🧑🏻💻 **Helps other developers** understand your work.

☐ **vite.config.js**

- vite.config.js is a config file for vite, which is a modern build tool and development server that's superfast compared to others.

This file allows you to:

- Customize your development server.
- Set up plugins (like React, TypeScript, etc.).
- Configure aliases and build options.
- Change port numbers or proxy settings.
- Control the final build output.

☐ **.gitignore**

gitignore is a file which tells git which file or folder to completely ignore – meaning git will not track or push that file or folder on github.

✅ Why we use this file .gitignore ?

- to avoid the unnecessary files to upload, files like temp files, system files, logs, etc
- to keep sensitive files safe for example API keys, passwords, environment files.
- ignore node_modules folder, which can be very large and is not needed in repository.

☐ **eslint.config.js**

The eslint.config.js file is used to configure eslint for your project. It helps define rules, environment and parser settings to check your code for errors and maintain coding standards.

☐ **index.html**

Entry level html file we can say which loads first

```


<!doctype html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <link rel="icon" type="image/svg+xml" href="/vite.svg" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Vite + React</title>
  </head>
  <body>
    <div id="root"></div>
    <script type="module" src="/src/main.jsx"></script>
  </body>
</html>

```

- here the whole script file main.jsx will load to the div with id = root
- pura code root id pe loga

☐ Node modules

"All the packages and libraries used in our project are installed inside the node_modules folder."

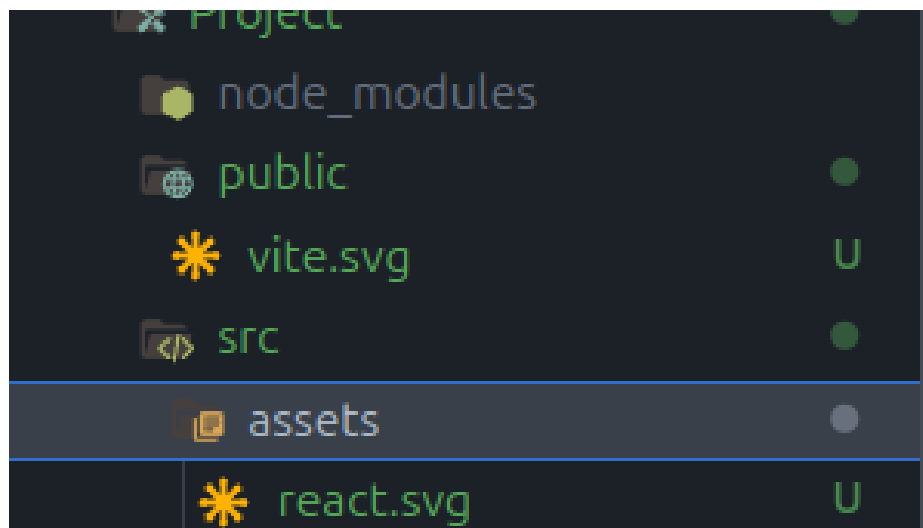

- ☐ public and assets store the same things like logo photos etc
- ☐ but what is difference between them why they have made ??

the public and assets are do the same things, but the only difference between them is when we store img in public any one can have access to it publically, but when we store the same thing in the assets anyone cant see that