
PIZZA SALES SQL QUERIES

A. KPI's


1. Total Revenue:

SELECT SUM(total_price) AS Total_Revenue FROM pizza_sales;



2. Average Order Value

SELECT (SUM(total_price) / COUNT(DISTINCT order_id)) AS Avg_order_Value FROM pizza_sales



3. Total Pizzas Sold

SELECT SUM(quantity) AS Total_pizza_sold FROM pizza_sales



4. Total Orders

SELECT COUNT(DISTINCT order_id) AS Total_Orders FROM pizza_sales




5. Average Pizzas Per Order

SELECT CAST(CAST(SUM(quantity) AS DECIMAL(10,2)) /

CAST(COUNT(DISTINCT order_id) AS DECIMAL(10,2)) AS DECIMAL(10,2))

AS Avg_Pizzas_per_order

FROM pizza sales




B. Daily Trend for Total Orders

SELECT DATENAME(DW, order_date) AS order_day, COUNT(DISTINCT order_id) AS total orders

FROM pizza_sales

GROUP BY DATENAME(DW, order_date)

Output:

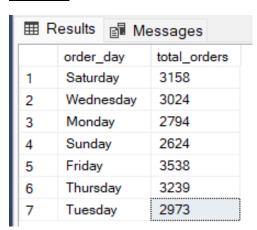

C. Monthly Trend for Orders

select DATENAME(MONTH, order_date) as Month_Name, COUNT(DISTINCT order id) as Total Orders

from pizza sales

GROUP BY DATENAME(MONTH, order date)

Output

		•
	Month_Name	Total_Orders
1	February	1685
2	June	1773
3	August	1841
4	April	1799
5	May	1853
6	December	1680
7	January	1845
8	September	1661
9	October	1646
10	July	1935
11	November	1792
12	March	1840

D. % of Sales by Pizza Category


SELECT pizza_category, CAST(SUM(total_price) AS DECIMAL(10,2)) as total_revenue,

CAST(SUM(total_price) * 100 / (SELECT SUM(total_price) from pizza_sales) AS DECIMAL(10,2)) AS PCT

FROM pizza_sales

GROUP BY pizza_category

<u>Output</u>

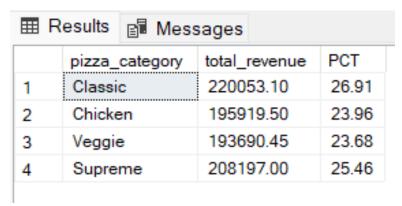

E. % of Sales by Pizza Size

SELECT pizza_size, CAST(SUM(total_price) AS DECIMAL(10,2)) as total_revenue,

CAST(SUM(total_price) * 100 / (SELECT SUM(total_price) from pizza_sales) AS DECIMAL(10,2)) AS PCT

FROM pizza_sales

GROUP BY pizza_size

ORDER BY pizza_size

<u>Output</u>

Ⅲ F	Results 📳 N	Messages	
	pizza_size	total_revenue	PCT
1	L	375318.70	45.89
2	M	249382.25	30.49
3	S	178076.50	21.77
4	XL	14076.00	1.72
5	XXL	1006.60	0.12

F. Total Pizzas Sold by Pizza Category

SELECT pizza_category, SUM(quantity) as Total_Quantity_Sold

FROM pizza_sales

WHERE MONTH(order_date) = 2

GROUP BY pizza_category

ORDER BY Total_Quantity_Sold DESC

<u>Output</u>

Ⅲ F	Results 📳 Mess	sages
	pizza_category	Total_Quantity_Sold
1	Classic	14888
2	Supreme	11987
3	Veggie	11649
4	Chicken	11050

G. Top 5 Pizzas by Revenue

SELECT Top 5 pizza_name, SUM(total_price) AS Total_Revenue FROM pizza_sales

GROUP BY pizza_name

ORDER BY Total_Revenue DESC

⊞ F	Results 🗊 Messages	
	pizza_name	Total_Revenue
1	The Thai Chicken Pizza	43434.25
2	The Barbecue Chicken Pizza	42768
3	The California Chicken Pizza	41409.5
4	The Classic Deluxe Pizza	38180.5
5	The Spicy Italian Pizza	34831.25

H. Bottom 5 Pizzas by Revenue

SELECT Top 5 pizza_name, SUM(total_price) AS Total_Revenue

FROM pizza_sales

GROUP BY pizza_name

ORDER BY Total_Revenue ASC

	pizza_name	Total_Revenue
1	The Brie Carre Pizza	11588.4998130798
2	The Green Garden Pizza	13955.75
3	The Spinach Supreme Pizza	15277.75
4	The Mediterranean Pizza	15360.5
5	The Spinach Pesto Pizza	15596

I. Top 5 Pizzas by Quantity

SELECT Top 5 pizza_name, SUM(quantity) AS Total_Pizza_Sold

FROM pizza_sales

GROUP BY pizza_name

ORDER BY Total_Pizza_Sold DESC

<u>Output</u>

pizza_name	Total_Pizza_Sold
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371
	The Classic Deluxe Pizza The Barbecue Chicken Pizza The Hawaiian Pizza The Pepperoni Pizza

J. Bottom 5 Pizzas by Quantity

SELECT TOP 5 pizza_name, SUM(quantity) AS Total_Pizza_Sold FROM pizza_sales

GROUP BY pizza_name

ORDER BY Total_Pizza_Sold ASC

Output

⊞ R	Results 🖺 Messages	
	pizza_name	Total_Pizza_Sold
1	The Brie Carre Pizza	490
2	The Mediterranean Pizza	934
3	The Calabrese Pizza	937
4	The Spinach Supreme Pizza	950
5	The Soppressata Pizza	961

K. Top 5 Pizzas by Total Orders

SELECT Top 5 pizza_name, COUNT(DISTINCT order_id) AS Total_Orders FROM pizza_sales

GROUP BY pizza_name

ORDER BY Total_Orders DESC



L. Borrom 5 Pizzas by Total Orders

 ${\tt SELECT\ Top\ 5\ pizza_name,\ COUNT(DISTINCT\ order_id)\ AS\ Total_Orders}$

FROM pizza_sales

GROUP BY pizza_name

ORDER BY Total_Orders ASC

	pizza_name	Total_Orders
1_	The Brie Carre Pizza	480
2	The Mediterranean Pizza	912
3	The Spinach Supreme Pizza	918
4	The Calabrese Pizza	918
5	The Chicken Pesto Pizza	938