

## EXERCISE-6

### Single Row Functions

#### Objective

After the completion of will be able to do the

- Describe various in SQL.
- Use character, in SELECT statement.
- Describe the use

this exercise, the students following:  
types of functions available

number and date functions

of conversion functions.

#### Single row functions:

Manipulate data items.

Accept arguments and return one value.

Act on each row returned.

Return one result per row.

May modify the data type.

Can be nested.


Accept arguments which can be a column or an expression

#### Syntax

Function\_name(arg1,...argn)

An argument can be one of the following


- ✓ User-supplied constant
- ✓ Variable value
- ✓ Column name
- ✓ Expression

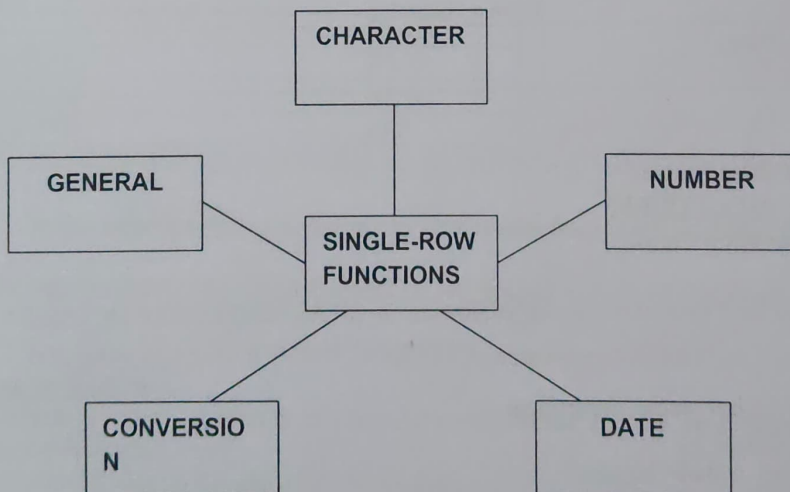

- Character Functions: Accept character input and can return both character and number values.

- Number functions: Accept numeric input and return numeric values.
- Date Functions: Operate on values of the DATE data type.
- Conversion Functions: Convert a value from one type to another.

### Character Functions

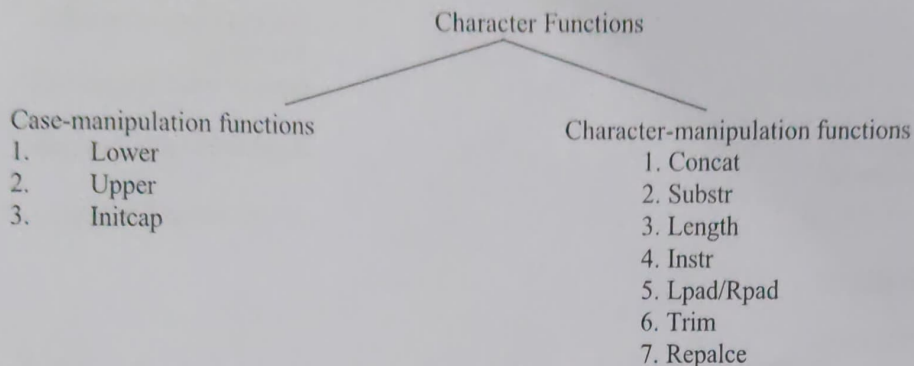

Function	Purpose
lower(column/expr)	Converts alpha character values to lowercase
upper(column/expr)	Converts alpha character values to uppercase
initcap(column/expr)	Converts alpha character values the to uppercase for the first letter of each word, all other letters in lowercase
concat(column1/expr1, column2/expr2)	Concatenates the first character to the second character
substr(column/expr,m,n)	Returns specified characters from character value starting at character position m, n characters long
length(column/expr)	Returns the number of characters in the expression
instr(column/expr,'string',m,n)	Returns the numeric position of a named string
lpad(column/expr, n,'string')	Pads the character value right-justified to a total width of n character positions
rpadd(column/expr,'string',m,n)	Pads the character value left-justified to a total width of n character positions
trim(leading/trailing/both, trim_character FROM trim_source)	Enables you to trim heading or string. trailing or both from a character
replace(text, search_string, replacement_string)	

#### Example:

```

lower('SQL Course')␣sql course
upper('SQL Course')␣SQL COURSE
initcap('SQL Course')␣Sql Course
  
```

```

SELECT 'The job id for' || upper(last_name) || 'is' || lower(job_id) AS "EMPLOYEE DETAILS"
FROM employees;
  
```

```

SELECT employee_id, last_name, department_id
FROM employees
WHERE LOWER(last_name)='higgins';
  
```

Function	Result
CONCAT('hello', 'world')	helloworld
Substr('helloworld',1,5)	Hello
Length('helloworld')	10

Instr('helloworld','w')	6
Lpad(salary,10,'*')	*****24000
Rpad(salary,10,'*')	24000*****
Trim('h' FROM 'helloworld')	elloworld

Command	Query	Output
initcap(char);	<i>select initcap('hello') from dual;</i>	Hello
lower(char);	<i>select lower('HELLO') from dual;</i>	Hello
upper(char);	<i>select upper('hello') from dual;</i>	HELLO
ltrim(char,[set]);	<i>select ltrim('cseit', 'cse') from dual;</i>	IT
rtrim(char,[set]);	<i>select rtrim('cseit', 'it') from dual;</i>	CSE
replace(char,search string, replace string);	<i>select replace('jack and jue', 'j', 'bl') from dual;</i>	black and blue
substr(char,m,n);	<i>select substr('information', 3, 4) from dual;</i>	form

#### Example:

SELECT employee\_id, CONCAT(first\_name,last\_name) NAME ,job\_id,LENGTH(last\_name),  
INSTR(last\_name,'a') "contains'a?"  
FROM employees WHERE SUBSTR(job\_id,4)='ERP';

#### NUMBER FUNCTIONS

Function	Purpose
round(column/expr, n)	Rounds the value to specified decimal
trunc(column/expr,n)	Truncates value to specified decimal
mod(m,n)	Returns remainder of division

#### Example

Function	Result
round(45.926,2)	45.93
trunc(45.926,2)	45.92
mod(1600,300)	100

SELECT ROUND(45.923,2), ROUND(45.923,0), ROUND(45.923,-1) FROM dual;

**NOTE:** Dual is a dummy table you can use to view results from functions and calculations.

SELECT TRUNC(45.923,2), TRUNC(45.923), TRUNC(45.923,-2) FROM dual;

SELECT last\_name,salary,MOD(salary,5000) FROM employees WHERE job\_id='sa\_rep';

#### Working with Dates

The Oracle database stores dates in an internal numeric format: century, year, month, day, hours, minutes, and seconds.

- The default date display format is DD-MON-RR.
- Enables you to store 21st-century dates in the 20th century by specifying only the last two digits of the year
- Enables you to store 20th-century dates in the 21st century in the same way

#### Example



```
SELECT last_name, hire_date FROM employees WHERE hire_date < '01-FEB-88;
```

### Working with Dates

SYSDATE is a function that returns:

- Date
- Time

#### Example

Display the current date using the DUAL table.

```
SELECT SYSDATE FROM DUAL;
```

### Arithmetic with Dates

- Add or subtract a number to or from a date for a resultant date value.
- Subtract two dates to find the number of days between those dates.
- Add hours to a date by dividing the number of hours by 24.

### Arithmetic with Dates

Because the database stores dates as numbers, you can perform calculations using arithmetic Operators such as addition and subtraction. You can add and subtract number constants as well as dates.

You can perform the following operations:

Operation	Result	Description
date + number	Date	Adds a number of days to a date
date - number	Date	Subtracts a number of days from a date
date - date	Number of days	Subtracts one date from another
date + number/24	Date	Adds a number of hours to a date

#### Example

```
SELECT last_name, (SYSDATE-hire_date)/7 AS WEEKS
FROM employees
WHERE department_id = 90;
```

### Date Functions

Function	Result
MONTHS_BETWEEN	Number of months between two dates
ADD_MONTHS	Add calendar months to date
NEXT_DAY	Next day of the date specified
LAST_DAY	Last day of the month
ROUND	Round date
TRUNC	Truncate date

### Date Functions

Date functions operate on Oracle dates. All date functions return a value of DATE data type except MONTHS\_BETWEEN, which returns a numeric value.

- MONTHS\_BETWEEN(date1, date2):: Finds the number of months between date1 and date2. The result can be positive or negative. If date1 is later than date2, the result is positive; if date1 is earlier than date2, the result is negative. The noninteger part of the result represents a portion of the month.

- **ADD\_MONTHS(date, n)::** Adds n number of calendar months to date. The value of n must be an integer and can be negative.
- **NEXT\_DAY(date, 'char')::** Finds the date of the next specified day of the week ('char') following date. The value of char may be a number representing a day or a character string.
- **LAST\_DAY(date)::** Finds the date of the last day of the month that contains date
- **ROUND(date[, 'fmt']::** Returns date rounded to the unit that is specified by the format model fmt. If the format model fmt is omitted, date is rounded to the nearest day.
- **TRUNC(date[, 'fmt']::** Returns date with the time portion of the day truncated to the unit that is specified by the format model fmt. If the format model fmt is omitted, date is truncated to the nearest day.

#### Using Date Functions

Function	Result
MONTHS_BETWEEN ( '01-SEP-95' , '11-JAN-94' )	19.6774194
ADD_MONTHS ( '11-JAN-94' , 6)	'11-JUL-94'
NEXT_DAY ( '01-SEP-95' , 'FRIDAY' )	'08-SEP-95'
LAST_DAY ( '01-FEB-95' )	'28-FEB-95'

#### Example


Display the employee number, hire date, number of months employed, sixmonth review date, first Friday after hire date, and last day of the hire month for all employees who have been employed for fewer than 70 months.

```
SELECT employee_id, hire_date, MONTHS_BETWEEN (SYSDATE, hire_date)
TENURE, ADD_MONTHS (hire_date, 6) REVIEW, NEXT_DAY (hire_date, 'FRIDAY'),
LAST_DAY(hire_date)
FROM employees
WHERE MONTHS_BETWEEN (SYSDATE, hire_date) < 70;
```

#### Conversion Functions

This covers the following topics:

- Writing a query that displays the current date
- Creating queries that require the use of numeric, character, and date functions
- Performing calculations of years and months of service for an employee

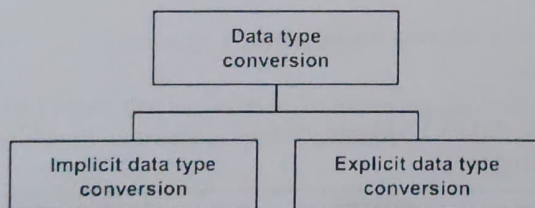

### Implicit Data Type Conversion

For assignments, the Oracle server can automatically convert the following:


From	To
VARCHAR2 or CHAR	NUMBER
VARCHAR2 or CHAR	DATE
NUMBER	VARCHAR2
DATE	VARCHAR2

For example, the expression `hire_date > '01-JAN-90'` results in the implicit conversion from the string '01-JAN-90' to a date.

For expression evaluation, the Oracle Server can automatically convert the following:

From	To
VARCHAR2 or CHAR	NUMBER
VARCHAR2 or CHAR	DATE

### Explicit Data Type Conversion

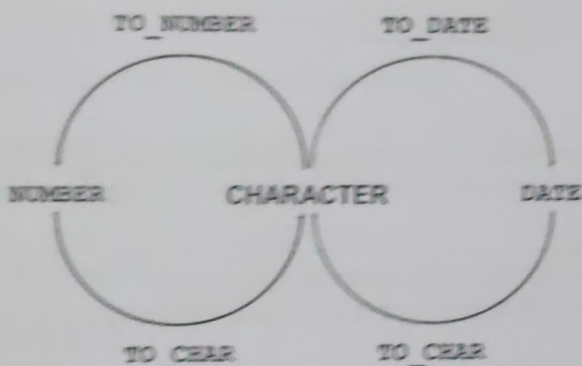

SQL provides three functions to convert a value from one data type to another:

#### Example:

Using the TO\_CHAR Function with Dates

`TO_CHAR(date, 'format_model')`


The format model:

- Must be enclosed by single quotation marks
- Is case-sensitive
- Can include any valid date format element
- Has an fm element to remove padded blanks or suppress leading zeros
- Is separated from the date value by a comma

```
SELECT employee_id, TO_CHAR(hire_date, 'MM/YY') Month_Hired  
FROM employees WHERE last_name = 'Higgins';
```



**Elements of the Date Format Model**

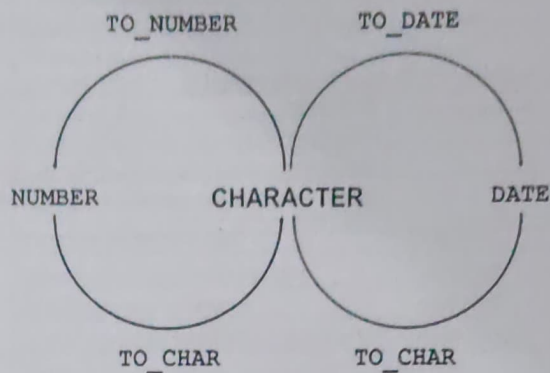

**Sample Format Elements of Valid Date**

Element	Description
SCC or CC	Century; server prefixes B.C. date with -
Years in dates YYYY or SYYYY	Year; server prefixes B.C. date with -
YYY or YY or Y	Last three, two, or one digits of year
Y,YYY	Year with comma in this position
IYYY, IYY, IY, I	Four-, three-, two-, or one-digit year based on the ISO standard
SYEAR or YEAR	Year spelled out; server prefixes B.C. date with -
BC or AD	Indicates B.C. or A.D. year
B.C. or A.D.	Indicates B.C. or A.D. year using periods
Q	Quarter of year
MM	Month: two-digit value
MONTH	Name of month padded with blanks to length of nine characters
MON	Name of month, three-letter abbreviation
RM	Roman numeral month
WW or W	Week of year or month
DDD or DD or D	Day of year, month, or week
DAY	Name of day padded with blanks to a length of nine characters
DY	Name of day; three-letter abbreviation
J	Julian day; the number of days since December 31, 4713 B.C.

**Date Format Elements: Time Formats**

Use the formats that are listed in the following tables to display time information and literals and to change numerals to spelled numbers.

Element	Description
AM or PM	Meridian indicator
A.M. or P.M.	Meridian indicator with periods
HH or HH12 or HH24	Hour of day, or hour (1-12), or hour (0-23)
MI	Minute (0-59)
SS	Second (0-59)
SSSSS	Seconds past midnight (0-86399)

#### Other Formats

Element	Description
.	Punctuation is reproduced in the result.
"of the"	Quoted string is reproduced in the result.

#### Specifying Suffixes to Influence Number Display

Element	Description
TH	Ordinal number (for example, DDTH for 4TH)
SP	Spelled-out number (for example, DDSP for FOUR)
SPTH or THSP	Spelled-out ordinal numbers (for example, DDSPTH for FOURTH)

#### Example

```
SELECT last_name,  
       TO_CHAR(hire_date, 'fmDD Month YYYY') AS HIREDATE  
FROM   employees;
```

Modify example to display the dates in a format that appears as "Seventeenth of June 1987 12:00:00 AM."

```
SELECT last_name,  
       TO_CHAR(hire_date, 'fmDdspth "of" Month YYYY fmHH:MI:SS AM') HIREDATE  
FROM   employees;
```

#### Using the TO\_CHAR Function with Numbers

TO\_CHAR(number, 'format\_model')

These are some of the format elements that you can use with the TO\_CHAR function to display a number value as a character:

Element	Result
9	Represents a number
0	Forces a zero to be displayed
\$	Places a floating dollar sign
L	Uses the floating local currency symbol
.	Prints a decimal point
,	Prints a comma as thousands indicator

#### Number Format Elements

If you are converting a number to the character data type, you can use the following format elements:



Element	Description	Example	Result
9	Numeric position (number of 9s determine display width)	999999	1234
0	Display leading zeros	099999	001234
\$	Floating dollar sign	\$999999	\$1234
L	Floating local currency symbol	£999999	£1234
D	Returns in the specified position the decimal character. The default is a period (.).	99D99	99.99
.	Decimal point in position specified	999999.99	1234.00
G	Returns the group separator in the specified position. You can specify multiple group separators in a number format model.	9,999	9G999
,	Comma in position specified	999,999	1,234
MI	Minus signs to right (negative values)	999999MI	1234-
PR	Parenthesize negative numbers	999999PR	<1234>
EEEE	Scientific notation (format must specify four Es)	99.999EEEE	1.234E+03
U	Returns in the specified position the "Euro" (or other) dual currency	U9999	€1234
V	Multiply by 10 <i>n</i> times ( <i>n</i> = number of 9s after V)	9999V99	123400
S	Returns the negative or positive value	S9999	-1234 or +1234
B	Display zero values as blank, not 0	B9999.99	1234.00

```
SELECT TO_CHAR(salary, '$99,999.00') SALARY
FROM employees
WHERE last_name = 'Ernst';
```

### Using the TO\_NUMBER and TO\_DATE Functions

- Convert a character string to a number format using the TO\_NUMBER function:  
TO\_NUMBER(char[, 'format\_model'])
- Convert a character string to a date format using the TO\_DATE function:  
TO\_DATE(char[, 'format\_model'])
- These functions have an fx modifier. This modifier specifies the exact matching for the character argument and date format model of a TO\_DATE function.

The fx modifier specifies exact matching for the character argument and date format model of a TO\_DATE function:

- Punctuation and quoted text in the character argument must exactly match (except for case) the corresponding parts of the format model.
  - The character argument cannot have extra blanks. Without fx, Oracle ignores extra blanks.
  - Numeric data in the character argument must have the same number of digits as the corresponding element in the format model. Without fx, numbers in the character argument can omit leading zeros.
- ```
SELECT last_name, hire_date
FROM employees
WHERE hire_date = TO_DATE('May 24, 1999', 'fxMonth DD, YYYY');
```

Find the Solution for the following:

1. Write a query to display the current date. Label the column Date.

select current\_date as date  
from dual;

2. The HR department needs a report to display the employee number, last name, salary, and increased by 15.5% (expressed as a whole number) for each employee. Label the column New Salary.

select employee-id, last\_name, salary, round(salary \* 1.155)  
as "New Salary" from employees;

3. Modify your query lab\_03\_02.sql to add a column that subtracts the old salary from the new salary. Label the column Increase.

select employee-id, last\_name, salary, round(salary \* 1.155)  
as "New Salary", round(salary \* 1.155) - salary as increase  
from employees;

4. Write a query that displays the last name (with the first letter uppercase and all other letters lowercase) and the length of the last name for all employees whose name starts with the letters J, A, or M. Give each column an appropriate label. Sort the results by the employees' last names.

select ~~init~~ initcap(last\_name) as "Last Name", length(last\_name)  
as "Length" from employees where upper(substr(last\_name,  
1,1)) in ('J', 'A', 'M') order by last\_name;

5. Rewrite the query so that the user is prompted to enter a letter that starts the last name. For example, if the user enters H when prompted for a letter, then the output should show all employees whose last name starts with the letter H.

select employee-id, last\_name, salary from  
employees where upper(substr(last\_name, 1, 1)) = UPPER  
~~letter~~ ('& letter');



6. The HR department wants to find the length of employment for each employee. For each employee, display the last name and calculate the number of months between today and the date on which the employee was hired. Label the column MONTHS\_WORKED. Order your results by the number of months employed. Round the number of months up to the closest whole number.

*select last\_name, ROUND(MONTHS\_BETWEEN(CURRENT\_DATE,  
hire\_date)) AS MONTH\_WORKER from employees order  
by MONTHS\_WORKER;*

Note: Your results will differ.

7. Create a report that produces the following for each employee:

<employee last name> earns <salary> monthly but wants <3 times salary>. Label the column Dream Salaries.

*select concat(last\_name, ' earns', salary, ' monthly but  
wants', salary \* 3) as "Dream Salaries" from employees;*

8. Create a query to display the last name and salary for all employees. Format the salary to be 15 characters long, left-padded with the \$ symbol. Label the column SALARY.

*select last\_name, PAD(concat('\$', salary), 15, ' ')  
as salary from employees;*

9. Display each employee's last name, hire date, and salary review date, which is the first Monday after six months of service. Label the column REVIEW. Format the dates to appear in the format similar to "Monday, the Thirty-First of July, 2000."

*select last\_name, hire\_date, to\_char(NEXT\_DAY(ADD-  
MONTHS(hire\_date, 6), 'MONDAY'), 'fm Day, "the" DDth"  
of "MONTH, YYYY') as review from employees;*



10. Display the last name, hire date, and day of the week on which the employee started. Label the column DAY. Order the results by the day of the week, starting with Monday.

*Select last\_name, hire\_date, to\_char(hire\_date, 'Day')  
as Day from employees order by to\_char(hire\_date, 'Day')*

| Evaluation Procedure | Marks awarded           |
|----------------------|-------------------------|
| Query(5)             | 5                       |
| Execution (5)        | 5                       |
| Viva(5)              | 5                       |
| Total (15)           | 15                      |
| Faculty Signature    | <i>D. M.<br/>8/9/15</i> |