

Week4-Quiz 1

10 May 2020 02:46

Inbox (5,615) · srinivasarao.dhar... (1) WhatsApp Coursera Response Program for Key concepts on Deep Neural N... deep-learning-coursera/Week 4

← → ↻ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt

Apps YouTube Gmail In-Browser Tutorial... GitHub · yanshengj... ai Telugu Movies 202... Google Images Krish Naik · YouTube Sci-Hub: removing... research papers Optical Character R...

← Key concepts on Deep Neural Networks Graded Quiz • 30 min Due Jun 1, 11:59 AM +05

Key concepts on Deep Neural Networks

TOTAL POINTS 10

1. What is the "cache" used for in our implementation of forward propagation and backward propagation? 1 point
- ☐ It is used to keep track of the hyperparameters that we are searching over, to speed up computation.
 - ☐ It is used to cache the intermediate values of the cost function during training.
 - ☒ We use it to pass variables computed during forward propagation to the corresponding backward propagation step. It contains useful values for backward propagation to compute derivatives.
 - ☐ We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.
2. Among the following, which ones are "hyperparameters"? (Check all that apply.) 1 point

☒ size of the hidden layers $n^{[l]}$

Windows Taskbar: File Explorer, Google Chrome, Microsoft Edge, etc. System tray: ENG, 02:47, 10-05-2020

Inbox (5,615) · srinivasarao.dhar... (1) WhatsApp Coursera Response Program for Key concepts on Deep Neural N... deep-learning-coursera/Week 4

← → ↻ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt

Apps YouTube Gmail In-Browser Tutorial... GitHub · yanshengj... ai Telugu Movies 202... Google Images Krish Naik · YouTube Sci-Hub: removing... research papers Optical Character R...

← Key concepts on Deep Neural Networks Graded Quiz • 30 min Due Jun 1, 11:59 AM +05

☐ We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.

2. Among the following, which ones are "hyperparameters"? (Check all that apply.) 1 point

- ☒ size of the hidden layers $n^{[l]}$
- ☐ bias vectors $b^{[l]}$
- ☐ activation values $a^{[l]}$
- ☒ number of layers L in the neural network
- ☒ number of iterations
- ☒ learning rate α
- ☐ weight matrices $W^{[l]}$

3. Which of the following statements is true? 1 point

Windows Taskbar: File Explorer, Google Chrome, Microsoft Edge, etc. System tray: ENG, 02:47, 10-05-2020

Inbox (5,615) · srinivasarao.dhar... (1) WhatsApp Coursera Response Program for Key concepts on Deep Neural Networks

← → ↻ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt

Apps YouTube Gmail In-Browser Tutorial... GitHub · yanshengj... ai Telugu Movies 202... Google Images Krish Naik - YouTube Sci-Hub: removing... research papers Optical Character R...

Key concepts on Deep Neural Networks

Graded Quiz · 30 min Due Jun 1, 11:59 AM +05

☐ weight matrices $W^{[l]}$

3. Which of the following statements is true? 1 point

- ☒ The deeper layers of a neural network are typically computing more complex features of the input than the earlier layers.
- ☐ The earlier layers of a neural network are typically computing more complex features of the input than the deeper layers.

4. Vectorization allows you to compute forward propagation in an L -layer neural network without an explicit for-loop (or any other explicit iterative loop) over the layers $l=1, 2, \dots, L$. True/False? 1 point

- ☐ True
- ☒ False

5. Assume we store the values for $n^{[l]}$ in an array called layers, as follows: layer_dims = [n_x, 4, 3, 2, 1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model? 1 point

☐ 1 = for(l in range(1, len(layer_dims)/2)):

Inbox (5,615) · srinivasarao.dhar... (1) WhatsApp Coursera Response Program for Key concepts on Deep Neural Networks

← → ↻ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt

Apps YouTube Gmail In-Browser Tutorial... GitHub · yanshengj... ai Telugu Movies 202... Google Images Krish Naik - YouTube Sci-Hub: removing... research papers Optical Character R...

Key concepts on Deep Neural Networks

Graded Quiz · 30 min Due Jun 1, 11:59 AM +05

5. Assume we store the values for $n^{[l]}$ in an array called layers, as follows: layer_dims = [n_x, 4, 3, 2, 1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model? 1 point

☐ 1 = for(l in range(1, len(layer_dims)/2)):
2 parameter['W' + str(l)] = np.random.randn(layers[l], layers[l-1]) * 0.01
3 parameter['b' + str(l)] = np.random.randn(layers[l], 1) * 0.01


☐ 1 = for(l in range(1, len(layer_dims)/2)):
2 parameter['W' + str(l)] = np.random.randn(layers[l], layers[l-1]) * 0.01
3 parameter['b' + str(l)] = np.random.randn(layers[l-1], 1) * 0.01

☐ 1 = for(l in range(1, len(layer_dims))):
2 parameter['W' + str(l)] = np.random.randn(layers[l-1], layers[l]) * 0.01
3 parameter['b' + str(l)] = np.random.randn(layers[l], 1) * 0.01

☒ 1 = for(l in range(1, len(layer_dims))):
2 parameter['W' + str(l)] = np.random.randn(layers[l], layers[l-1]) * 0.01
3 parameter['b' + str(l)] = np.random.randn(layers[l], 1) * 0.01

6. Consider the following neural network.

1 point

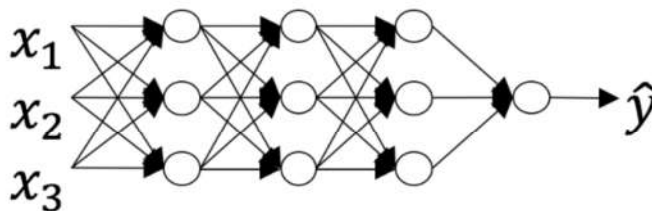

How many layers does this network have?

- ☒ The number of layers L is 4. The number of hidden layers is 3.
- ☐ The number of layers L is 3. The number of hidden layers is 3.
- ☐ The number of layers L is 4. The number of hidden layers is 4.
- ☐ The number of layers L is 5. The number of hidden layers is 4.

7. During forward propagation, in the forward function for a layer l you need to know what is the activation function in a layer (Sigmoid, tanh, ReLU, etc.). During backpropagation, the corresponding backward function also needs to know what is the activation function for layer l , since the gradient depends on it. True/False?

1 point

- ☒ True
- ☐ False

8. There are certain functions with the following properties:

1 point

(i) To compute the function using a shallow network circuit, you will need a large network (where we measure size by the number of logic gates in the network), but (ii) To compute it using a deep network circuit, you need only an exponentially smaller network. True/False?

- ☒ True
- ☐ False

9. Consider the following 2 hidden layer neural network:

1 point

$$x^{(i)} \longrightarrow \left(a^{[1]} \right)$$

Key concepts on Deep Neural Networks
Graded Quiz • 30 min

Due Jun 1, 11:59 AM +05

- ☒ $W^{[1]}$ will have shape (4, 4)
- ☒ $b^{[1]}$ will have shape (4, 1)
- ☐ $W^{[1]}$ will have shape (3, 4)
- ☐ $b^{[1]}$ will have shape (3, 1)
- ☒ $W^{[2]}$ will have shape (3, 4)
- ☐ $b^{[2]}$ will have shape (1, 1)
- ☒ $W^{[2]}$ will have shape (3, 1)
- ☐ $b^{[2]}$ will have shape (3, 1)
- ☐ $W^{[3]}$ will have shape (3, 1)
- ☒ $b^{[3]}$ will have shape (1, 1)
- ☒ $W^{[3]}$ will have shape (1, 3)
- ☐ $b^{[3]}$ will have shape (3, 1)

Key concepts on Deep Neural Networks
Graded Quiz • 30 min

Due Jun 1, 11:59 AM +05

- ☐ $b^{[2]}$ will have shape (1, 1)
- ☒ $W^{[2]}$ will have shape (3, 1)
- ☐ $b^{[3]}$ will have shape (3, 1)
- ☐ $W^{[3]}$ will have shape (3, 1)
- ☒ $b^{[3]}$ will have shape (1, 1)
- ☒ $W^{[3]}$ will have shape (1, 3)
- ☐ $b^{[3]}$ will have shape (3, 1)

10. Whereas the previous question used a specific network, in the general case what is the dimension of $W^{(l)}$, the weight matrix associated with layer l ? 1 point

- ☐ $W^{(l)}$ has shape $(n^{l-1}, n^{(l)})$
- ☒ $W^{(l)}$ has shape $(n^{(l)}, n^{l-1})$
- ☐ $W^{(l)}$ has shape $(n^{(l)}, n^{l+1})$
- ☐ $W^{(l)}$ has shape $(n^{l+1}, n^{(l)})$

Key concepts on Deep Neural Networks

LATEST SUBMISSION GRADE

90%

1. What is the "cache" used for in our implementation of forward propagation and backward propagation? 1 / 1 point
- ☐ It is used to keep track of the hyperparameters that we are searching over, to speed up computation.
 - ☐ It is used to cache the intermediate values of the cost function during training.
 - ☒ We use it to pass variables computed during forward propagation to the corresponding backward propagation step. It contains useful values for backward propagation to compute derivatives.
 - ☐ We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.

✓ Correct

Correct, the "cache" records values from the forward propagation units and sends it to the backward propagation units because it is needed to compute the chain rule derivatives.

2. Among the following, which ones are "hyperparameters"? (Check all that apply.) 1 / 1 point

☒ size of the hidden layers n^H

✓ Correct

☐ bias vectors b^H

☐ activation values a^H

☒ number of layers L in the neural network

✓ Correct

☒ number of iterations

✓ Correct

☒ learning rate α

✓ Correct

☐ weight matrices W^H

3. Which of the following statements is true?

1 / 1 point

- ☒ The deeper layers of a neural network are typically computing more complex features of the input than the earlier layers.
- ☐ The earlier layers of a neural network are typically computing more complex features of the input than the deeper layers.

✓ Correct

4. Vectorization allows you to compute forward propagation in an L -layer neural network without an explicit for-loop (or any other explicit iterative loop) over the layers $l=1, 2, \dots, L$. True/False?

1 / 1 point

- ☐ True
- ☒ False

✓ Correct

Forward propagation propagates the input through the layers, although for shallow networks we may just write all the lines ($a^{[2]} = g^{[2]}(z^{[2]})$, $z^{[2]} = W^{[2]}a^{[1]} + b^{[2]}$, ...) in a deeper network, we cannot avoid a for loop iterating over the layers: ($a^{[l]} = g^{[l]}(z^{[l]})$, $z^{[l]} = W^{[l]}a^{[l-1]} + b^{[l]}$, ...).

5. Assume we store the values for $n^{[l]}$ in an array called layers, as follows: layer_dims = [n_x , 4, 3, 2, 1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model?

1 / 1 point

we may just write all the lines ($a^{[2]} = g^{[2]}(z^{[2]})$, $z^{[2]} = W^{[2]}a^{[1]} + b^{[2]}$, ...) in a deeper network, we cannot avoid a for loop iterating over the layers: ($a^{[l]} = g^{[l]}(z^{[l]})$, $z^{[l]} = W^{[l]}a^{[l-1]} + b^{[l]}$, ...).

5. Assume we store the values for $n^{[l]}$ in an array called layers, as follows: layer_dims = [n_x , 4, 3, 2, 1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model?

1 / 1 point

- ☐

```
1 = for(l in range(1, len(layer_dims)-1)):
2   parameter['w' + str(l)] = np.random.randn(layers[l], layers[l-1]) * 0.01
3   parameter['b' + str(l)] = np.random.randn(layers[l], 1) * 0.01
```
- ☐

```
1 = for(l in range(1, len(layer_dims)-1)):
2   parameter['w' + str(l)] = np.random.randn(layers[l], layers[l-1]) * 0.01
3   parameter['b' + str(l)] = np.random.randn(layers[l-1], 1) * 0.01
```
- ☐

```
1 = for(l in range(1, len(layer_dims))):
2   parameter['w' + str(l)] = np.random.randn(layers[l-1], layers[l]) * 0.01
3   parameter['b' + str(l)] = np.random.randn(layers[l], 1) * 0.01
```
- ☒


```
1 = for(l in range(1, len(layer_dims))):
2   parameter['w' + str(l)] = np.random.randn(layers[l], layers[l-1]) * 0.01
3   parameter['b' + str(l)] = np.random.randn(layers[l], 1) * 0.01
```

✓ Correct

✓ Correct

6. Consider the following neural network.

1 / 1 point

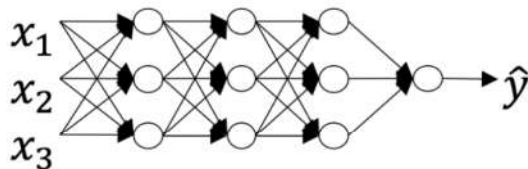

How many layers does this network have?

- ☒ The number of layers L is 4. The number of hidden layers is 3.
- ☐ The number of layers L is 3. The number of hidden layers is 3.
- ☐ The number of layers L is 4. The number of hidden layers is 4.
- ☐ The number of layers L is 5. The number of hidden layers is 4.

✓ Correct

Yes. As seen in lecture, the number of layers is counted as the number of hidden layers + 1. The input and output layers are not counted as hidden layers.

7. During forward propagation, in the forward function for a layer l you need to know what is the activation

1 / 1 point

✓ Correct

Yes. As seen in lecture, the number of layers is counted as the number of hidden layers + 1. The input and output layers are not counted as hidden layers.

7. During forward propagation, in the forward function for a layer l you need to know what is the activation function in a layer (Sigmoid, tanh, ReLU, etc.). During backpropagation, the corresponding backward function also needs to know what is the activation function for layer l , since the gradient depends on it. True/False?

1 / 1 point

- ☒ True
- ☐ False

✓ Correct

Yes, as you've seen in the week 3 each activation has a different derivative. Thus, during backpropagation you need to know which activation was used in the forward propagation to be able to compute the correct derivative.

8. There are certain functions with the following properties:

1 / 1 point

(i) To compute the function using a shallow network circuit, you will need a large network (where we measure size by the number of logic gates in the network), but (ii) To compute it using a deep network circuit, you need only an exponentially smaller network. True/False?

- ☒ True
- ☐ False

✓ Correct

Inbox (5,615) - srinivasarao.dhar... (1) WhatsApp Coursera Response Program for Key concepts on Deep Neural Networks

← → ↻ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt?redirectToCover=true

Apps YouTube Gmail In-Browser Tutorial... GitHub - yanshengj... ai Telugu Movies 202... Google Images Krish Naik - YouTube Sci-Hub: removing... research papers Optical Character R...

← Key concepts on Deep Neural Networks Graded Quiz • 30 min Due Jun 1, 11:59 AM +05

Which of the following statements are True? (Check all that apply).

- ☒ $W^{[2]}$ will have shape (4, 4)

✓ Correct

Yes. More generally, the shape of $W^{[l]}$ is $(n^{[l]}, n^{[l-1]})$.
- ☒ $b^{[1]}$ will have shape (4, 1)

✓ Correct

Yes. More generally, the shape of $b^{[l]}$ is $(n^{[l]}, 1)$.
- ☐ $W^{[1]}$ will have shape (3, 4)
- ☐ $b^{[1]}$ will have shape (3, 1)
- ☒ $W^{[2]}$ will have shape (3, 4)

✓ Correct

Yes. More generally, the shape of $W^{[l]}$ is $(n^{[l]}, n^{[l-1]})$.
- ☐ $b^{[2]}$ will have shape (1, 1)

Inbox (5,615) - srinivasarao.dhar... (1) WhatsApp Coursera Response Program for Key concepts on Deep Neural Networks

← → ↻ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt?redirectToCover=true

Apps YouTube Gmail In-Browser Tutorial... GitHub - yanshengj... ai Telugu Movies 202... Google Images Krish Naik - YouTube Sci-Hub: removing... research papers Optical Character R...

← Key concepts on Deep Neural Networks Graded Quiz • 30 min Due Jun 1, 11:59 AM +05

- ☒ $W^{[2]}$ will have shape (3, 4)

✓ Correct

Yes. More generally, the shape of $W^{[l]}$ is $(n^{[l]}, n^{[l-1]})$.
- ☐ $b^{[2]}$ will have shape (1, 1)
- ☒ $W^{[2]}$ will have shape (3, 1)

! This should not be selected

No. More generally, the shape of $W^{[l]}$ is $(n^{[l]}, n^{[l-1]})$.
- ☐ $b^{[2]}$ will have shape (3, 1)
- ☐ $W^{[2]}$ will have shape (3, 1)
- ☒ $b^{[2]}$ will have shape (1, 1)

✓ Correct

Yes. More generally, the shape of $b^{[l]}$ is $(n^{[l]}, 1)$.
- ☒ $W^{[3]}$ will have shape (1, 3)

✓ Correct

Yes. More generally, the shape of $W^{[l]}$ is $(n^{[l]}, n^{[l-1]})$.
- ☐ $b^{[3]}$ will have shape (3, 1)

Inbox (5,615) - srinivasarao.dhar... (1) WhatsApp Coursera Response Program for... Key concepts on Deep Neural Networks

← → ↺ ⌂ coursera.org/learn/neural-networks-deep-learning/exam/v5sVo/key-concepts-on-deep-neural-networks/attempt?redirectToCover=true

Apps YouTube Gmail In-Browser Tutorial... GitHub - yanshengj... ai Telugu Movies 202... Google Images Krish Naik - YouTube Sci-Hub: removing... research papers Optical Character R...

← Key concepts on Deep Neural Networks Graded Quiz • 30 min Due Jun 1, 11:59 AM +05

☐ $b^{[2]}$ will have shape (3, 1)

☐ $W^{[2]}$ will have shape (3, 1)

☒ $b^{[2]}$ will have shape (1, 1)

✓ Correct
Yes. More generally, the shape of $b^{[l]}$ is $(n^{[l]}, 1)$.

☒ $W^{[2]}$ will have shape (1, 3)

✓ Correct
Yes. More generally, the shape of $W^{[l]}$ is $(n^{[l]}, n^{[l-1]})$.

☐ $b^{[3]}$ will have shape (3, 1)

10. Whereas the previous question used a specific network, in the general case what is the dimension of $W^{[l]}$, the weight matrix associated with layer l ? 1 / 1 point

☐ $W^{[l]}$ has shape $(n^{[l-1]}, n^{[l]})$

☒ $W^{[l]}$ has shape $(n^{[l]}, n^{[l-1]})$

☐ $W^{[l]}$ has shape $(n^{[l]}, n^{[l+1]})$

☐ $W^{[l]}$ has shape $(n^{[l+1]}, n^{[l]})$

✓ Correct
True

Windows 10 taskbar: Search, File Explorer, Edge, Chrome, PowerPoint, System tray (Network, Volume, ENG, 02:50, 10-05-2020)