


Familiar workflow accuracy hides failures on new combinations

Four different convention mappings, task orders and datasets; one optimization seed per stream.

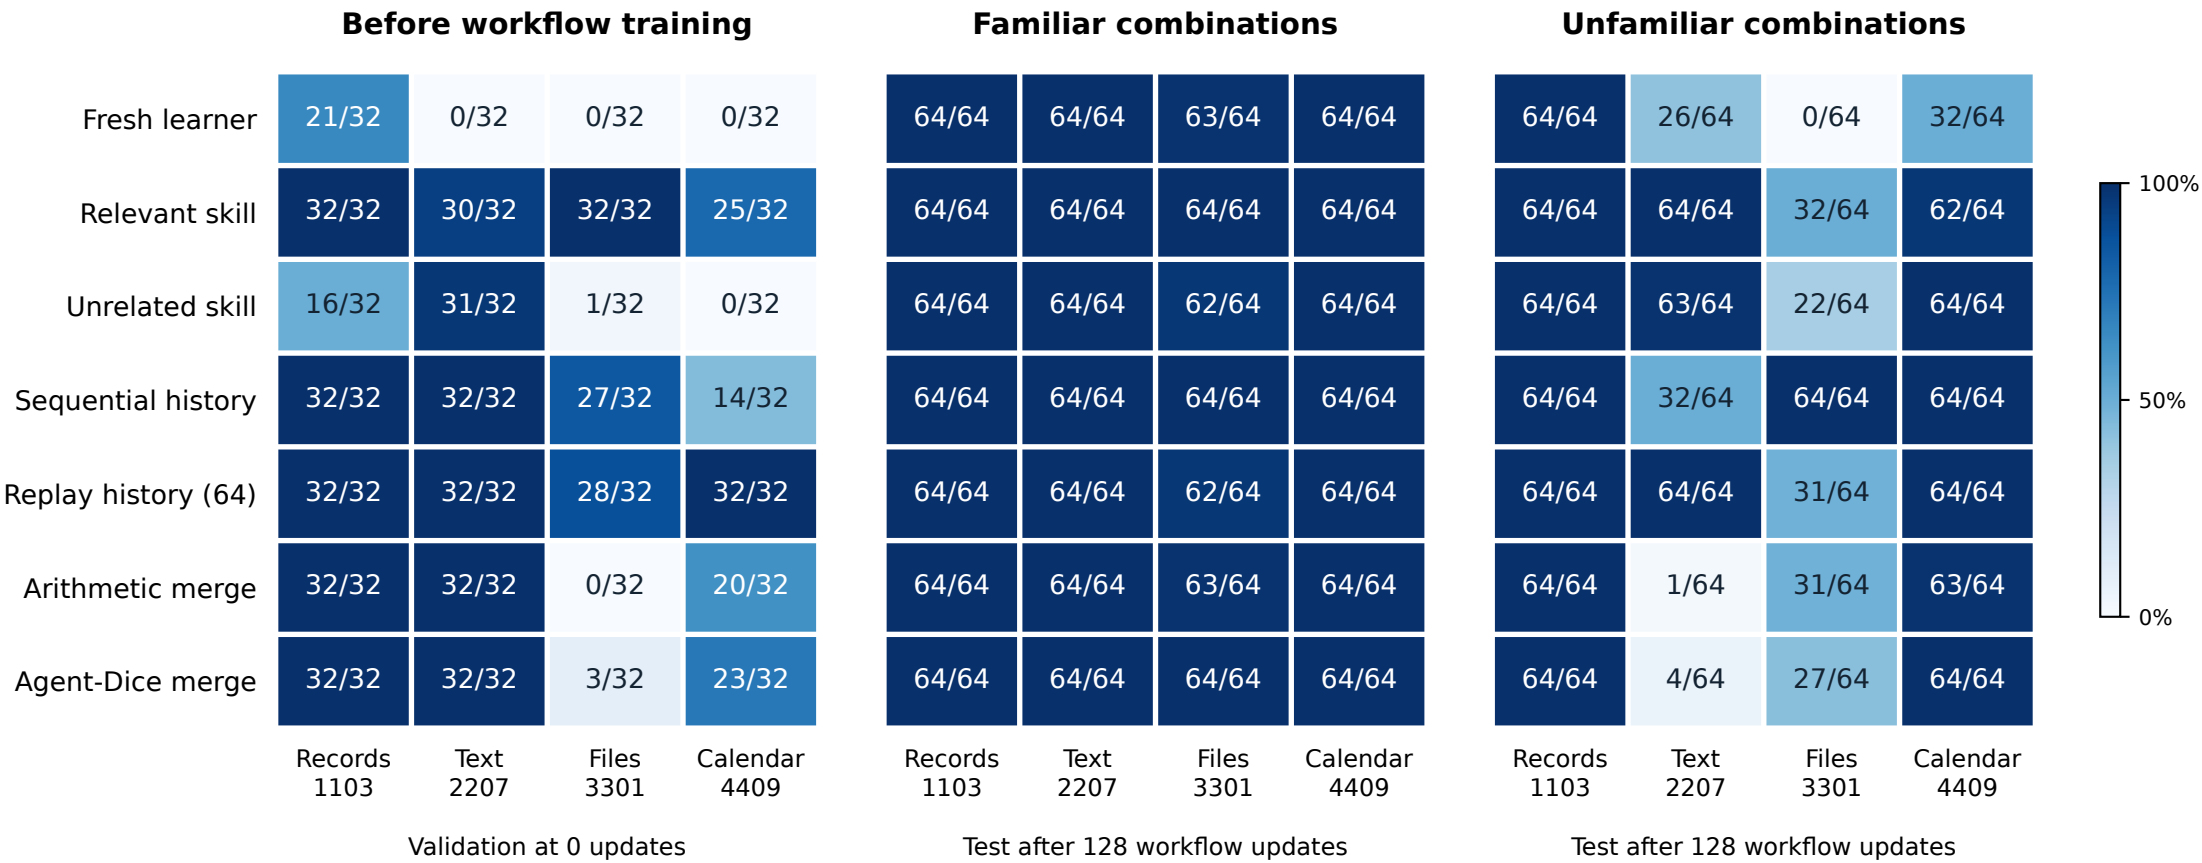

Rows describe primitive training history. All seven workflow arms train on 512 current examples without rehearsal.

A correct answer is a complete JSON program that executes to the expected state and ends with native EOS.

Unfamiliar command combinations were absent from workflow training. Requests explicitly state the steps.

Merged adapters retain dense offsets; other rows use rank-8 adapters. These rows are not equal in resident memory.