

eVAS: A user-friendly electronic Visual Analogue Scale

Philip Gouverneur¹✉, Frédéric Li¹, Luisa Luebke², Tibor M. Szikszay², Sonja-Dana Roelen³, Jarek Krajewski³, Kerstin Luedtke², and Marcin Grzegorzek^{1,4}

¹ Institute of Medical Informatics, University of Lübeck, Ratzeburger Allee 160, 23562 Lübeck, Germany
² Institute of Health Sciences, Department of Physiotherapy, Pain and Exercise Research Luebeck (P.E.R.L.), University of Lübeck, 23562 Lübeck, Germany ³ Institut für Experimentelle Psychophysiologie GmbH (IXP), 40215 Düsseldorf, Germany ⁴ Department of Knowledge Engineering, University of Economics in Katowice, Bogucicka 3, 40287 Katowice, Poland ✉ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ✉
- [Repository](#) ✉
- [Archive](#) ✉

Editor: ✉

Submitted: 19 February 2024

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)).

Summary

Data collection is ubiquitous in many areas of research. Recently, more and more data collection has been automated to facilitate subsequent computer analysis. The same applies to access to subjects' interpretations in the form of self-reports. These self-reports, usually collected in paper form as questionnaires, are standard in several applications in the field of psychology, and have been used in studies of pain, emotion, behaviour, anxiety and personality assessment, for example. Ratings are often obtained using simple Visual Analogue Scales (VAS) or Numeric Rating Scales (NRS), where subjects are asked to rate a particular outcome on a straight line or by a number in a given range with specific anchors. For example, people are asked to rate their current perceived level of pain between the anchors 'no pain' and 'most pain imaginable'. While these self-reports are easy to do with pen and paper, open-source software that can easily digitise and quantify the results of self-reports on an ongoing basis is rare. This is particularly true for researchers who are unfamiliar with writing code and software themselves.

We therefore present the electronic Visual Analogue Scale (eVAS), an easy-to-use electronic visual analogue scale that continuously records subject feedback. Initially introduced to record pain levels for automated pain detection, but not limited to this use case, eVAS aims to provide a ready-to-use tool that is highly configurable, even for non-computer scientists, and can be used for various applications. eVAS is open source, hosted on [GitHub](#), available from a [download page](#) and distributed under an MIT license. It employs automatic updates via GitHub when a new release is available, is working fail-safe, logs possible errors in a log file and saves results as text files.

Statement of need

Self-report measures are one of the most popular tools used to measure personality because of their practicality and extensive research support ([Robins et al., 2009](#)). In particular, VASs are used as simple tools to provide single index measures, with the majority of research using VASs focusing on obtaining health states ([Åström et al., 2023](#)). Examples include the measurement of pain ([Heller et al., 2016](#)), but also several other applications such as the estimation of hunger ([Beaulieu & Blundell, 2021](#)) or emotions such as fear (of childbirth) ([Rouhe et al., 2009](#)) or anxiety ([Duinen et al., 2008](#)). While paper-based solutions are easy to implement, they lack the continuity, scalability and automation that are of paramount importance in most areas of research. To overcome these problems, research could benefit from software that implements self-report scales. Electronic versions could help to automate data collection, allow continuous recording with accurate timestamps where reaction times are critical, and

be used in large studies. For example, the inclusion of subjective perceived pain levels from a Computerised Visual Analogue Scale (CoVAS) in the construction of automated pain detection models has been shown to improve classification results (Gouverneur, Li, M. Szikszay, et al., 2021; Gouverneur, Li, Adamczyk, et al., 2021).

Although several papers have demonstrated that scores obtained from computer and mobile phone-based platforms and traditional paper-based VAS assessment are not interchangeable (Byrom et al., 2022), but yield comparable results (Byrom et al., 2022; Delgado et al., 2018; Kos et al., 2017; Whybrow et al., 2006), electronic implementations of VASs are not commonly used. More specifically, paper using electronic versions rarely share their software, such as Turnbull et al. (2020), and open source code to implement solutions is rare. In addition, research articles introducing electronic scales are outdated with broken download links, such as the Adaptive Visual Analog Scales (AVAS) (Marsh-Richard et al., 2009), or for specific use cases, such as the Visual Analog Scales Measuring State Anxiety (VAS-A) (Abend et al., 2014).

Therefore, we present **eVAS**, an open source Python software to easily implement an electronic VAS. It is available with built-in applications for all operating systems (Windows, Linux, MacOS), highly configurable and easy to use. A detailed description of the introduced scale can be found in the following sections.

Usage

The eVAS is designed to be as easy to use as possible, so that researchers without a background in computer science can use it. Standalone applications for Windows, Linux and MacOS are available from the following [download page](#) or the github [release page](#). Simply download the appropriate software and double-click to run. The software runs without any additional files or requirements as such. The default use of the application allows the user to exit the software at any time by pressing Escape. On startup, the software checks for updates, then loads the full screen application, displays the scale and instruction message, and waits for user interaction. A recording can be started by pressing the space bar. The slider can then be moved left/right according to the user's feedback. The values are saved to a file throughout the session. As mentioned earlier, the user can stop the current recording by pressing the Escape key.

A screenshot of a possible appearance of the eVAS for pain assessment can be seen in [Figure 1](#). Further examples are available at the following [link](#), where the given configuration files can be copied to apply the specific scale.

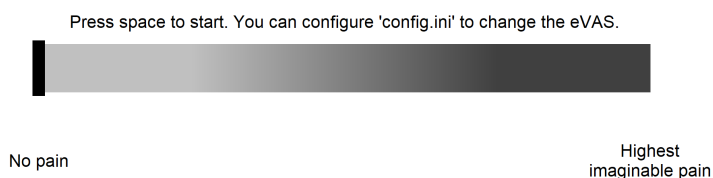


Figure 1: Default appearance of the eVAS.

A text file ('config.ini') can be used to change the behaviour and appearance of the scale.

76 Several parameters in the General, Scale, Devices, Keys, Appearance and CSV categories can be
77 set directly in the text file. Each parameter has a short description that summarises its purpose
78 and the changes that occur when it is modified. For example, keyboard or mouse control can
79 be configured and even specific key mappings can be implemented. If no configuration file can
80 be found, a default file is created at the start of the application, which implements a simple
81 VAS for pain assessment. A screenshot of the beginning of the default configuration can be
82 found in [Figure 2](#). A list of all parameters can be found in [Table 1](#).

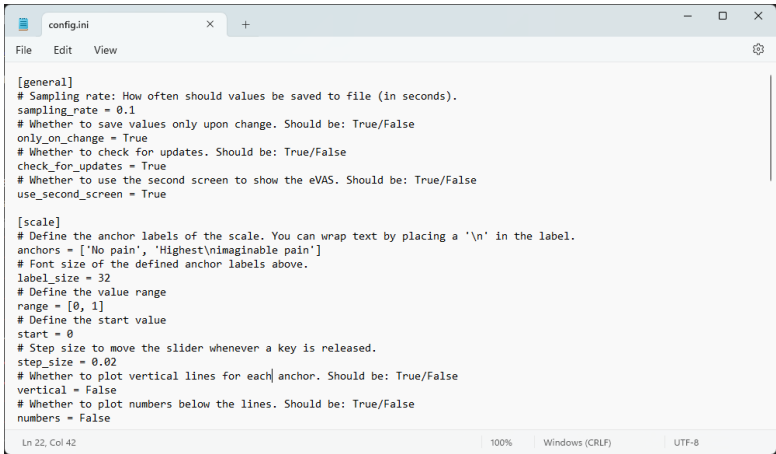


Figure 2: Screenshot of the default configuration (config.ini).

Table 1: Parameters of the *config.ini* file.

Section	Name	Expected value	Default	Description
General	sampling_rate	float	0.1	How often should values be saved to file (in seconds).
	only_on_change	bool	True	Whether to save values only upon change.
	use_second_screen	bool	True	Whether to use the second screen to show the eVAS.
scale	anchors	list	['No pain', 'High pain']	Anchor labels of the scale.
	label_size	int	32	Font size of the defined anchor labels.
	range	list	[0,1]	List with two integers, defining the value range.
	start	int	0	Defining the start position/value of the slider.
	step_size	float	0.2	Step size to move the slider whenever a key is released.
	vertical	bool	False	Whether to plot vertical lines for each anchor.
	numbers	bool	False	Whether to plot numbers below the vertical lines.
devices	trigger_thermode	bool	False	Whether to trigger the thermode (QST.LAB TCS2).
	move_while_down	bool	False	Whether to move the slider while the button is held down.

Section	Name	Expected value	Default	Description
	use_mouse	bool	False	Whether to use the mouse (slider does not move with keys anymore).
keys	keys_start	list	[Key.space]	Keys to start the recording.
	keys_end	list	[Key.esc, Key.end]	Keys to end the recording.
	keys_left	list	[Key.left, Key.page_up]	Keys to move the slider left.
	keys_right	list	[Key.right, Key.page_down]	Keys to move the slider right.
appearance	use_image	bool	False	Whether to load an external image as slider background.
	use_upper_image	bool	False	Whether to load an external image and place it above the slider.
	slider_width	int	31	Width of the slider.
	slider_height	int	138	Height of the slider.
	slider_color	list	(0,0,0)	Color of the slider.
	left_color	list	(192,192,192)	Background color left.
	right_color	list	(64,64,64)	Background color right.
	mid_color	list/None	None	Background color mid.
	use_triangle	bool	False	Use a triangle instead of a square for the background.
	use_two_triangle	bool	False	Use a decreasing & increasing triangle instead of a square for the background.
csv	welcome_message	string		Welcome message that is displayed at the beginning.
	delimiter	string	;	Delimiter used in the CSV output file.
	decimal_point	string	,	Decimal point used in the CSV output file.
	decimal_places	int	4	Number of digits after the decimal point for the slider values saved.

83 Measured feedback from the eVAS is stored in a CSV file for ease of use. The resulting files
 84 consist of two columns, 'secs' and 'values', containing an entry with the measurement and an
 85 associated timestamp in seconds. The delimiter and floating point are set to the European
 86 standard, a semicolon and comma respectively, but can be changed in the configuration. In
 87 addition, the frequency and whether values should be saved only on change can also be set
 88 in the config.ini file. The timestamp in seconds is stored to two decimal places, while the
 89 values are freely configurable. The resulting file names contain the start time in the format
 90 "year|month|day_hour|minute|second_vas.csv", for example "20240206_093809_vas.csv". If
 91 the application is closed without recording any data, the empty CSV file is deleted on exit.

92 Although eVAS has been implemented to catch errors, unexpected errors are logged in a log.txt
 93 file. If no error is logged, the log file will be removed if it is empty at the end of the eVAS
 94 instance. Common errors, such as a corrupt config.ini file, are caught and useful information is
 95 provided to the end user via message boxes. A screenshot of an example warning displayed
 96 when the configuration file is incorrectly set up can be seen in [Figure 3](#).

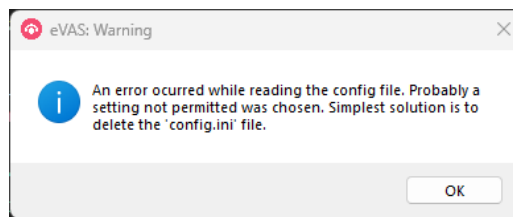


Figure 3: Warning if the config file is setup wrong.

To enable automatic deployment of new features and bug fixes, the software checks for new releases on GitHub at startup. If a new version is available, the user is notified and an automatic update can be performed (Windows only).

Researchers are welcome to contribute on GitHub, open pull requests, implement their own versions and deploy them using the provided scripts to build the executables using PyInstaller. The application and scripts have been implemented and tested using Python 3.12.

The idea and first implementations of eVAS were realised in the course of the BMBF project *PainMonit* ('Multimodale Plattform zum Schmerz-Monitoring in der Physiotherapie', 01DS19008A/B). Here, the task of building automated pain detection systems in the physiotherapy context showed a clear need for a digital yet easy-to-use tool. As we focused on providing a simple application that could be used by researchers of any background, we did not make the software available on the Python Package Index or related repositories. Knowledge of Python should not be a requirement for end users, so eVAS is available as standalone software running on Windows, MacOS and Ubuntu. Previous implementations of the software have been used to collect data for pain-related studies (Luebke et al., 2024; Szikszay et al., 2022, 2023). By creating easy-to-use Python software, we hope that eVAS can help researchers to easily conduct their experiments and collect subjective feedback from subjects.

Acknowledgements

This research was funded by the German Federal Ministry of Education and Research (BMBF) in the frame of the project PainMonit (grant number: 01DS19008B).

References

- Abend, R., Dan, O., Maoz, K., Raz, S., & Bar-Haim, Y. (2014). Reliability, validity and sensitivity of a computerized visual analog scale measuring state anxiety. *Journal of Behavior Therapy and Experimental Psychiatry*, 45(4), 447–453. <https://doi.org/10.1016/j.jbtep.2014.06.004>
- Åström, M., Thet Lwin, Z. M., Teni, F. S., Burström, K., & Berg, J. (2023). Use of the visual analogue scale for health state valuation: A scoping review. *Quality of Life Research*, 1–11. <https://doi.org/10.1007/s11136-023-03411-3>
- Beaulieu, K., & Blundell, J. (2021). The psychobiology of hunger—a scientific perspective. *Topoi*, 40(3), 565–574. <https://doi.org/10.1007/s11245-020-09724-z>
- Byrom, B., Elash, C. A., Eremenco, S., Bodart, S., Muehlhausen, W., Platko, J. V., Watson, C., & Howry, C. (2022). Measurement comparability of electronic and paper administration of visual analogue scales: A review of published studies. *Therapeutic Innovation & Regulatory Science*, 56(3), 394–404. <https://doi.org/10.1007/s43441-022-00376-2>
- Delgado, D. A., Lambert, B. S., Boutris, N., McCulloch, P. C., Robbins, A. B., Moreno, M. R., & Harris, J. D. (2018). Validation of digital visual analog scale pain scoring with a

- 133 traditional paper-based visual analog scale in adults. *Journal of the American Academy*
134 *of Orthopaedic Surgeons. Global Research & Reviews*, 2(3). [https://doi.org/10.5435/](https://doi.org/10.5435/jaaosglobal-d-17-00088)
135 [jaaosglobal-d-17-00088](https://doi.org/10.5435/jaaosglobal-d-17-00088)
- 136 Duinen, M. van, Rickelt, J., & Griez, E. (2008). Validation of the electronic visual analogue
137 scale of anxiety. *Progress in Neuro-Psychopharmacology and Biological Psychiatry*, 32(4),
138 1045–1047. <https://doi.org/10.1016/j.pnpbp.2008.02.002>
- 139 Gouverneur, P., Li, F., Adamczyk, W. M., Szikszay, T. M., Luedtke, K., & Grzegorzec, M.
140 (2021). Comparison of feature extraction methods for physiological signals for heat-based
141 pain recognition. *Sensors*, 21(14), 4838. <https://doi.org/10.3390/s21144838>
- 142 Gouverneur, P., Li, F., M. Szikszay, T., M. Adamczyk, W., Luedtke, K., & Grzegorzec,
143 M. (2021). Classification of heat-induced pain using physiological signals. *Information*
144 *Technology in Biomedicine*, 239–251. https://doi.org/10.1007/978-3-030-49666-1_19
- 145 Heller, G. Z., Manuguerra, M., & Chow, R. (2016). How to analyze the visual analogue
146 scale: Myths, truths and clinical relevance. *Scandinavian Journal of Pain*, 13(1), 67–75.
147 <https://doi.org/10.1016/j.sjpain.2016.06.012>
- 148 Kos, D., Raeymaekers, J., Van Remoortel, A., D'hooghe, M., Nagels, G., D'Haeseleer, M.,
149 Peeters, E., Dams, T., & Peeters, T. (2017). Electronic visual analogue scales for pain,
150 fatigue, anxiety and quality of life in people with multiple sclerosis using smartphone
151 and tablet: A reliability and feasibility study. *Clinical Rehabilitation*, 31(9), 1215–1225.
152 <https://doi.org/10.1177/0269215517692641>
- 153 Luebke, L., Selle, J. von, Adamczyk, W. M., Knorr, M. J., Carvalho, G. F., Gouverneur, P.,
154 Luedtke, K., & Szikszay, T. M. (2024). Differential effects of thermal stimuli in eliciting
155 temporal contrast enhancement: A psychophysical study. *The Journal of Pain*, 25(1),
156 228–237. <https://doi.org/10.1016/j.jpain.2023.08.005>
- 157 Marsh-Richard, D. M., Hatzis, E. S., Mathias, C. W., Venditti, N., & Dougherty, D. M. (2009).
158 Adaptive visual analog scales (AVAS): A modifiable software program for the creation,
159 administration, and scoring of visual analog scales. *Behavior Research Methods*, 41(1),
160 99–106. <https://doi.org/10.3758/BRM.41.1.99>
- 161 Robins, R. W., Fraley, R. C., & Krueger, R. F. (2009). *Handbook of research methods in*
162 *personality psychology*. Guilford Publications. ISBN: 9781606236123
- 163 Rouhe, H., Salmela-Aro, K., Halmesmaki, E., & Saisto, T. (2009). Fear of childbirth according
164 to parity, gestational age, and obstetric history. *BJOG: An International Journal of*
165 *Obstetrics & Gynaecology*, 116(1), 67–73. [https://doi.org/10.1111/j.1471-0528.2008.](https://doi.org/10.1111/j.1471-0528.2008.02002.x)
166 [02002.x](https://doi.org/10.1111/j.1471-0528.2008.02002.x)
- 167 Szikszay, T. M., Adamczyk, W. M., Lévéné, J. L., Gouverneur, P., & Luedtke, K. (2022).
168 Temporal properties of pain contrast enhancement using repetitive stimulation. *European*
169 *Journal of Pain*, 26(7), 1437–1447. <https://doi.org/10.1002/ejp.1971>
- 170 Szikszay, T. M., Adamczyk, W. M., Panskus, J., Heimes, L., David, C., Gouverneur, P., &
171 Luedtke, K. (2023). Psychological mechanisms of offset analgesia: The effect of expectancy
172 manipulation. *PloS One*, 18(1), e0280579. <https://doi.org/10.1371/journal.pone.0280579>
- 173 Turnbull, A., Sculley, D., Escalona-Marfil, C., Riu-Gispert, L., Ruiz-Moreno, J., Gironès, X., &
174 Coda, A. (2020). Comparison of a mobile health electronic visual analog scale app with a
175 traditional paper visual analog scale for pain evaluation: Cross-sectional observational study.
176 *Journal of Medical Internet Research*, 22(9), e18284. <https://doi.org/10.2196/18284>
- 177 Whybrow, S., Stephen, J., & Stubbs, R. (2006). The evaluation of an electronic visual analogue
178 scale system for appetite and mood. *European Journal of Clinical Nutrition*, 60(4), 558–560.
179 <https://doi.org/10.1038/sj.ejcn.1602342>