





Code	ONLINE DRIPPER	Packaging-Box
HAT-70	0-70 lph	4.200



There are different color options.

APPLICATIONS;

- Orchards, fruit crops, vegetables, nurseries & flowers.

- Openable Dripper; Easy to clean by users.
- UV Resistant.
- Manufactured from virgin plastic for stableperformance and longer life.
- Adjustable flow rate 0-70 Lt/h
- Easy to install even on the hardest surfaces without the use ofdrill with special design.
- The number of drippers can easily be increased to meet a sufficient amount of water for your plant.








irritime ONLINE DRIPPERS

Debi (Flow Rate) Lt/h						
Klik Sayısı	Basınç (Pressure) (BAR)					
Clicks	0,5	1	1,5	2	2,5	3
6	0,4	0,5	0,6	0,6	0,7	0,8
8	18,9	23,4	28,7	31,4	33,2	36,1
12	50,7	63,3	84,9	93,2	103,3	116,8
16	56,8	68,7	89,9	105,0	115,1	127,6
max	85.0	106.2	131 8	150.8	159.0	171 7

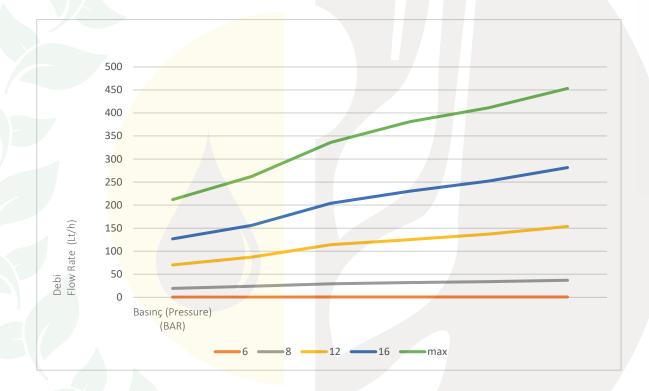

- There are 8 water outlet holes on the cover of the dripper.
- There are 18 clicks (Flow Rate Adjustment Section) on the dripper body.
- In order for the cover of the dripper to work safely without dislodging, it must be turned a maximum of 2.5 turns.
- One full turn of the dripper is 12 clicks.







HAT - 100




Code	ONLINE DRIPPER	Packaging-Box	
HAT-100	0-100 lph	1.500	

APPLICATIONS;

- Orchards, fruit crops, vegetables, nurseries & flowers.


- Openable Dripper; Easy to clean by users.
- UV Resistant.
- Manufactured from virgin plastic for stableperformance and longer life.
- Adjustable flow rate 0-100 Lt/h
- The number of drippers can easily be increased to meet a sufficient amount of water for your plant.







Debi (Flow Rate) Lt/h						
Klik	Basınç (Pressure) (BAR)					
Sayısı	0.5 bar	1.0 bar	1.5 bar	2.0 bar	2.5 bar	3.0 bar
2	0,30	0,40	0,50	0,60	0,80	1,00
8	9,60	15,20	19,00	21,80	25,40	30,10
12	13,70	22,30	28,30	33,60	37,90	42,60
16	31,00	48,20	62,50	72,40	79,60	84,70
20	56,20	84,90	110,90	125,70	137,00	146,00
24	81,70	116,50	147,60	172,60	187,30	206,30
28	84,80	122,90	153,90	179,00	202,40	216,40
32	86,00	125,30	154,10	179,40	202,90	217,30

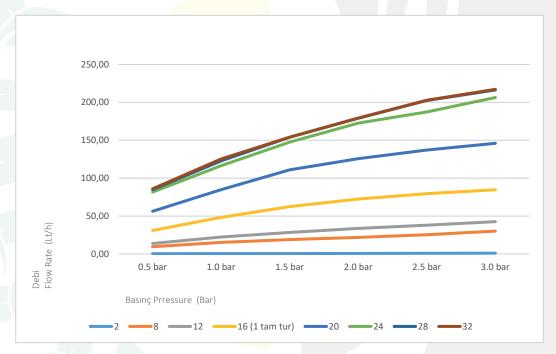

- There are 8 water outlet holes on the cover of the dripper.
- There are 32 clicks (Flow Rate Adjustment Section) on the dripper body.
- In order for the cover of the dripper to work safely without dislodging, it must be turned a maximum of 2.5 turns.
- One full turn of the dripper is 16 clicks.











Code	ONLINE DRIPPER	Packaging-Box
HAT-140	0-140 lph	1.200


APPLICATIONS;

- Suitable for trees having high water requirement.
- Recommended for sandy soils / desert conditions.


- It has been produced from high quality polypropylene raw material and it has resistance to impact
- Adjustable discharge according to the water requirements and growth stages.
- Total shut-off possible.
- Nominal operating pressure 1,5 bar, but discharge can be adjusted even at low pressures.
- Unique design prevents blockage of dripper in desert conditions.
- Available in 0 to 140 lph discharge.









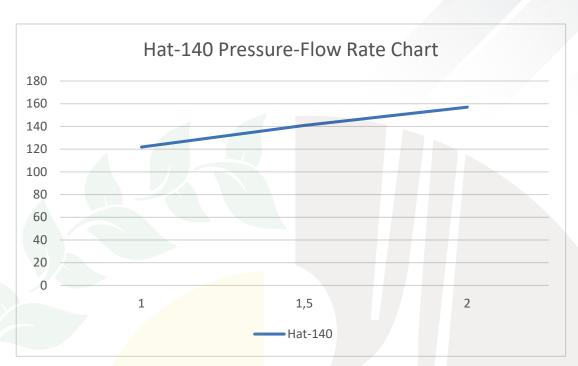

INSTALLATION;

- 3 mm Manual Punch can use for assembly the Online Dripper



Debi (Flow Rate)	Basınç (Pressure) (BAR)			
	1	1,5	2	
Hat-140	122	141	157	

