Assignment 3 CPSC 526 Fall 2017 October 29, 2017

Mason Lieu Shane Sims
ID: 10110089 ID: 00300601
Tutorial 04 Tutorial 04
mlieu@ucalgary.ca shane.sims@ucalgary.ca

Contents

1	How to monitor HTTP	1
2	How to monitor SSH	1
3	How to monitor NetCat-to-NetCat	2
4	Supported logging formats	2
5	Sample output 5.1 Output - no logging 5.2 Output - raw 5.3 Output - strip 5.4 Output - hex 5.5 Output - autoN 5.6 Output - replace	3 3 4 6 8 9
1 Te	How to monitor HTTP erminal 1: Run the proxy server	
ру	thon3 simpleProxyServer.py [log options] <source port=""/> <web server="" url=""> <destinatio< th=""><th>n port></th></destinatio<></web>	n port>
Web browser: Connect to the server		

2 How to monitor SSH

localhost:<source port>

Terminal 1: Run the proxy server

python3 simpleProxyServer.py [log options] <source port> localhost 22

ssh localhost -p 22

3 How to monitor NetCat-to-NetCat

Terminal 1: Run NetCat to listening for incoming connection

nc -l <destination port>

Terminal 2: Run the proxy server

python3 simpleProxyServer.py [log options] <source port> localhost <destination port>

Terminal 3: Run NetCat

nc localhost <source port>

4 Supported logging formats

This program supports the following logging formats

- 1. -raw
- 2. -strip
- 3. -hex
- 4. -autoN
- 5. -replace

5 Sample output

5.1 Output - no logging

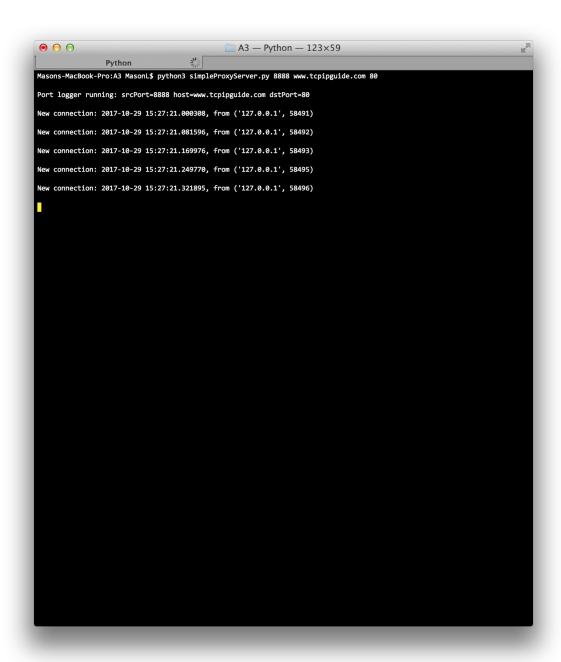


Figure 1: No logging options selected

5.2 Output - raw

```
\Theta \cap \Theta
                                                                       \triangle A3 — bash — 123×59
                           bash
Masons-MacBook-Pro:A3 MasonL$ python3 simpleProxyServer.py -raw 8880 www.tcpipguide.com 80
Port logger running: srcPort=8880 host=www.tcpipguide.com dstPort=80
New connection: 2017-10-29 15:28:30.692630, from ('127.0.0.1', 58520)
New connection: 2017-10-29 15:28:30.771834, from ('127.0.0.1', 58521)
 ---> Host: localhost:8880
---> Connection: keep-alive
--- User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_9_5) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/61.0.3163.10 0 Safari/537.36
 ---> Upgrade-Insecure-Requests: 1
 ---> Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,image/apng,*/*;q=0.8
---> Accept-Encoding: gzip, deflate, br
---> Accept-Language: fr-CA,en-CA;q=0.8,fr-FR;q=0.6,fr;q=0.4,en-US;q=0.2,en;q=0.2
 ---- HTTP/1.1 200 OK
---- Date: Sun, 29 Oct 2017 21:28:30 GMT
---- Server: Apache/2.2.34
---- Accept-Ranges: bytes
 <--- Content-Length: 20757
<--- Keep-Alive: timeout=5, max=100
<--- Connection: Keep-Alive</pre>
 <--- Content-Type: text/html
 <--- <html>
 <--- (Neau)**
--- (Neau)**
--- (Neau)**
--- (Neau)**
--- (Meta http-equiv="Content-Language" content="en-us")*
--- (Meta name="GENERATOR" content="Microsoft FrontPage 6.0")*
--- (Meta name="ProgId" content="FrontPage.Editor.Document")*
--- (Meta http-equiv="Content-Type" content="text/html; charset=windows-1252")*
--- (title>Welcome to The TCP/IP Guide!</title>
--- (script language="JavaScript" fptype="dynamicanimation")*
--- (script language="JavaScript" fptype="dynamicanimation")*
 <--- function dynAnimation() {}
<--- function clickSwapImg() {}</pre>
 <--- //-->
<--- </script>
  <--- <script language="JavaScript1.2" fptype="dynamicanimation" src="animate.js">
 <--- </script>
 <--- </head>
 <--- <body>
<--- <table border="0" width="100%" cellpadding="3" cellspacing="0" id="AutoNumber3" height="522" style="border-collapse:
collapse" bordercolor="#111111">
           <---
 <--- <div align="left">
<--- <table border="0" width="161" cellpadding="3" cellspacing="1" id="AutoNumber1" height="431">
```

Figure 2: Initialization of proxy server with raw formatting

```
● ● ●
                                                                      A3 - Python - 123 \times 59
=*??;)??:(??:(??;)??<)??=*??>*???)??>(??E+??I-?@'PG^?????n????qq??\X??IE??3.??%????? ???
 ??????
                                                  ??
 ????????(??C2??I7
  --- ??K8??M9?70:??Q<??R=??S=??VA?????????????????x2x2x3 ?s*r"?{&?+??'??V/??X9??]/??h0??m3??k3??j3??k4??m5??o7??n9??1;??i</p>
??????^:??V7??L2??B-??;)??7'??7'??8(???+?pc,?Vp+?qR+??K,?pY*?VT?????B???84??
        ???
...
????????41?7TB??YG??[G??]I?_J??`K??bM??cN??bL?k????????????ePfe?EN?HP?GP?HP?IN/?8im;1?o$?p1?Z%?01?uW(??c/??u.??^+??e,??1-?
?r0??w0??{2??~4??~6??}9??{;??w=??q>??1>??e=??[:??04??C.??:*??6'??;*?}b0?7?&??"?7}$?ib+?ah)?S[.????????ïNK?? ??'??#?????
??????????????iw??kX??mY??nZ?p[??r]??r^?oZ?????????????h??e?dPt?re?dPt?n!?p ?((?nN#?Xu$r?g+??a+??n-??z3???>
??????????"UG?98? :{<?>??x@?pA??h@??\;??nS??A.??8)??G-?S?:?!?1?.??#?0?"?A?!?Pa?????? ????a_??(!??1*?.'??+#??$???
<--- ??T@??ue??xg??zh??|1??~_[??1??m??n??~i????????]?z??EG?GH?HH?GG?HFD{4wp7 ?n!?r&?iI!?Fu?gr'??^+??o-???6???9???@?18?q
**:?j<?i>?;?j<?i>?***| B}?$$<?i>?***| B}?$$<?i>?***| B}?$$<?i>***| B}?$$<?i>**| B}?$$<?i>***| B}?$$<?i>**| B}?$$<?i>
???????????!??#??3???z?????????????????
???,???Ï????????????<u>?</u>??????w???a???R???C???????&??
                                                                            ???????C b#??P?Z?D?8?E?8?S?S?1???k???`???}?<sup>5</sup>??¬???o???d??????
```

Figure 3: Sample output in the middle of execution

5.3 Output - strip

```
\Theta \cap \Theta
                                                                   \triangle A3 — bash — 123×59
                         bash
Masons-MacBook-Pro:A3 MasonL$ python3 simpleProxyServer.py -strip 8880 www.tcpipguide.com 80
Port logger running: srcPort=8880 host=www.tcpipguide.com dstPort=80
New connection: 2017-10-29 15:32:40.302238, from ('127.0.0.1', 58579)
New connection: 2017-10-29 15:32:40.385152, from ('127.0.0.1', 58580)
 ---> Host: localhost:8880.
---> Connection: keep-alive.
---> User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_9_5) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/61.0.3163.10 0 Safari/537.36.
 ---> Upgrade-Insecure-Requests: 1.
 ---> Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,image/apng,*/*;q=0.8.
---> Accept-Encoding: gzip, deflate, br.
---> Accept-Language: fr-CA,en-CA;q=0.8,fr-FR;q=0.6,fr;q=0.4,en-US;q=0.2,en;q=0.2.
New connection: 2017-10-29 15:32:40.472576, from ('127.0.0.1', 58581)
New connection: 2017-10-29 15:32:40.553252, from ('127.0.0.1', 58582)
New connection: 2017-10-29 15:32:40.624985, from ('127.0.0.1', 58583)
 <--- HTTP/1.1 200 OK.
 --- Date: Sun, 29 Oct 2017 21:32:40 GMT.
<--- Server: Apache/2.2.34.
<--- Accept-Ranges: bytes.</pre>
 <--- Content-Length: 20757.
<--- Keep-Alive: timeout=5, max=100.
<--- Connection: Keep-Alive.</pre>
 <--- Content-Type: text/html.
 <--- .
<--- <html>
 <--- <meta http-equiv="Content-Language" content="en-us">
<--- <meta name="GENERATOR" content="Microsoft FrontPage 6.0">
 <--- <meta name="BrogId" content= microsort FrontPage 6.0 >
<--- <meta name="ProgId" content="FrontPage.Editor.Document">
<--- <meta http-equiv="Content-Type" content="text/html; charset=windows-1252">
<--- <tittle>Welcome to The TCP/IP Guide!</title>
<--- <script language="JavaScript" fptype="dynamicanimation">
 <--- function dynAnimation() {}
<--- function clickSwapImg() {}</pre>
 <--- //-->
<--- </script>
  <--- <script language="JavaScript1.2" fptype="dynamicanimation" src="animate.js">
 <--- </script>
 <--- </head>
 <--- <body>
<--- <table border="0" width="100%" cellpadding="3" cellspacing="0" id="AutoNumber3" height="522" style="border-collapse:
collapse" bordercolor="#111111">
```

Figure 4: Initialization of proxy server with strip formatting

```
■ A3 — Python — 123×59
                           Python
 <--- <|--webbot bot="Include" i-checksum="38707" endspan -->
</-- </tr>

<--- </tr>

<--- </table>
 <--- </body>
  ---> GIT /images/features/btn_featuresdown.gif HTTP/1.1.
---> Host: localhost:8888.
  ---> Connection: keep-alive.
---> User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_9_5) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/61.0.3163.10
0 Safari/537.36.
 ---> Accept: Image/webp.image/apng.image/*,*/*;q=0.8.
---> Referer: http://localhost:8888/news.htm.
---> Accept-Encoding: gzip, deflate, br.
---> Accept-Language: fr-CA,en-CA;q=0.8,fr-FR;q=0.6,fr;q=0.4,en-US;q=0.2,en;q=0.2.
 ---- 
---- HTTP/1.1 200 OK.
---- Date: Sun, 29 Oct 2017 21:33:55 GMT.
---- Server: Apache/2.2.34.
---- Etag: "34b-3cedb133c2380".
---- Etag: "34b-3cedb133c2380".
---- Conget-Ranges: bytes.
 <--- Content-Length: 843.
<--- Keep-Alive: timeout=5, max=93.
<--- Connection: Keep-Alive.</pre>
  <--- Content-Type: image/gif.
 ---> Host: localhost:8888.
---> Host: localhost:8888.
---> Connection: keep-alive.
---> Upgrade-Insecure-Requests: 1.
---> User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_9_5) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/61.0.3163.10
0 Safari/537.36.
 % adarar/jos/io.
---> Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,image/apng,*/*;q=0.8.
---> Referer: http://localhost:8888/news.htm.
---> Accept-Encoding: gzip, deflate, br.
---> Accept-Language: fr-CA,en-CA;q=0.8,fr-FR;q=0.6,fr;q=0.4,en-US;q=0.2,en;q=0.2.
  ---> .
  <--- HTTP/1.1 200 OK.
 <--- ATTP:/1.200 UK.
<--- Date: Sun, 29 Oct 2017 21:34:00 GMT.
<--- Server: Apache/2.2.34.
<--- Accept-Ranges: bytes.
<--- Content-Length: 16046.
<--- Keep-Alive: timeout=5, max=92.</pre>
```

Figure 5: Sample output in the middle of execution

5.4 Output - hex



Figure 6: Initialization of proxy server with hex formatting

5.5 Output - autoN

```
\Theta \cap \Theta
                                                                                                         \triangle A3 — bash — 123×59
Masons-MacBook-Pro:A3 MasonL$ python3 simpleProxyServer.py -autoN 30 8888 www.tcpipguide.com 80
Port logger running: srcPort=8888 host=www.tcpipguide.com dstPort=80
New connection: 2017-10-29 15:39:15.871428, from ('127.0.0.1', 58646)
New connection: 2017-10-29 15:39:15.953720, from ('127.0.0.1', 58647)
  ---> GET / HTTP/1.1\r\nHost: localhos
 ---> t:888%\\nconnection: keep-alive
--> \t\s888\\\nconnection: keep-alive
--> \t\n\User-Agent: Mozilla/5.0 (Mac
--> intosh; Intel Mac OS X 10_9_5)
--> AppleWebKit/537.36 (KHTML, 11
--> ke Gecko) Chrome/61.0.3163.100
  ---> Safari/537.36\r\nUpgrade-Insecu
---> re-Requests: 1\r\nAccept: text/h
---> tml,application/xhtml+xml,appl
  ---> ication/xml;q=0.9;image/webp;i
---> mage/apng,*/*;q=0.8\r\nAccept-En
---> coding: gzip, deflate, br\r\nAcc
---> ept-Language: fr-CA,en-CA;q=0.
---> 8,fr-R;q=0.6,fr;q=0.4,en-US;q
---> 8,fr-R;q=0.2\r\n\r\n
 New connection: 2017-10-29 15:39:16.041709, from ('127.0.0.1', 58648)
New connection: 2017-10-29 15:39:16.123697, from ('127.0.0.1', 58650)
 New connection: 2017-10-29 15:39:16.201673, from ('127.0.0.1', 58651)
  <--- HTTP/1.1 200 OK\r\nDate: Sun, 29
<--- Oct 2017 21:39:15 GMT\r\nServer
<--- : Apache/2.2.34\r\nAccept-Ranges</pre>
  <--- : bytes\r\nContent-Length: 20757
<--- \r\nKeep-Alive: timeout=5, max=1</pre>
 <--- \\n\meta name= GENERALUK CONT
<--- ent="Microsoft FrontPage 6.0">
<--- \\n\meta name="ProgId" content="
<--- FrontPage.Editor.Document">\n\m
<--- eta http-equiv="Content-Type"</pre>
  <--- content="text/html; charset=wi
<--- ndows-1252">\n<title>Welcome to
  <--- The TCP/IP Guidel</title>\n<sc
<--- ript language="JavaScript" fpt
<--- ype="dynamicanimation">\n<!--\nf</pre>
 --- ype="dynamicanimation"\\n<!--\nf
--- unction dynAnimation() {\nfunc
--- tion clickSwapImg() {\n\/--\n<
--- /script\\n<script language="Jav
--- aScript1.2" fptype="dynamicani
--- mation" src="animate.js"\\n</sc
--- ript\\n</head\\n\n\ncbody\n\n\n<table
--- border="0" width="100%" cellpa
--- dding="3" cellspacing="0" id="
--- AutoNumber3" height="522" styl
--- e="horder-collanse: collanse"</pre>
  <--- ducondmbers height size style
<--- e="border-collapse: collapse"
<--- bordercolor="#111111">\n \n
```

Figure 7: Initialization of proxy server with autoN formatting where n = 30

5.6 Output - replace

```
OO
                                                                      A3 - Python - 123 \times 59
                        Python
Masons-MacBook-Pro:A3 MasonL$ python3 simpleProxyServer.py -strip -replace localhost REDACTED 8888 www.tcpipguide.com 80
Port logger running: srcPort=8888 host=www.tcpipguide.com dstPort=80
New connection: 2017-10-29 16:04:45.718649, from ('127.0.0.1', 58982)
New connection: 2017-10-29 16:04:45.788184, from ('127.0.0.1', 58986)
 ---> GET / HTTP/1.1.
---> Host: REDACTED:8888.
 ---> Connection: keep-alive.
---> User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_9_5) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/61.0.3163.10 0 Safari/537.36.
 ---> Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,image/apng,*/*;q=0.8.
---> Accept-Encoding: gzip, deflate, br.
---> Accept-Language: fr-CA,en-CA;q=0.8,fr-FR;q=0.6,fr;q=0.4,en-US;q=0.2,en;q=0.2.
 New connection: 2017-10-29 16:04:45.865270, from ('127.0.0.1', 58987)
New connection: 2017-10-29 16:04:45.937752, from ('127.0.0.1', 58988)
 <--- Date: Sun, 29 Oct 2017 22:04:45 GMT. <--- Server: Apache/2.2.34.
 <--- Accept-Ranges: bytes.
<--- Content-Length: 20757.</pre>
 <--- Keep-Alive: timeout=5, max=100.
<--- Connection: Keep-Alive.
<--- Content-Type: text/html.</pre>
 <--- .
<--- <html>
 <--- <head>
 <--- <head>
<--- <meta http-equiv="Content-Language" content="en-us">
<--- <meta name="GENERATOR" content="Microsoft FrontPage 6.0">
<--- <meta name="ProgId" content="FrontPage.Editor.Document">
<--- <meta nttp-equiv="Content-Type" content="text/html; charset=windows-1252">
<--- <ti><tittle>Welcome to The TCP/IP Guidel</title>
<--- <script language="JavaScript" fptype="dynamicanimation">
<--- </tr>
 <--- <!--
 <--- function dynAnimation() {}
<--- function clickSwapImg() {}
<--- //-->
 <--- <script language="JavaScript1.2" fptype="dynamicanimation" src="animate.js">
 <--- </script>
 <--- <body>
 <--- <table border="0" width="100%" cellpadding="3" cellspacing="0" id="AutoNumber3" height="522" style="border-collapse:
collapse" bordercolor="#111111">
         TAGEBODYTAGEBODY</p
New connection: 2017-10-29 16:04:46.015759, from ("127.0.0.1", 58989)
```

Figure 8: Initialization of proxy server with replace formatting. All instances of 'localhost' replaced with 'REDACTED'