

MeterSphere 新增微服务模块过程记录

1、复制已有模块到新模块，如：test-utils

framework

test-track

test-utils

backend

frontend

scripts

Dockerfile

pom.xml

workstation

.gitignore

CODE_OF_CONDUCT.md

CONTRIBUTING.md

Jenkinsfile

LICENSE

OWNERS

README-EN.md

README.md

SECURITY.md

build.md

lombok.config

metersphere / test-utils / pom.xml

fit2cloud and fit2cloud 数据模块新增

CodeBlame20 lines (16 loc) · 635 Bytes

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
3     xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 https://maven.apache.org/xsd/maven-4.0.0.xsd">
4     <modelVersion>4.0.0</modelVersion>
5
6     <artifactId>test-utils-parent</artifactId>
7     <packaging>pom</packaging>
8
9     <parent>
10         <groupId>io.metersphere</groupId>
11         <artifactId>metersphere</artifactId>
12         <version>${revision}</version>
13     </parent>
14
15     <modules>
16         <module>frontend</module>
17         <module>backend</module>
18     </modules>
19
20 </project>
```

后端修改：

metersphere

<> Code Pull requests Actions Projects Security Insights

Files

test-utils

backend

scripts/sql

src/main

java/io/metersphere

resources

application.properties

logback.xml

permission.json

.gitignore

pom.xml

frontend

scripts

Dockerfile

pom.xml

workstation

.gitignore

CODE_OF_CONDUCT.md

CONTRIBUTING.md

Jenkinsfile

LICENSE

OWNERS

README-EN.md

README.md

metersphere / test-utils / backend / pom.xml

Code Blame 153 lines (142 loc) · 5.69 KB

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0"
3   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
4   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 https://maven.apache.org/xsd/maven-4.0.0.xsd">
5   <modelVersion>4.0.0</modelVersion>
6
7   <parent>
8     <groupId>io.metersphere</groupId>
9     <artifactId>test-utils-parent</artifactId>
10    <version>${revision}</version>
11  </parent>
12
13  <artifactId>test-utils</artifactId>
14
15  <dependencies>
16    <dependency>
17      <groupId>io.metersphere</groupId>
18      <artifactId>sdk</artifactId>
19      <version>${revision}</version>
20    </dependency>
21    <dependency>
22      <groupId>io.metersphere</groupId>
23      <artifactId>xpack-interface</artifactId>
24      <version>${revision}</version>
25    </dependency>
26
27    <!-- 数据库相关 START -->
28    <dependency>
29      <groupId>mysql</groupId>
30      <artifactId>mysql-connector-java</artifactId>
31      <version>8.0.29</version>
32    </dependency>
33
34    <dependency>
35      <groupId>com.baomidou</groupId>
36      <artifactId>mybatis-plus-boot-starter</artifactId>
37      <version>3.5.2</version>
```


metersphere / test-utils / backend / src / main / resources / application.properties

fit2cloud and fit2cloud 数据模块新增

Code Blame 39 lines (37 loc) · 1.66 KB

```
1 spring.application.name=testutils
2 spring.main.allow-bean-definition-overriding=true
3 server.port=8008
4 management.server.port=7008
5 logging.file.path=/opt/metersphere/logs/test-utils
6
7 spring.datasource.dynamic.primary=covserver
8 spring.datasource.dynamic.datasource.covserver.driver-class-name=com.mysql.cj.jdbc.Driver
9 spring.datasource.dynamic.datasource.covserver.url=jdbc:mysql://:4000/COVSERVER?useUnicode=true&characterEncoding=utf-8
10 spring.datasource.dynamic.datasource.covserver.username=
11 spring.datasource.dynamic.datasource.covserver.password=
12 spring.datasource.dynamic.datasource.dashboard.driver-class-name=com.mysql.cj.jdbc.Driver
13 spring.datasource.dynamic.datasource.dashboard.url=jdbc:mysql://:shboard?useUnicode=true&characterEncoding=utf-8
14 spring.datasource.dynamic.datasource.dashboard.username=q
15 spring.datasource.dynamic.datasource.dashboard.password=q
```

前端修改：

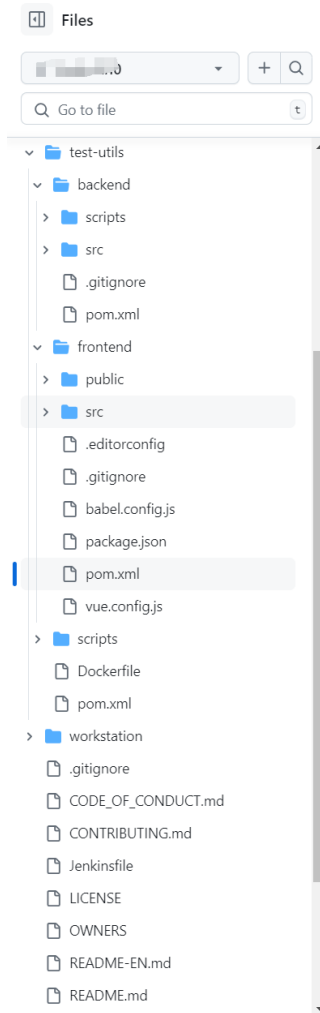

metersphere / test-utils / frontend / pom.xml

fit2cloud and fit2cloud 数据模块新增

Code Blame 88 lines (82 loc) · 2.84 KB

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0"
3       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
4       xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/xsd/maven-4.0.0.xsd">
5   <packaging>pom</packaging>
6
7   <parent>
8     <groupId>io.metersphere</groupId>
9     <artifactId>test-utils-parent</artifactId>
10    <version>${revision}</version>
11  </parent>
12
13  <modelVersion>4.0.0</modelVersion>
14  <artifactId>test-utils-frontend</artifactId>
15
16  <properties>
17    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
18    <project.reporting.outputEncoding>UTF-8</project.reporting.outputEncoding>
19  </properties>
20
21  <build>
22    <plugins>
23      <plugin>
24        <groupId>com.github.eirslett</groupId>
25        <artifactId>frontend-maven-plugin</artifactId>
26        <version>${frontend-maven-plugin.version}</version>
27        <configuration>
28          <installDirectory>../../.node</installDirectory>
29        </configuration>
30      </plugin>
31    </plugins>
32    <executions>
33      <execution>
34        <!-- optional: you don't really need execution ids, but it looks nice in your build log. -->
35        <id>install node and npm</id>
36        <goals>
37          <goal>install-node-and-npm</goal>
38        </goals>
39        <!-- optional: default phase is "generate-resources" -->
40        <phase>generate-resources</phase>
41      </execution>
42    </executions>
43  </build>
44
45  <configuration>
46    <nodeVersion>${node.version}</nodeVersion>
47    <npmVersion>${npm.version}</npmVersion>
48  </configuration>
```

Showing 169 changed files with 15,232 additions and 5 deletions.


Filter changed files

- .gitignore
- framework
- pom.xml
- system-setting
- test-utils
 - Dockerfile
 - backend
 - frontend
 - .editorconfig
 - .gitignore
 - babel.config.js
 - package.json
 - pom.xml
 - public
 - src
 - vue.config.js
 - pom.xml
 - scripts
 - pack.sh

119 test-utils/frontend/package.json

```
@@ -0,0 +1,119 @@
1 + {
2 +   "name": "testutils",
3 +   "version": "1.0.0",
4 +   "private": true,
5 +   "scripts": {
6 +     "testutils": "vue-cli-service serve",
7 +     "build": "vue-cli-service build",
8 +     "lint": "vue-cli-service lint",
9 +     "report": "NODE_ENV=analyze vue-cli-service build"
10 +   },
11 +   "dependencies": {
12 +     "@ckeditor/ckeditor5-build-classic": "^18.0.0",
13 +     "@ckeditor/ckeditor5-vue": "^1.0.1",
14 +     "@form-create/element-ui": "^2.5.8",
15 +     "@fortawesome/fontawesome-svg-core": "^1.2.26",
16 +     "@fortawesome/free-brands-svg-icons": "^5.13.0",
17 +     "@fortawesome/free-regular-svg-icons": "^5.12.0",
18 +     "@fortawesome/free-solid-svg-icons": "^5.12.0",
19 +     "@fortawesome/vue-fontawesome": "^0.1.9",
20 +     "@vueuse/core": "^10.7.0",
21 +     "crypto-js": "^4.1.1",
22 +     "diffable-html": "^4.0.0",
23 +     "echarts": "^5.0.2",
24 +     "el-table-infinite-scroll": "^1.0.10",
25 +     "el-tree-transfer": "^2.4.7",
26 +     "element-resize-detector": "^1.2.4",
27 +     "element-ui": ">2.15.9 || 2.15.8",
28 +     "fit2cloud-ui": "^1.8.0",
29 +     "highlight.js": "^11.8.0",
30 +     "html2canvas": "^1.0.0-rc.7",
31 +     "js-base64": "^3.4.4",
32 +     "jsencrypt": "^3.1.0",
33 +     "json-bigint": "^1.0.0",
34 +     "json-schema-faker": "^0.5.0-rcv.32",
35 +     "json5": "^2.1.3",
36 +     "jsondiffpatch": "^0.4.1",
37 +     "jsoneditor": "^9.5.6",
38 +     "jsonpath": "^1.1.0",
39 +     "jspdf": "^2.3.1",
40 +     "lodash.isboolean": "^3.0.3",
41 +     "lodash.isempty": "^4.4.0",
42 +     "lodash.isinteger": "^4.0.4",
43 +     "lodash.isnull": "^3.0.0",
44 +     "lodash.isnumber": "^3.0.3",
```

Showing 169 changed files with 15,232 additions and 5 deletions.

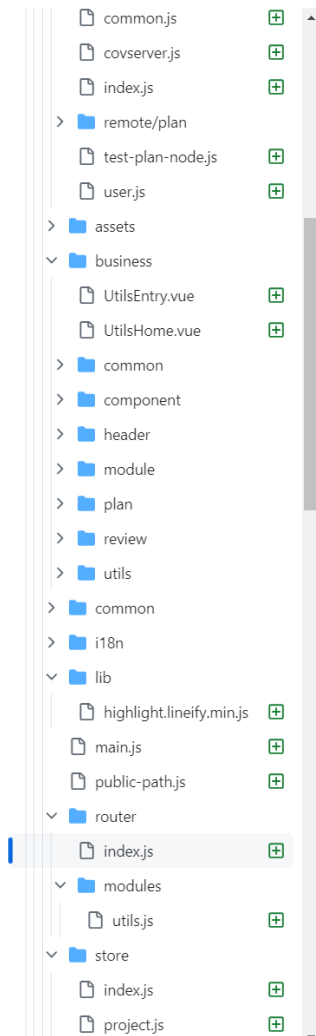

```
test-utils/frontend/src/router/index.js
@@ -0,0 +1,63 @@
1 + import Vue from "vue";
2 + import Router from "vue-router";
3 + import Utils from "@router/modules/utils";
4 + import { Utils as CUtils } from "@common";
5 + import { CovserverAPI } from "@api";
6 + import { consPhecdUser } from "@store/project";
7 +
8 + // 修复路由变更后报错的问题
9 + const routerPush = Router.prototype.push;
10 + Router.prototype.push = function push(location) {
11 +   return routerPush.call(this, location).catch((error) => error);
12 + };
13 +
14 + Vue.use(Router);
15 +
16 + // 顶部菜单
17 + Utils.children.forEach((item) => {
18 +   item.children = [{ path: "", component: item.component }];
19 +   item.component = () => import("@/business/UtilsEntry");
20 + });
21 +
22 + export const constantRoutes = [
23 +   { path: "/", redirect: "/testutils/home" },
24 +   {
25 +     path: "/login",
26 +     component: () => import("metersphere-frontend/src/business/login"),
27 +     hidden: true,
28 +   },
29 +   Utils,
30 + ];
31 +
32 + const createRouter = () =>
33 +   new Router({
34 +     scrollBehavior: () => ({ y: 0 }),
35 +     routes: constantRoutes,
36 +   });
37 +
38 + export function resetRouter() {
39 +   const newRouter = createRouter();
40 +   router.matcher = newRouter.matcher; // reset router
41 + }
42 +
43 + const router = createRouter();
44 +
```

```
35 test-utils/frontend/src/business/UtilsHome.vue

... @@ -0,0 +1,35 @@

1 + <template>
2 +   <div id="utils-home">
3 +     <el-row :gutter="20">
4 +       <el-col :span="4" v-for="(app, idx) in utilsApps" :key="idx">
5 +         <util-card :info="app" />
6 +       </el-col>
7 +     </el-row>
8 +   </div>
9 + </template>
10 +
11 + <script setup>
12 +   import UtilCard from "../component/UtilCard"
13 +
14 +   const APPS = [
15 +     {
16 +       name: "UI自动化测试平台",
17 +       img: "uittest",
18 +       url: "http://test.uiauto.cicc.com.cn/",
19 +     },
20 +     {
21 +       name: "精准测试平台",
22 +       img: "precision",
23 +       url: "/testutils/precision",
24 +       inner: true,
25 +     },
26 +   ]
27 +
28 +   const utilsApps = APPS.filter((app) => !(app.hidden ?? false))
29 + </script>
30 +
31 + <style scoped>
32 + #utils-home {
33 +   padding: 10px;
34 + }
35 + </style>
```

2. gateway 增加 swagger 路由以及 模块前缀的过滤

Showing 169 changed files with 15,232 additions and 5 deletions.

framework/gateway/src/main/java/io/metersphere/gateway/filter/SessionFilter.java

```
17 17 @Component
18 18 public class SessionFilter implements WebFilter {
19 19     // 所有模块的前缀
20 20     private static final String[] PREFIX = new String[]{"setting", "/project", "/api", "/performance", "/track", "/workstation", "/ui", "/report"};
21 21     private static final String[] TO_SUB_SERVICE = new String[]{"license", "/system", "/resource", "/sso/callback/logout", "/sso/callback/cas/logout"};
22 22     private static final String PERFORMANCE_DOWNLOAD_PREFIX = "/jmeter/";
23 23     private static final String API_DOWNLOAD_PREFIX = "/api/jmeter/";
```

framework/gateway/src/main/resources/application.properties

```
38 38 springdoc.swagger-ui.urls[7].url=workstation/v3/api-docs
39 39 springdoc.swagger-ui.urls[8].url=/ui/v3/api-docs
40 40 springdoc.swagger-ui.urls[9].name=ui
41 41 springdoc.swagger-ui.urls[9].url=/testutils/v3/api-docs
42 42 springdoc.swagger-ui.urls[9].name=testutils
43 43 # sticky-session
44 44 spring.cloud.loadbalancer.sticky-session.add-service-instance-cookie=true
45 45 #
```

3. sdk增加菜单前端

Showing 169 changed files with 15,232 additions and 5 deletions.

Whitespac

- framework/sdk-parent
 - domain/src/main/resources
 - frontend/src
 - assets/module
 - testutils.svg
 - components
 - head
 - ProjectSearchList.vue
 - layout
 - AsideMenus.vue
 - search
 - search-components.js
 - i18n/lang
 - en-US.js
 - track
 - zh-CN.js
 - zh-CN.js
 - zh-TW.js
 - utils
 - default-table-header.js
 - pom.xml
 - system-setting
 - test-utils
 - Dockerfile
 - backend
 - frontend
 - .editorconfig
 - .gitignore
 - babel.config.js
 - package.json

framework/sdk-parent/frontend/src/components/head/ProjectSearchList.vue

```
@@ -116,6 +116,11 @@ export default {
 116 116     this.reload();
 117 117     return;
 118 118 }
 119 + if (copyRedirectUrl.startsWith("/testutils")){
 120 +     this.$router.push(copyRedirectUrl);
 121 +     this.reload();
 122 +     return;
 123 + }
 119 124 if (copyRedirectUrl.startsWith("/track") || copyRedirectUrl.startsWith("/performance")
 120 125 || copyRedirectUrl.startsWith("/api") || copyRedirectUrl.startsWith("/ui")) {
 121 126 // 获取有权限的跳转路径
```

framework/sdk-parent/frontend/src/components/layout/AsideMenus.vue

```
@@ -76,6 +76,12 @@
 76 76     <span slot="title" class="ms-menu-item-title">{{ $('commons.system_setting' )}}</span>
 77 77     </div>
 78 78     </el-menu-item>
 79 +     <el-menu-item index="/testutils" v-if="check('testutils')">
 80 +     <div>
 81 +     <svg icon class="testutils" class-name="ms-menu-img" />
 82 +     <span slot="title" class="ms-menu-item-title">{{ $('commons.test_utils' )}}</span>
 83 +     </div>
 84 +     </el-menu-item>
 79 85     </el-menu>
 80 86 </template>
 81 87
```

framework/sdk-parent/frontend/src/components/search/search-components.js

```
@@ -945,6 +945,12 @@ export const TEST_PLAN_MODULE_TREE = _getModuleTree({
 945 945     params: {} // 赋值时注意顺序
 946 946 })
 947 947
 948 + export const DATA_RULES_MODULE_TREE = _getModuleTree({
 949 +     url: "/rules/node/list",
 950 +     type: "POST",
 951 +     params: {} // 赋值时注意顺序
 952 + })
 953 +
 948 954 export const API_MODULE_TREE = _getModuleTree({
```