


To explore the mechanism that allows music recognition apps to work.

Suen Hang C Yeung

Candidate number: 9273

Centre number: 28278

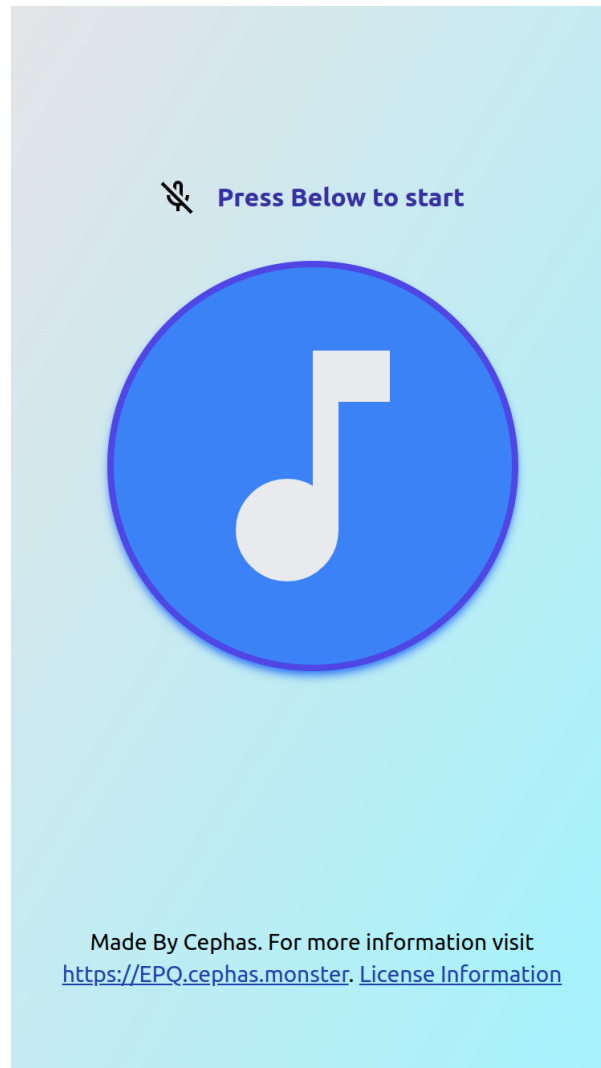

Contents

1	Introduction	4
2	Methodology / Design Choice	5
2.1	Web app	5
2.2	The algorithm	6
3	Process of creation	7
3.1	Coding section	7
3.2	Material selection	8
3.3	Extra investigation	8
4	Testing method	10
5	Discussion	11
6	Conclusion	12
	Bibliography	13
	<u>Appendix</u>	
A	Figures	15
B	Testing results	18
C	Screenshots	19
D	Meeting logs	20
D.1	Meeting with the supervisor at 25 November 2024	20
D.2	Meeting with a professional at 13 January 2025	20
E	Critical Bibliography	21
F	Timetable	26
G	Links	28
H	Presentation	30
I	Word Count	40

For the purpose of this project, the replica of a music recognition app is created.

The algorithm first creates a fingerprint for each audio file from its spectrogram. Which are added to a database as a hashed value.

When song are recorded through the interface, the algorithm repeats the fingerprinting process, but instead compares the hash value with the matched songs.

During the research phase there are multiple areas that require extra research, such as testing the program and solving unexpected errors.

At the end, the artefact is created to fulfil the original goal of recreating it.

In the modern digital world, millions of songs are created every month. According to former CEO Stephen Cooper from a prominent record label company Warner Bros - approximately 100,000 tracks are now being uploaded to popular music streaming sites such as SoundCloud[®], Spotify[®], Apple Music[®] and so on.¹ The demand for recognizing music increases. According to the Google Play Store[®] (the Android[®] app store), there are currently 500M+ downloads of the Shazam[®] app (**This number is taken in 2025*). And the functionality of Shazam[®] is built into all Apple[®] devices around the world. That's about 2.35 billion active Apple[®] users having the Shazam[®] app built in. (***This number includes all devices that might not be up-to-date and could include the country that blocks the functionality. This data is taken in 2025 from Apple[®] app store.*) That is about 2.85 billion active users. And this is not the only app that has this functionality. This article will answer how modern music recognition apps work.

The aim of this research is to understand and replicate how modern-day music recognition algorithms work.

There are starter knowledge that are essential to know, in particular “What does Fourier transform do?”. As part of this research, video tutorial from the Washington University are used to aid the understanding of how it works.² However, due to the complexities that it involves. Code from (Virtanen et al. 2020) are used to complete the task of doing Fourier Transform.

Within the research, research are conducted from a very concrete and credible source of a patent created by the original founder and chief scientist of Shazam[®] (Now part of Apple Inc[®]) - Avery Wang.³ Shazam[®] is the industry leader in music recognition. The patent created by the creator of Shazam[®] are cited 771 times by other companies and organization with all sorts of purposes, such as being used as copyright detection, search result ranking from Google[®] and searching any multimedia products.⁴ However, due to the age of the source, some information might be irrelevant and outdated.

During the creation process, it was created using different resources to make the artefact (e.g: patent, research paper and blog posts) and method are introduced in order to test the success criteria set out by the algorithm.⁵

As part of this project, primary research are conducted with a professional. (Appendix [section D.2](#))

1. [Ingham 2022](#).

2. [Brunton 2020](#).

3. [Newnham 2023](#).

4. [Wang and III 2013](#).

5. [Yang 2001](#).

The software is run inside a container as the patent suggested. By containerizing the program (using docker). It allows it to be run in a “Distributed system”.

The artefact is divided into two parts (Structure: Figure A.1). The web app that allows user to interact with the program graphically. (Screenshots: Figure C.1). And the main algorithm allows the processing of the audio.

2.1 Web app

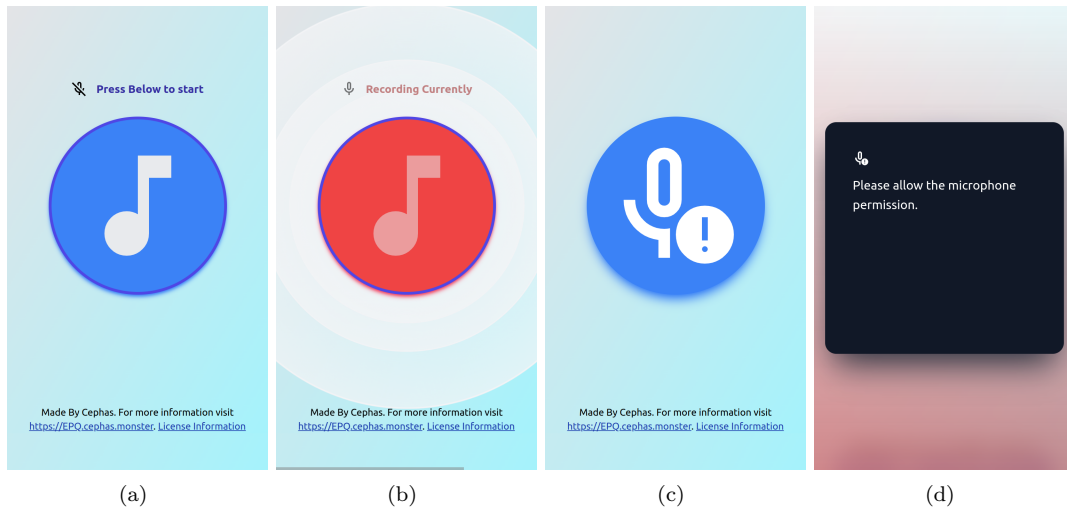


Figure 2.1: The list of screenshot of the main screen from the web app (a) “Home”, (b) Recording (c)(d) “Microphone permission are disabled”

The web app is designed to be as user-friendly as possible.

The home page of the app would immediately present the user with the instruction text on top to remind the user to press start. And the record button are clearly outlined and highlighted with a bright colour to remind the user to click on it to start the recording.

Below the picture there are key text, such as link to the licensing information which includes the music that I used to use as demo. As shown in Figure 2.1(a)

When the user start recording the music, the animated bubble effect shows up and the record button changed to red, indicating that the app is recording. As shown in Figure 2.1(b).

If the user has not given the web app the permission to use microphone, the logo will show the user that they have not given the recording permission to us. As shown in Figure 2.1(c).

And if they disabled their microphone entirely or if they blocked the access to microphone to the website, a pop-up will show up to prevent further action from the app, as the App will no-longer works. As shown in

Figure 2.1(d).

2.2 The algorithm

When the program first registers the song in to the database. It will go through the process of “fingerprinting” to the piece of music.

The algorithm consist of creating spectrogram where it uses STFT (Fast Fourier Transform dissolves a function of time or signal into the frequencies that makes in a way similar to how a musical chord can be expressed as the pitches of its constituent notes. It is also called the frequency domain representation of the original signals. Short-time Fourier Transform is a variation of the Fast Fourier transform built for making spectrogram¹). Illustrated in appendix of Figure A.3.²

In this case, the spectrogram is being filtered through using maximum filter. The two spectrograms are compared to pick peak points. The peaks used to construct the pairs. The pairs of points are hashed using the default hashing function (Hashing function is a function where you put in any item and getting back a number. Hash functions’ output tells you where the item is store and the item can be searched in a very fast time.³) which generate an almost unique hash values in the program. Illustrated in appendix of Figure A.4, Figure A.6 and Figure A.5.

The hash point is then placed into a database alongside with its song name and where the point A’s real time. The song data (metadata) such as author and copyright detail are placed in a different database. Database example: Figure 2.2.

Song_ID	Name	Author	Genre
f633c47a	J. S. Bach: Prelude in C - BWV 846	Kevin MacLeod	Classical

Figure 2.2: Example of a database entry of the song data (metadata)

When the user record the sample of audio through the user interface from the web app, the recording sample is sent to the server. It is processed where it applies the same algorithm from above. First it constructs a spectrogram, peak point are picked and hash values are created, the hash values are searched inside the *points* table. The point’s table are as illustrated in appendix of Figure A.6.

The list of successfully matched song are than going through the process of “scoring”. The score calculated by constructing a histogram with the point A’s real time value. (As illustrated in appendix in the forth column of Figure A.6) The highest score would be the correctly matched song. Using score system ensures accuracy results.⁴⁵⁶⁷

1. Alpay et al. 2024.
 2. Chittora and Babel 2018.
 3. Bhargava 2016.
 4. Wang and III 2013.
 5. MacLeod 2022.
 6. Yang 2001.
 7. Wang 2003.

3.1 Coding section

The hardest part of creating this artefact is programming the algorithm of the program. From using the blog post source ([MacLeod 2022](#)). It leads me to the direction of creating the algorithm that takes in the song file and fingerprint the song entry in the program.

Within the scope of the project, Python are chosen to program the algorithm, as Python is the most popular programming language for data analysis and other general usage.

Initially, a problem appeared where there are two different song arrays. Later found out that because most song file are represented as stereo music (where there are typically two channels e.g. left ears and right ears). So a music encoding program of FFmpeg is used to mix the audio back into mono audio. Unfortunately, Shazam[®] does not explicitly provide the information on how they handle stereo music, as stereo music are prominent at the time of the patent are published.

From the research into the method of creating spectrogram, due to the time constraint of this project, creating an algorithm that produces a spectrogram is not possible. A programming library is used to produce spectrogram instead of creating the spectrogram algorithm from scratch. Next the spectrogram are initially programmed so that it is produced using the Librosa library. However, due to the constraint created by the library Librosa and the low efficiency that the library creates, within the design it is required to be “high performance”, so the signal library SciPy are used instead¹. The spectrogram produce by SciPy illustrated in [Figure 3.1](#). (In the actual program, the spectrogram would not actually be produced because it is not necessary to produce it in the product artefact. Settings have been included in the internal code so that diagram can be created to show the program works.)

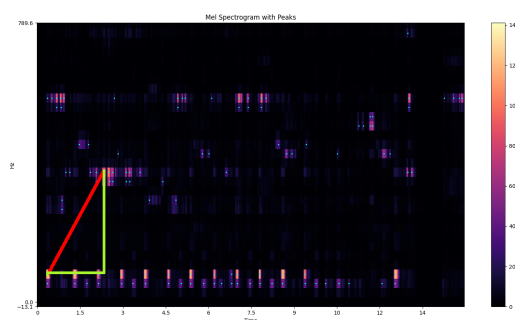


Figure 3.1: This is demonstrating how the spectrogram would look like.

And the data are processed using the library of NumPy² through maximum filter in the library of SciPy³. The output of two arrays of spectrogram data are compared using NumPy’s technique of boolean mask as shown

1. Virtanen et al. [2020](#).
2. Harris et al. [2020](#).
3. Virtanen et al. [2020](#).

in the figure in appendix of [Figure A.4](#).

When the pairs are created from the peak picked from the maximum filter, the patent included methods to create pairs of points. However, the patent does not specify what is the upper and lower limit of how pair of points should be spaced each other. From different testing, it has suggested that the upper limit of $4000Hz$ for the frequency and $1.5second$ of time the pairs of points limited to.

In addition to the upper limits, the lower limit of $0.05second$ to prevent pairs to be too close to each other.

Having upper limit allows the program to not create too many pairs of values, as if there are no limits to how many pairs there are, there would be way too many pairs created, which reduces the uniqueness of each fingerprint profile of each song. And it reduces the performance of searching as there are more fingerprint entries in the database. For example: one of the song *J. S. Bach: Prelude in C - BWV 846* when there are noises added to the original sample, there are 2138 peaks, if no upper limit is imposed, there would be $2138 \times (2138 - 1) = 4568906$ pairs (which is about the half the size of all the pairs stored in the actual song database for all the songs which is about 65 songs) and way larger than the final with limit of 8668 pairs for the song.

Having lower limit allows points that are nearly next to each other to be omitted from pairing up, as some recording, there are imperfection in intonation or sound attenuation over distances when recording.

It was also discovered that from creating the program, rounding up the frequency and the time value are required for the algorithm to work properly. This is discovered during the creation phase of the project from the discussion with the professional ([Appendix section D.2](#)). This might be due to different microphone in different device records slightly differently, and their electrical design might be different. And as sound wave propagates for some distances through the atmosphere, high-frequency components become more attenuated than low-frequency ones due to heat conduction, shear viscosity, and relaxation losses. This is noticeable after $> 15m$.⁴

3.2 Material selection

Because this algorithm requires a library of song to demonstrate its effectiveness. Library of song from Kevin MacLeod are used for this artefact for demo songs used to test the algorithm, all of his song library are copyright free and licensed under *the Creative Commons Attributions*. This is done to avoid infringing the *Copyright, Designs and Patents Act 1988, section 47 "copying the material"*, as the algorithm are required to download the music and analysis it (create a spectrogram) from placing it inside the database.

The logo used for user guidance and visual in the web app are also downloaded from the *Google® Material Symbols and Icons* as they are licensed under free and open source licence of *Apache Licence 2.0*. And the logos from the library create a more user-friendly way of interacting the App and also give visual hint to the user.

3.3 Extra investigation

During the creation process, the project encounters a large hurdle. Due to random noise in the sample of the audio during the fingerprinting process, it was unable to block the random noise in the sample, because of this when the program is sampling "nothing" just background noise, it would appear to the user that there is song playing in the background with a random results because the program only initially took the maximum value from the list of scores. This is not mentioned in any of the articles. (This might be due to the quality of the songs)

Investigation and experiment is done to fix the problem. The problem is fixed by using a mathematical concept of finding outliers from the list of songs. Firstly, all the score are fetched from the searching done inside the database. Then, the interquartile range would be calculated from the list of data. If there are an outlier, that means that the matched songs are not created by random background noise from the sample itself. See [Figure 3.2](#)

There are also places where errors are circumvented, such as at the start the user can record sample of the music that have a short duration, this would not be effective as the program would not be able to recognise songs. So an error prompt message is added to stop the user from uploading a song that is too short. See [Figure 3.2](#).

4. Spiousas et al. [2017](#).

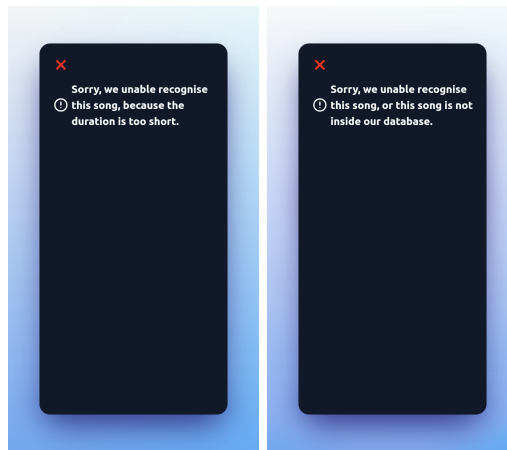


Figure 3.2: Left: when duration of sample is too short. Right: when it fails to find the song

The program is tested using the method described in this paper¹ and a primary research conducted from a meeting of a professional (Appendix [section D.2](#)). Detail of the meetings is in the appendix. An evidence from all the song from (almost 100%) of the fingerprinted music collection is used to test the program, this is so that it reduce the likelihood of a flawed test.

The test have increasing level of difficulty:

- Test 1: original song file (unmodified digital file)
- Test 2: original song file but shifted
- Test 3: original song file but with controlled level of noise. (E.g.: a sine wave)
- Test 4: original song file but played over the air and recorded.
- Test 5: original song but perform by different people.
- Test 6: transposed song

Test 1, 2 worked 100% of the time and test 3 worked 74% of the time. However, because test 4 requires a lot of time I only tested 40% of the data but most works. (There are some anomalies because for some reason the song database have duplicate songs.) Test 5 and 6 are not tested extensively because it's time-consuming, and it is expected that most of them fails so at the end only just 10% of the songs are tested and all of them did fail.

There are also additional tests one where there are no audio playing, just background noise, this is done for control purposes.

The test results are inside [Figure B.1](#).

In addition, further test should be done to test the program on performance, as Shazam[®] 's end goal is to create a high performance algorithm, and I haven't tested on this aspect yet. This could be tested in various different ways, such as testing it using more clients and more traffic flow, I could also test it with more number of music in the database.

1. Yang [2001](#).

As discussed in [the test conducted](#), this artefact is not capable to detect a transposed music, “humming”, live music and a piece of music being played by a different orchestra. Because this song only matches the exact frequency that the song produces.

One way that the problem can solve is to change the fingerprinting and searching mechanism entirely to not rely purely on the raw frequency data, instead by using the MIDI file (where it uses MIDI messages that control musical elements like pitch, velocity, modulation, and more.¹) Then from it, create a database of melody. Which can recognise songs from it by recording the song and passing the fingerprint of the recording into the algorithm to process for results. This allows a wider error range for recognizing song such as it can be capable of detecting recording made from “humming”.² However, this would make the algorithm costly and slow to run.³

In addition, extra research might be needed to improve the speed, making it more commercially viable which is the goal set out by the Shazam[®] team where they designed it so that it’s high performance.⁴

The research can also be further extended not limited to searching for songs, such as searching for patten inside text, audio, video, image, and any multimedia combinations of individual media types. For example: image fingerprints can be created from an array of pixel’s RGB value.⁵

In addition, this project only uses copyright-free music, as there would be legal and ethical implication to using contemporary music.

The biggest ethical implication that most music recognition app faced are privacy violation, as some app record the audio in the background even without user interaction. The project would not be concerned about this because it only records when user intended to. So a privacy notice is created to show to the user if needed. And there are also privacy notice created to tell the user the retention period of the data, which is set to 30 days and the data would be kept anonymously. For more details, please scan the QR-code for privacy notice from [Appendix G](#).

1. [Anthony 2025](#).

2. [Ghias et al. 1995](#).

3. [Yang 2001](#).

4. [Wang and III 2013](#).

5. [Wang and III 2013](#).

Further research might be needed into improving the accuracy, making it able to recognise variation (such as transposed music, “humming”, live music and music being played by a different orchestra) of the same song.¹ Performance would be a bonus factor for this artefact, but at the end the artefact run fast enough for the time being.

Self research into some aspect of the project are being conducted and implemented successfully, such as the implementation of spacing in the spectrogram analysis. Some limits introduce to user, such as the lower limit on the duration of the songs. These action have been done to ensure accuracy and performance of the program.

Ethical factors are critically evaluated and implemented into the actual artefact. Such as privacy notice, retention policy and anonymity of users data.

In conclusion, it met the expectation of the project end goal which is creating an artefact that demonstrate by testing using a vigorous testing method set out by a professional opinion (Appendix [section D.2](#)) and an article.

1. Yang [2001](#).

Bibliography

- Alpay, Daniel, Antonino De Martino, Kamal Diki, and Daniele C. Struppa. 2024. Short-time Fourier transform and superoscillations. *Applied and Computational Harmonic Analysis* 73 (November): 101689. ISSN: 1063-5203, accessed March 9, 2025. <https://doi.org/10.1016/j.acha.2024.101689>. <https://www.sciencedirect.com/science/article/pii/S1063520324000666>.
- Anthony. 2025. *What is MIDI? Everything You Need to Know About This Vital Tool* [in en], February. Accessed March 25, 2025. <https://www.gear4music.com/blog/what-is-midi/>.
- Bhargava, Aditya Y. 2016. *Grokking algorithms: an illustrated guide for programmers and other curious people*. Manning Publications. ISBN: 978-1-61729-223-1.
- Brunton, Steve. 2020. *The Fast Fourier Transform Algorithm*, April. Accessed October 29, 2024. https://www.youtube.com/watch?v=toj_IoCQE-4.
- Chittora, Nisha, and Deepika Babel. 2018. A BRIEF STUDY ON FOURIER TRANSFORM AND ITS APPLICATIONS [in en]. 05 (12).
- Ghias, Asif, Jonathan Logan, David Chamberlin, and Brian C. Smith. 1995. Query by humming: musical information retrieval in an audio database [in en]. In *Proceedings of the third ACM international conference on Multimedia - MULTIMEDIA '95*, 231–236. San Francisco, California, United States: ACM Press. ISBN: 978-0-89791-751-3, accessed January 31, 2025. <https://doi.org/10.1145/217279.215273>. <http://portal.acm.org/citation.cfm?doid=217279.215273>.
- Harris, Charles R., K. Jarrod Millman, Stéfan J. Van Der Walt, Ralf Gommers, Pauli Virtanen, David Cournapeau, Eric Wieser, et al. 2020. Array programming with NumPy [in en]. *Nature* 585, no. 7825 (September): 357–362. ISSN: 0028-0836, 1476-4687, accessed January 12, 2025. <https://doi.org/10.1038/s41586-020-2649-2>. <https://www.nature.com/articles/s41586-020-2649-2>.
- Ingham, Tim. 2022. *100,000 tracks being uploaded to Spotify and other services daily* [in en-US], October. Accessed March 25, 2025. <https://www.musicbusinessworldwide.com/its-happened-100000-tracks-are-now-being-uploaded/>.
- MacLeod, Cameron. 2022. *Abracadabra: How does Shazam work?* [In en], February. Accessed October 28, 2024. <https://www.cameronmacleod.com/blog/how-does-shazam-work>.
- Newnham, Danielle. 2023. *INTERVIEW: Dr Avery Wang, Principal Research Scientist at Apple and Co-Founder and Chief Scientist, Shazam* [in en], February. Accessed February 2, 2025. <https://daniellenewnham.medium.com/fostering-innovation-and-choosing-the-right-founding-team-6287f7eed9f>.
- Spiousas, Ignacio, Pablo E. Etchemendy, Manuel C. Eguia, Esteban R. Calcagno, Ezequiel Abregú, and Ramiro O. Vergara. 2017. Sound Spectrum Influences Auditory Distance Perception of Sound Sources Located in a Room Environment. *Front Psychol* 8 (June): 969. ISSN: 1664-1078, accessed March 9, 2025. <https://doi.org/10.3389/fpsyg.2017.00969>. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5479918/>.
- Virtanen, Pauli, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, et al. 2020. SciPy 1.0: fundamental algorithms for scientific computing in Python [in en]. Publisher: Nature Publishing Group, *Nat Methods* 17, no. 3 (March): 261–272. ISSN: 1548-7105, accessed October 28, 2024. <https://doi.org/10.1038/s41592-019-0686-2>. <https://www.nature.com/articles/s41592-019-0686-2>.

- Wang, Avery Li-Chun. 2003. An Industrial-Strength Audio Search Algorithm [in en] (January).
- Wang, Avery Li-Chun, and Julius O. Smith III. 2013. Systems and methods for recognizing sound and music signals in high noise and distortion [in en] US8386258B2, filed February 2013. Accessed December 25, 2024. <https://patents.google.com/patent/US8386258B2/en?assignee=Shazam+Investments+Ltd&num=25>.
- Yang, Cheng. 2001. *Music Database Retrieval Based on Spectral Similarity*. Technical Report 2001-14. Backup Publisher: Stanford InfoLab. Stanford. <http://ilpubs.stanford.edu:8090/489/>.

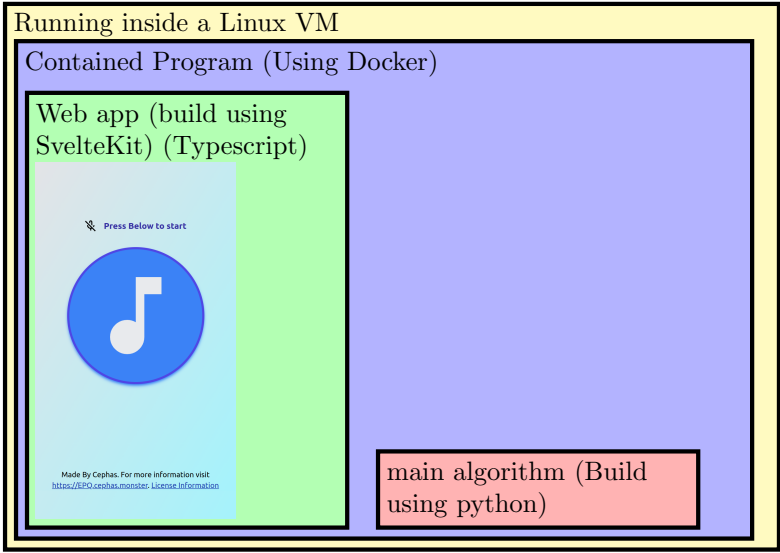


Figure A.1: Overall Architecture

0. User pressed start record button (🎵)

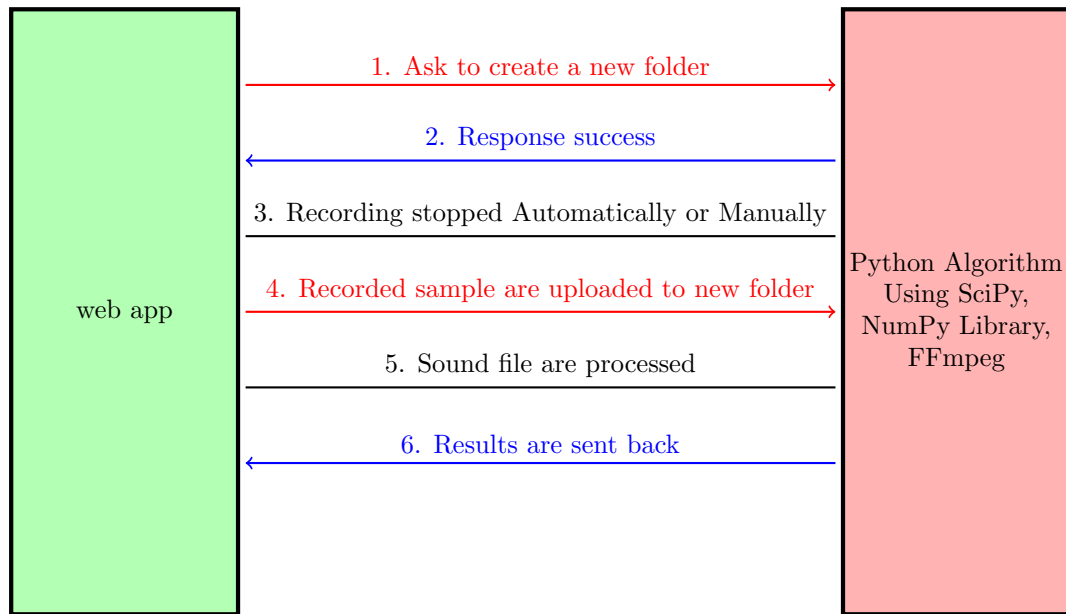


Figure A.2: Overall Architecture (app)

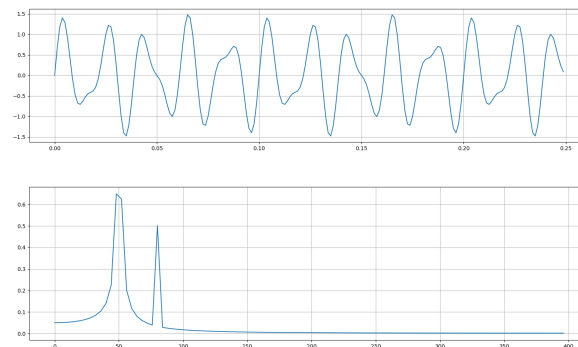


Figure A.3: Fast Fourier Transform as an example through transforming the top signal in to representation in the frequency domain at the bottom.

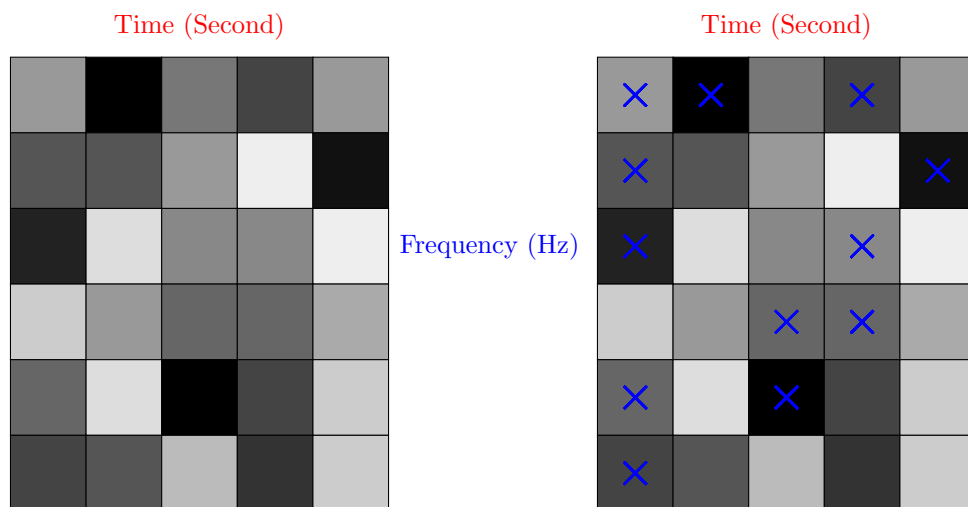


Figure A.4: Illustrating an example of a spectrogram picking of points. The darker the box, the higher the amplitude (value) represents

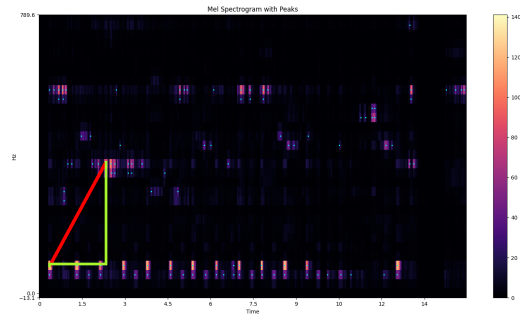


Figure A.5: The tip of the triangle represents Point A and Point B. Y-axis represents the time, X-axis represents the frequency, The amplitude scales are represented by the colour bar on the right.


Point A (Hz)	Point B (Hz)	Time delta (s)	Point A time (s)	Track UUID
20.1	302.1	1.8	0.3	ea47a3c5
2388532207457024332			2.1	ea47a3c5

Figure A.6: Demonstrate / example of how item are hashed.

Song_ID	Name	Author	Genre
f633c47a	J. S. Bach: Prelude in C - BWV 846	Kevin MacLeod	Classical

Figure A.7: Example of a database entry

Testing results

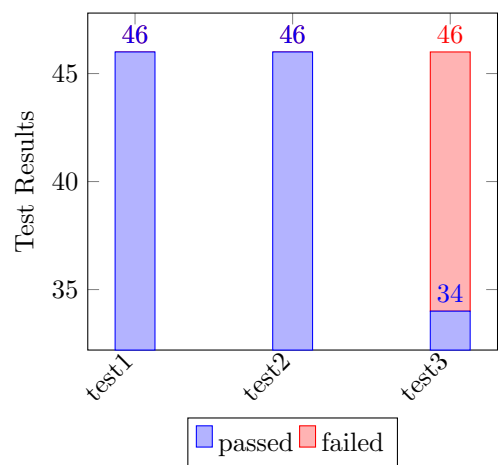

Test 1: (tested on 100% of the song library)

filepath	passed	SUBTOTAL
test/test_1.py	46	46
TOTAL	46	46

Test 2: (tested on 100% of the song library)

filepath	passed	SUBTOTAL
test/test_2.py	46	46
TOTAL	46	46

Test 3: (tested on 100% of the song library)

filepath	passed	failed	SUBTOTAL
test/test_3.py	34	12	46
TOTAL	34	12	46

Test 4: Most works (Only tested 40% of the song library)

Test 5: Most failed (Only tested 20% of the song library)

Test 6: All failed (Only tested 10% of the song library)

Figure B.1: test result table

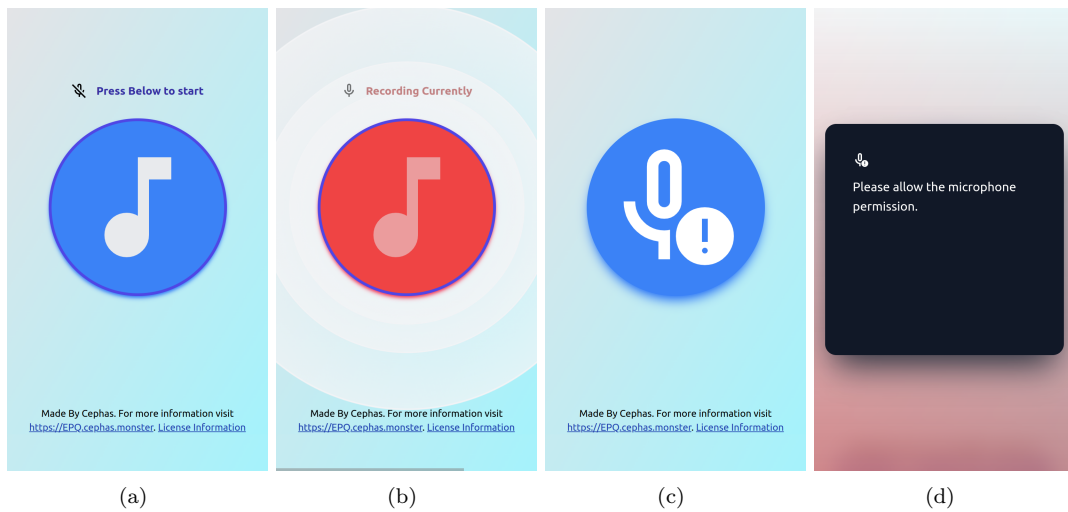


Figure C.1: (a) “Home”, (b) Recording (c)(d) “Microphone permission are disabled”

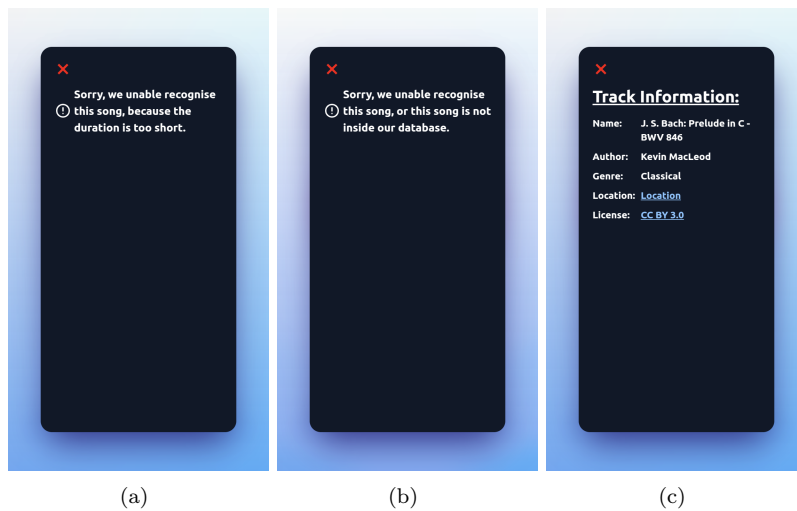


Figure C.2: (a) “Too Short”, (b) “No song”, (c) “Recognized song (e.g: Prelude by Bach)”

All the figures are simulated to the size of an iPhone[®] SE display.

D.1 Meeting with the supervisor at 25 November 2024

Summary:

Improve on the part A of the production logs, with more details on the titles described and what resources I will be using (such as the URLs should be provided), the timescale and what is involve.

As things I should be including to create a great project is the benefit that this might bring to the society and the impact.

And a plan to see what I should be sending or showing to the examiner in the future such as:

- Send product log
- Presentation of the artefact
- Evidence of the artefact
- Critical bibliography
- Place that in the Appendix and write a reference back to the appendix through the production log.

D.2 Meeting with a professional at 13 January 2025

Summary:

I explained the background details during the meeting.

I have explained that the program can only detect sounds from following test that I conducted such as:

- A test where there are no modifications to the original sound,
- A test where the song has cropped and reduced to a smaller size.
- A test where there is a constant noise generated by a program with a constant sine wave in the background.
- A test where the songs are mixed with a normal acceptable background noise such as coughing.

All of those above works as expected.

However, the test that I did by recording when the sound is played on a music player on a different device doesn't work.

As an additional note, he has mentioned that the program is slow because of a reason which might be caused by the hash point not being an integer, as the hash value using integer is faster than using string as hash. (It was diagnosed with a slow database reading speed prior to the meeting).

The project has concluded as partially successful from the results produced from the searching algorithm.

Summary of Improvement I need to make from the project.

I should use a different hashing algorithm for the fingerprinting part of the program.

Round up the frequency, and the changes in time that are fed into the hashing algorithm.

Additional note:

The meetings are conducted with the consent of the professional. (in regards to the ethical issues)

The professional is my computer science teacher, as he has a decent qualification of a university degree.

APPENDIX E

Critical Bibliography

Sources		Critics	Notes
Title: Short-time Fourier transform and superoscillations Author: Alpay et al. Issue Date: November 2024 URL: https://www.sciencedirect.com/science/article/pii/S1063520324000666	Alpay et al. 2024	This article is indented to provide information about the basics of Short-time Fourier Transform.	
Title: What is MIDI? Author: Anthony Issue Date: February 2025 URL: https://www.gear4music.com/blog/what-is-midi/	Anthony 2025	This tutorial article is indented to provide a really basic definition about the MIDI file.	
Title: Grokking algorithms Author: Bhargava Issue Date: 2016 URL:	Bhargava 2016	This book is indented to provide a really basic definition about some algorithm that is involve in this project.	
Title: Query by humming Author: Ghias et al. Issue Date: 1995 URL: http://portal.acm.org/citation.cfm?doid=217279.215273	Ghias et al. 1995	This conference article provide a discussion point on how to make the artefact if I want to do it differently. This source is credible to an extent as it's written by ACM which is a scientific and educational computing society. However, it might be slightly outdated (published date 1995) as there might be more information about this.	
Title: Array programming with NumPy Author: Harris et al. Issue Date: September 2020 URL: https://www.nature.com/articles/s41586-020-2649-2	Harris et al. 2020	This program is indented to be used in the program. This program extensively used in data analysis. It's an industry standard tool to analysis array in all fields, such as research.	Utilized only in the code

Title: <i>100,000 tracks being uploaded to Spotify and other services daily</i> Author: Ingham Issue Date: October 2022 URL: https://www.musicbusinessworldwide.com/its-happened-100000-tracks-are-now-being-uploaded/	Ingham 2022	This article provide insight into the music industry from the former CEO of a large record label company Warner Bros explaining the number of music being uploaded daily.	
Title: <i>Abracadabra: How does Shazam work?</i> Author: MacLeod Issue Date: February 2022 URL: https://www.cameronmacleod.com/blog/how-does-shazam-work	MacLeod 2022	This blog post is important because this includes much more details that the original article from the Shazam company. However, this does not mean this blog post are accurate as this is from written from a perspective of the original creator. But the writer is partially qualified to write about this topic as the writer work as a software engineer at Bloomberg and a graduate of University of Edinburgh.	
Title: <i>INTERVIEW: Dr Avery Wang, Principal Research Scientist at Apple and Co-Founder and Chief Scientist, Shazam</i> Author: Newnham Issue Date: February 2023 URL: https://daniellenewnam.medium.com/fostering-innovation-and-choosing-the-right-founding-team-6287f7eed9f	Newnham 2023	This interview give an insight into the creator of Shazam Avery Wang's identity, which his source is used as concrete source in the program. Wang and III 2013 ; Wang 2003	

Title: Sound Spectrum Influences Auditory Distance Perception of Sound Sources Located in a Room Environment Author: Spiouasas et al. Issue Date: June 2017 URL: https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5479918/	Spiouasas et al. 2017	This article provides evidence to show that for sound play from a distance, the frequency are propagated and changed. This factor is consider in the project.	
Title: The Fast Fourier Transform Algorithm Author: Brunton Issue Date: April 2020 URL: https://www.youtube.com/watch?v=toj_IoCQE-4	Brunton 2020	This video tutorial from the university of washington gives a basic detail and tutorial on the topic of fast fourier transform. This gives enough insight to allow me to create the project.	
Title: SciPy 1.0 Author: Virtanen et al. Issue Date: March 2020 URL: https://www.nature.com/articles/s41592-019-0686-2	Virtanen et al. 2020	This program is indented to be used in the program. This program extensively used in solving mathematical problem and scientific tool. And it's an industry standard programming interface for solving mathematical problem and analysing scientific problem.	Utilized only in the code
Title: An Industrial-Strength Audio Search Algorithm Author: Wang Issue Date: January 2003 URL:	Wang 2003	This is the original article explaining from a prospective of the creator. This article creates a basic understanding of how the basics works. They have a detail analysis of recognition rate and the performance associated. However, the article is missing from explaining the method of how they create Spectrogram, and the algorithm they are using to create it. There might be changes to the modern day algorithm that the product is using, this might be due to the age of this paper being published in 2003. And since now the company are acquired by Apple Inc.	

Title: Systems and methods for recognizing sound and music signals in high noise and distortion Author: Wang and III Issue Date: February 2013 URL: https://patents.google.com/patent/US8386258B2/en?assignee=Shazam+Investments+Ltd&num=25	Wang and III 2013	This source is very credible and concrete, as the original program Shazam are based on it. It is created by the founder and principle scientist of Shazam. Inside the source there are also figures attached to it. This patent is cited (as of February 2025) 771 times. It's being used in various different field, most notability social media companies and big tech companies such as Google, Snap. However, the source might not be as relevant because the patent are outdated and expired.	
Title: Music Database Retrieval Based on Spectral Similarity Author: Yang Issue Date: 2001 URL: http://ilpubs.stanford.edu:8090/489/	Yang 2001	This source provides resources mainly how to test the artefact. This report are also written by the Stanford University which is a very credible source and provides great information.	

APPENDIX F

Timetable

See the landscape table file after this page.

- Green done means on time
- Orange done means not on time

I choose to use timetable target set by week because it allows for more streamline approach to time management.

timetable

Todos	Expected Length	Recomanded Date	Final Length	Final Date	Done	Notes
learning about how spectrogram are made	1 week	27/10/2024	1 week	5/11/2024	✓	/
Make a spectrogram	1 week	4/11/2024	2 week	20/11/2024	✓	The creation process takes longer than expected, as I have to figure out out of memory issues.
make a contellation map of it	2 week	18/11/2024	1 week	1/12/2024	✓	
store the data point as a hash point	2 week	2/12/2024	2 week	2/12/2024	✓	The Time it takes to complete it are shorter than expected
place the hash point in a database	2 week	16/12/2024	3 week	25/12/2024	✓	The process took longer than expected due to unexpected event happening outside of the EPQ.
make a web app that allows recording of the music	2 week	16/1/2025	2 week	30/1/2025	✓	Both process are interlinked to each other and the time of completion are linked
linking everything together	2 week	1/2/2025	3 week	6/2/2025	✓	
testing process	2 week	13/2/2025	1 week	13/2/2025	✓	Both process are interlinked to each other as I am required to test the program while writing the report
write a report about it	3 week	13/3/2025	1 week	13/3/2025	✓	
make slideshow to present	2 week	13/3/2025	1 week	13/3/2025	✓	

Links

The Artefact: https://recognizer.cephas.monster/	
EPQ directory: https://EPQ.cephas.monster/	
Privacy statement: https://EPQ.cephas.monster/privacy	
EPQ code: https://EPQ.cephas.monster/code	

This report: <https://EPQ.cephas.monster/report>




APPENDIX H

Presentation

To explore the mechanism that allows music recognition apps to work.

By Cephas

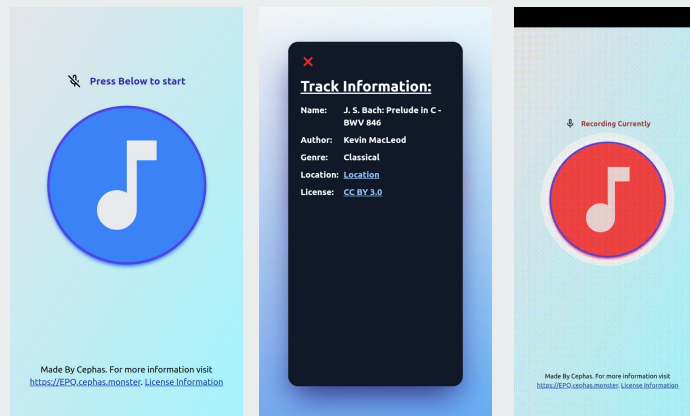

QR codes for all the links

All the links



The artefact





Question

How well can you recognise a song?

I am certainly not good at it. 😞

But how can computers recognise songs better than us?



Why did I choose this title

To explore the mechanism that allows music recognition apps to work.


- Interesting
- It has purpose
- Learning new things
- Difficult / Challenging
- Problem-solving
- Rewarding

Source and resources I used


- Patent from the original creator of Shazam
- Research article
 - How is it made
 - Research about the testing method
- Blog post made by a professional
- Thanks to my computer science teacher listening for feedback.

An oversimplified summary of how it works


The user
records the
song

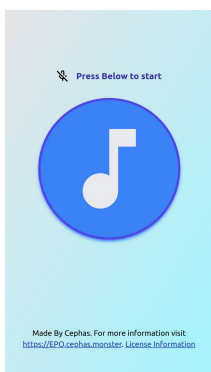

The song is
uploaded to the
server

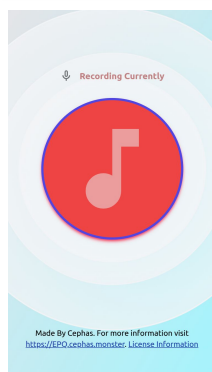

The song is
processed

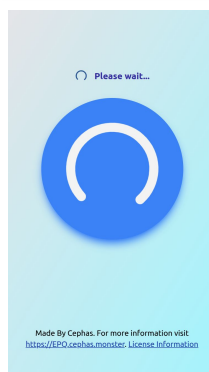

The key feature
of the song are
picked out



An oversimplified summary of how it works

pick out key
feature of the
song


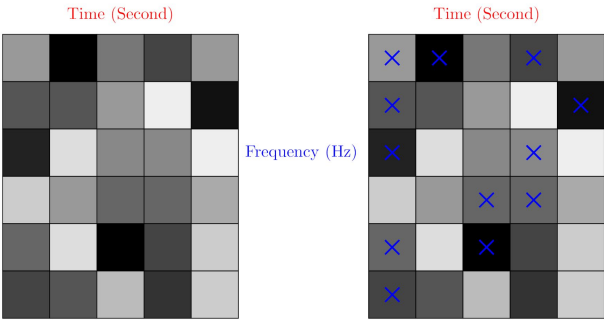


Figure A.4: Illustrating an example of a spectrogram picking of points. The darker the box, the higher the amplitude (value) represents



An oversimplified summary of how it works


pick out key
feature of the
song

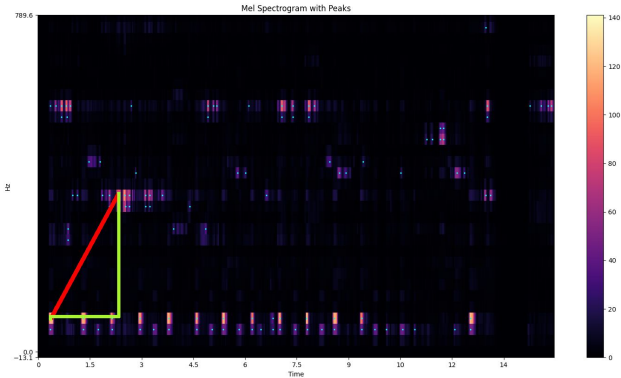


Point A (Hz)	Point B (Hz)	Time delta (s)	Point A time (s)	Track UUID
20.1	302.1	1.8	0.3	ea47a3c5

An oversimplified summary of how it works


The user records the song

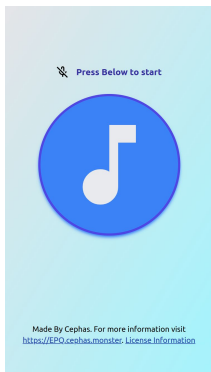


The song are uploaded to the server

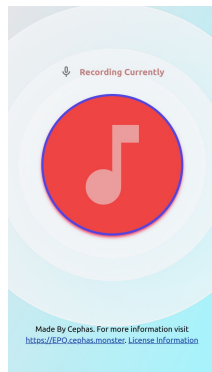


The song are processed

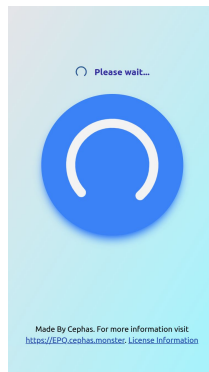

The key feature of the song are picked out



The features are compared with the database

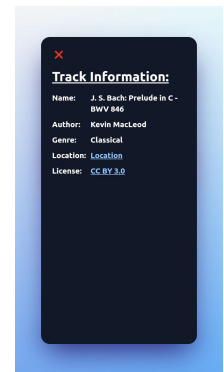

Recording Currently



Made By Cephas. For more information visit <https://EPO.cephas.monster> License Information



Findings

Knowledge and skills:

- What is “Fourier transform”?
- How to make a spectrogram
- How to create the app



Findings

extra programming skills:


- How to make a Histogram in Python
- How to create an efficient database
- Some data analysis skills

Findings

Plan:

- Testing the effectiveness of the artefact

How can it be improved



- Using “humming” to guess songs doesn’t work.
 - Improving it requires restructuring of the program.
- The music library is too small
 - This project only utilised copyright free songs
 - Just add more
- The program is too slow
 - Money to infrastructure 💎💰💵



Most importantly

Privacy



Link to the
Privacy notice



Key takeaways

- Time management
- Learning new skills and knowledge quickly
- Problem-solving skills.



Please allow the microphone permission.



Sorry, we unable recognise
ⓘ this song, because the
duration is too short.



Thank you for listening

Any questions?

All the links



The artefact



Word Count

- 97 Chapter: Abstract
- 398 Chapter: Introduction
- 64 Chapter: Methodology / Design Choice
- 214 Section: Web app
- 383 Section: The algorithm
- 0 Chapter: Process of creation
- 704 Section: Coding section
- 144 Section: Material selection
- 239 Section: Extra investigation
- 314 Chapter: Testing method
- 365 Chapter: Discussion
- 172 Chapter: Conclusion

Words in text: 3094