



%3 = alloca %struct.S\*, align 8

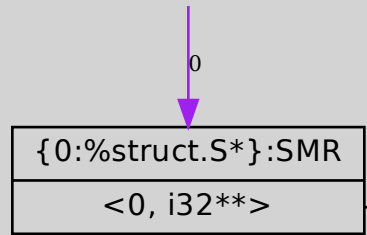

%5 = load %struct.S\*, %struct.S\*\* %3, align 8

0, i32\*\*




%4 = call %struct.S\* @foo()

0


%7 = load i32\*, i32\*\* %6, align 8

0




%2 = alloca i32, align 4

0




0, i32\*


.str




.str.1



\_\_PRETTY\_FUNCTION\_\_ .main



%1 = alloca i32, align 4



A

0