


Github URL

W07-P1: Use tailwind to style react icons and add a delete button

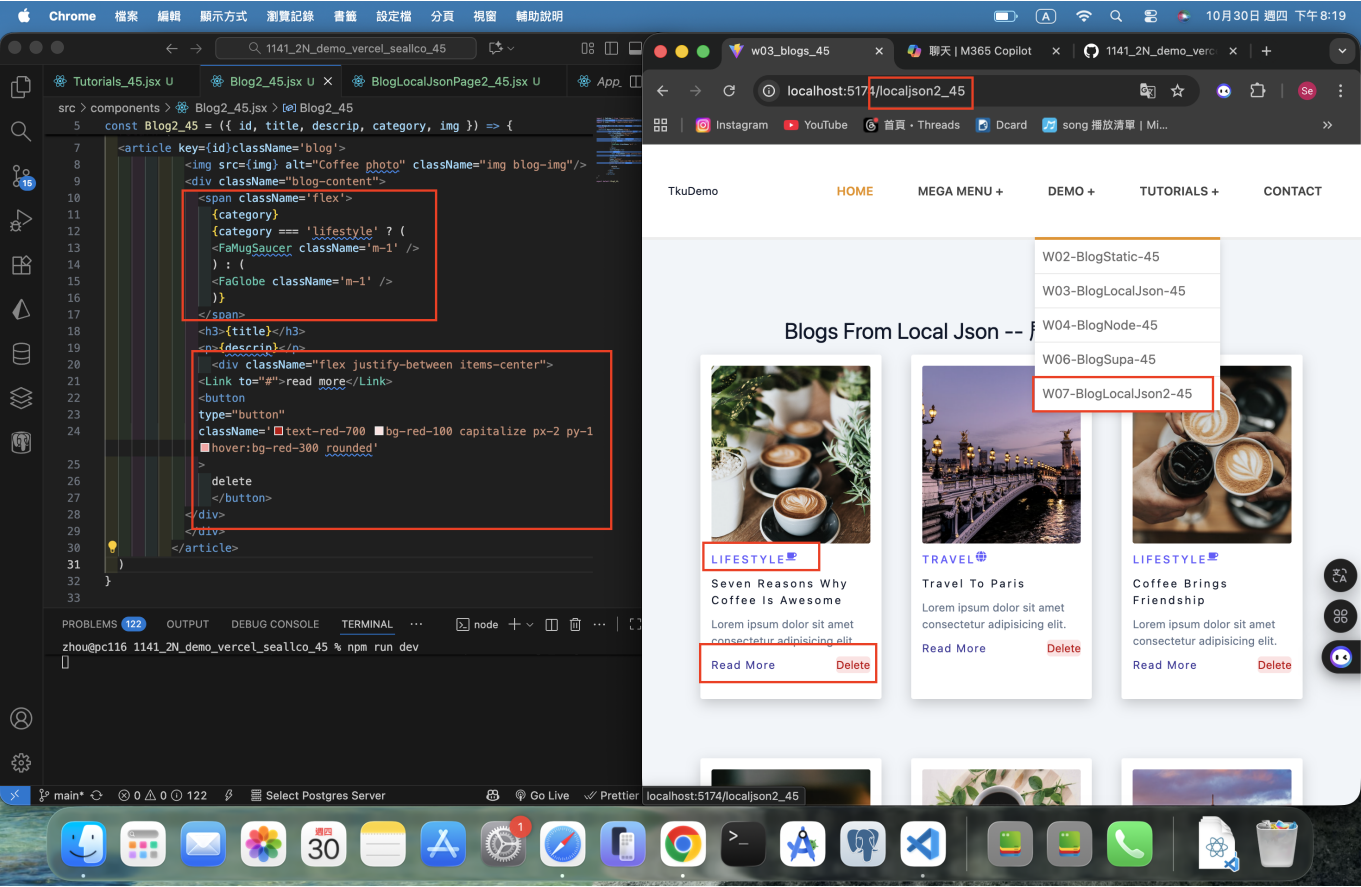


3d1dc73 seallco Thu Oct 30 20:22:28 2025 +0800 W07-P1: Use tailwind to style react icons and add a delete button


alt text

W07-P2: Implement delete a blog, clear all blogs, load all blogs


=> delete first blog

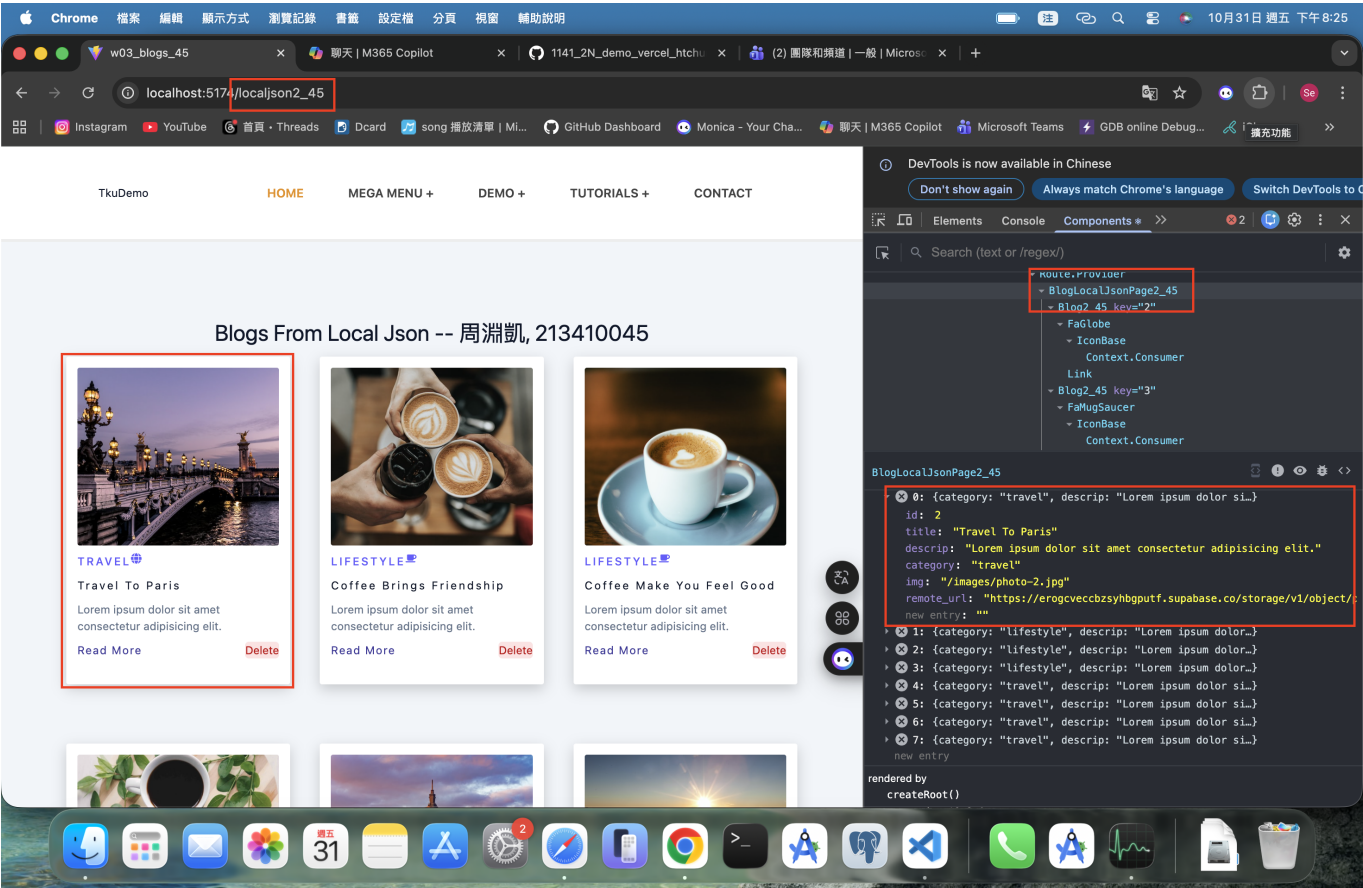


=> clear all blogs

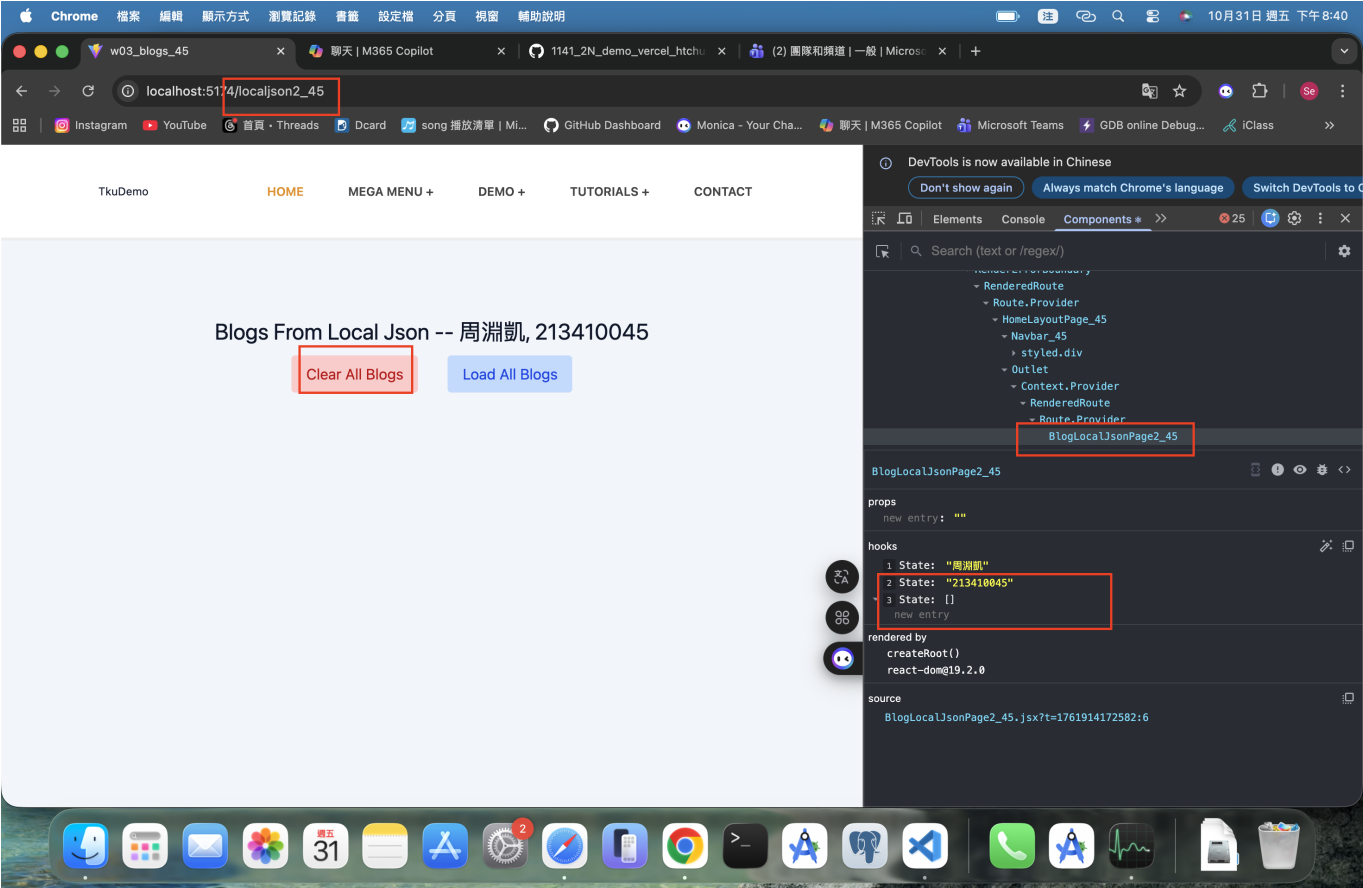

=> load all blogs

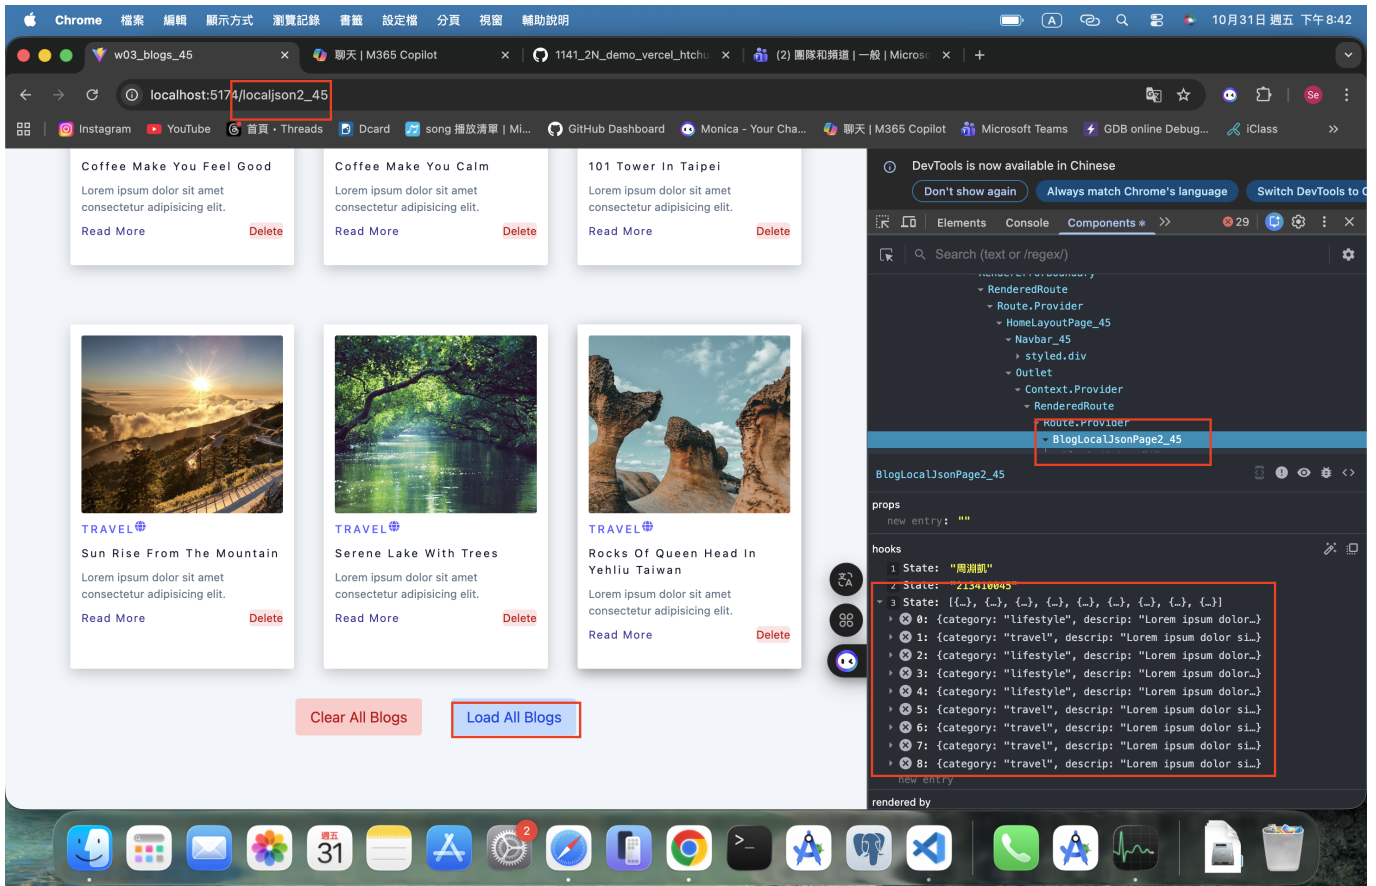

=> code for deleting a blog

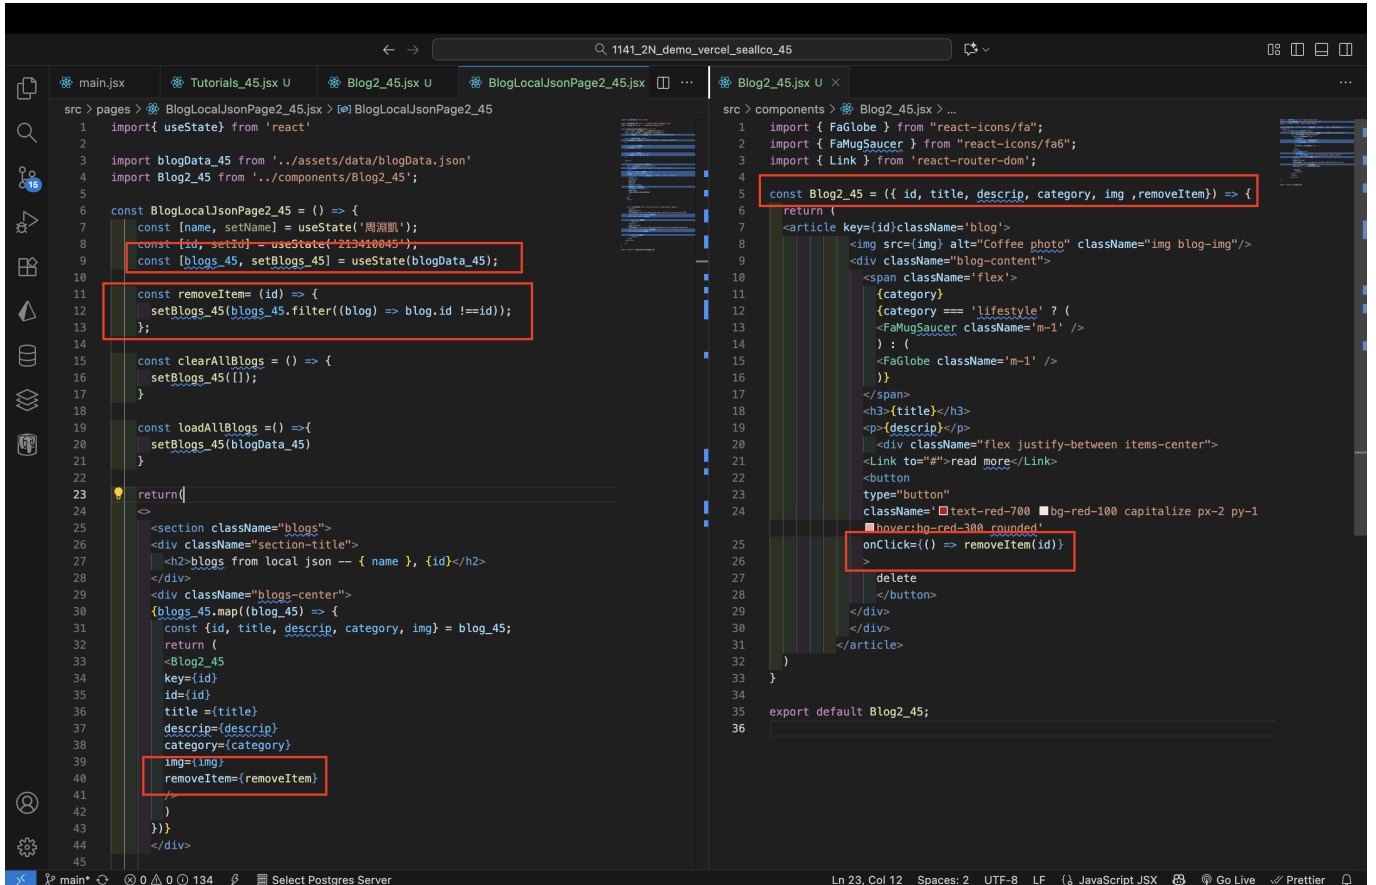

=> code for clear and load all blogs

```
c7f310e seallco Fri Oct 31 20:49:14 2025 +0800 W07-P2: Implement delete a
blog, clear all blogs, load all blogs
```

=> code for Alert_45

The screenshot shows a VS Code editor with a project named '1141_2N_demo_vercel_seallco_45'. The Explorer panel on the left shows the file structure, with 'Alert_45.jsx' highlighted in the 'components' directory. The main editor displays the code for 'BlogLocalJsonPage2_45.jsx' and 'Alert_45.jsx'.

BlogLocalJsonPage2_45.jsx (lines 8-39):

```
8 const BlogLocalJsonPage2_45 = () => {
9
10  const [id, setId] = useState('213410045');
11  const [blogs_45, setBlogs_45] = useState(blogData_45);
12
13  const [alert, setAlert] = useState({
14    show: false,
15    msg: '',
16    type: ''
17  });
18
19  const showAlert = (show = false, msg = '', type = '') => {
20    setAlert({show, msg, type});
21  };
22
23  const removeItem = (id) => {
24    showAlert(true, 'blog removed', 'danger');
25    setBlogs_45(blogs_45.filter((blog) => blog.id !== id));
26  };
27
28  const clearAllBlogs = () => {
29    showAlert(true, 'all blogs cleared', 'danger');
30    setBlogs_45([]);
31  };
32
33  const loadAllBlogs = () => {
34    showAlert(true, 'load all blogs', 'success');
35    setBlogs_45(blogData_45);
36  };
37
38  return (
39    <Wrapper>
40      <Alert_45 alert={alert} showAlert={showAlert}/>
41    </Wrapper>
42  );
43 }
```

Alert_45.jsx (lines 1-19):

```
1 import {useEffect} from 'react';
2
3 const Alert_45 = ({alert, showAlert}) => {
4   useEffect(() => {
5     const timeout = setTimeout(() => {
6       showAlert();
7     }, 3000);
8     return () => clearTimeout(timeout);
9   });
10
11   if (alert.type === 'success') {
12     return <p className='grid items-center text-center'
13       capitalize text-green-700 bg-green-200>{alert.msg}</p>;
14   } else if (alert.type === 'danger') {
15     return <p className='grid items-center text-center'
16       capitalize text-red-700 bg-red-200>{alert.msg}</p>;
17   }
18 }
19 export default Alert_45
```

The bottom status bar shows the file is at line 19, column 20, with 2 spaces, in UTF-8 encoding, using the JavaScript JSX language, with Go Live and Prettier extensions active.

204429a seallco Sat Nov 1 17:45:16 2025 +0800 W07-P3: Implement Alert_45