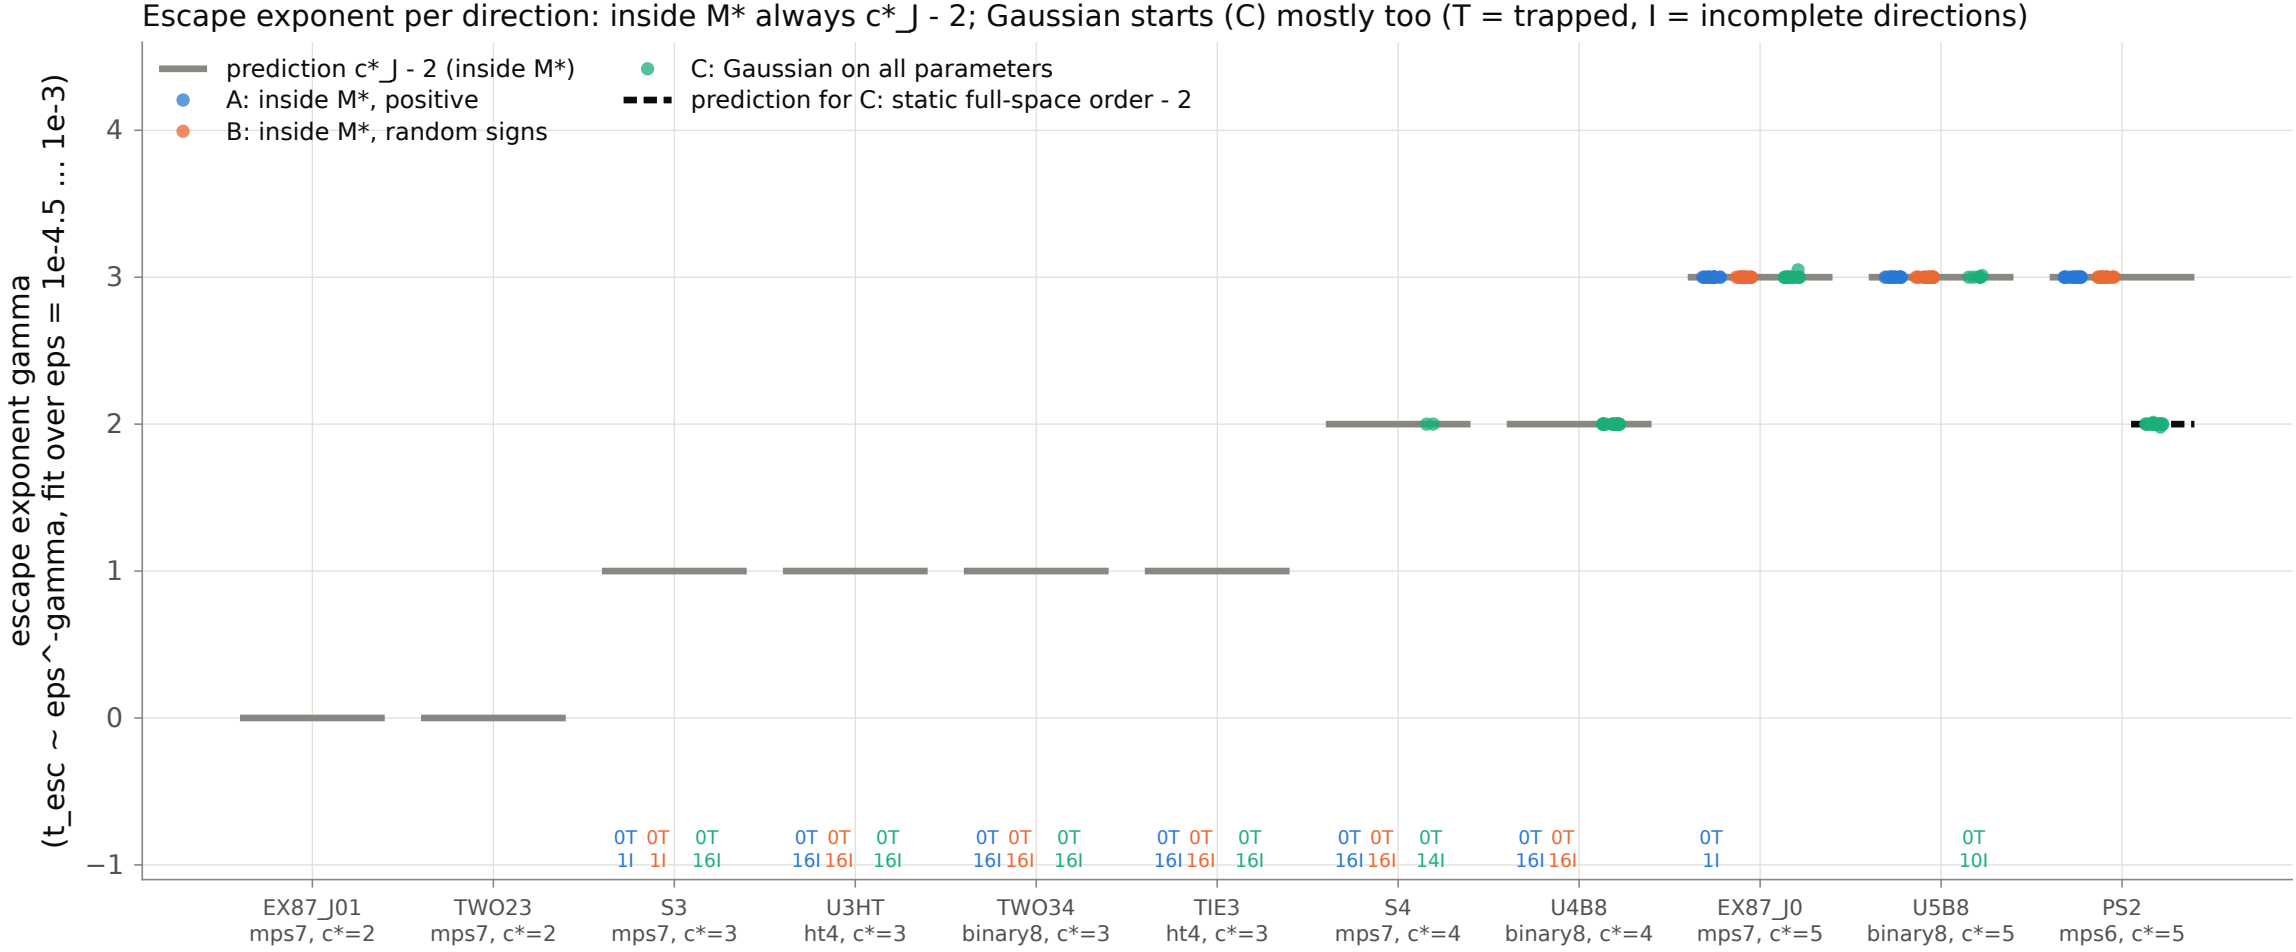
Escape exponent per direction: inside M* always c*_J - 2; Gaussian starts (C) mostly too (T = trapped, I = incomplete directions)
prediction c*_J - 2 (inside M*)
A: inside M*, positive
B: inside M*, random signs
C: Gaussian on all parameters
prediction for C: static full-space order - 2
escape exponent gamma
(t_esc ~ eps^-gamma, fit over eps = 1e-4.5 ... 1e-3)
4
3
2
1
0
−1
0T 1I
0T 1I
0T 16I
0T 16I
0T 16I
0T 16I
0T 16I
0T 16I
0T 16I
0T 16I
0T 16I
0T 16I
0T 14I
0T 16I
0T 16I
0T 1I
0T 10I
EX87_J01
mps7, c*=2
TWO23
mps7, c*=2
S3
mps7, c*=3
U3HT
ht4, c*=3
TWO34
binary8, c*=3
TIE3
ht4, c*=3
S4
mps7, c*=4
U4B8
binary8, c*=4
EX87_J0
mps7, c*=5
U5B8
binary8, c*=5
PS2
mps6, c*=5