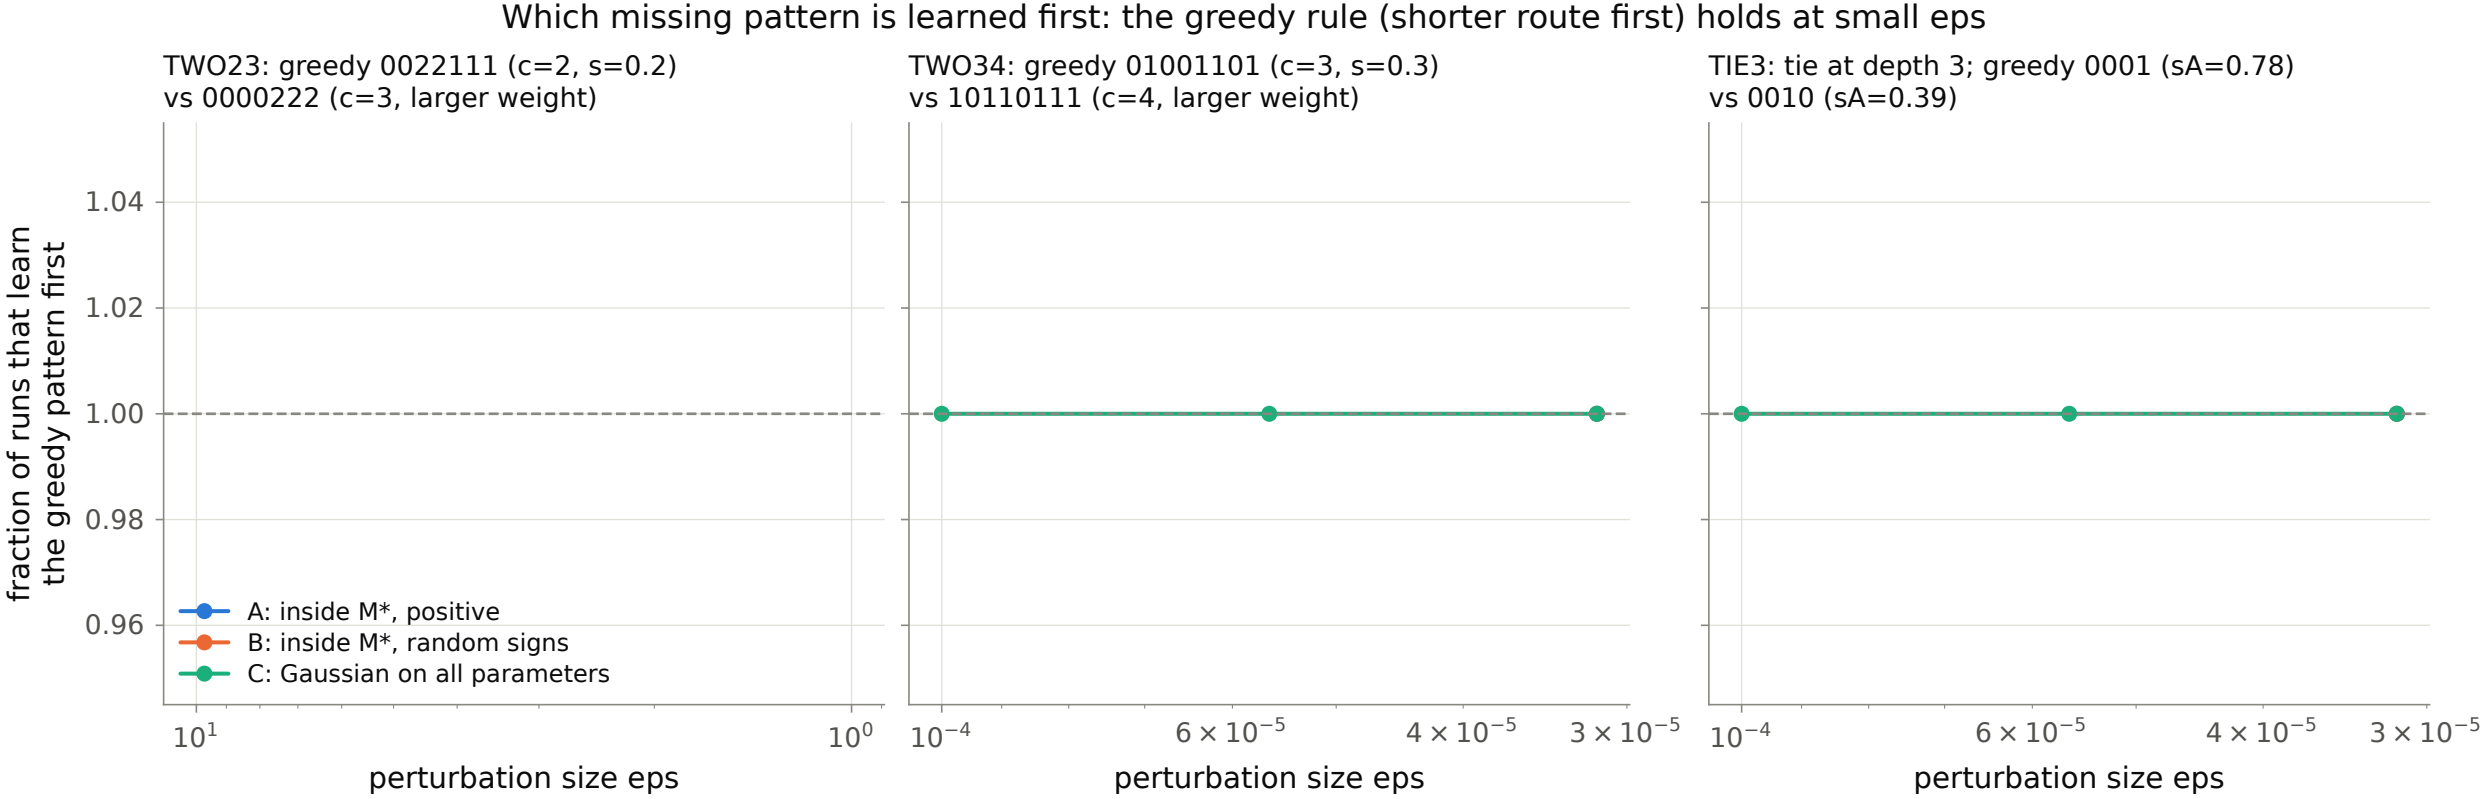
Which missing pattern is learned first: the greedy rule (shorter route first) holds at small eps
TWO23: greedy 0022111 (c=2, s=0.2)
vs 0000222 (c=3, larger weight)
TWO34: greedy 01001101 (c=3, s=0.3)
vs 10110111 (c=4, larger weight)
TIE3: tie at depth 3; greedy 0001 (sA=0.78)
vs 0010 (sA=0.39)
fraction of runs that learn the greedy pattern first
1.04
1.02
1.00
0.98
0.96
A: inside M*, positive
B: inside M*, random signs
C: Gaussian on all parameters
10^{1}
10^{0}
10^{-4}
6×10^{-5}
4×10^{-5}
3×10^{-5}
perturbation size eps