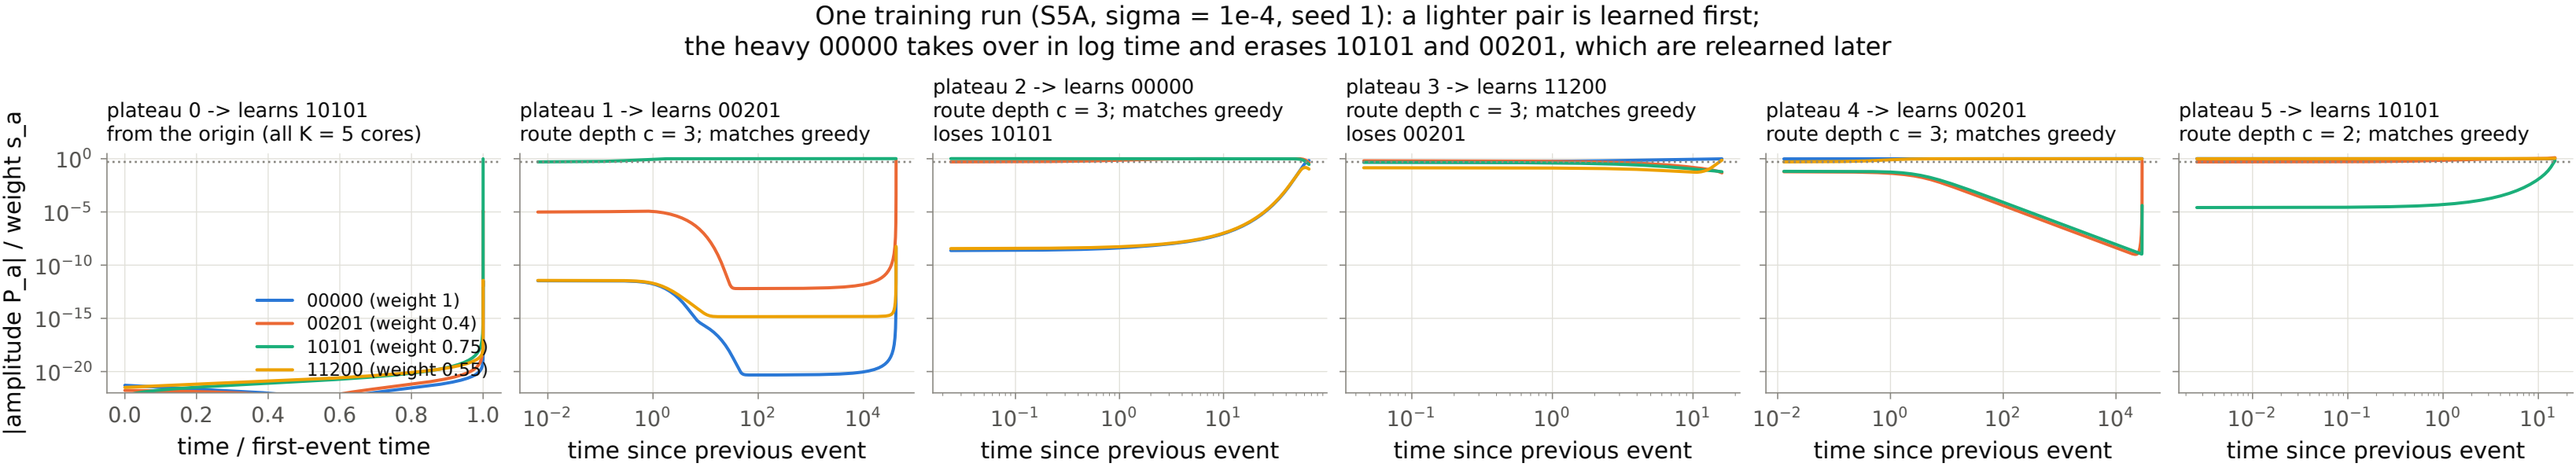
One training run (S5A, sigma = 1e-4, seed 1): a lighter pair is learned first;
the heavy 00000 takes over in log time and erases 10101 and 00201, which are relearned later
plateau 0 -> learns 10101
from the origin (all K = 5 cores)
plateau 1 -> learns 00201
route depth c = 3; matches greedy
plateau 2 -> learns 00000
route depth c = 3; matches greedy
loses 10101
plateau 3 -> learns 11200
route depth c = 3; matches greedy
loses 00201
plateau 4 -> learns 00201
route depth c = 3; matches greedy
plateau 5 -> learns 10101
route depth c = 2; matches greedy
|amplitude P_a| / weight s_a
00000 (weight 1)
00201 (weight 0.4)
10101 (weight 0.75)
11200 (weight 0.55)
time / first-event time
time since previous event
time since previous event
time since previous event
time since previous event
time since previous event