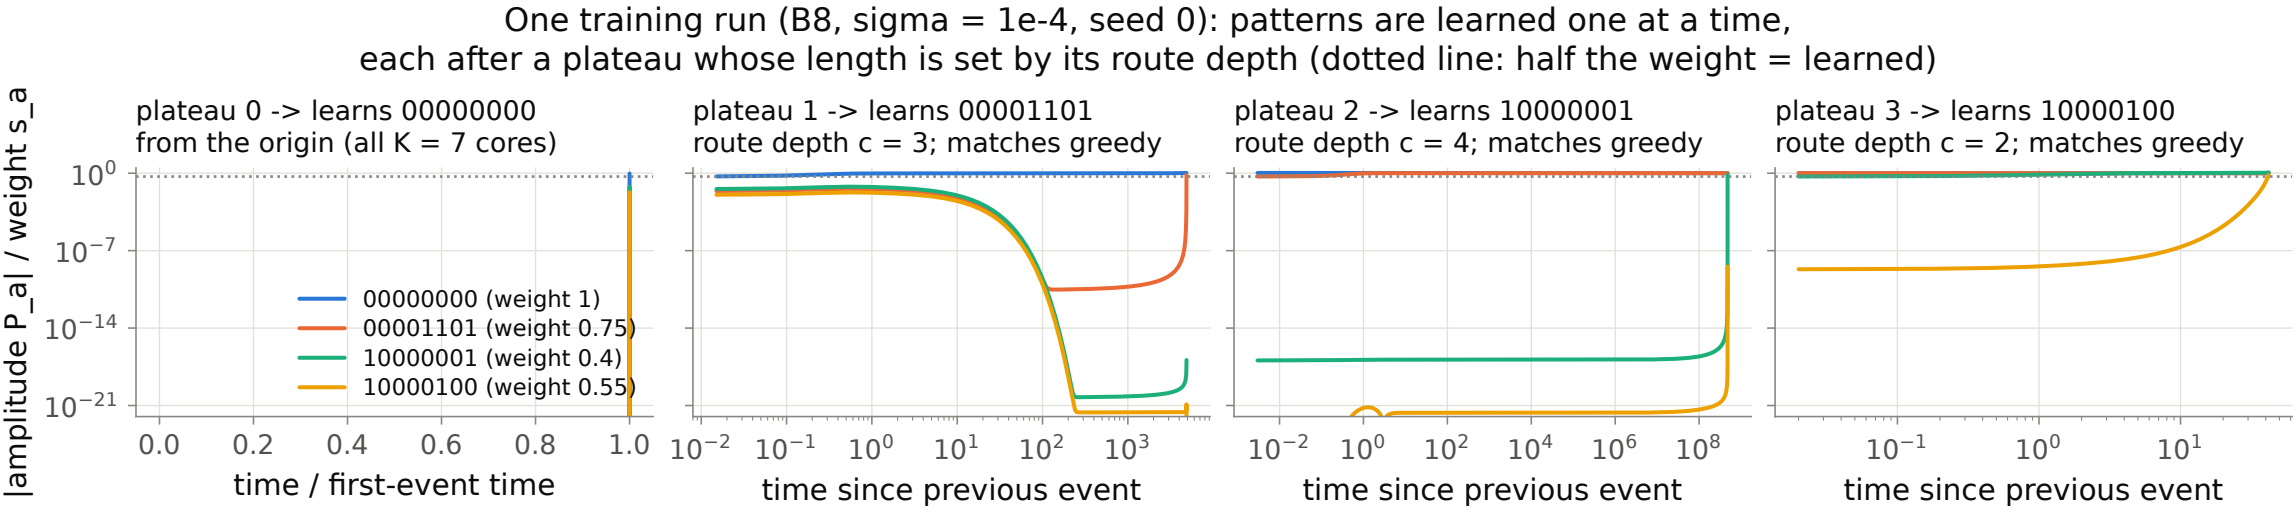
One training run (B8, sigma = 1e-4, seed 0): patterns are learned one at a time,
each after a plateau whose length is set by its route depth (dotted line: half the weight = learned)
plateau 0 -> learns 00000000
from the origin (all K = 7 cores)
plateau 1 -> learns 00001101
route depth c = 3; matches greedy
plateau 2 -> learns 10000001
route depth c = 4; matches greedy
plateau 3 -> learns 10000100
route depth c = 2; matches greedy
|amplitude P_a| / weight s_a
10^0
10^−7
10^−14
10^−21
00000000 (weight 1)
00001101 (weight 0.75)
10000001 (weight 0.4)
10000100 (weight 0.55)
0.0
0.2
0.4
0.6
0.8
1.0
time / first-event time
10^−2
10^−1
10^0
10^1
10^2
10^3
time since previous event
10^−2
10^0
10^2
10^4
10^6
10^8
time since previous event
10^−1
10^0
10^1
time since previous event