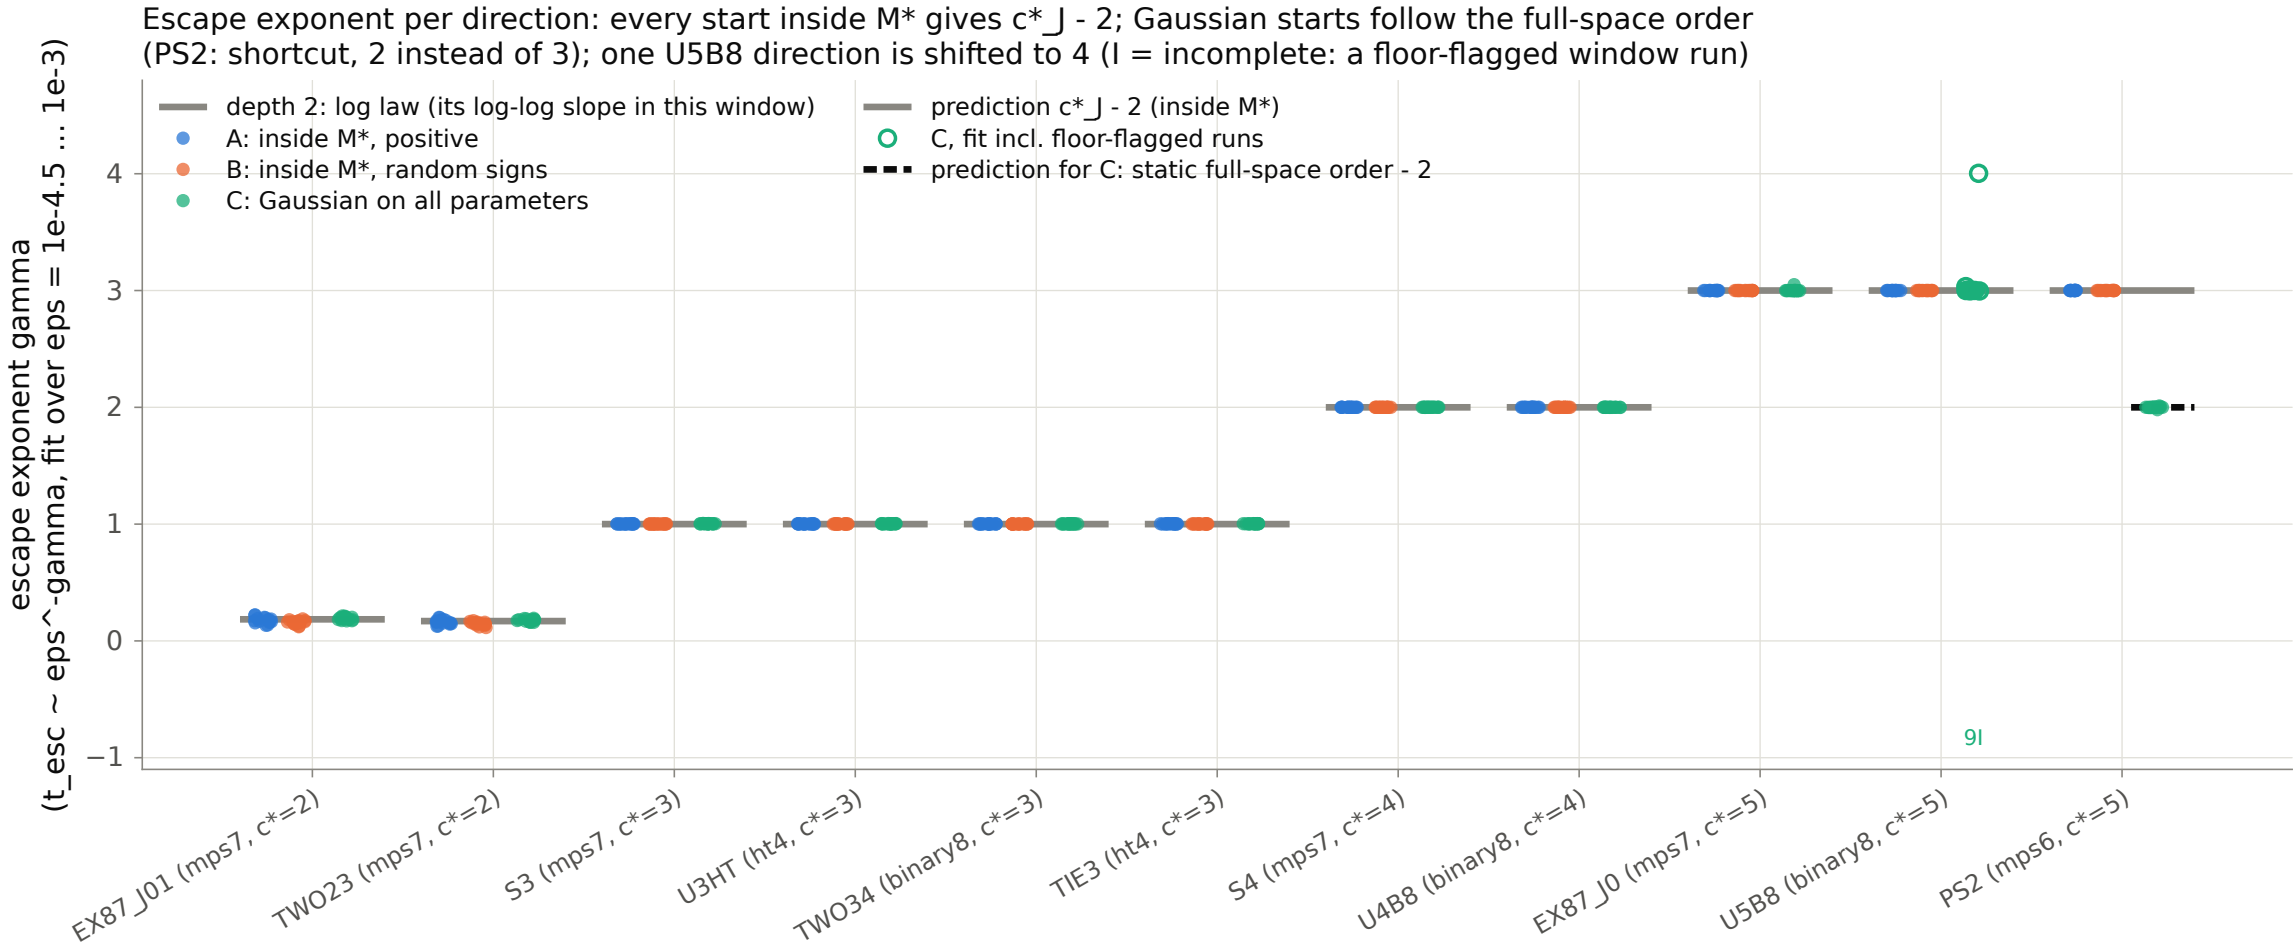
Escape exponent per direction: every start inside M* gives c*_J - 2; Gaussian starts follow the full-space order
(PS2: shortcut, 2 instead of 3); one U5B8 direction is shifted to 4 (I = incomplete: a floor-flagged window run)
depth 2: log law (its log-log slope in this window)
A: inside M*, positive
B: inside M*, random signs
C: Gaussian on all parameters
prediction c*_J - 2 (inside M*)
C, fit incl. floor-flagged runs
prediction for C: static full-space order - 2
escape exponent gamma
(t_esc ~ eps^-gamma, fit over eps = 1e-4.5 ... 1e-3)
4
3
2
1
0
−1
9I
EX87 J01 (mps7, c*=2)
TWO23 (mps7, c*=2)
S3 (mps7, c*=3)
U3HT (ht4, c*=3)
TWO34 (binary8, c*=3)
TIE3 (ht4, c*=3)
S4 (mps7, c*=4)
U4B8 (binary8, c*=4)
EX87 J0 (mps7, c*=5)
U5B8 (binary8, c*=5)
PS2 (mps6, c*=5)