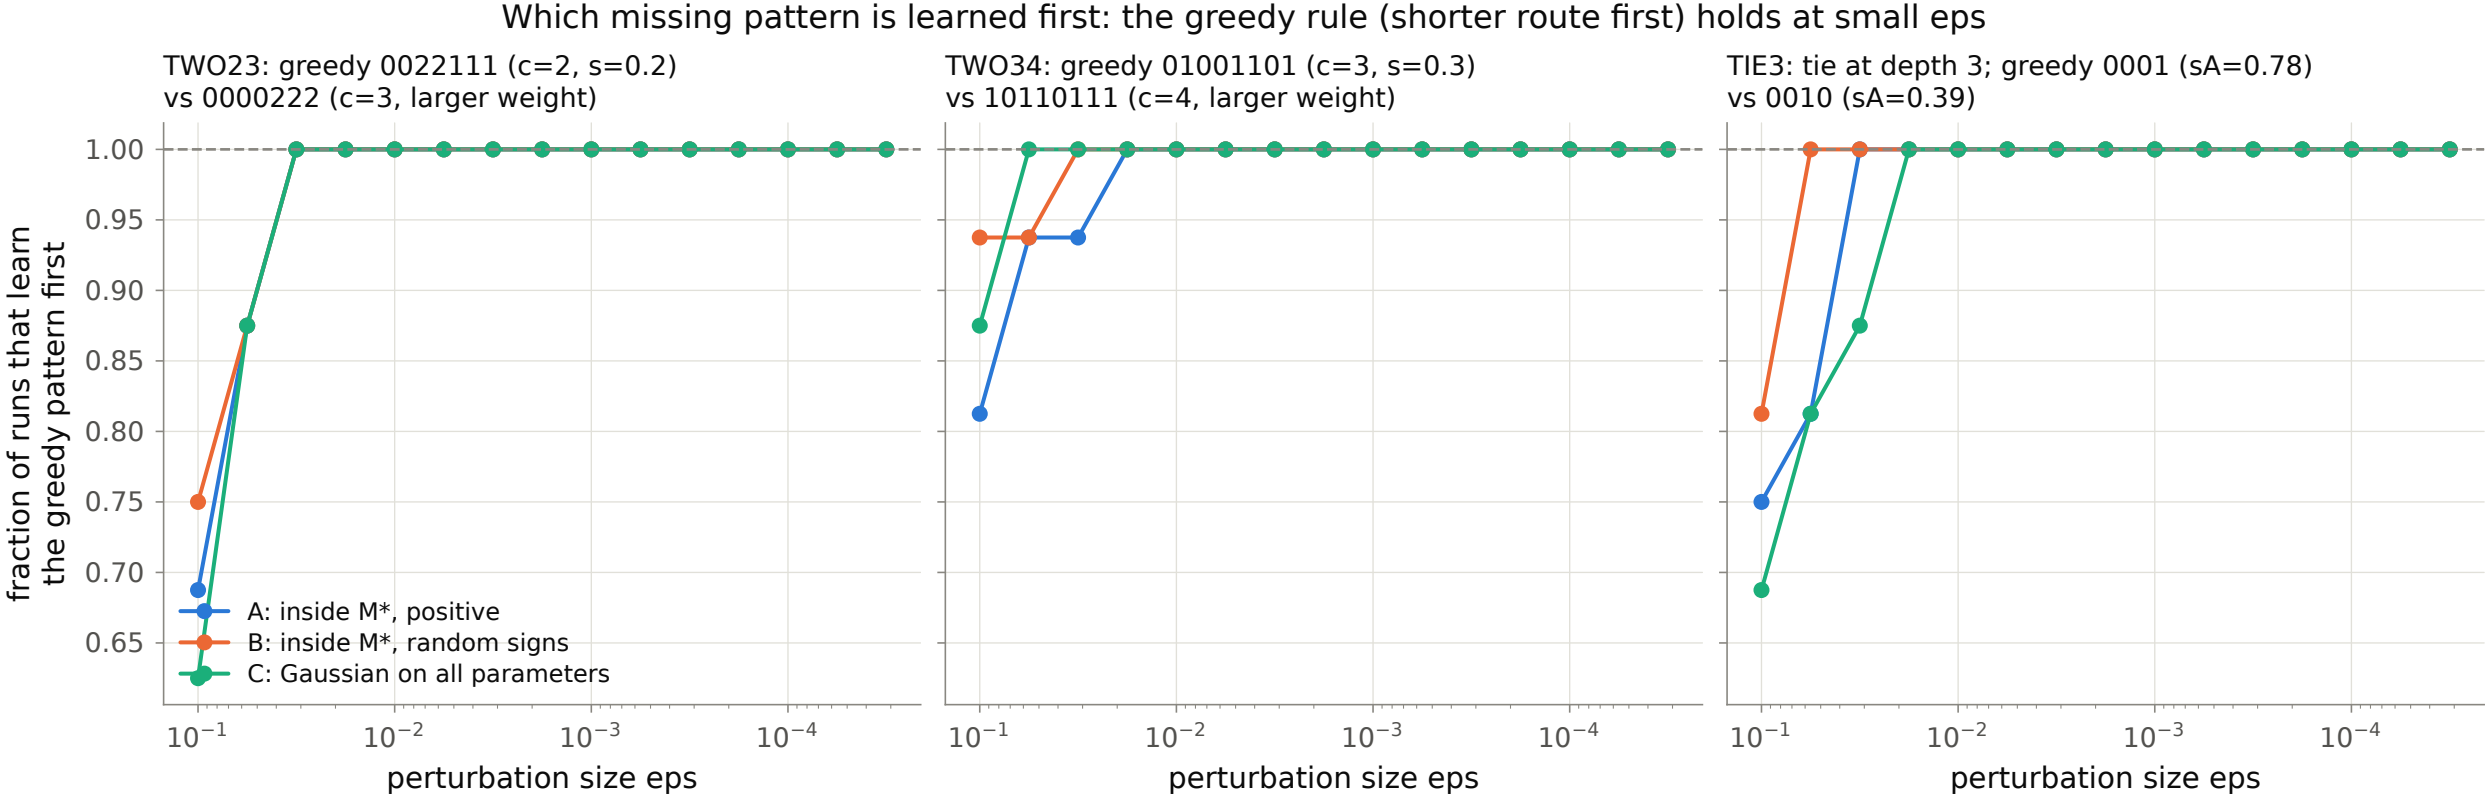
Which missing pattern is learned first: the greedy rule (shorter route first) holds at small eps
TWO23: greedy 0022111 (c=2, s=0.2)
vs 0000222 (c=3, larger weight)
TWO34: greedy 01001101 (c=3, s=0.3)
vs 10110111 (c=4, larger weight)
TIE3: tie at depth 3; greedy 0001 (sA=0.78)
vs 0010 (sA=0.39)
fraction of runs that learn the greedy pattern first
1.00
0.95
0.90
0.85
0.80
0.75
0.70
0.65
A: inside M*, positive
B: inside M*, random signs
C: Gaussian on all parameters
10^{-1}
10^{-2}
10^{-3}
10^{-4}
perturbation size eps