
The R Bioc Book

SEAN DAVIS

University of Colorado Anschutz School of Medicine

2025-06-06

Table of contents

Preface	1
What are the goals?	2
Adult learners	2
AI is part of the solution	4
I. Introduction	6
1. About R	7
1.1. What is R?	7
1.2. Why use R?	7
1.3. Why not use R?	9
1.4. R License and the Open Source Ideal	9
1.5. Working with R	10
2. RStudio	11
2.1. Getting started with RStudio	11
2.2. The RStudio Interface	11
2.3. Alternatives to RStudio	14
3. R mechanics	17
3.1. Starting R	17
3.2. <i>RStudio</i> : A Quick Tour	17
3.3. Interacting with R	17
3.3.1. Expressions	18
3.3.2. Assignment	19
3.4. Rules for Names in R	21
3.5. Resources for Getting Help	21
4. Up and Running with R	23
4.1. The R User Interface	23
4.1.1. An exercise	27
4.2. Objects	27

Table of contents

4.3. Functions	35
4.3.1. Sample with Replacement	39
4.4. Writing Your Own Functions	41
4.4.1. The Function Constructor	42
4.5. Arguments	44
4.6. Scripts	47
4.7. Summary	48
5. Packages and more dice	49
5.1. Packages	49
5.1.1. Installing R packages	50
5.1.2. Installing vs loading (library) R packages	50
5.1.3. Finding R packages	51
5.2. Are our dice fair?	51
5.3. Bonus exercise	54
6. Reading and writing data files	55
6.1. Introduction	55
6.2. CSV files	55
6.2.1. Writing a CSV file	55
6.2.2. Reading a CSV file	56
6.3. Excel files	58
6.3.1. Reading an Excel file	58
6.3.2. Writing an Excel file	59
6.4. Additional options	60
7. Data Visualization with ggplot2	61
II. R Data Structures	62
Chapter overview	63
8. Vectors	66
8.1. What is a Vector?	66
8.2. Creating vectors	67
8.3. Vector Operations	69
8.4. Logical Vectors	70
8.4.1. Logical Operators	71
8.5. Indexing Vectors	72
8.6. Named Vectors	73
8.7. Character Vectors, A.K.A. Strings	74
8.8. Missing Values, AKA “NA”	76

Table of contents

8.9. Exercises	77
9. Matrices	79
9.1. Creating a matrix	79
9.2. Accessing elements of a matrix	82
9.3. Changing values in a matrix	84
9.4. Calculations on matrix rows and columns	86
9.5. Exercises	88
9.5.1. Data preparation	88
9.5.2. Questions	88
10. Lists	91
10.1. The Power of a “Catch-All” Container	91
10.2. Creating a List	92
10.3. Inspecting Your List: What’s Inside?	93
10.3.1. <code>str()</code> : The Structure Function	93
10.3.2. <code>length()</code> , <code>names()</code> , and <code>class()</code>	93
10.4. Accessing List Elements: Getting Things Out	94
10.4.1. The Mighty <code>[[...]]</code> and <code>\$</code> for Single Items	94
10.4.2. The Subsetting <code>[...]</code> for New Lists	95
10.5. Modifying Lists	96
10.5.1. Adding and Updating Elements	96
10.5.2. Removing Elements	97
10.6. A Biological Example: A Self-Contained Gene Record	97
11. Data Frames	99
11.1. Learning goals	99
11.2. Learning objectives	99
11.3. Dataset	99
11.4. Reading in data	100
11.5. Inspecting <code>data.frames</code>	101
11.6. Accessing variables (columns) and subsetting	104
11.6.1. Some data exploration	106
11.6.2. More advanced indexing and subsetting	107
11.7. Aggregating data	110
11.8. Creating a <code>data.frame</code> from scratch	111
11.9. Saving a <code>data.frame</code>	112
12. Factors	113
12.1. Factors	113

Table of contents

III. Exploratory data analysis	115
13. Introduction to dplyr: mammal sleep dataset	117
13.1. Learning goals	117
13.2. Learning objectives	117
13.3. What is dplyr?	118
13.4. Why Is dplyr useful?	118
13.5. Data: Mammals Sleep	118
13.6. dplyr verbs	119
13.7. Using the dplyr verbs	119
13.7.1. Selecting columns: <code>select()</code>	120
13.7.2. Selecting rows: <code>filter()</code>	122
13.8. “Piping” with <code> ></code>	124
13.8.1. Arrange Or Re-order Rows Using <code>arrange()</code>	125
13.9. Create New Columns Using <code>mutate()</code>	127
13.9.1. Create summaries: <code>summarise()</code>	128
13.10 Grouping data: <code>group_by()</code>	129
14. Case Study: Behavioral Risk Factor Surveillance System	130
14.1. A Case Study on the Behavioral Risk Factor Surveillance System	130
14.2. Loading the Dataset	130
14.3. Inspecting the Data	131
14.4. Summary Statistics	132
14.5. Data Visualization	132
14.6. Analyzing Relationships Between Variables	134
14.7. Exercises	135
14.8. Conclusion	138
14.9. Learn about the data	138
14.10 Clean data	138
14.11 Weight in 1990 vs. 2010 Females	139
14.12 Weight and height in 2010 Males	140
IV. statistics	144
15. Working with distribution functions	145
15.1. <code>pnorm</code>	145
15.2. <code>dnorm</code>	147
15.3. <code>qnorm</code>	147
15.4. <code>rnorm</code>	147
15.5. IQ scores	149

Table of contents

16. The t-statistic and t-distribution	154
16.1. Background	154
16.2. The Z-score and probability	154
16.2.1. Small diversion: two-sided pnorm function	156
16.3. The t-distribution	157
16.3.1. p-values based on Z vs t	159
16.3.2. Experiment	160
16.4. Summary of t-distribution vs normal distribution	164
16.5. t.test	165
16.5.1. One-sample	165
16.5.2. two-sample	166
16.5.3. from a data.frame	166
16.5.4. Equivalence to linear model	168
16.6. Power calculations	169
16.7. Resources	172
17. K-means clustering	173
17.1. History of the k-means algorithm	173
17.2. The k-means algorithm	174
17.3. Pros and cons of k-means clustering	174
17.4. An example of k-means clustering	175
17.4.1. The data and experimental background	175
17.5. Getting data	176
17.6. Preprocessing	177
17.7. Clustering	179
17.8. Summary	180
18. Machine Learning	181
18.1. What is Machine Learning?	181
18.2. Classes of Machine Learning	181
18.2.1. Supervised learning	181
18.2.2. Unsupervised learning	181
18.3. Supervised Learning	186
18.3.1. Linear regression	186
18.3.2. K-nearest Neighbor	187
18.4. Penalized regression	189
18.4.1. Ridge regression	190
18.4.2. LASSO regression	190
18.4.3. Elastic Net	191
18.4.4. Classification and Regression Trees (CART)	191
18.4.5. RandomForest	193

Table of contents

19. Machine Learning 2	195
19.1. Overview	195
19.1.1. Key features of mlr3	195
19.2. The mlr3 workflow	197
19.2.1. The machine learning Task	199
19.2.2. The “Learner” in Machine Learning	201
19.3. Setup	205
19.4. Example: Cancer types	205
19.4.1. Understanding the Problem	205
19.4.2. Data Preparation	206
19.4.3. Feature selection and data cleaning	206
19.4.4. Creating the “task”	207
19.4.5. Splitting the data	208
19.4.6. Example learners	208
19.5. Example Predicting age from DNA methylation	218
19.5.1. Example learners	220
19.6. Example: Expression prediction from histone modification data	229
19.6.1. The Data	230
19.6.2. Create task	233
19.6.3. Example learners	233
V. Bioconductor	243
20. Accessing and working with public omics data	244
20.1. Background	244
20.2. GEOquery to PCA	245
21. Introduction to SummarizedExperiment	248
21.1. Anatomy of a SummarizedExperiment	248
21.1.1. Assays	249
21.1.2. ‘Row’ (regions-of-interest) data	251
21.1.3. ‘Column’ (sample) data	252
21.1.4. Experiment-wide metadata	253
21.2. Common operations on SummarizedExperiment	254
21.2.1. Subsetting	254
21.2.2. Getters and setters	255
21.2.3. Range-based operations	256
21.3. Constructing a SummarizedExperiment	257

Table of contents

22. Ranges Exercises	259
22.1. Exercise 1	259
22.2. Exercise 2	260
22.3. Exercise 3	261
22.4. Exercise 4	263
23. ATAC-Seq with Bioconductor	266
 Overview	267
Pre-requisites	267
Participation	267
R / Bioconductor packages used	267
Time outline	268
Learning goals	268
Learning objectives	268
24. Background	269
24.1. Informatics overview	272
24.2. Working with sequencing data in Bioconductor	273
25. Data import and quality control	274
25.1. Coverage	276
25.2. Fragment Lengths	279
26. Viewing data in IGV	285
27. Additional work	286
Appendix	287
Session info	287
MACS2	289
28. References	290
References	291
Appendices	293
A. Appendix	293
A.1. Data Sets	293
A.2. Swirl	293

Table of contents

B. Additional resources	294
C. AI Tools for Enhanced Learning and Productivity in Bioinformatics	295
C.1. Introduction: AI as Your Bioinformatics Learning Companion	295
C.2. AI for Understanding Statistical Concepts and R Functions	296
C.3. AI for Data Exploration and Visualization Strategies	297
C.4. AI for Boosting Productivity and Troubleshooting	298
C.5. Best Practices for Prompt Engineering	298
C.6. Ethical Considerations and Limitations	299
C.7. The Future: AI in Bioinformatics and Data Science	301
C.8. Practical Exercises and Activities	301

List of Figures

1.	Schema theory of learning. While probably not entirely applicable to how adults learn, it does highlight the importance of building on prior knowledge. When new knowledge is introduced, it is more quickly stored into long-term memory if strongly-related concepts are already available for connection.	1
2.	Why do adults choose to learn something?	3
3.	How to stay stuck in data science (or anything). The “Read-Do” loop tends to deliver the best results. Too much reading between doing can be somewhat effective. Reading and simply copy-paste is probably the least effective. When working through material, experiment. Try to break things. Incorporate your own experience or applications whenever possible.	4
1.1.	Google trends showing the popularity of R over time based on Google Trends. Note that google does not capture the context here; bioinformatics applications are still quite heavily reliant on R.	8
2.1.	The RStudio interface. In this layout, the source pane is in the upper left, the console is in the lower left, the environment panel is in the top right and the viewer/help/files panel is in the bottom right.	12
2.2.	Dealing with limited screen real estate can be a challenge, particularly when you want to open another window to, for example, view a web page. You can resize the panes by sliding the center divider (red arrows) or by clicking on the minimize/maximize buttons (see blue arrow).	13
2.3.	Jupyter Notebook interface. This is an interactive environment for writing and executing R code, along with rich text support for documentation.	14
2.4.	Visual Studio Code (VSCode) with the R extension. This is a lightweight alternative to RStudio that provides syntax highlighting, code completion, and integrated terminal support.	15
2.5.	Positron Workbench interface. This IDE supports R and Python, providing a similar interface to RStudio with additional features for data science workflows.	16

List of Figures

4.1.	Your computer does your bidding when you type R commands at the prompt in the bottom line of the console pane. Don't forget to hit the Enter key. When you first open RStudio, the console appears in the pane on your left, but you can change this with File > Tools > Global Options in the menu bar.	24
4.2.	Assignment creates an object in the environment pane.	30
4.3.	"When R performs element-wise execution, it matches up vectors and then manipulates each pair of elements independently."	33
4.4.	"R will repeat a short vector to do element-wise operations with two vectors of uneven lengths."	34
4.5.	"When you link functions together, R will resolve them from the innermost operation to the outermost. Here R first looks up die, then calculates the mean of one through six, then rounds the mean."	36
4.6.	"Every function in R has the same parts, and you can use <code>function</code> to create these parts. Assign the result to a name, so you can call the function later."	46
4.7.	"When you open an R Script (File > New File > R Script in the menu bar), RStudio creates a fourth pane (or puts a new tab in the existing pane) above the console where you can write and edit your code."	47
5.1.	Installing vs loading R packages.	51
5.2.	In an ideal world, a histogram of the results would look like this	52
5.3.	Histogram of the sums from 100 rolls of our fair dice	53
5.4.	Histogram with 100000 rolls much more closely approximates the pyramidal shape we anticipated	54
7.1.	A pictorial representation of R's most common data structures are vectors, matrices, arrays, lists, and dataframes. Figure from Hands-on Programming with R.	64
8.1.	"Pictorial representation of three vector examples. The first vector is a numeric vector. The second is a 'logical' vector. The third is a character vector. Vectors also have indices and, optionally, names."	66
9.1.	A matrix is a collection of column vectors.	79
15.1.	The pnorm function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.	146
15.2.	The pnorm function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.	147
15.3.	The pnorm function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.	148

List of Figures

15.13The rnorm function takes a number of samples and returns a vector of random numbers from the normal distribution (with mean=0, sd=1 as defaults)	148
15.4. The pnorm function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.	149
15.5. The dnorm function returns the height of the normal distribution at a given point.	150
15.6. The dnorm function returns the height of the normal distribution at a given point.	151
15.7. The dnorm function returns the height of the normal distribution at a given point.	152
15.8. The qnorm function is the inverse of the pnorm function in that it takes a probability and gives the quantile.	153
15.9. The qnorm function is the inverse of the pnorm function in that it takes a probability and gives the quantile.	153
15.10The qnorm function is the inverse of the pnorm function in that it takes a probability and gives the quantile.	153
15.11The qnorm function is the inverse of the pnorm function in that it takes a probability and gives the quantile.	153
15.12The qnorm function is the inverse of the pnorm function in that it takes a probability and gives the quantile.	153
16.1. t-distributions for various degrees of freedom. Note that the tails are fatter for smaller degrees of freedom, which is a result of estimating the standard deviation from the data.	158
17.1. K-means clustering takes a dataset and divides it into k clusters.	173
17.2. Histogram of standard deviations for all genes in the deRisi dataset.	178
17.3. Gene expression profiles for the four clusters identified by k-means clustering. Each line represents a gene in the cluster, and each column represents a time point in the experiment. Each cluster shows a distinct trend where the genes in the cluster are potentially co-regulated.	180
18.1. Data simulated according to the function $f(x) = \sin(2\pi x) + N(0, 0.25)$ fitted with four different models. A) A simple linear model demonstrates <i>underfitting</i> . B) A linear model with a sin function ($y = \sin(2\pi x)$) and C) a loess model with a wide span (0.5) demonstrate <i>good fits</i> . D) A loess model with a narrow span (0.1) is a good example of <i>overfitting</i>	183
18.2. A simple view of machine learning according the sklearn.	184
18.3. A schematic of the supervised learning process.	184
18.4. Training and testing sets.	185

List of Figures

18.5. Figure. The k-nearest neighbor algorithm can be used for regression or classification.	187
18.6. An example of a decision tree that performs classification, also sometimes called a classification tree.	192
18.7. Random forests or random decision forests is an ensemble learning method for classification, regression and other tasks that operates by constructing a multitude of decision trees at training time.	194
19.1. The mlr3 ecosystem.	196
19.2. The simplified workflow of a machine learning pipeline using mlr3.	198
19.3. Two stages of a learner. Top: data (features and a target) are passed to an (untrained) learner. Bottom: new data are passed to the trained model which makes predictions for the ‘missing’ target column.	204
19.4. Regression diagnostic plots. The top left plot shows the residuals vs. fitted values. The top right plot shows the normal Q-Q plot. The bottom left plot shows the scale-location plot. The bottom right plot shows the residuals vs. leverage.	221
19.5. What is the combined effect of histone marks on gene expression?	229
19.6. Boxplots of original and scaled data.	231
19.7. Heatmap of 500 randomly sampled rows of the data. Columns are histone marks and there is a row for each gene.	232
21.1. Summarized Experiment. There are three main components, the <code>colData()</code> , the <code>rowData()</code> and the <code>assays()</code> . The accessors for the various parts of a complete <code>SummarizedExperiment</code> object match the names.	250
24.1. Chromatin accessibility methods, compared. Representative DNA fragments generated by each assay are shown, with end locations within chromatin defined by colored arrows. Bar diagrams represent data signal obtained from each assay across the entire region. The footprint created by a transcription factor (TF) is shown for ATAC-seq and DNase-seq experiments.	270
24.2. Multimodal chromatin comparisons. From (Buenrostro et al. 2013), Figure 4. (a) CTCF footprints observed in ATAC-seq and DNase-seq data, at a specific locus on chr1. (b) Aggregate ATAC-seq footprint for CTCF (motif shown) generated over binding sites within the genome (c) CTCF predicted binding probability inferred from ATAC-seq data, position weight matrix (PWM) scores for the CTCF motif, and evolutionary conservation (PhyloP). Right-most column is the CTCF ChIP-seq data (ENCODE) for this GM12878 cell line, demonstrating high concordance with predicted binding probability.	271

List of Figures

24.3. A BAM file in text form. The output of <code>samtools view</code> is the text format of the BAM file (called SAM format). Bioconductor and many other tools use BAM files for input. Note that BAM files also often include an index <code>.bai</code> file that enables random access into the file; one can read just a genomic region without having to read the entire file.	272
25.1. Reads per chromosome. In our example data, we are using only chromosomes 21 and 22.	275
25.2. Read counts normalized by chromosome length. This is not a particularly important plot, but it can be useful to see the relative contribution of each chromosome given its length.	276
25.3. Relationship between fragment length and nucleosome number.	280
25.4. Fragment length histogram.	281
25.5. Enrichment of nucleosome free reads just upstream of the TSS.	283
25.6. Depletion of nucleosome free reads just upstream of the TSS.	284
25.7. Comparison of signals at TSS. Mononucleosome data on the left, nucleosome-free on the right.	284

List of Tables

8.1. Atomic (simplest) data types in R	67
15.1. Table 1.1: Functions for the normal distribution	145
24.1. Commonly used Bioconductor and their high-level use cases.	273
C.1. Table AI Tools for Bioinformatics Learning	295

Preface

The goal of the material is NOT to teach you R or Bioconductor, but rather to provide enough groundwork to enable you to learn R and Bioconductor on your own. The idea is that we learn faster and better by developing “schemata” that allow us to organize and understand new information. When a new concept is introduced, it is easier to understand if it can be related to something we already know (see Figure 1).

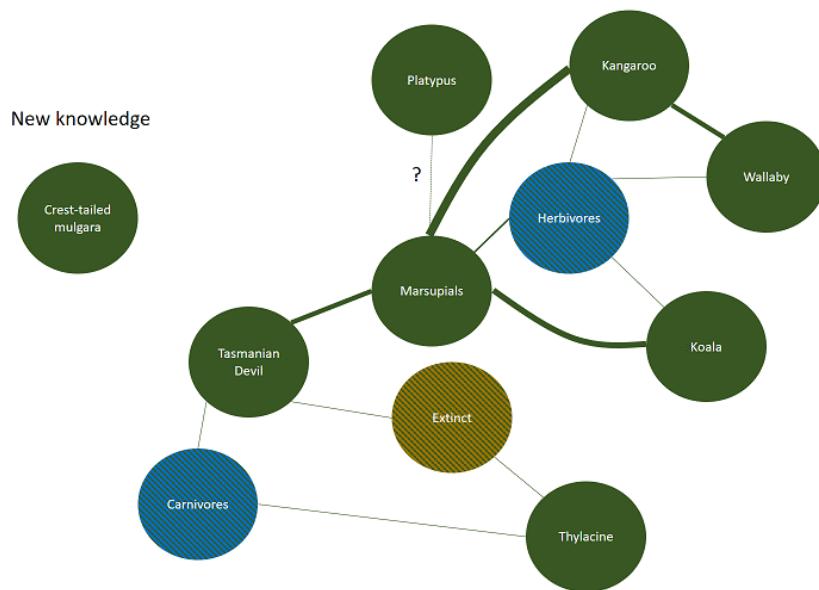


Figure 1.: Schema theory of learning. While probably not entirely applicable to how adults learn, it does highlight the importance of building on prior knowledge. When new knowledge is introduced, it is more quickly stored into long-term memory if strongly-related concepts are already available for connection.

This book is a collection of resources meant to help build your data science, statistical, and computational schemata. It is meant to be largely self-directed, but for those looking to teach data science, it can also be used as a guide for structuring a course. Material is a bit variable in terms of difficulty, prerequisites, and format which is a reflection of the organic

What are the goals?

creation of the material. See below for additional thoughts on adult learning and how it relates to this material.

What are the goals?

We can often get lost in the weeds of technical details of lessons, focusing only on the syntax and semantics of R and Bioconductor. Let's take a step back and consider the big picture. The goals are to:

1. Have a foundation for reading and writing R code to solve problems and understand data.
2. Be able to find and use online resources including AI and tutorials to solve problems and learn new concepts.
3. Be able to effectively communicate with others about R code and data science concepts.
4. Most importantly, to develop the confidence to become a self-directed learner, experimenting with concepts and practice of data science to address real-world problems.

Adult learners

Adult Learning Theory, also known as Andragogy, is the concept and practice of designing, developing, and delivering instructional experiences for adult learners. It is based on the belief that adults learn differently than children, and thus, require distinct approaches to engage, motivate, and retain information (Center 2016). The term was first introduced by Malcolm Knowles, an American educator who is known for his work in adult education (Knowles, Holton, and Swanson 2005).

One of the fundamental principles of Adult Learning Theory is that adults are self-directed learners. This means that we prefer to take control of our own learning process and set personal goals for themselves. We are motivated by our desire to solve problems or gain knowledge to improve our lives (see Figure 2). As a result, educational content for adults should be relevant and applicable to real-life situations. Furthermore, adult learners should be given opportunities to actively engage in the learning process by making choices, setting goals, and evaluating their progress.

Another key aspect of Adult Learning Theory is the role of experience. We bring a wealth of experience to the learning process, which serves as a resource for new learning. We often have well-established beliefs, values, and mental models that can influence our willingness to accept new ideas and concepts. Therefore, it is essential to acknowledge and respect our

Adult learners

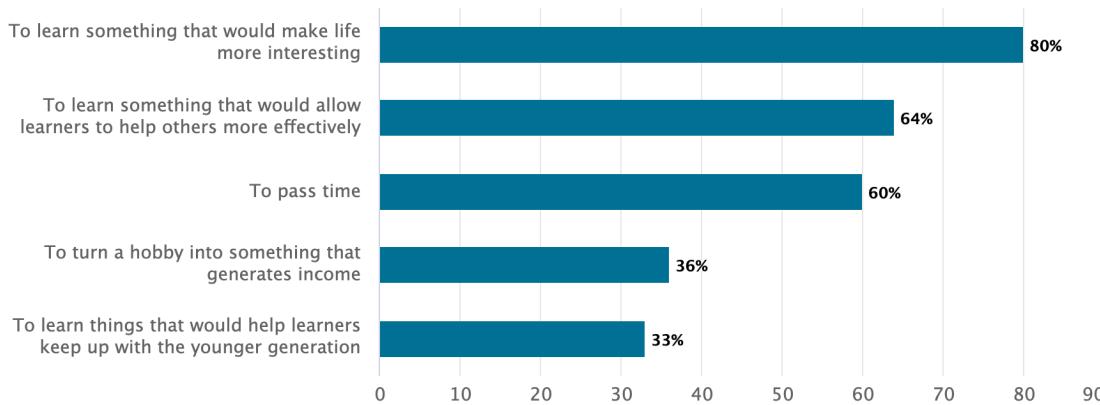


Figure 2.: Why do adults choose to learn something?

shared and unique past experiences and create an environment where we all feel comfortable sharing our perspectives.

To effectively learn as a group of adult learners, it is crucial to establish a collaborative learning environment that promotes open communication and fosters trust among participants. We all appreciate and strive for a respectful and supportive atmosphere where we can express our opinions without fear of judgment. Instructors should help facilitate discussions, encourage peer-to-peer interactions, and incorporate group activities and collaboration to capitalize on the collective knowledge of participants.

Additionally, adult learners often have multiple responsibilities outside of the learning environment, such as work and family commitments. As a result, we require flexible learning opportunities that accommodate busy schedules. Offering a variety of instructional formats, such as online modules, self-paced learning, or evening classes, can help ensure that adult learners have access to education despite any time constraints.

Adult learners benefit from a learner-centered approach that focuses on the individual needs, preferences, and interests of each participant can greatly enhance the overall learning experience. In addition, we tend to be more intrinsically motivated to learn when we have a sense of autonomy and can practice and experiment (see Figure 3) with new concepts in a safe environment.

Understanding Adult Learning Theory and its principles can significantly enhance the effectiveness of teaching and learning as adults. By respecting our autonomy, acknowledging our experiences, creating a supportive learning environment, offering flexible learning opportunities, and utilizing diverse teaching methods, we can better cater to the unique needs and preferences of adult learners.

AI is part of the solution

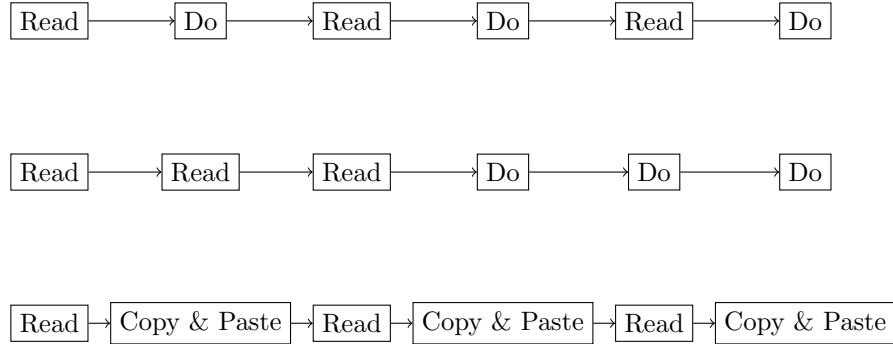


Figure 3.: How to stay stuck in data science (or anything). The “Read-Do” loop tends to deliver the best results. Too much reading between doing can be somewhat effective. Reading and simply copy-paste is probably the least effective. When working through material, experiment. Try to break things. Incorporate your own experience or applications whenever possible.

In practice, that means that we will not be prescriptive in our approach to teaching data science. We will not tell you what to do, but rather we will provide you with a variety of options and you can choose what works best for you. We will also provide you with a variety of resources and you can choose where to focus your time. Given that we cannot possibly cover everything, we will provide you with a framework for learning and you can fill in the gaps as you see fit. A key component of our success as adult learners is to gain the confidence to ask questions and problem-solve on our own.

AI is part of the solution

Artificial Intelligence (AI) is becoming an increasingly important tool in education, and it can be a powerful ally in our quest to learn data science. As it turns out, AI is excellent at helping us learn. It can provide tailored explanations, generate practice problems, and even simulate real-world scenarios for us to work through. AI can also help us find resources, summarize complex topics, and even provide feedback on our work. However, it is important to remember that AI is a tool, not a replacement for our own learning. We still need to engage with the material, ask questions, and seek out additional resources when needed. AI can help us learn more efficiently, but it cannot do the learning for us.

I encourage you to use AI tools to help you learn and to even do work for you when appropriate; AI is an excellent partner in analysis and programming. However, I also encourage you to be critical of the information that AI provides. AI is not perfect and can make mistakes. Throughout this course and book, use AI to dive deeper into the material,

AI is part of the solution

to provide additional explanations, and to generate additional depth and breadth to the material.

Part I.

Introduction

1. About R

In this chapter, we will discuss the basics of R and RStudio, two essential tools in genomics data analysis. We will cover the advantages of using R and RStudio, how to set up RStudio, and the different panels of the RStudio interface.

1.1. What is R?

R is a programming language and software environment designed for statistical computing and graphics. It is widely used by statisticians, data scientists, and researchers for data analysis and visualization. R is an open-source language, which means it is free to use, modify, and distribute. Over the years, R has become particularly popular in the fields of genomics and bioinformatics, owing to its extensive libraries and powerful data manipulation capabilities.

The R language is a dialect of the S language, which was developed in the 1970s at Bell Laboratories. The first version of R was written by Robert Gentleman and Ross Ihaka and released in 1995 (see [this slide deck](#) for Ross Ihaka's take on R's history). Since then, R has been continuously developed by the R Core Team, a group of statisticians and computer scientists. The R Core Team releases a new version of R every year.

1.2. Why use R?

There are several reasons why R is a popular choice for data analysis, particularly in genomics and bioinformatics. These include:

1. **Open-source:** R is free to use and has a large community of developers who contribute to its growth and development. [What is “open-source”?](#)
2. **Extensive libraries:** There are thousands of R packages available for a wide range of tasks, including specialized packages for genomics and bioinformatics. These libraries have been extensively tested and are available for free.
3. **Data manipulation:** R has powerful data manipulation capabilities, making it easy (or at least possible) to clean, process, and analyze large datasets.

1. About R

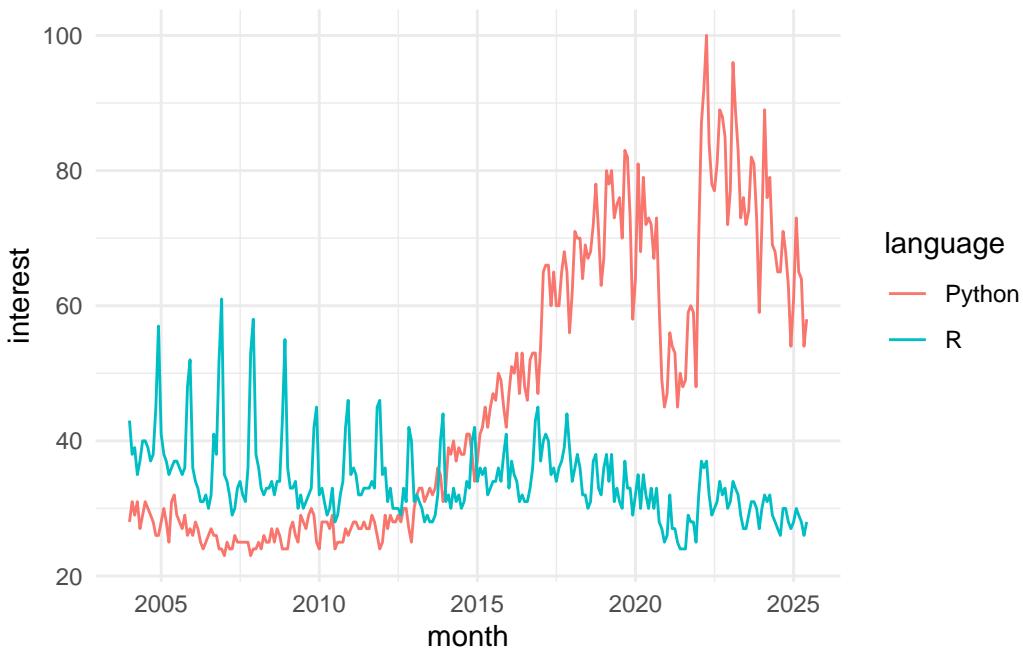


Figure 1.1.: Google trends showing the popularity of R over time based on [Google Trends](#). Note that google does not capture the context here; bioinformatics applications are still quite heavily reliant on R.

1. About R

4. **Graphics and visualization:** R has excellent tools for creating high-quality graphics and visualizations that can be customized to meet the specific needs of your analysis. In most cases, graphics produced by R are publication-quality.
5. **Reproducible research:** R enables you to create reproducible research by recording your analysis in a script, which can be easily shared and executed by others. In addition, R does not have a meaningful graphical user interface (GUI), which renders analysis in R much more reproducible than tools that rely on GUI interactions.
6. **Cross-platform:** R runs on Windows, Mac, and Linux (as well as more obscure systems).
7. **Interoperability with other languages:** R can interact with FORTRAN, C, and many other languages.
8. **Scalability:** R is useful for small and large projects.

I can develop code for analysis on my Mac laptop. I can then install the *same* code on our 20k core cluster and run it in parallel on 100 samples, monitor the process, and then update a database (for example) with R when complete. In other words, R is a powerful tool that can be used for a wide range of tasks, from small-scale data analysis to large-scale genomics and omics data science projects.

1.3. Why not use R?

- R cannot do everything.
- R is not always the “best” tool for the job.
- R will *not* hold your hand. Often, it will *slap* your hand instead.
- The documentation can be opaque (but there is documentation).
- R can drive you crazy (on a good day) or age you prematurely (on a bad one).
- Finding the right package to do the job you want to do can be challenging; worse, some contributed packages are unreliable.]{}
- R does not have a meaningfully useful graphical user interface (GUI).
- Additional languages are becoming increasingly popular for bioinformatics and biological data science, such as Python, Julia, and Rust.

1.4. R License and the Open Source Ideal

R is free (yes, totally free!) and distributed under GNU license. In particular, this license allows one to:

- Download the source code
- Modify the source code to your heart’s content

1. About R

- Distribute the modified source code and even charge money for it, but you must distribute the modified source code under the original GNU license.

This license means that R will always be available, will always be open source, and can grow organically without constraint.

1.5. Working with R

R is a programming language, and as such, it requires you to write code to perform tasks. This can be intimidating for beginners, but it is also what makes R so powerful. In R, you can write scripts to automate tasks, create functions to encapsulate complex operations, and use packages to extend the functionality of R.

R can be used interactively or as a scripting language. In interactive mode, you can enter commands directly into the R console and see the results immediately. In scripting mode, you can write a series of commands in a script file and then execute the entire script at once. This allows you to save your work, reuse code, and share your analysis with others.

In the next section, we will discuss how to set up RStudio, an integrated development environment (IDE) for R that makes it easier to write and execute R code. However, you can use R without RStudio if you prefer to work in the R console or another IDE. RStudio is not required to use R, but it does provide a more user-friendly interface and several useful features that can enhance your R programming experience.

2. RStudio

RStudio is an integrated development environment (IDE) for R. It provides a graphical user interface (GUI) for R, making it easier to write and execute R code. RStudio also provides several other useful features, including a built-in console, syntax-highlighting editor, and tools for plotting, history, debugging, workspace management, and workspace viewing. RStudio is available in both free and commercial editions; the commercial edition provides some additional features, including support for multiple sessions and enhanced debugging.

2.1. Getting started with RStudio

To get started with RStudio, you first need to install both R and RStudio on your computer. Follow these steps:

1. Download and install R from the [official R website](#).
2. Download and install RStudio from the [official RStudio website](#).
3. Launch RStudio. You should see the RStudio interface with four panels.

i R versions

RStudio works with all versions of R, but it is recommended to use the latest version of R to take advantage of the latest features and improvements. You can check your R version by running `version` (no parentheses) in the R console.

You can check the latest version of R on the [R-project website](#).

2.2. The RStudio Interface

RStudio's interface consists of four panels (see Figure 2.1):

- **Console** This panel displays the R console, where you can enter and execute R commands directly. The console also shows the output of your code, error messages, and other information.

2. RStudio

- **Source** This panel is where you write and edit your R scripts. You can create new scripts, open existing ones, and run your code from this panel.
- **Environment** This panel displays your current workspace, including all variables, data objects, and functions that you have created or loaded in your R session.
- **Plots, Packages, Help, and Viewer** These panels display plots, installed packages, help files, and web content, respectively.

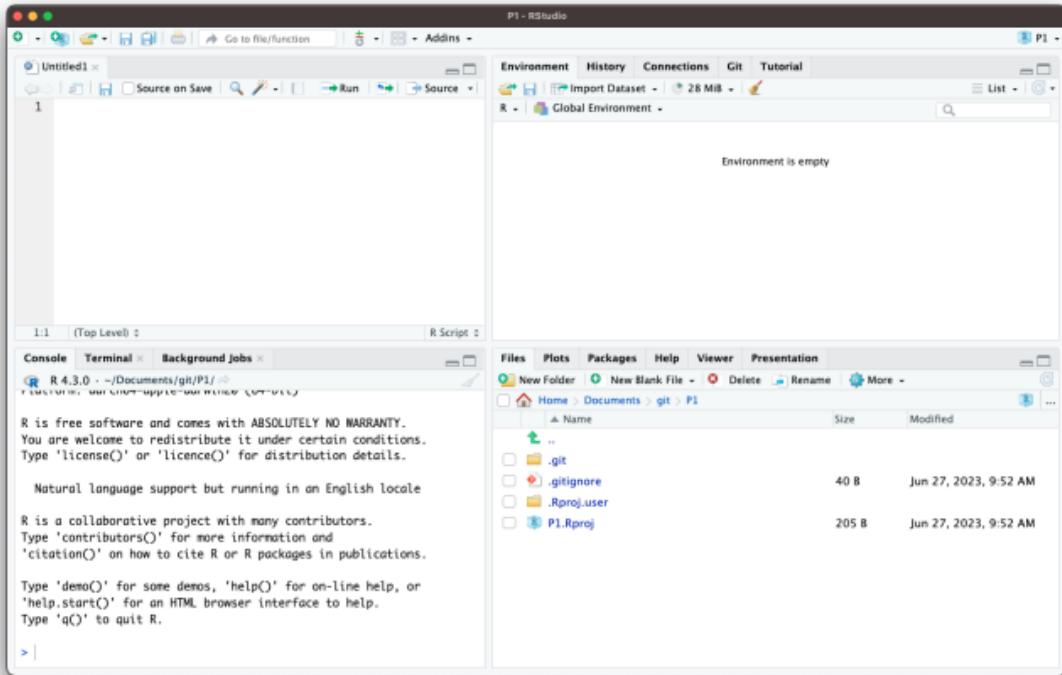


Figure 2.1.: The RStudio interface. In this layout, the **source** pane is in the upper left, the **console** is in the lower left, the **environment** panel is in the top right and the **viewer/help/files** panel is in the bottom right.

i Do I need to use RStudio?

No. You can use R without RStudio. However, RStudio makes it easier to write and execute R code, and it provides several useful features that are not available in the basic R console. Note that the only part of RStudio that is actually interacting with R directly is the console. The other panels are simply providing a GUI that enhances

2. RStudio

the user experience.

Customizing the RStudio Interface

You can customize the layout of RStudio to suit your preferences. To do so, go to **Tools > Global Options > Appearance**. Here, you can change the theme, font size, and panel layout. You can also resize the panels as needed to gain screen real estate (see Figure 2.2).

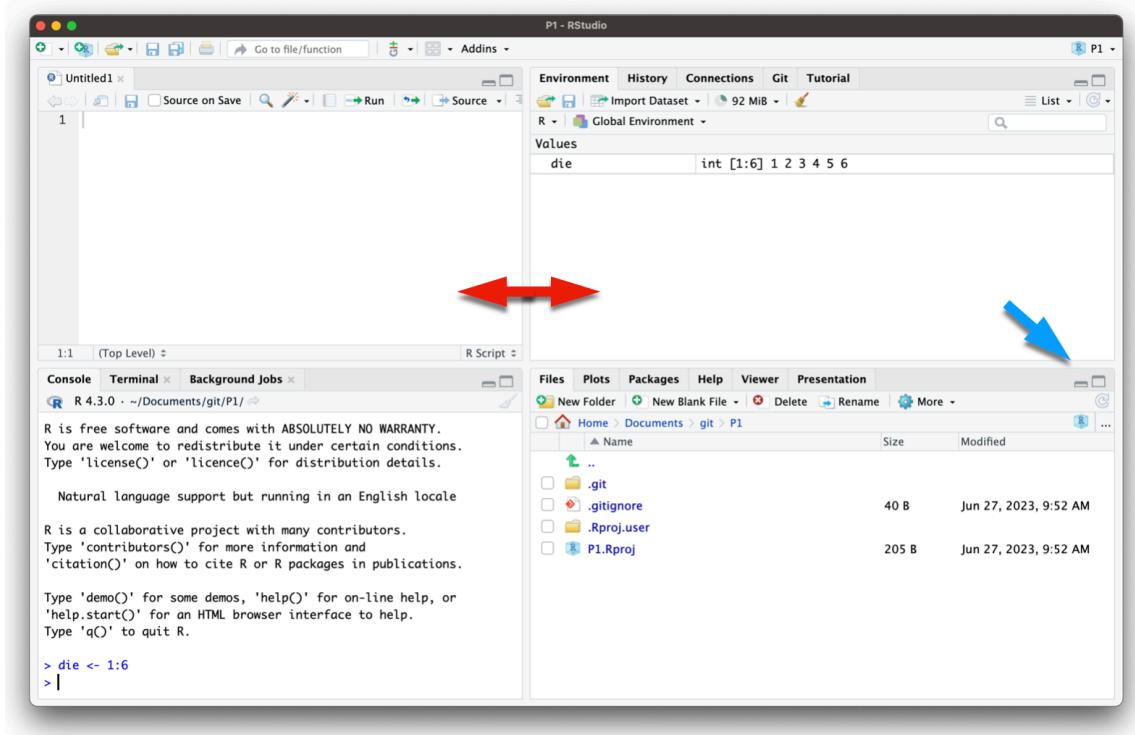


Figure 2.2.: Dealing with limited screen real estate can be a challenge, particularly when you want to open another window to, for example, view a web page. You can resize the panes by sliding the center divider (red arrows) or by clicking on the minimize/maximize buttons (see blue arrow).

In summary, R and RStudio are powerful tools for genomics data analysis. By understanding the advantages of using R and RStudio and familiarizing yourself with the RStudio interface, you can efficiently analyze and visualize your data. In the following chapters, we will delve deeper into the functionality of R, Bioconductor, and various statistical methods to help you gain a comprehensive understanding of genomics data analysis.

2. RStudio

2.3. Alternatives to RStudio

While RStudio is a popular choice for R development, there are several alternatives you can consider:

1. **Jupyter Notebooks:** Jupyter Notebooks provide an interactive environment for writing and executing R code, along with rich text support for documentation. You can use the IRKernel to run R code in Jupyter.

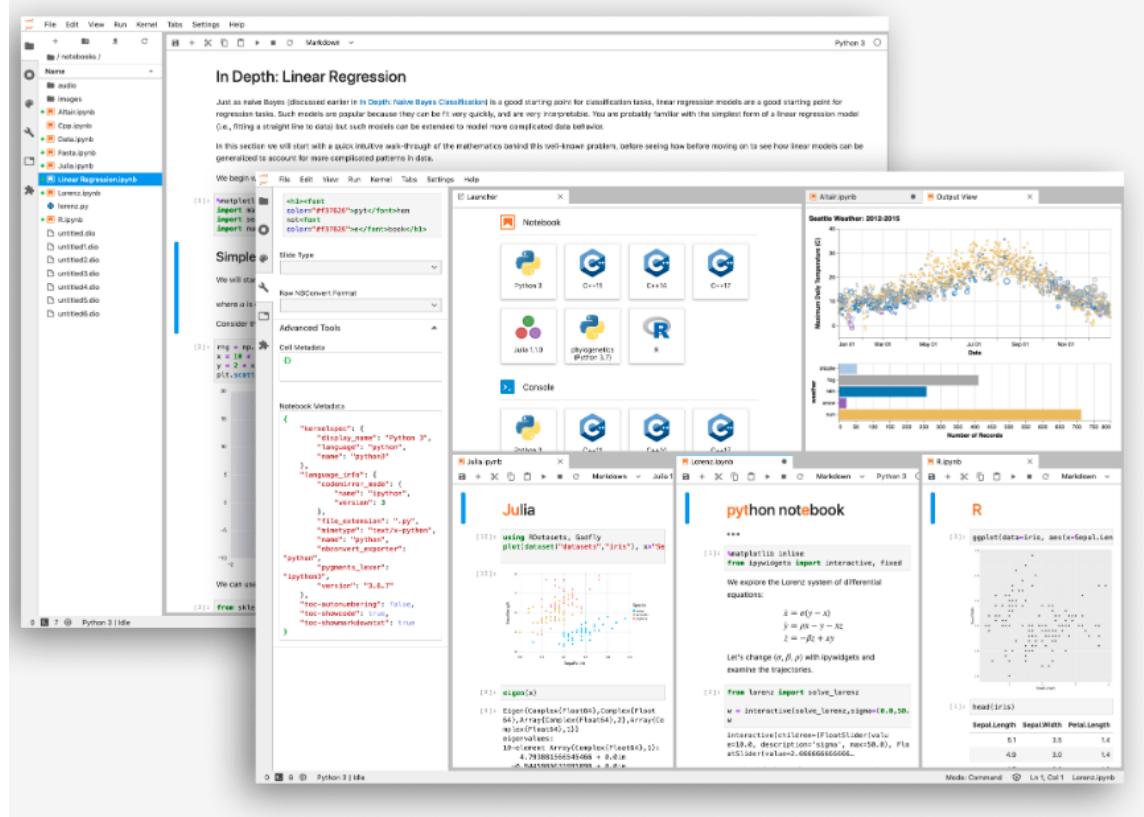


Figure 2.3.: Jupyter Notebook interface. This is an interactive environment for writing and executing R code, along with rich text support for documentation.

2. **Visual Studio Code:** With the R extension for Visual Studio Code, you can write and execute R code in a lightweight editor. This setup provides features like syntax highlighting, code completion, and integrated terminal support.

2. RStudio

The screenshot shows the RStudio interface. On the left, the 'R' pane displays the file structure and code for 'data_analysis.R'. The main workspace shows a terminal window with R code and output, and a plot titled 'Residuals vs Leverage' showing standardized residuals versus leverage. Below the plot are four smaller diagnostic plots.

```

data_analysis.R > ...
1 library(data.table)
2
3 set.seed(123)
4 n <- 1000
5 dt <- data.table(id = 1:n)
6 dt[, x1 := rnorm(.N, mean = 0, sd = 2)]
7 dt[, x2 := runif(.N, min = -1, max = 1)]
8 dt[, y := 2 * x1 + x2 + 0.5 + rnorm(.N)]
9
10 model <- lm(y ~ x1 + x2, data = dt)
11
12 summary(model)
13 plot(model)
14

> library(data.table)
> set.seed(123)
> n <- 1000
> dt <- data.table(id = 1:n)
> dt[, x1 := rnorm(.N, mean = 0, sd = 2)]
> dt[, x2 := runif(.N, min = -1, max = 1)]
> dt[, y := 2 * x1 + x2 + 0.5 + rnorm(.N)]
> model <- lm(y ~ x1 + x2, data = dt)
> summary(model)

Call:
lm(formula = y ~ x1 + x2, data = dt)

Residuals:
    Min      1Q  Median      3Q     Max 
-1.5437 -0.3164 -0.01093  0.34316  1.61131 

Coefficients:
            Estimate Std. Error t value Pr(>|t|)    
(Intercept) -0.0007077  0.4155577  -0.051   0.959    
x1           1.9855840  0.0076404 252.563 <2e-16 ***  
x2           1.0224384  0.0266384  38.382 <2e-16 ***  
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Residual standard error: 0.4919 on 997 degrees of freedom
Multiple R-squared:  0.9851, Adjusted R-squared:  0.9851 
F-statistic: 3.298e+04 on 2 and 997 DF,  p-value: < 2.2e-16

> plot(model)
> 
```

Figure 2.4.: Visual Studio Code (VSCode) with the R extension. This is a lightweight alternative to RStudio that provides syntax highlighting, code completion, and integrated terminal support.

3. **Positron Workbench:** This is a commercial IDE that supports R and Python. It provides a similar interface to RStudio but with additional features for data science workflows, including support for multiple languages and cloud integration.

2. RStudio

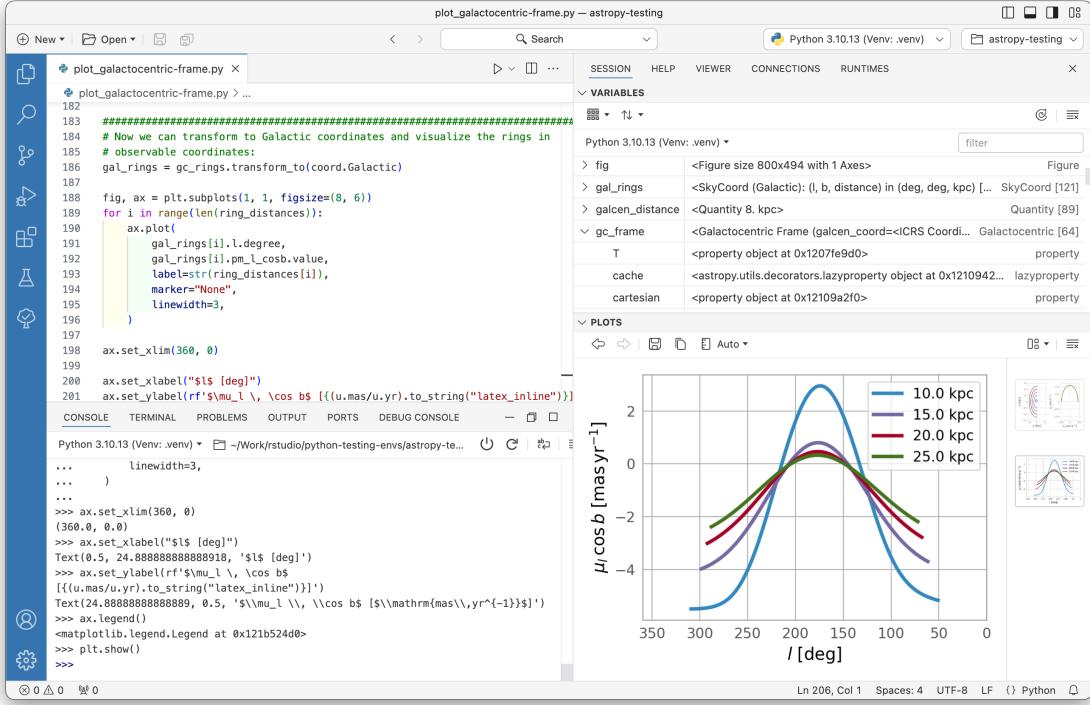


Figure 2.5.: Positron Workbench interface. This IDE supports R and Python, providing a similar interface to RStudio with additional features for data science workflows.

4. **Command Line R:** For those who prefer a minimalist approach, you can use R directly from the command line. This method lacks the GUI features of RStudio but can be efficient for quick tasks, scripting, automation, or when working on remote servers.

Each of these alternatives has its own strengths and weaknesses, so you may want to try a few to see which one best fits your workflow. All are available for free, and you can install them alongside RStudio if you wish to use multiple environments. Each can be installed in Windows, Mac, and Linux.

3. R mechanics

3.1. Starting R

We've installed R and RStudio. Now, let's start R and get going. How to start R depends a bit on the operating system (Mac, Windows, Linux) and interface. In this course, we will largely be using an Integrated Development Environment (IDE) called *RStudio*, but there is nothing to prohibit using R at the command line or in some other interface (and there are a few).

3.2. RStudio: A Quick Tour

The RStudio interface has multiple panes. All of these panes are simply for convenience except the "Console" panel, typically in the lower left corner (by default). The console pane contains the running R interface. If you choose to run R outside RStudio, the interaction will be *identical* to working in the console pane. This is useful to keep in mind as some environments, such as a computer cluster, encourage using R without RStudio.

- Panes
- Options
- Help
- Environment, History, and Files

3.3. Interacting with R

The only meaningful way of interacting with R is by typing into the R console. At the most basic level, anything that we type at the command line will fall into one of two categories:

1. Assignments

```
x = 1  
y <- 2
```

3. R mechanics

2. Expressions

```
1 + pi + sin(42)
```

```
[1] 3.225071
```

The assignment type is obvious because either the `<-` or `=` are used. Note that when we type expressions, R will return a result. In this case, the result of R evaluating `1 + pi + sin(42)` is 3.2250711.

The standard R prompt is a “`>`” sign. When present, R is waiting for the next expression or assignment. If a line is not a complete R command, R will continue the next line with a “`+`”. For example, typing the following with a “Return” after the second “`+`” will result in R giving back a “`+`” on the next line, a prompt to keep typing.

```
1 + pi +
sin(3.7)
```

```
[1] 3.611757
```

R can be used as a glorified calculator by using R expressions. Mathematical operations include:

- Addition: `+`
- Subtraction: `-`
- Multiplication: `*`
- Division: `/`
- Exponentiation: `^`
- Modulo: `%%`

The `^` operator raises the number to its left to the power of the number to its right: for example `3^2` is 9. The modulo returns the remainder of the division of the number to the left by the number on its right, for example 5 modulo 3 or `5 %% 3` is 2.

3.3.1. Expressions

```
5 + 2
28 %% 3
3^2
5 + 4 * 4 + 4 ^ 4 / 10
```

3. R mechanics

Note that R follows order-of-operations and groupings based on parentheses.

```
5 + 4 / 9  
(5 + 4) / 9
```

3.3.2. Assignment

While using R as a calculator is interesting, to do useful and interesting things, we need to assign *values* to *objects*. To create objects, we need to give it a name followed by the assignment operator `<-` (or, entirely equivalently, `=`) and the value we want to give it:

```
weight_kg <- 55
```

`<-` is the assignment operator. Assigns values on the right to objects on the left, it is like an arrow that points from the value to the object. Using an `=` is equivalent (in nearly all cases). Learn to use `<-` as it is good programming practice.

Objects can be given any name such as `x`, `current_temperature`, or `subject_id` (see below). You want your object names to be explicit and not too long. They cannot start with a number (`2x` is not valid but `x2` is). R is case sensitive (e.g., `weight_kg` is different from `Weight_kg`). There are some names that cannot be used because they represent the names of fundamental functions in R (e.g., `if`, `else`, `for`, see [here](#) for a complete list). In general, even if it's allowed, it's best to not use other function names, which we'll get into shortly (e.g., `c`, `T`, `mean`, `data`, `df`, `weights`). When in doubt, check the help to see if the name is already in use. It's also best to avoid dots (.) within a variable name as in `my.dataset`. It is also recommended to use nouns for variable names, and verbs for function names.

When assigning a value to an object, R does not print anything. You can force to print the value by typing the name:

```
weight_kg
```

```
[1] 55
```

Now that R has `weight_kg` in memory, which R refers to as the “global environment”, we can do arithmetic with it. For instance, we may want to convert this weight in pounds (weight in pounds is 2.2 times the weight in kg).

3. R mechanics

```
2.2 * weight_kg
```

```
[1] 121
```

We can also change a variable's value by assigning it a new one:

```
weight_kg <- 57.5  
2.2 * weight_kg
```

```
[1] 126.5
```

This means that assigning a value to one variable does not change the values of other variables. For example, let's store the animal's weight in pounds in a variable.

```
weight_lb <- 2.2 * weight_kg
```

and then change `weight_kg` to 100.

```
weight_kg <- 100
```

What do you think is the current content of the object `weight_lb`, 126.5 or 220?

You can see what objects (variables) are stored by viewing the Environment tab in Rstudio. You can also use the `ls()` function. You can remove objects (variables) with the `rm()` function. You can do this one at a time or remove several objects at once. You can also use the little broom button in your environment pane to remove everything from your environment.

```
ls()  
rm(weight_lb, weight_kg)  
ls()
```

What happens when you type the following, now?

```
weight_lb # oops! you should get an error because weight_lb no longer exists!
```

3.4. Rules for Names in R

R allows users to assign names to objects such as variables, functions, and even dimensions of data. However, these names must follow a few rules.

- Names may contain any combination of letters, numbers, underscore, and ":"
- Names may not start with numbers, underscore.
- R names are case-sensitive.

Examples of valid R names include:

```
pi  
x  
camelCaps  
my_stuff  
MY_Stuff  
this.is.the.name.of.the.man  
ABC123  
abc1234asdf  
.hi
```

3.5. Resources for Getting Help

There is extensive built-in help and documentation within R. A separate page contains a collection of [additional resources](#).

If the name of the function or object on which help is sought is known, the following approaches with the name of the function or object will be helpful. For a concrete example, examine the help for the `print` method.

```
help(print)  
help('print')  
?print
```

If the name of the function or object on which help is sought is *not* known, the following from within R will be helpful.

```
help.search('microarray')  
RSiteSearch('microarray')  
apropos('histogram')
```

3. R mechanics

There are also tons of online resources that Google will include in searches if online searching feels more appropriate.

I strongly recommend using `help("newfunction")` for all functions that are new or unfamiliar to you.

There are also many open and free resources and reference guides for R.

- [Quick-R](#): a quick online reference for data input, basic statistics and plots
- R reference card [PDF](#) by Tom Short
- Rstudio [cheatsheets](#)

4. Up and Running with R

In this chapter, we’re going to get an introduction to the R language, so we can dive right into programming. We’re going to create a pair of virtual dice that can generate random numbers. No need to worry if you’re new to programming. We’ll return to many of the concepts here in more detail later.

To simulate a pair of dice, we need to break down each die into its essential features. A die can only show one of six numbers: 1, 2, 3, 4, 5, and 6. We can capture the die’s essential characteristics by saving these numbers as a group of values in the computer. Let’s save these numbers first and then figure out a way to “roll” our virtual die.

4.1. The R User Interface

The RStudio interface is simple. You type R code into the bottom line of the RStudio console pane and then click Enter to run it. The code you type is called a *command*, because it will command your computer to do something for you. The line you type it into is called the *command line*.

When you type a command at the prompt and hit Enter, your computer executes the command and shows you the results. Then RStudio displays a fresh prompt for your next command. For example, if you type `1 + 1` and hit Enter, RStudio will display:

```
> 1 + 1  
[1] 2  
>
```

You’ll notice that a `[1]` appears next to your result. R is just letting you know that this line begins with the first value in your result. Some commands return more than one value, and their results may fill up multiple lines. For example, the command `100:130` returns 31 values; it creates a sequence of integers from 100 to 130. Notice that new bracketed numbers appear at the start of the second and third lines of output. These numbers just mean that the second line begins with the 14th value in the result, and the third line begins with the 25th value. You can mostly ignore the numbers that appear in brackets:

4. Up and Running with R

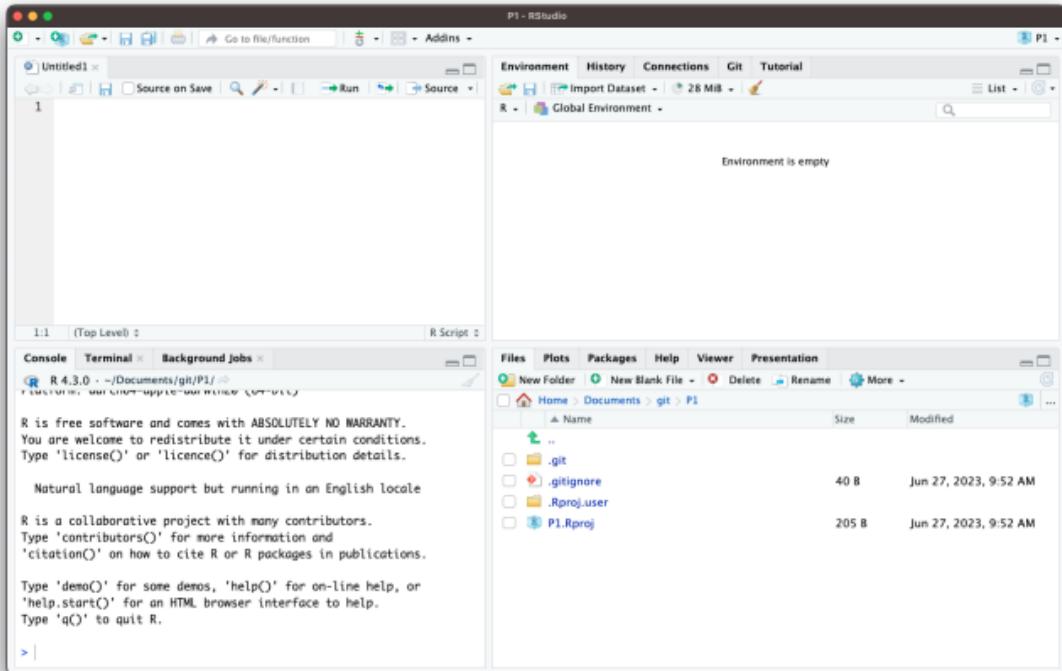


Figure 4.1.: Your computer does your bidding when you type R commands at the prompt in the bottom line of the console pane. Don't forget to hit the Enter key. When you first open RStudio, the console appears in the pane on your left, but you can change this with **File > Tools > Global Options** in the menu bar.

4. Up and Running with R

```
> 100:130  
[1] 100 101 102 103 104 105 106 107 108 109 110 111 112  
[14] 113 114 115 116 117 118 119 120 121 122 123 124 125  
[25] 126 127 128 129 130
```

Tip

The colon operator (:) returns every integer between two integers. It is an easy way to create a sequence of numbers.

When do we compile?

In some languages, like C, Java, and FORTRAN, you have to compile your human-readable code into machine-readable code (often 1s and 0s) before you can run it. If you've programmed in such a language before, you may wonder whether you have to compile your R code before you can use it. The answer is no. R is a dynamic programming language, which means R automatically interprets your code as you run it.

If you type an incomplete command and press Enter, R will display a + prompt, which means R is waiting for you to type the rest of your command. Either finish the command or hit Escape to start over:

```
> 5 -  
+  
+ 1  
[1] 4
```

If you type a command that R doesn't recognize, R will return an error message. If you ever see an error message, don't panic. R is just telling you that your computer couldn't understand or do what you asked it to do. You can then try a different command at the next prompt:

```
> 3 % 5  
Error: unexpected input in "3 % 5"  
>
```

4. Up and Running with R

💡 Tip

Whenever you get an error message in R, consider googling the error message. You'll often find that someone else has had the same problem and has posted a solution online. Simply cutting-and-pasting the error message into a search engine will often work

Once you get the hang of the command line, you can easily do anything in R that you would do with a calculator. For example, you could do some basic arithmetic:

```
2 * 3
```

```
[1] 6
```

```
4 - 1
```

```
[1] 3
```

```
# this obeys order-of-operations  
6 / (4 - 1)
```

```
[1] 2
```

💡 Tip

R treats the hashtag character, #, in a special way; R will not run anything that follows a hashtag on a line. This makes hashtags very useful for adding comments and annotations to your code. Humans will be able to read the comments, but your computer will pass over them. The hashtag is known as the *commenting symbol* in R.

❗ Cancelling commands

Some R commands may take a long time to run. You can cancel a command once it has begun by pressing **ctrl + c** or by clicking the “stop sign” if it is available in Rstudio. Note that it may also take R a long time to cancel the command.

4. Up and Running with R

4.1.1. An exercise

That's the basic interface for executing R code in RStudio. Think you have it? If so, try doing these simple tasks. If you execute everything correctly, you should end up with the same number that you started with:

1. Choose any number and add 2 to it.
2. Multiply the result by 3.
3. Subtract 6 from the answer.
4. Divide what you get by 3.

```
10 + 2
```

```
[1] 12
```

```
12 * 3
```

```
[1] 36
```

```
36 - 6
```

```
[1] 30
```

```
30 / 3
```

```
[1] 10
```

4.2. Objects

Now that you know how to use R, let's use it to make a virtual die. The `:` operator from a couple of pages ago gives you a nice way to create a group of numbers from one to six. The `:` operator returns its results as a **vector** (we are going to work with vectors in more detail), a one-dimensional set of numbers:

```
1:6  
## 1 2 3 4 5 6
```

4. Up and Running with R

That's all there is to how a virtual die looks! But you are not done yet. Running `1:6` generated a vector of numbers for you to see, but it didn't save that vector anywhere for later use. If we want to use those numbers again, we'll have to ask your computer to save them somewhere. You can do that by creating an R *object*.

R lets you save data by storing it inside an R object. What is an object? Just a name that you can use to call up stored data. For example, you can save data into an object like `a` or `b`. Wherever R encounters the object, it will replace it with the data saved inside, like so:

```
a <- 1  
a
```

```
[1] 1
```

```
a + 2
```

```
[1] 3
```

What just happened?

1. To create an R object, choose a name and then use the less-than symbol, `<`, followed by a minus sign, `-`, to save data into it. This combination looks like an arrow, `<-`. R will make an object, give it your name, and store in it whatever follows the arrow. So `a <- 1` stores 1 in an object named `a`.
2. When you ask R what's in `a`, R tells you on the next line.
3. You can use your object in new R commands, too. Since `a` previously stored the value of 1, you're now adding 1 to 2.

Assignment vs expressions

Everything that you type into the R console can be assigned to one of two categories:

- Assignments
- Expressions

An expression is a command that tells R to do something. For example, `1 + 2` is an expression that tells R to add 1 and 2. When you type an expression into the R console, R will evaluate the expression and return the result. For example, if you type `1 + 2` into the R console, R will return 3. Expressions can have “side effects”

4. Up and Running with R

but they don't explicitly result in anything being added to R memory.

```
5 + 2
```

```
[1] 7
```

```
28 %% 3
```

```
[1] 1
```

```
3^2
```

```
[1] 9
```

```
5 + 4 * 4 + 4 ^ 4 / 10
```

```
[1] 46.6
```

While using R as a calculator is interesting, to do useful and interesting things, we need to assign values to objects. To create objects, we need to give it a name followed by the assignment operator `<-` (or, entirely equivalently, `=`) and the value we want to give it:

```
weight_kg <- 55
```

So, for another example, the following code would create an object named `die` that contains the numbers one through six. To see what is stored in an object, just type the object's name by itself:

```
die <- 1:6  
die
```

```
[1] 1 2 3 4 5 6
```

When you create an object, the object will appear in the environment pane of RStudio, as shown in Figure 4.2. This pane will show you all of the objects you've created since opening RStudio.

4. Up and Running with R

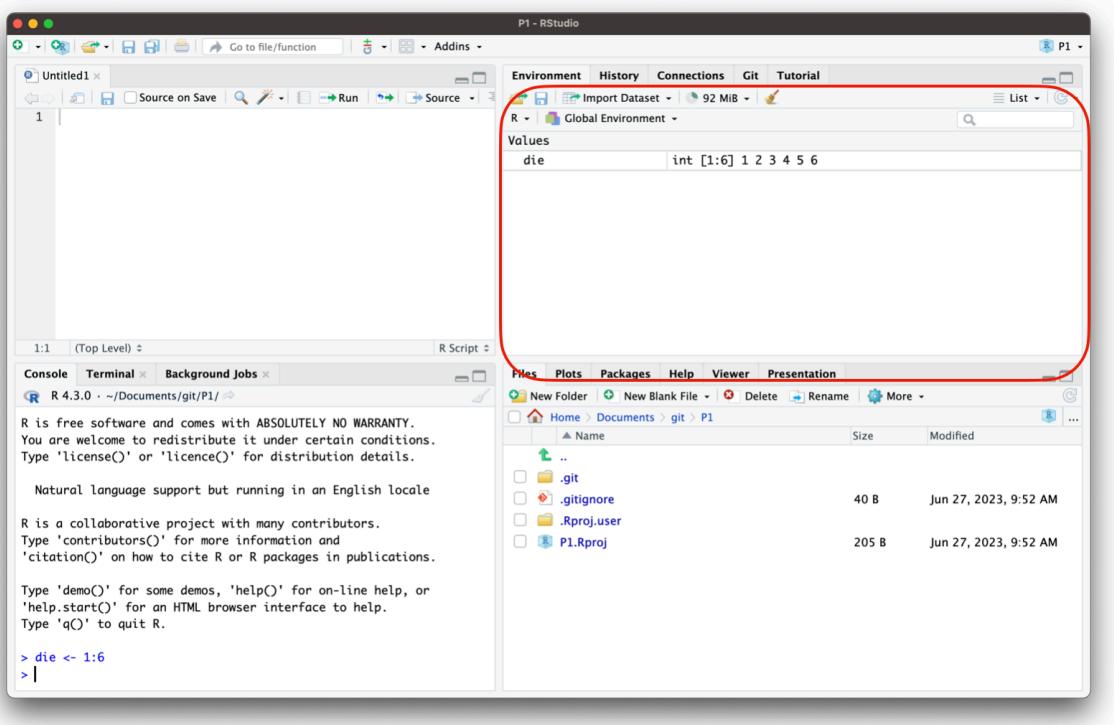


Figure 4.2.: Assignment creates an object in the environment pane.

4. Up and Running with R

You can name an object in R almost anything you want, but there are a few rules. First, a name cannot start with a number. Second, a name cannot use some special symbols, like `^`, `!`, `$`, `@`, `+`, `-`, `/`, or `*`:

Good names	Names that cause errors
a	1trial
b	\$
FOO	^mean
my_var	2nd
.day	!bad

Capitalization matters

R is case-sensitive, so `name` and `Name` will refer to different objects:

```
> Name = 0
> Name + 1
[1] 1
> name + 1
Error: object 'name' not found
```

The error above is a common one!

Finally, R will overwrite any previous information stored in an object without asking you for permission. So, it is a good idea to *not* use names that are already taken:

```
my_number <- 1
```

```
my_number
```

```
[1] 1
```

```
my_number <- 999
```

```
my_number
```

```
[1] 999
```

You can see which object names you have already used with the function `ls`:

4. Up and Running with R

```
ls()
```

Your environment will contain different names than mine, because you have probably created different objects.

You can also see which names you have used by examining RStudio's environment pane.

We now have a virtual die that is stored in the computer's memory and which has a name that we can use to refer to it. You can access it whenever you like by typing the word `die`.

So what can you do with this die? Quite a lot. R will replace an object with its contents whenever the object's name appears in a command. So, for example, you can do all sorts of math with the die. Math isn't so helpful for rolling dice, but manipulating sets of numbers will be your stock and trade as a data scientist. So let's take a look at how to do that:

```
die - 1
```

```
[1] 0 1 2 3 4 5
```

```
die / 2
```

```
[1] 0.5 1.0 1.5 2.0 2.5 3.0
```

```
die * die
```

```
[1] 1 4 9 16 25 36
```

R uses *element-wise execution* when working with a *vector* like `die`. When you manipulate a set of numbers, R will apply the same operation to each element in the set. So for example, when you run `die - 1`, R subtracts one from each element of `die`.

When you use two or more vectors in an operation, R will line up the vectors and perform a sequence of individual operations. For example, when you run `die * die`, R lines up the two `die` vectors and then multiplies the first element of vector 1 by the first element of vector 2. R then multiplies the second element of vector 1 by the second element of vector 2, and so on, until every element has been multiplied. The result will be a new vector the same length as the first two {Figure 4.3}.

If you give R two vectors of unequal lengths, R will repeat the shorter vector until it is as long as the longer vector, and then do the math, as shown in Figure 4.4. This isn't a

4. Up and Running with R

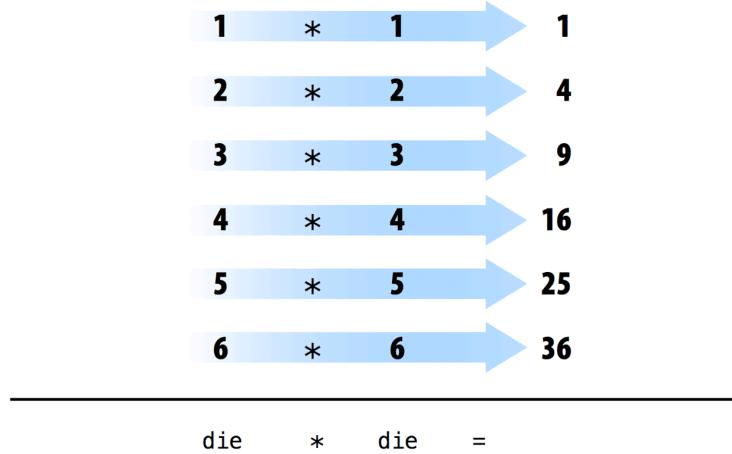


Figure 4.3.: “When R performs element-wise execution, it matches up vectors and then manipulates each pair of elements independently.”

permanent change—the shorter vector will be its original size after R does the math. If the length of the short vector does not divide evenly into the length of the long vector, R will return a warning message. This behavior is known as *vector recycling*, and it helps R do element-wise operations:

```
1:2
```

```
[1] 1 2
```

```
1:4
```

```
[1] 1 2 3 4
```

```
die
```

```
[1] 1 2 3 4 5 6
```

```
die + 1:2
```

```
[1] 2 4 4 6 6 8
```

4. Up and Running with R

```
die + 1:4
```

Warning in die + 1:4: longer object length is not a multiple of shorter object length

```
[1] 2 4 6 8 6 8
```

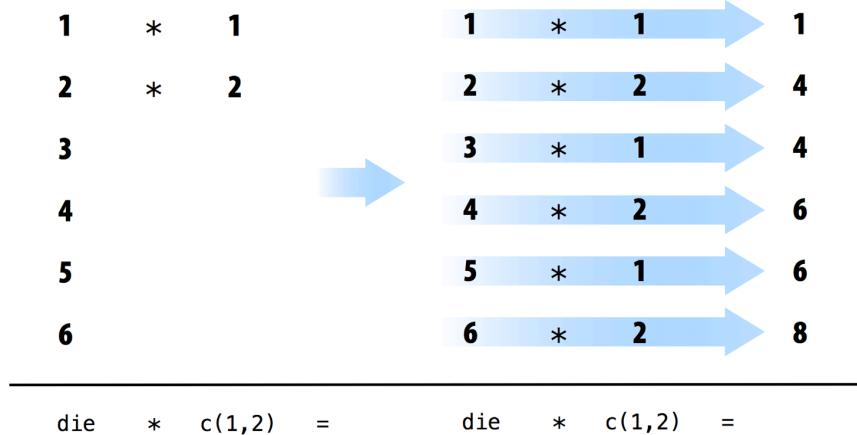


Figure 4.4.: “R will repeat a short vector to do element-wise operations with two vectors of uneven lengths.”

Element-wise operations are a very useful feature in R because they manipulate groups of values in an orderly way. When you start working with data sets, element-wise operations will ensure that values from one observation or case are only paired with values from the same observation or case. Element-wise operations also make it easier to write your own programs and functions in R.

! Element-wise operations are not matrix operations

It is important to know that operations with vectors are not the same that you might expect if you are expecting R to perform “matrix” operations. R can do inner multiplication with the `%*%` operator and outer multiplication with the `%o%` operator:

```
# Inner product (1*1 + 2*2 + 3*3 + 4*4 + 5*5 + 6*6)
die %*% die
# Outer product
die %o% die
```

4. Up and Running with R

Now that you can do math with your `die` object, let's look at how you could "roll" it. Rolling your die will require something more sophisticated than basic arithmetic; you'll need to randomly select one of the die's values. And for that, you will need a *function*.

4.3. Functions

R has many functions and puts them all at our disposal. We can use functions to do simple and sophisticated tasks. For example, we can round a number with the `round` function, or calculate its factorial with the `factorial` function. Using a function is pretty simple. Just write the name of the function and then the data you want the function to operate on in parentheses:

```
round(3.1415)
```

```
[1] 3
```

```
factorial(3)
```

```
[1] 6
```

The data that you pass into the function is called the function's *argument*. The argument can be raw data, an R object, or even the results of another R function. In this last case, R will work from the innermost function to the outermost Figure 4.5.

```
mean(1:6)
```

```
[1] 3.5
```

```
mean(die)
```

```
[1] 3.5
```

```
round(mean(die))
```

```
[1] 4
```

4. Up and Running with R




Figure 4.5.: “When you link functions together, R will resolve them from the innermost operation to the outermost. Here R first looks up die, then calculates the mean of one through six, then rounds the mean.”

Returning to our die, we can use the `sample` function to randomly select one of the die’s values; in other words, the `sample` function can simulate rolling the `die`.

The `sample` function takes *two* arguments: a vector named `x` and a number named `size`. `sample` will return `size` elements from the vector:

```
sample(x = 1:4, size = 2)
```

```
[1] 3 1
```

To roll your die and get a number back, set `x` to `die` and sample one element from it. You’ll get a new (maybe different) number each time you roll it:

```
sample(x = die, size = 1)
```

```
[1] 1
```

```
sample(x = die, size = 1)
```

```
[1] 1
```

```
sample(x = die, size = 1)
```

```
[1] 2
```

4. Up and Running with R

Many R functions take multiple arguments that help them do their job. You can give a function as many arguments as you like as long as you separate each argument with a comma.

You may have noticed that I set `die` and `1` equal to the names of the arguments in `sample`, `x` and `size`. Every argument in every R function has a name. You can specify which data should be assigned to which argument by setting a name equal to data, as in the preceding code. This becomes important as you begin to pass multiple arguments to the same function; names help you avoid passing the wrong data to the wrong argument. However, using names is optional. You will notice that R users do not often use the name of the first argument in a function. So you might see the previous code written as:

```
sample(die, size = 1)
```

```
[1] 6
```

Often, the name of the first argument is not very descriptive, and it is usually obvious what the first piece of data refers to anyways.

But how do you know which argument names to use? If you try to use a name that a function does not expect, you will likely get an error:

```
round(3.1415, corners = 2)
## Error in round(3.1415, corners = 2) : unused argument(s) (corners = 2)
```

If you're not sure which names to use with a function, you can look up the function's arguments with `args`. To do this, place the name of the function in the parentheses behind `args`. For example, you can see that the `round` function takes two arguments, one named `x` and one named `digits`:

```
args(round)
```

```
function (x, digits = 0, ...)
NULL
```

Did you notice that `args` shows that the `digits` argument of `round` is already set to 0? Frequently, an R function will take optional arguments like `digits`. These arguments are considered optional because they come with a default value. You can pass a new value to an optional argument if you want, and R will use the default value if you do not. For example, `round` will round your number to 0 digits past the decimal point by default. To override the default, supply your own value for `digits`:

4. Up and Running with R

```
round(3.1415)
```

```
[1] 3
```

```
round(3.1415, digits = 2)
```

```
[1] 3.14
```

```
# pi happens to be a built-in value in R  
pi
```

```
[1] 3.141593
```

```
round(pi)
```

```
[1] 3
```

You should write out the names of each argument after the first one or two when you call a function with multiple arguments. Why? First, this will help you and others understand your code. It is usually obvious which argument your first input refers to (and sometimes the second input as well). However, you'd need a large memory to remember the third and fourth arguments of every R function. Second, and more importantly, writing out argument names prevents errors.

If you do not write out the names of your arguments, R will match your values to the arguments in your function by order. For example, in the following code, the first value, `die`, will be matched to the first argument of `sample`, which is named `x`. The next value, `1`, will be matched to the next argument, `size`:

```
sample(die, 1)
```

```
[1] 5
```

As you provide more arguments, it becomes more likely that your order and R's order may not align. As a result, values may get passed to the wrong argument. Argument names prevent this. R will always match a value to its argument name, no matter where it appears in the order of arguments:

4. Up and Running with R

```
sample(size = 1, x = die)
```

```
[1] 1
```

4.3.1. Sample with Replacement

If you set `size = 2`, you can *almost* simulate a pair of dice. Before we run that code, think for a minute why that might be the case. `sample` will return two numbers, one for each die:

```
sample(die, size = 2)
```

```
[1] 2 6
```

I said this “almost” works because this method does something funny. If you use it many times, you’ll notice that the second die never has the same value as the first die, which means you’ll never roll something like a pair of threes or snake eyes. What is going on?

By default, `sample` builds a sample *without replacement*. To see what this means, imagine that `sample` places all of the values of `die` in a jar or urn. Then imagine that `sample` reaches into the jar and pulls out values one by one to build its sample. Once a value has been drawn from the jar, `sample` sets it aside. The value doesn’t go back into the jar, so it cannot be drawn again. So if `sample` selects a six on its first draw, it will not be able to select a six on the second draw; six is no longer in the jar to be selected. Although `sample` creates its sample electronically, it follows this seemingly physical behavior.

One side effect of this behavior is that each draw depends on the draws that come before it. In the real world, however, when you roll a pair of dice, each die is independent of the other. If the first die comes up six, it does not prevent the second die from coming up six. In fact, it doesn’t influence the second die in any way whatsoever. You can recreate this behavior in `sample` by adding the argument `replace = TRUE`:

```
sample(die, size = 2, replace = TRUE)
```

```
[1] 6 5
```

4. Up and Running with R

The argument `replace = TRUE` causes `sample` to sample *with replacement*. Our jar example provides a good way to understand the difference between sampling with replacement and without. When `sample` uses replacement, it draws a value from the jar and records the value. Then it puts the value back into the jar. In other words, `sample` replaces each value after each draw. As a result, `sample` may select the same value on the second draw. Each value has a chance of being selected each time. It is as if every draw were the first draw.

Sampling with replacement is an easy way to create *independent random samples*. Each value in your sample will be a sample of size one that is independent of the other values. This is the correct way to simulate a pair of dice:

```
sample(die, size = 2, replace = TRUE)
```

```
[1] 3 4
```

Congratulate yourself; you've just run your first simulation in R! You now have a method for simulating the result of rolling a pair of dice. If you want to add up the dice, you can feed your result straight into the `sum` function:

```
dice <- sample(die, size = 2, replace = TRUE)  
dice
```

```
[1] 2 5
```

```
sum(dice)
```

```
[1] 7
```

What would happen if you call `dice` multiple times? Would R generate a new pair of dice values each time? Let's give it a try:

```
dice
```

```
[1] 2 5
```

4. Up and Running with R

```
dice
```

```
[1] 2 5
```

```
dice
```

```
[1] 2 5
```

The name `dice` refers to a *vector* of two numbers. Calling more than once does not change the favlue. Each time you call `dice`, R will show you the result of that one time you called `sample` and saved the output to `dice`. R won't rerun `sample(die, 2, replace = TRUE)` to create a new roll of the dice. Once you save a set of results to an R object, those results do not change.

However, it *would* be convenient to have an object that can re-roll the dice whenever you call it. You can make such an object by writing your own R function.

4.4. Writing Your Own Functions

To recap, you already have working R code that simulates rolling a pair of dice:

```
die <- 1:6
dice <- sample(die, size = 2, replace = TRUE)
sum(dice)
```

```
[1] 3
```

You can retype this code into the console anytime you want to re-roll your dice. However, this is an awkward way to work with the code. It would be easier to use your code if you wrapped it into its own function, which is exactly what we'll do now. We're going to write a function named `roll` that you can use to roll your virtual dice. When you're finished, the function will work like this: each time you call `roll()`, R will return the sum of rolling two dice:

4. Up and Running with R

```
roll()  
## 8  
  
roll()  
## 3  
  
roll()  
## 7
```

Functions may seem mysterious or fancy, but they are *just another type of R object*. Instead of containing data, they contain code. This code is stored in a special format that makes it easy to reuse the code in new situations. You can write your own functions by recreating this format.

4.4.1. The Function Constructor

Every function in R has three basic parts: a name, a body of code, and a set of arguments. To make your own function, you need to replicate these parts and store them in an R object, which you can do with the `function` function. To do this, call `function()` and follow it with a pair of braces, {}:

```
my_function <- function() {}
```

This function, as written, doesn't do anything (yet). However, it is a valid function. You can call it by typing its name followed by an open and closed parenthesis:

```
my_function()
```

```
NULL
```

`function` will build a function out of whatever R code you place between the braces. For example, you can turn your dice code into a function by calling:

```
roll <- function() {  
  die <- 1:6  
  dice <- sample(die, size = 2, replace = TRUE)  
  sum(dice)  
}
```

4. Up and Running with R

Indentation and readability

Notice each line of code between the braces is indented. This makes the code easier to read but has no impact on how the code runs. R ignores spaces and line breaks and executes one complete expression at a time. Note that in other languages like python, spacing is extremely important and part of the language.

Just hit the Enter key between each line after the first brace, {. R will wait for you to type the last brace, }, before it responds.

Don't forget to save the output of `function` to an R object. This object will become your new function. To use it, write the object's name followed by an open and closed parenthesis:

```
roll()
```

```
[1] 8
```

You can think of the parentheses as the “trigger” that causes R to run the function. If you type in a function’s name *without* the parentheses, R will show you the code that is stored inside the function. If you type in the name *with* the parentheses, R will run that code:

```
roll
```

```
function ()  
{  
  die <- 1:6  
  dice <- sample(die, size = 2, replace = TRUE)  
  sum(dice)  
}
```

```
roll()
```

```
[1] 8
```

The code that you place inside your function is known as the *body* of the function. When you run a function in R, R will execute all of the code in the body and then return the result of the last line of code. If the last line of code doesn’t return a value, neither will your function, so you want to ensure that your final line of code returns a value. One way

4. Up and Running with R

to check this is to think about what would happen if you ran the body of code line by line in the command line. Would R display a result after the last line, or would it not?

Here's some code that would display a result:

```
dice  
1 + 1  
sqrt(2)
```

And here's some code that would not:

```
dice <- sample(die, size = 2, replace = TRUE)  
two <- 1 + 1  
a <- sqrt(2)
```

Again, this is just showing the distinction between expressions and assignments.

4.5. Arguments

What if we removed one line of code from our function and changed the name `die` to `bones` (just a name—don't think of it as important), like this?

```
roll2 <- function() {  
  dice <- sample(bones, size = 2, replace = TRUE)  
  sum(dice)  
}
```

Now I'll get an error when I run the function. The function **needs** the object `bones` to do its job, but there is no object named `bones` to be found (you can check by typing `ls()` which will show you the names in the environment, or memory).

```
roll2()  
## Error in sample(bones, size = 2, replace = TRUE) :  
##   object 'bones' not found
```

You can supply `bones` when you call `roll2` if you make `bones` an argument of the function. To do this, put the name `bones` in the parentheses that follow `function` when you define `roll2`:

4. Up and Running with R

```
roll12 <- function(bones) {  
  dice <- sample(bones, size = 2, replace = TRUE)  
  sum(dice)  
}
```

Now `roll12` will work as long as you supply `bones` when you call the function. You can take advantage of this to roll different types of dice each time you call `roll12`.

Remember, we're rolling pairs of dice:

```
roll12(bones = 1:4)
```

```
[1] 7
```

```
roll12(bones = 1:6)
```

```
[1] 11
```

```
roll12(1:20)
```

```
[1] 8
```

Notice that `roll12` will still give an error if you do not supply a value for the `bones` argument when you call `roll12`:

```
roll12()  
## Error in sample(bones, size = 2, replace = TRUE) :  
##   argument "bones" is missing, with no default
```

You can prevent this error by giving the `bones` argument a default value. To do this, set `bones` equal to a value when you define `roll12`:

```
roll12 <- function(bones = 1:6) {  
  dice <- sample(bones, size = 2, replace = TRUE)  
  sum(dice)  
}
```

4. Up and Running with R

Now you can supply a new value for `bones` if you like, and `roll2` will use the default if you do not:

```
roll2()
```

```
[1] 12
```

You can give your functions as many arguments as you like. Just list their names, separated by commas, in the parentheses that follow `function`. When the function is run, R will replace each argument name in the function body with the value that the user supplies for the argument. If the user does not supply a value, R will replace the argument name with the argument's default value (if you defined one).

To summarize, `function` helps you construct your own R functions. You create a body of code for your function to run by writing code between the braces that follow `function`. You create arguments for your function to use by supplying their names in the parentheses that follow `function`. Finally, you give your function a name by saving its output to an R object, as shown in Figure 4.6.

Once you've created your function, R will treat it like every other function in R. Think about how useful this is. Have you ever tried to create a new Excel option and add it to Microsoft's menu bar? Or a new slide animation and add it to Powerpoint's options? When you work with a programming language, you can do these types of things. As you learn to program in R, you will be able to create new, customized, reproducible tools for yourself whenever you like.

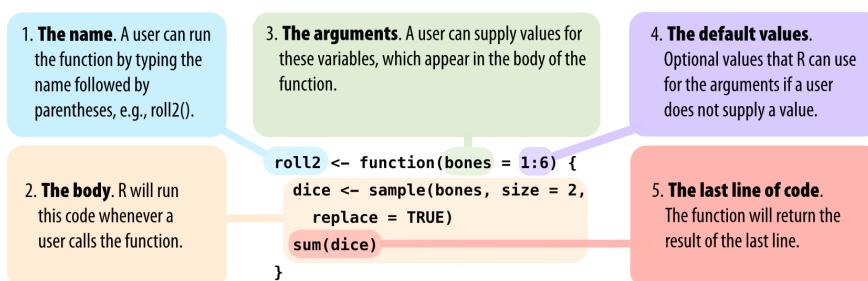


Figure 4.6.: “Every function in R has the same parts, and you can use `function` to create these parts. Assign the result to a name, so you can call the function later.”

4.6. Scripts

Scripts are code that are saved for later reuse or editing. An R script is just a plain text file that you save R code in. You can open an R script in RStudio by going to **File > New File > R script** in the menu bar. RStudio will then open a fresh script above your console pane, as shown in Figure 4.7.

I strongly encourage you to write and edit all of your R code in a script before you run it in the console. Why? This habit creates a reproducible record of your work. When you're finished for the day, you can save your script and then use it to rerun your entire analysis the next day. Scripts are also very handy for editing and proofreading your code, and they make a nice copy of your work to share with others. To save a script, click the scripts pane, and then go to **File > Save As** in the menu bar.

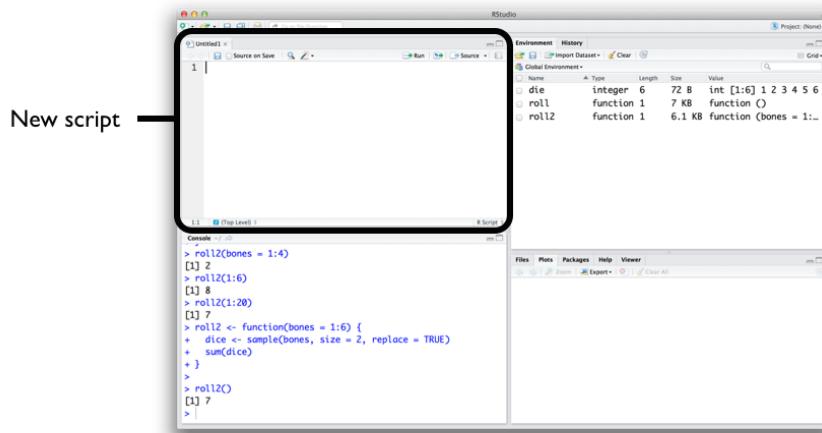


Figure 4.7.: “When you open an R Script (File > New File > R Script in the menu bar), RStudio creates a fourth pane (or puts a new tab in the existing pane) above the console where you can write and edit your code.”

RStudio comes with many built-in features that make it easy to work with scripts. First, you can automatically execute a line of code in a script by clicking the Run button at the top of the editor panel.

R will run whichever line of code your cursor is on. If you have a whole section highlighted, R will run the highlighted code. Alternatively, you can run the entire script by clicking the Source button. Don't like clicking buttons? You can use Control + Return as a shortcut for the Run button. On Macs, that would be Command + Return.

4. Up and Running with R

If you're not convinced about scripts, you soon will be. It becomes a pain to write multi-line code in the console's single-line command line. Let's avoid that headache and open your first script now before we move to the next chapter.



Tip

Extract function

RStudio comes with a tool that can help you build functions. To use it, highlight the lines of code in your R script that you want to turn into a function. Then click **Code > Extract Function** in the menu bar. RStudio will ask you for a function name to use and then wrap your code in a **function** call. It will scan the code for undefined variables and use these as arguments.

You may want to double-check RStudio's work. It assumes that your code is correct, so if it does something surprising, you may have a problem in your code.

4.7. Summary

We've covered a lot of ground already. You now have a virtual die stored in your computer's memory, as well as your own R function that rolls a pair of dice. You've also begun speaking the R language.

The two most important components of the R language are objects, which store data, and functions, which manipulate data. R also uses a host of operators like `+`, `-`, `*`, `/`, and `<-` to do basic tasks. As a data scientist, you will use R objects to store data in your computer's memory, and you will use functions to automate tasks and do complicated calculations.

5. Packages and more dice

We now have code that allows us to roll two dice and add the results together. To keep things interesting, let's aim to weight the dice so that we can fool our friends into thinking we are lucky.

First, though, we should prove to ourselves that our dice are fair. We can investigate the behavior of our dice using two powerful and general tools;

- Simulation (or repetition or repeated sampling)
- Visualization

For the repetition part of things, we will use a built-in R function, `replicate`. For visualization, we are going to use a convenient plotting function, `qplot`. However, `qplot` does not come built into R. We must install a *package* to gain access to it.

5.1. Packages

R is a powerful language for data science and programming, allowing beginners and experts alike to manipulate, analyze, and visualize data effectively. One of the most appealing features of R is its extensive library of packages, which are essential tools for expanding its capabilities and streamlining the coding process.

An R package is a collection of reusable functions, datasets, and compiled code created by other users and developers to extend the functionality of the base R language. These packages cover a wide range of applications, such as data manipulation, statistical analysis, machine learning, and data visualization. By utilizing existing R packages, you can leverage the expertise of others and save time by avoiding the need to create custom functions from scratch.

Using others' R packages is incredibly beneficial as it allows you to take advantage of the collective knowledge of the R community. Developers often create packages to address specific challenges, optimize performance, or implement popular algorithms or methodologies. By incorporating these packages into your projects, you can enhance your productivity, reduce development time, and ensure that you are using well-tested and reliable code.

5. Packages and more dice

5.1.1. Installing R packages

To install an R package, you can use the `install.packages()` function in the R console or script. For example, to install the popular data manipulation package “dplyr,” simply type `install.packages("dplyr")`. This command will download the package from the Comprehensive R Archive Network (CRAN) and install it on your local machine. Keep in mind that you only need to install a package once, unless you want to update it to a newer version.

For those who are going to be using R for bioinformatics or biological data science, you will also want to install packages from Bioconductor, which is a repository of R packages specifically designed for bioinformatics and computational biology. To install Bioconductor packages, you can use the `BiocManager::install()` function.

To use this recommended approach, you first need to install the `BiocManager` package, which is the package manager for Bioconductor.

```
install.packages('BiocManager')
```

This is a one-time installation. After that, you can install any R, Bioconductor, rOpenSci, or even GitHub package using the `BiocManager::install()` function. For example, to install the `ggplot2` package, which is widely used for data visualization, you would run:

```
BiocManager::install("ggplot2")
```

5.1.2. Installing vs loading (library) R packages

After installing an R package, you will need to load it into your R session before using its functions. To load a package, use the `library()` function followed by the package name, such as `library(dplyr)`. Loading a package makes its functions and datasets available for use in your current R session. Note that you need to load a package every time you start a new R session.

```
library(ggplot2)
```

Now, the functionality of the `ggplot2` package is available in our R session.

💡 Installing vs loading packages

The main thing to remember is that you only need to install a package once, but you need to load it with `library` each time you wish to use it in a new R session. R will

5. Packages and more dice

unload all of its packages each time you close RStudio.



Images sourced from <https://www.wikihow.com/Change-a-Light-Bulb>

Figure 5.1.: Installing vs loading R packages.

As in {Figure 5.1}, screw in the lightbulb (eg., `BiocManager::install`) only once and then to use it, you need to turn on the switch each time you want to use it (`library`).

5.1.3. Finding R packages

Finding useful R packages can be done in several ways. First, browsing CRAN (<https://cran.r-project.org/>) and Bioconductor (more later, <https://bioconductor.org>) are an excellent starting points, as they host thousands of packages categorized by topic. Additionally, online forums like Stack Overflow and R-bloggers can provide valuable recommendations based on user experiences. Social media platforms such as Twitter, where developers and data scientists often share new packages and updates, can also be a helpful resource. Finally, don't forget to ask your colleagues or fellow R users for their favorite packages, as they may have insights on which ones best suit your specific needs.

5.2. Are our dice fair?

Well, let's review our code.

5. Packages and more dice

```
roll12 <- function(bones = 1:6) {
  dice = sample(bones, size = 2, replace = TRUE)
  sum(dice)
}
```

If our dice are fair, then each number should show up equally. What does the sum look like with our two dice?

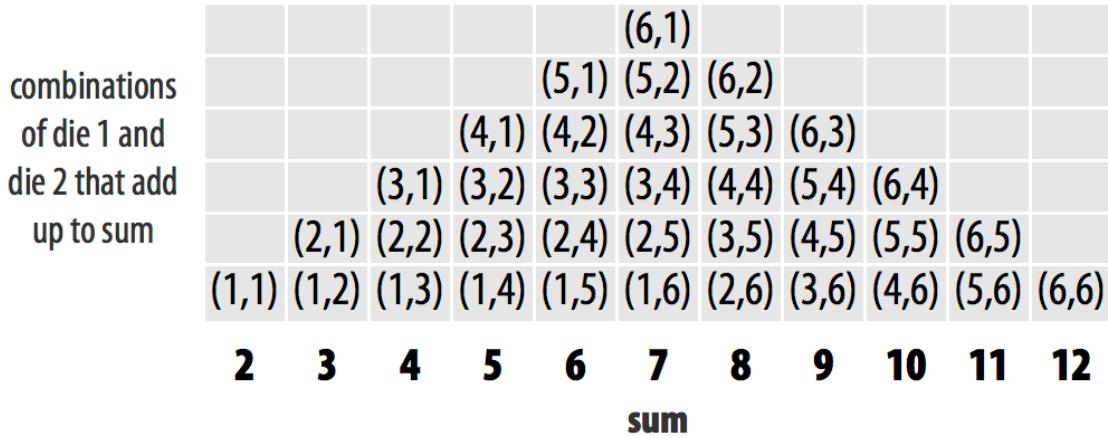


Figure 5.2.: In an ideal world, a histogram of the results would look like this

Read the help page for `replicate` (i.e., `help("replicate")`). In short, it suggests that we can repeat our dice rolling as many times as we like and `replicate` will return a *vector* of the sums for each roll.

```
rolls = replicate(n = 100, roll12())
```

What does `rolls` look like?

```
head(rolls)
```

```
[1] 4 7 5 11 7 8
```

```
length(rolls)
```

5. Packages and more dice

```
[1] 100
```

```
mean(rolls)
```

```
[1] 7.03
```

```
summary(rolls)
```

Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
2.00	5.00	7.00	7.03	9.00	12.00

This looks like it roughly agrees with our sketched out ideal histogram in Figure 5.2. However, now that we've loaded the `qplot` function from the `ggplot2` package, we can make a histogram of the data themselves.

```
qplot(rolls, binwidth=1)
```

```
Warning: `qplot()` was deprecated in ggplot2 3.4.0.
```

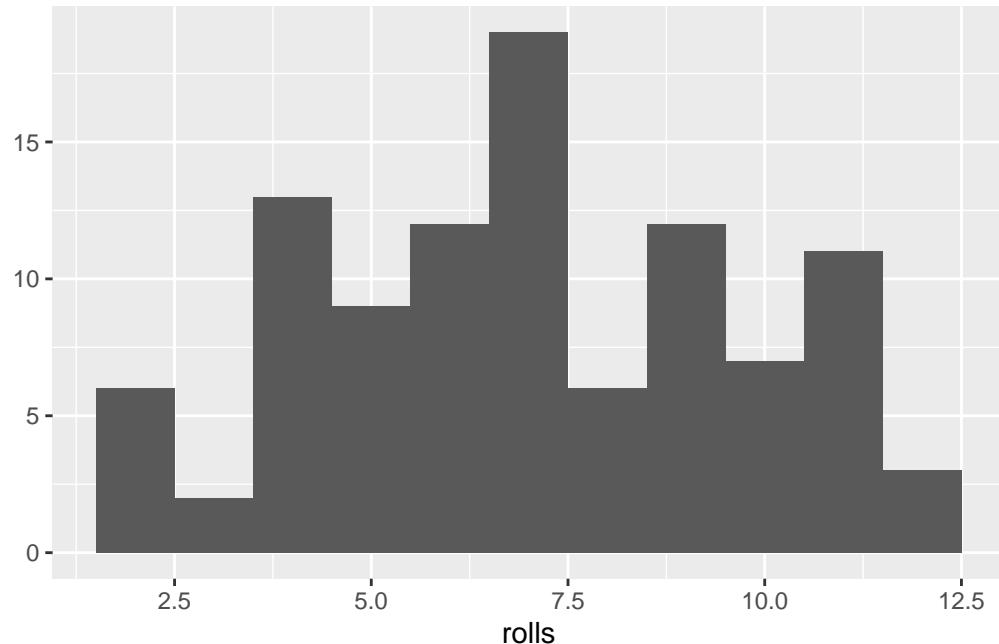


Figure 5.3.: Histogram of the sums from 100 rolls of our fair dice

5. Packages and more dice

How does your histogram look (and yours will be different from mine since we are sampling random values)? Is it what you expect?

What happens to our histogram as we increase the number of replicates?

```
rolls = replicate(n = 100000, roll2())
qplot(rolls, binwidth=1)
```

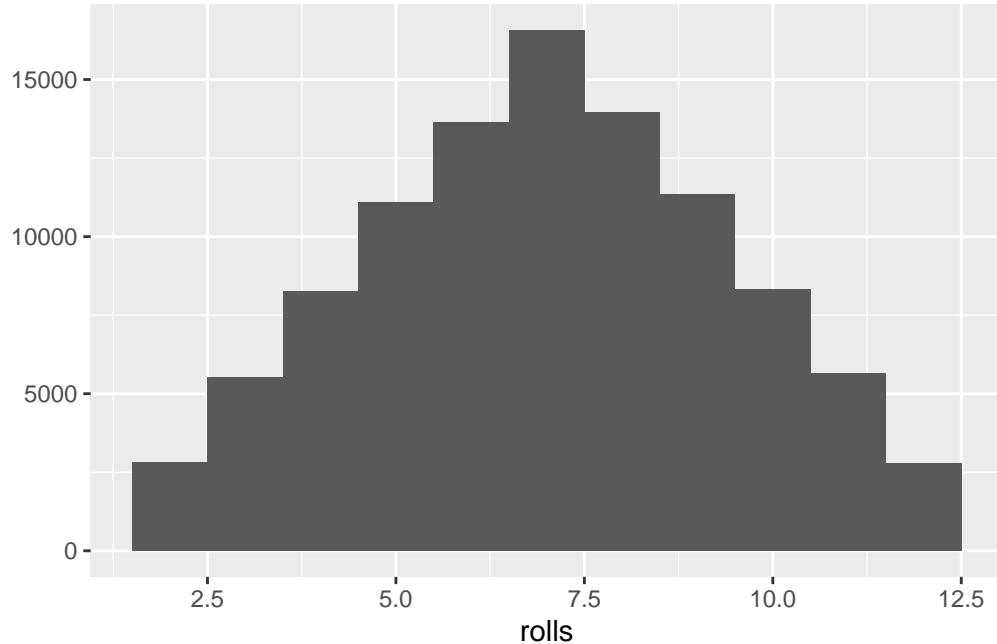


Figure 5.4.: Histogram with 100000 rolls much more closely approximates the pyramidal shape we anticipated

5.3. Bonus exercise

How would you change the `roll2` function to weight the dice?

i Hint

Read the help page for `sample` (i.e., `help("sample")`).

6. Reading and writing data files

6.1. Introduction

In this chapter, we will discuss how to read and write data files in R. Data files are essential for storing and sharing data across different platforms and applications. R provides a variety of functions and packages to read and write data files in different formats, such as text files, CSV files, Excel files. By mastering these functions, you can efficiently import and export data in R, enabling you to perform data analysis and visualization tasks effectively.

6.2. CSV files

Comma-Separated Values (CSV) files are a common file format for storing tabular data. They consist of rows and columns, with each row representing a record and each column representing a variable or attribute. CSV files are widely used for data storage and exchange due to their simplicity and compatibility with various software applications. In R, you can read and write CSV files using the `read.csv()` and `write.csv()` functions, respectively. A commonly used alternative is to use the `readr` package, which provides faster and more user-friendly functions for reading and writing CSV files.

6.2.1. Writing a CSV file

Since we are going to use the `readr` package, we need to install it first. You can install the `readr` package using the following command:

```
install.packages("readr")
```

Once the package is installed, you can load it into your R session using the `library()` function:

6. Reading and writing data files

```
library(readr)
```

Since we don't have a CSV file sitting around, let's create a simple data frame to write to a CSV file. Here's an example data frame:

```
df <- data.frame(  
  id = c(1, 2, 3, 4, 5),  
  name = c("Alice", "Bob", "Charlie", "David", "Eve"),  
  age = c(25, 30, 35, 40, 45)  
)
```

Now, you can write this data frame to a CSV file using the `write_csv()` function from the `readr` package. Here's how you can do it:

```
write_csv(df, "data.csv")
```

You can check the current working directory to see if the CSV file was created successfully. If you want to specify a different directory or file path, you can provide the full path in the `write_csv()` function.

```
# see what the current working directory is  
getwd()
```

```
[1] "/Users/davsean/Documents/git/RBiocBook"
```

```
# and check to see that the file was created  
dir(pattern = "data.csv")
```

```
[1] "data.csv"
```

6.2.2. Reading a CSV file

Now that we have a CSV file, let's read it back into R using the `read_csv()` function from the `readr` package. Here's how you can do it:

6. Reading and writing data files

```
df2 <- read_csv("data.csv")

Rows: 5 Columns: 3
-- Column specification -----
Delimiter: ","
chr (1): name
dbl (2): id, age

i Use `spec()` to retrieve the full column specification for this data.
i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

You can check the structure of the data frame `df2` to verify that the data was read correctly:

```
df2

# A tibble: 5 x 3
  id   name    age
  <dbl> <chr>   <dbl>
1     1 Alice     25
2     2 Bob       30
3     3 Charlie   35
4     4 David    40
5     5 Eve      45
```

The `readr` package can read CSV files with various delimiters, headers, and data types, making it a versatile tool for handling tabular data in R. It can also read CSV files directly from web locations like so:

```
df3 <- read_csv("https://data.cdc.gov/resource/pwn4-m3yp.csv")

Rows: 1000 Columns: 10
-- Column specification -----
Delimiter: ","
chr (1): state
dbl (6): tot_cases, new_cases, tot_deaths, new_deaths, new_historic_cases, ...
dttm (3): date_updated, start_date, end_date

i Use `spec()` to retrieve the full column specification for this data.
i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

6. Reading and writing data files

The dataset that you just downloaded is described here: [Covid-19 data from CDC](#)

6.3. Excel files

Microsoft Excel files are another common file format for storing tabular data. Excel files can contain multiple sheets, formulas, and formatting options, making them a popular choice for data storage and analysis. In R, you can read and write Excel files using the `readxl` package. This package provides functions to import and export data from Excel files, enabling you to work with Excel data in R.

6.3.1. Reading an Excel file

To read an Excel file in R, you need to install and load the `readxl` package. You can install the `readxl` package using the following command:

```
install.packages("readxl")
```

Once the package is installed, you can load it into your R session using the `library()` function:

```
library(readxl)
```

Now, you can read an Excel file using the `read_excel()` function from the `readxl` package. We don't have an excel file available, so let's download one from the internet. Here's an example:

```
download.file('https://www.w3resource.com/python-exercises/pandas/excel/SaleData.xlsx', 'Sa
```

Now, you can read the Excel file into R using the `read_excel()` function:

```
df_excel <- read_excel("SaleData.xlsx")
```

You can check the structure of the data frame `df_excel` to verify that the data was read correctly:

6. Reading and writing data files

```
df_excel
```

```
# A tibble: 45 x 8
  OrderDate      Region Manager SalesMan Item  Units Unit_price Sale_amt
  <dttm>        <chr>   <chr>   <chr>   <chr> <dbl>    <dbl>    <dbl>
1 2018-01-06 00:00:00 East    Martha  Alexander Tele~    95     1198    113810
2 2018-01-23 00:00:00 Central Hermann Shelli   Home~    50      500    25000
3 2018-02-09 00:00:00 Central Hermann Luis     Tele~    36     1198    43128
4 2018-02-26 00:00:00 Central Timothy David   Cell~    27      225    6075
5 2018-03-15 00:00:00 West    Timothy Stephen  Tele~    56     1198    67088
6 2018-04-01 00:00:00 East    Martha  Alexander Home~    60      500    30000
7 2018-04-18 00:00:00 Central Martha  Steven   Tele~    75     1198    89850
8 2018-05-05 00:00:00 Central Hermann Luis     Tele~    90     1198    107820
9 2018-05-22 00:00:00 West    Douglas Michael  Tele~    32     1198    38336
10 2018-06-08 00:00:00 East   Martha  Alexander Home~    60      500    30000
# i 35 more rows
```

The `readxl` package provides various options to read Excel files with multiple sheets, specific ranges, and data types, making it a versatile tool for handling Excel data in R.

6.3.2. Writing an Excel file

To write an Excel file in R, you can use the `write_xlsx()` function from the `writexl` package. You can install the `writexl` package using the following command:

```
install.packages("writexl")
```

Once the package is installed, you can load it into your R session using the `library()` function:

```
library(writexl)
```

The `write_xlsx()` function allows you to write a data frame to an Excel file. Here's an example:

```
write_xlsx(df, "data.xlsx")
```

6. Reading and writing data files

You can check the current working directory to see if the Excel file was created successfully. If you want to specify a different directory or file path, you can provide the full path in the `write_xlsx()` function.

```
# see what the current working directory is  
getwd()
```

```
[1] "/Users/davsean/Documents/git/RBiocBook"
```

```
# and check to see that the file was created  
dir(pattern = "data.xlsx")
```

```
[1] "data.xlsx"
```

6.4. Additional options

- Google Sheets: You can read and write data from Google Sheets using the `googlesheets4` package. This package provides functions to interact with Google Sheets, enabling you to import and export data from Google Sheets to R.
- JSON files: You can read and write JSON files using the `jsonlite` package. This package provides functions to convert R objects to JSON format and vice versa, enabling you to work with JSON data in R.
- Database files: You can read and write data from database files using the `DBI` and `RSQLite` packages. These packages provide functions to interact with various database systems, enabling you to import and export data from databases to R.

7. Data Visualization with `ggplot2`

Start with this worked example to get a feel for the `ggplot2` package.

- <https://rkabacoff.github.io/datavis/IntroGGPLOT.html>

Then, for more detail, I refer you to this excellent `ggplot2` tutorial.

Finally, for more R graphics inspiration, see the [R Graph Gallery](#).

Part II.

R Data Structures

Chapter overview

Welcome to the section on R data structures! As you begin your journey in learning R, it is essential to understand the fundamental building blocks of this powerful programming language. R offers a variety of data structures to store and manipulate data, each with its unique properties and capabilities. In this section, we will cover the core data structures in R, including:

- Vectors
- Matrices
- Lists
- Data.frames

By the end of this section, you will have a solid understanding of these data structures, and you will be able to choose and utilize the appropriate data structure for your specific data manipulation and analysis tasks.

In each chapter, we will delve into the properties and usage of each data structure, starting with their definitions and moving on to their practical applications. We will provide examples, exercises, and active learning approaches to help you better understand and apply these concepts in your work.

Chapter overview

- **Vectors** : In this chapter, we will introduce you to the simplest data structure in R, the vector. We will cover how to create, access, and manipulate vectors, as well as discuss their unique properties and limitations.
- **Matrices** Next, we will explore matrices, which are two-dimensional data structures that extend vectors. You will learn how to create, access, and manipulate matrices, and understand their usefulness in mathematical operations and data organization.
- **Lists** The third chapter will focus on lists, a versatile data structure that can store elements of different types and sizes. We will discuss how to create, access, and modify lists, and demonstrate their flexibility in handling complex data structures.
- **Data.frames** Finally, we will examine data.frames, a widely-used data structure for organizing and manipulating tabular data. You will learn how to create, access, and manipulate data.frames, and understand their advantages over other data structures for data analysis tasks.

Chapter overview

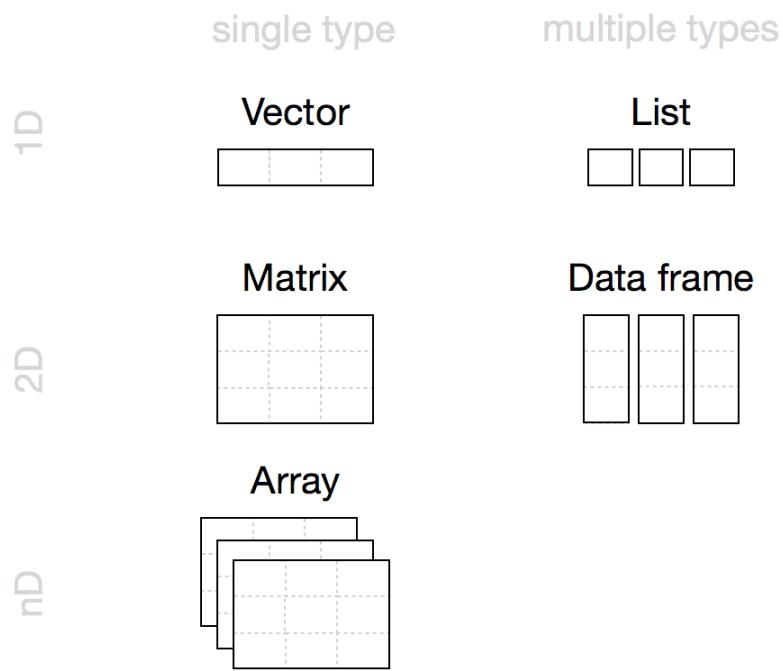


Figure 7.1.: A pictorial representation of R's most common data structures are vectors, matrices, arrays, lists, and dataframes. Figure from [Hands-on Programming with R](#).

Chapter overview

- **Arrays** While we will not focus directly on the `array` data type, which are multidimensional data structures that extend matrices, they are very similar to matrices, but with a third dimension.

As you progress through these chapters, practice the examples and exercises provided, engage in discussion, and collaborate with your peers to deepen your understanding of R data structures. This solid foundation will serve as the basis for more advanced data manipulation, analysis, and visualization techniques in R.

8. Vectors

8.1. What is a Vector?

A vector is the simplest and most basic data structure in R. It is a one-dimensional, ordered collection of elements, where all the elements are of the same data type. Vectors can store various types of data, such as numeric, character, or logical values. Figure 8.1 shows a pictorial representation of three vector examples.

Index	1	2	3	4	5	6	7
Vector	3	7	10	NA	932	127	-3
Vector	TRUE	FALSE	FALSE	TRUE	TRUE	FALSE	NA
Vector	“Cat”	“Dog”	“A”	“C”	“T”	NA	“G”
Names (Optional)	“H”	“I”	“L”	“Z”	“This”	“That”	“Other”

Figure 8.1.: “Pictorial representation of three vector examples. The first vector is a numeric vector. The second is a ‘logical’ vector. The third is a character vector. Vectors also have indices and, optionally, names.”

In this chapter, we will provide a comprehensive overview of vectors, including how to create, access, and manipulate them. We will also discuss some unique properties and rules associated with vectors, and explore their applications in data analysis tasks.

In R, even a single value is a vector with length=1.

8. Vectors

```
z = 1  
z
```

```
[1] 1
```

```
length(z)
```

```
[1] 1
```

In the code above, we “assigned” the value 1 to the variable named `z`. Typing `z` by itself is an “expression” that returns a result which is, in this case, the value that we just assigned. The `length` method takes an R object and returns the R length. There are numerous ways of asking R about what an object represents, and `length` is one of them.

Vectors can contain numbers, strings (character data), or logical values (TRUE and FALSE) or other “atomic” data types Table 8.1. *Vectors cannot contain a mix of types!* We will introduce another data structure, the R `list` for situations when we need to store a mix of base R data types.

Table 8.1.: Atomic (simplest) data types in R.

Data type	Stores
numeric	floating point numbers
integer	integers
complex	complex numbers
factor	categorical data
character	strings
logical	TRUE or FALSE
NA	missing
NULL	empty
function	function type

8.2. Creating vectors

Character vectors (also sometimes called “string” vectors) are entered with each value surrounded by single or double quotes; either is acceptable, but they must match. They are always displayed by R with double quotes. Here are some examples of creating vectors:

8. Vectors

```
# examples of vectors  
c('hello','world')
```

```
[1] "hello" "world"
```

```
c(1,3,4,5,1,2)
```

```
[1] 1 3 4 5 1 2
```

```
c(1.12341e7,78234.126)
```

```
[1] 11234100.00    78234.13
```

```
c(TRUE,FALSE,TRUE,TRUE)
```

```
[1] TRUE FALSE  TRUE  TRUE
```

```
# note how in the next case the TRUE is converted to "TRUE"  
# with quotes around it.  
c(TRUE,'hello')
```

```
[1] "TRUE"  "hello"
```

We can also create vectors as “regular sequences” of numbers. For example:

```
# create a vector of integers from 1 to 10  
x = 1:10  
# and backwards  
x = 10:1
```

The `seq` function can create more flexible regular sequences.

```
# create a vector of numbers from 1 to 4 skipping by 0.3  
y = seq(1,4,0.3)
```

And creating a new vector by concatenating existing vectors is possible, as well.

8. Vectors

```
# create a sequence by concatenating two other sequences
z = c(y,x)
z
```

```
[1] 1.0 1.3 1.6 1.9 2.2 2.5 2.8 3.1 3.4 3.7 4.0 10.0 9.0 8.0 7.0
[16] 6.0 5.0 4.0 3.0 2.0 1.0
```

8.3. Vector Operations

Operations on a single vector are typically done element-by-element. For example, we can add 2 to a vector, 2 is added to each element of the vector and a new vector of the same length is returned.

```
x = 1:10
x + 2
```

```
[1] 3 4 5 6 7 8 9 10 11 12
```

If the operation involves two vectors, the following rules apply. If the vectors are the same length: R simply applies the operation to each pair of elements.

```
x + x
```

```
[1] 2 4 6 8 10 12 14 16 18 20
```

If the vectors are different lengths, but one length a multiple of the other, R reuses the shorter vector as needed.

```
x = 1:10
y = c(1,2)
x * y
```

```
[1] 1 4 3 8 5 12 7 16 9 20
```

If the vectors are different lengths, but one length *not* a multiple of the other, R reuses the shorter vector as needed *and* delivers a warning.

8. Vectors

```
x = 1:10
y = c(2,3,4)
x * y
```

Warning in x * y: longer object length is not a multiple of shorter object length

```
[1] 2 6 12 8 15 24 14 24 36 20
```

Typical operations include multiplication (“*”), addition, subtraction, division, exponentiation (“ \wedge ”), but many operations in R operate on vectors and are then called “vectorized”.

Be aware of the recycling rule when working with vectors of different lengths, as it may lead to unexpected results if you’re not careful.

8.4. Logical Vectors

Logical vectors are vectors composed on only the values TRUE and FALSE. Note the all-upper-case and no quotation marks.

```
a = c(TRUE, FALSE, TRUE)

# we can also create a logical vector from a numeric vector
# 0 = false, everything else is 1
b = c(1, 0, 217)
d = as.logical(b)
d
```

```
[1] TRUE FALSE TRUE
```

```
# test if a and d are the same at every element
all.equal(a, d)
```

```
[1] TRUE
```

8. Vectors

```
# We can also convert from logical to numeric  
as.numeric(a)
```

```
[1] 1 0 1
```

8.4.1. Logical Operators

Some operators like `<`, `>`, `==`, `>=`, `<=`, `!=` can be used to create logical vectors.

```
# create a numeric vector  
x = 1:10  
# testing whether x > 5 creates a logical vector  
x > 5
```

```
[1] FALSE FALSE FALSE FALSE FALSE TRUE TRUE TRUE TRUE TRUE
```

```
x <= 5
```

```
[1] TRUE TRUE TRUE TRUE TRUE FALSE FALSE FALSE FALSE FALSE
```

```
x != 5
```

```
[1] TRUE TRUE TRUE TRUE FALSE TRUE TRUE TRUE TRUE TRUE
```

```
x == 5
```

```
[1] FALSE FALSE FALSE FALSE FALSE TRUE FALSE FALSE FALSE FALSE
```

We can also assign the results to a variable:

```
y = (x == 5)  
y
```

```
[1] FALSE FALSE FALSE FALSE FALSE TRUE FALSE FALSE FALSE FALSE
```

8.5. Indexing Vectors

In R, an index is used to refer to a specific element or set of elements in a vector (or other data structure). [R uses [and] to perform indexing, although other approaches to getting subsets of larger data structures are common in R.

```
x = seq(0,1,0.1)
# create a new vector from the 4th element of x
x[4]
```

```
[1] 0.3
```

We can even use other vectors to perform the “indexing”.

```
x[c(3,5,6)]
```

```
[1] 0.2 0.4 0.5
```

```
y = 3:6
x[y]
```

```
[1] 0.2 0.3 0.4 0.5
```

Combining the concept of indexing with the concept of logical vectors results in a very power combination.

```
# use help('rnorm') to figure out what is happening next
myvec = rnorm(10)

# create logical vector that is TRUE where myvec is >0.25
gt1 = (myvec > 0.25)
sum(gt1)
```

```
[1] 5
```

8. Vectors

```
# and use our logical vector to create a vector of myvec values that are >0.25  
myvec[gt1]
```

```
[1] 2.3567830 0.5266998 1.0390147 1.2989228 0.3576956
```

```
# or <=0.25 using the logical "not" operator, "!"  
myvec[!gt1]
```

```
[1] -0.9015151 -0.9194154 0.1518130 -0.2471621 -0.9175934
```

```
# shorter, one line approach  
myvec[myvec > 0.25]
```

```
[1] 2.3567830 0.5266998 1.0390147 1.2989228 0.3576956
```

8.6. Named Vectors

Named vectors are vectors with labels or names assigned to their elements. These names can be used to access and manipulate the elements in a more meaningful way.

To create a named vector, use the `names()` function:

```
fruit_prices <- c(0.5, 0.75, 1.25)  
names(fruit_prices) <- c("apple", "banana", "cherry")  
print(fruit_prices)
```

```
apple banana cherry  
0.50   0.75   1.25
```

You can also access and modify elements using their names:

```
banana_price <- fruit_prices["banana"]  
print(banana_price)
```

```
banana  
0.75
```

8. Vectors

```
fruit_prices["apple"] <- 0.6
print(fruit_prices)
```

```
apple banana cherry
0.60   0.75   1.25
```

8.7. Character Vectors, A.K.A. Strings

R uses the `paste` function to concatenate strings.

```
paste("abc","def")
```

```
[1] "abc def"
```

```
paste("abc","def",sep="THISSEP")
```

```
[1] "abcTHISSEPdef"
```

```
paste0("abc","def")
```

```
[1] "abcdef"
```

```
## [1] "abcdef"
paste(c("X","Y"),1:10)
```

```
[1] "X 1"   "Y 2"   "X 3"   "Y 4"   "X 5"   "Y 6"   "X 7"   "Y 8"   "X 9"   "Y 10"
```

```
paste(c("X","Y"),1:10,sep="_")
```

```
[1] "X_1"   "Y_2"   "X_3"   "Y_4"   "X_5"   "Y_6"   "X_7"   "Y_8"   "X_9"   "Y_10"
```

We can count the number of characters in a string.

8. Vectors

```
nchar('abc')
```

```
[1] 3
```

```
nchar(c('abc','d',123456))
```

```
[1] 3 1 6
```

Pulling out parts of strings is also sometimes useful.

```
substr('This is a good sentence.',start=10,stop=15)
```

```
[1] " good "
```

Another common operation is to replace something in a string with something (a find-and-replace).

```
sub('This','That','This is a good sentence.')
```

```
[1] "That is a good sentence."
```

When we want to find all strings that match some other string, we can use `grep`, or “grab regular expression”.

```
grep('bcd',c('abcdef','abcd','bcde','cdef','defg'))
```

```
[1] 1 2 3
```

```
grep('bcd',c('abcdef','abcd','bcde','cdef','defg'),value=TRUE)
```

```
[1] "abcdef" "abcd"    "bcde"
```

Read about the `grepl` function (`?grepl`). Use that function to return a logical vector (TRUE/FALSE) for each entry above with an `a` in it.

8.8. Missing Values, AKA “NA”

R has a special value, “NA”, that represents a “missing” value, or *Not Available*, in a vector or other data structure. Here, we just create a vector to experiment.

```
x = 1:5
x
```

```
[1] 1 2 3 4 5
```

```
length(x)
```

```
[1] 5
```

```
is.na(x)
```

```
[1] FALSE FALSE FALSE FALSE FALSE
```

```
x[2] = NA
x
```

```
[1] 1 NA 3 4 5
```

The length of `x` is unchanged, but there is one value that is marked as “missing” by virtue of being `NA`.

```
length(x)
```

```
[1] 5
```

```
is.na(x)
```

```
[1] FALSE TRUE FALSE FALSE FALSE
```

We can remove `NA` values by using indexing. In the following, `is.na(x)` returns a logical vector the length of `x`. The `!` is the logical *NOT* operator and converts `TRUE` to `FALSE` and vice-versa.

```
x[!is.na(x)]
```

```
[1] 1 3 4 5
```

8.9. Exercises

1. Create a numeric vector called `temperatures` containing the following values: 72, 75, 78, 81, 76, 73.

```
temperatures <- c(72, 75, 78, 81, 76, 73, 93)
```

2. Create a character vector called `days` containing the following values: “Monday”, “Tuesday”, “Wednesday”, “Thursday”, “Friday”, “Saturday”, “Sunday”.

```
days <- c("Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday")
```

3. Calculate the average temperature for the week and store it in a variable called `average_temperature`.

```
average_temperature <- mean(temperatures)
```

4. Create a named vector called `weekly_temperatures`, where the names are the days of the week and the values are the temperatures from the `temperatures` vector.

```
weekly_temperatures <- temperatures
names(weekly_temperatures) <- days
```

5. Create a numeric vector called `ages` containing the following values: 25, 30, 35, 40, 45, 50, 55, 60.

```
ages <- c(25, 30, 35, 40, 45, 50, 55, 60)
```

6. Create a logical vector called `is_adult` by checking if the elements in the `ages` vector are greater than or equal to 18.

```
is_adult <- ages >= 18
```

7. Calculate the sum and product of the `ages` vector.

```
sum_ages <- sum(ages)
product_ages <- prod(ages)
```

8. Vectors

8. Extract the ages greater than or equal to 40 from the `ages` vector and store them in a variable called `older_ages`.

```
older_ages <- ages[ages >= 40]
```

9. Matrices

A *matrix* is a rectangular collection of the same data type (see Figure 9.1). It can be viewed as a collection of column vectors all of the same length and the same type (i.e. numeric, character or logical) OR a collection of row vectors, again all of the same type and length. A *data.frame* is *also* a rectangular array. All of the columns must be the same length, but they **may be** of *different* types. The rows and columns of a matrix or data frame can be given names. However these are implemented differently in R; many operations will work for one but not both, often a source of confusion.

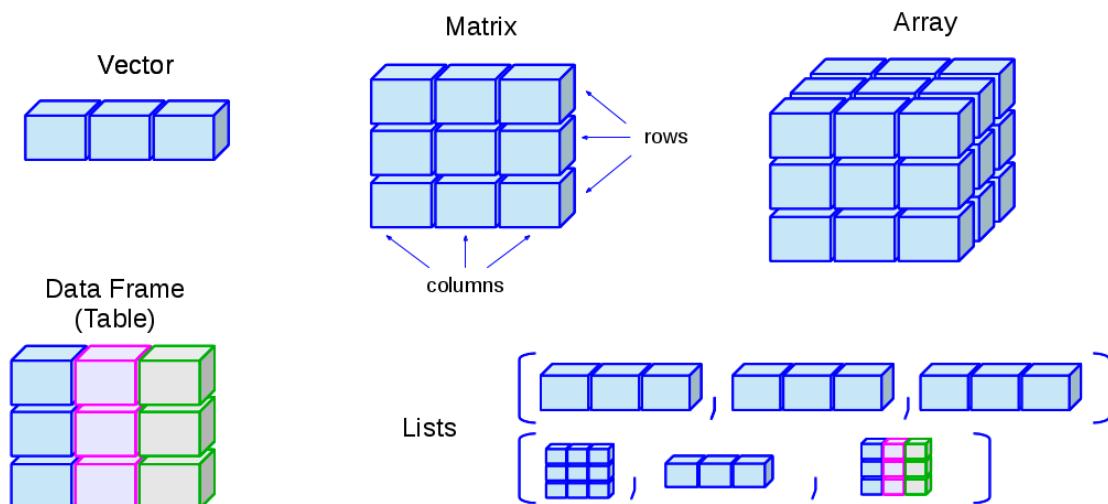


Figure 9.1.: A matrix is a collection of column vectors.

9.1. Creating a matrix

There are many ways to create a matrix in R. One of the simplest is to use the `matrix()` function. In the code below, we'll create a matrix from a vector from 1:16.

9. Matrices

```
mat1 <- matrix(1:16,nrow=4)
mat1
```

```
[,1] [,2] [,3] [,4]
[1,]    1     5     9    13
[2,]    2     6    10    14
[3,]    3     7    11    15
[4,]    4     8    12    16
```

The same is possible, but specifying that the matrix be “filled” by row.

```
mat1 <- matrix(1:16,nrow=4,byrow = TRUE)
mat1
```

```
[,1] [,2] [,3] [,4]
[1,]    1     2     3     4
[2,]    5     6     7     8
[3,]    9    10    11    12
[4,]   13    14    15    16
```

Notice the subtle difference in the order that the numbers go into the matrix.

We can also build a matrix from parts by “binding” vectors together:

```
x <- 1:10
y <- rnorm(10)
```

Each of the vectors above is of length 10 and both are “numeric”, so we can make them into a matrix. Using `rbind` binds rows (`r`) into a matrix.

```
mat <- rbind(x,y)
mat
```

```
[,1]      [,2]      [,3]      [,4]      [,5]      [,6]      [,7]      [,8]
x  1.000000 2.000000 3.000000 4.000000 5.0000000 6.0000000 7.0000000 8.0000000
y -1.383674 1.022323 1.188663 -1.068186 0.4360454 0.9917045 0.5836144 0.5213843
[,9]      [,10]
x  9.0000000 10.000000
y -0.4447755 0.781375
```

9. Matrices

The alternative to `rbind` is `cbind` that binds columns (**c**) together.

```
mat <- cbind(x,y)
mat
```

```
      x         y
[1,] 1 -1.3836742
[2,] 2  1.0223233
[3,] 3  1.1886630
[4,] 4 -1.0681859
[5,] 5  0.4360454
[6,] 6  0.9917045
[7,] 7  0.5836144
[8,] 8  0.5213843
[9,] 9 -0.4447755
[10,] 10 0.7813750
```

Inspecting the names associated with rows and columns is often useful, particularly if the names have human meaning.

```
rownames(mat)
```

```
NULL
```

```
colnames(mat)
```

```
[1] "x" "y"
```

We can also change the names of the matrix by assigning *valid* names to the columns or rows.

```
colnames(mat) = c('apples','oranges')
colnames(mat)
```

```
[1] "apples"  "oranges"
```

9. Matrices

```
mat
```

```
    apples     oranges
[1,]      1 -1.3836742
[2,]      2  1.0223233
[3,]      3  1.1886630
[4,]      4 -1.0681859
[5,]      5  0.4360454
[6,]      6  0.9917045
[7,]      7  0.5836144
[8,]      8  0.5213843
[9,]      9 -0.4447755
[10,]     10  0.7813750
```

Matrices have dimensions.

```
dim(mat)
```

```
[1] 10  2
```

```
nrow(mat)
```

```
[1] 10
```

```
ncol(mat)
```

```
[1] 2
```

9.2. Accessing elements of a matrix

Indexing for matrices works as for vectors except that we now need to include both the row and column (in that order). We can access elements of a matrix using the square bracket [indexing method. Elements can be accessed as `var[r, c]`. Here, `r` and `c` are vectors describing the elements of the matrix to select.

9. Matrices

! Important

The indices in R start with one, meaning that the first element of a vector or the first row/column of a matrix is indexed as one.

This is different from some other programming languages, such as Python, which use zero-based indexing, meaning that the first element of a vector or the first row/column of a matrix is indexed as zero.

It is important to be aware of this difference when working with data in R, especially if you are coming from a programming background that uses zero-based indexing. Using the wrong index can lead to unexpected results or errors in your code.

```
# The 2nd element of the 1st row of mat  
mat[1,2]
```

```
oranges  
-1.383674
```

```
# The first ROW of mat  
mat[1,]
```

```
apples    oranges  
1.000000 -1.383674
```

```
# The first COLUMN of mat  
mat[,1]
```

```
[1] 1 2 3 4 5 6 7 8 9 10
```

```
# and all elements of mat that are > 4; note no comma  
mat[mat>4]
```

```
[1] 5 6 7 8 9 10
```

```
## [1] 5 6 7 8 9 10
```

9. Matrices

Caution

Note that in the last case, there is no “,”, so R treats the matrix as a long vector (length=20). This is convenient, sometimes, but it can also be a source of error, as some code may “work” but be doing something unexpected.

We can also use indexing to exclude a row or column by prefixing the selection with a - sign.

```
mat[,-1]      # remove first column
```

```
[1] -1.3836742  1.0223233  1.1886630 -1.0681859  0.4360454  0.9917045  
[7]  0.5836144  0.5213843 -0.4447755  0.7813750
```

```
mat[-c(1:5),]  # remove first five rows
```

```
      apples     oranges  
[1,]       6  0.9917045  
[2,]       7  0.5836144  
[3,]       8  0.5213843  
[4,]       9 -0.4447755  
[5,]      10  0.7813750
```

9.3. Changing values in a matrix

We can create a matrix filled with random values drawn from a normal distribution for our work below.

```
m = matrix(rnorm(20), nrow=10)  
summary(m)
```

V1	V2
Min. :-1.54340	Min. :-1.4190
1st Qu.:-0.67168	1st Qu.:-0.9032
Median : 0.06123	Median :-0.1002
Mean :-0.02654	Mean :-0.2634
3rd Qu.: 0.55115	3rd Qu.: 0.1103
Max. : 1.25409	Max. : 0.9455

9. Matrices

Multiplication and division works similarly to vectors. When multiplying by a vector, for example, the values of the vector are reused. In the simplest case, let's multiply the matrix by a constant (vector of length 1).

```
# multiply all values in the matrix by 20
m2 = m*20
summary(m2)
```

V1	V2
Min. :-30.8681	Min. :-28.379
1st Qu.:-13.4336	1st Qu.:-18.064
Median : 1.2246	Median : -2.005
Mean : -0.5307	Mean : -5.267
3rd Qu.: 11.0230	3rd Qu.: 2.206
Max. : 25.0819	Max. : 18.910

By combining subsetting with assignment, we can make changes to just part of a matrix.

```
# and add 100 to the first column of m
m2[,1] = m2[,1] + 100
# summarize m
summary(m2)
```

V1	V2
Min. : 69.13	Min. :-28.379
1st Qu.: 86.57	1st Qu.:-18.064
Median :101.22	Median : -2.005
Mean : 99.47	Mean : -5.267
3rd Qu.:111.02	3rd Qu.: 2.206
Max. :125.08	Max. : 18.910

A somewhat common transformation for a matrix is to transpose which changes rows to columns. One might need to do this if an assay output from a lab machine puts samples in rows and genes in columns, for example, while in Bioconductor/R, we often want the samples in columns and the genes in rows.

```
t(m2)
```

9. Matrices

```
[,1]      [,2]      [,3]      [,4]      [,5]      [,6]      [,7]
[1,] 124.333765 125.081871 97.70854 101.300544 101.148731 106.68670 73.979815
[2,] -2.214361 -1.795608 -22.58731 -1.454317 -4.492802 10.77263 3.425541
      [,8]      [,9]      [,10]
[1,] 112.46845 69.13193 82.85241
[2,] -24.85817 18.90987 -28.37912
```

9.4. Calculations on matrix rows and columns

Again, we just need a matrix to play with. We'll use `rnorm` again, but with a slight twist.

```
m3 = matrix(rnorm(100,5,2),ncol=10) # what does the 5 mean here? And the 2?
```

Since these data are from a normal distribution, we can look at a row (or column) to see what the mean and standard deviation are.

```
mean(m3[,1])
```

```
[1] 5.585108
```

```
sd(m3[,1])
```

```
[1] 0.7807432
```

```
# or a row  
mean(m3[1,])
```

```
[1] 6.367885
```

```
sd(m3[1,])
```

```
[1] 1.459511
```

There are some useful convenience functions for computing means and sums of data in **all** of the columns and rows of matrices.

9. Matrices

```
colMeans(m3)
```

```
[1] 5.585108 5.616137 4.437312 6.001155 5.826136 6.218967 5.763700 5.683374  
[9] 5.058097 4.419581
```

```
rowMeans(m3)
```

```
[1] 6.367885 5.364585 5.475563 4.690024 4.948899 6.060900 6.223290 5.552056  
[9] 5.290125 4.636241
```

```
rowSums(m3)
```

```
[1] 63.67885 53.64585 54.75563 46.90024 49.48899 60.60900 62.23290 55.52056  
[9] 52.90125 46.36241
```

```
colSums(m3)
```

```
[1] 55.85108 56.16137 44.37312 60.01155 58.26136 62.18967 57.63700 56.83374  
[9] 50.58097 44.19581
```

We can look at the distribution of column means:

```
# save as a variable  
cmeans = colMeans(m3)  
summary(cmeans)
```

Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
4.420	5.190	5.650	5.461	5.811	6.219

Note that this is centered pretty closely around the selected mean of 5 above.

How about the standard deviation? There is not a `colSd` function, but it turns out that we can easily apply functions that take vectors as input, like `sd` and “apply” them across either the rows (the first dimension) or columns (the second) dimension.

9. Matrices

```
csds = apply(m3, 2, sd)
summary(csds)
```

Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
0.7807	1.6781	1.9775	1.9495	2.2203	3.0281

Again, take a look at the distribution which is centered quite close to the selected standard deviation when we created our matrix.

9.5. Exercises

9.5.1. Data preparation

For this set of exercises, we are going to rely on a dataset that comes with R. It gives the number of sunspots per month from 1749-1983. The dataset comes as a `ts` or time series data type which I convert to a matrix using the following code.

Just run the code as is and focus on the rest of the exercises.

```
data(sunspots)
sunspot_mat <- matrix(as.vector(sunspots), ncol=12, byrow = TRUE)
colnames(sunspot_mat) <- as.character(1:12)
rownames(sunspot_mat) <- as.character(1749:1983)
```

9.5.2. Questions

- After the conversion above, what does `sunspot_mat` look like? Use functions to find the number of rows, the number of columns, the class, and some basic summary statistics.

```
ncol(sunspot_mat)
nrow(sunspot_mat)
dim(sunspot_mat)
summary(sunspot_mat)
head(sunspot_mat)
tail(sunspot_mat)
```

- Practice subsetting the matrix a bit by selecting:

9. Matrices

- The first 10 years (rows)
- The month of July (7th column)
- The value for July, 1979 using the rowname to do the selection.

```
sunspot_mat[1:10,]  
sunspot_mat[,7]  
sunspot_mat['1979',7]
```

1. These next few exercises take advantage of the fact that calling a univariate statistical function (one that expects a vector) works for matrices by just making a vector of all the values in the matrix. What is the highest (max) number of sunspots recorded in these data?

```
max(sunspot_mat)
```

2. And the minimum?

```
min(sunspot_mat)
```

3. And the overall mean and median?

```
mean(sunspot_mat)  
median(sunspot_mat)
```

4. Use the `hist()` function to look at the distribution of all the monthly sunspot data.

```
hist(sunspot_mat)
```

5. Read about the `breaks` argument to `hist()` to try to increase the number of breaks in the histogram to increase the resolution slightly. Adjust your `hist()` and `breaks` to your liking.

```
hist(sunspot_mat, breaks=40)
```

6. Now, let's move on to summarizing the data a bit to learn about the pattern of sunspots varies by month or by year. Examine the dataset again. What do the columns represent? And the rows?

```
# just a quick glimpse of the data will give us a sense  
head(sunspot_mat)
```

7. We'd like to look at the distribution of sunspots by month. How can we do that?

```
# the mean of the columns is the mean number of sunspots per month.  
colMeans(sunspot_mat)
```

9. Matrices

```
# Another way to write the same thing:  
apply(sunspot_mat, 2, mean)
```

8. Assign the month summary above to a variable and summarize it to get a sense of the spread over months.

```
monthmeans = colMeans(sunspot_mat)  
summary(monthmeans)
```

9. Play the same game for years to get the per-year mean?

```
ymeans = rowMeans(sunspot_mat)  
summary(ymean)
```

10. Make a plot of the yearly means. Do you see a pattern?

```
plot(ymean)  
# or make it clearer  
plot(ymean, type='l')
```

10. Lists

10.1. The Power of a “Catch-All” Container

So far in our journey through R’s data structures, we’ve dealt with vectors and matrices. These are fantastic tools, but they have one strict rule: all their elements must be of the *same data type*. You can have a vector of numbers or a matrix of characters, but you can’t mix and match.

But what about real-world biological data? A single experiment can generate a dizzying variety of information. Imagine you’re studying a particular gene. You might have:

- The gene’s name (text).
- Its expression level across several samples (a set of numbers).
- A record of whether it’s a known cancer-related gene (a simple TRUE/FALSE).
- The raw fluorescence values from your qPCR machine (a matrix of numbers).
- Some personal notes about the experiment (a paragraph of text).

How could you possibly store all of this related, yet different, information together? You could create many separate variables, but that would be clunky and hard to manage. This is exactly the problem that **lists** are designed to solve.

A list in R is like a flexible, multi-compartment container. It’s a single object that can hold a collection of *other* R objects, and those objects can be of any type, length, or dimension. You can put vectors, matrices, logical values, and even other lists inside a single list. This makes them one of the most fundamental and powerful data structures for bioinformatics analysis.

The key features of lists are:

- **Flexibility:** They can contain a mix of any data type.
- **Organization:** You can and should *name* the elements of a list, making your data self-describing.
- **Hierarchy:** Because lists can contain other lists, you can create complex, nested data structures to represent sophisticated relationships in your data.

10.2. Creating a List

You create a list with the `list()` function. The best practice is to name the elements as you create them. This makes your code infinitely more readable and your data easier to work with.

Let's create a list to store the information for our hypothetical gene study.

```
# An experiment tracking list for the gene TP53
experiment_data <- list(
  experiment_id = "EXP042",
  gene_name = "TP53",
  read_counts = c(120, 155, 98, 210),
  is_control = FALSE,
  sample_matrix = matrix(1:4, nrow = 2, dimnames = list(c("Treated", "Untreated"), c("Replicate1", "Replicate2")))
)

# --- Function Explainer: print() ---
# The print() function displays the contents of an R object in the console.
# For a list, it shows each element and its contents. It's the default action
# when you just type the variable's name and hit Enter.
print(experiment_data)

$experiment_id
[1] "EXP042"

$gene_name
[1] "TP53"

$read_counts
[1] 120 155 98 210

$is_control
[1] FALSE

$sample_matrix
      Replicate1 Replicate2
Treated          1          3
Untreated        2          4
```

10.3. Inspecting Your List: What's Inside?

When someone hands you a tube in the lab, the first thing you do is look at the label. When R gives you a complex object like a list, you need to do the same. R provides several “introspection” functions to help you understand the contents and structure of your lists.

10.3.1. str(): The Structure Function

This is arguably the most useful function for inspecting any R object, especially lists.

```
# --- Function Explainer: str() ---
# The str() function provides a compact, human-readable summary of an
# object's internal "str"ucture. It's your best friend for understanding
# what's inside a list, including the type and a preview of each element.
str(experiment_data)
```

```
List of 5
$ experiment_id: chr "EXP042"
$ gene_name     : chr "TP53"
$ read_counts   : num [1:4] 120 155 98 210
$ is_control    : logi FALSE
$ sample_matrix: int [1:2, 1:2] 1 2 3 4
  ..- attr(*, "dimnames")=List of 2
  ...$ : chr [1:2] "Treated" "Untreated"
  ...$ : chr [1:2] "Replicate1" "Replicate2"
```

The output of `str()` tells us everything we need to know: it's a “List of 5”, and for each of the 5 elements, it shows the name (e.g., `experiment_id`), the data type (e.g., `chr` for character, `num` for numeric), and a preview of the content.

10.3.2. length(), names(), and class()

These functions give you more specific information about the list itself.

```
# --- Function Explainer: length() ---
# For a list, length() tells you how many top-level elements it contains.
length(experiment_data)
```

```
[1] 5
```

```
# --- Function Explainer: names() ---
# The names() function extracts the names of the elements in a list as a
# character vector. It's a great way to see what you can access.
names(experiment_data)
```

```
[1] "experiment_id" "gene_name"      "read_counts"    "is_control"
[5] "sample_matrix"
```

```
# --- Function Explainer: class() ---
# The class() function tells you the type of the object itself.
# This is useful to confirm you are indeed working with a list.
class(experiment_data)
```

```
[1] "list"
```

10.4. Accessing List Elements: Getting Things Out

Okay, you've packed your experimental data into a list. Now, how do you get specific items out? This is a critical concept, and R has a few ways to do it, each with a distinct purpose.

10.4.1. The Mighty `[[...]]` and `$` for Single Items

To pull out a *single element* from a list in its original form, you use either double square brackets `[[...]]` or the dollar sign `$` (for named lists). Think of this as carefully reaching into a specific compartment of your container and taking out the item itself.

Let's use our `experiment_data` list.

```
# Get the gene name using [[...]]
gene <- experiment_data[["gene_name"]]
print(gene)
```

```
[1] "TP53"
```

```
class(gene) # It's a character vector, just as it was when we put it in.
```

```
[1] "character"
```

```
# Get the read counts using the $ shortcut. This is often easier to read.
reads <- experiment_data$read_counts
print(reads)
```

```
[1] 120 155 98 210
```

```
class(reads) # It's a numeric vector.
```

```
[1] "numeric"
```

```
# The [...] has a neat trick: you can use a variable to specify the name.
element_to_get <- "read_counts"
experiment_data[[element_to_get]]
```

```
[1] 120 155 98 210
```

The key takeaway is that [...] and \$ extract the element. The result is the object that was stored inside the list.

10.4.2. The Subsetting [...] for New Lists

The single square bracket [...] behaves differently. It always returns a *new, smaller list* that is a subset of the original list. It's like taking a whole compartment, label and all, out of your larger container.

```
# Get the gene name using [...]
gene_sublist <- experiment_data["gene_name"]

print(gene_sublist)
```

```
$gene_name
[1] "TP53"
```

```
# --- Note the class! ---
# The result is another list, which contains the gene_name element.
class(gene_sublist)

[1] "list"
```

This distinction is vital. If you want to perform a calculation on an element (like finding the `mean()` of `read_counts`), you must extract it with `[...]` or `$`. If you tried `mean(experiment_data["read_counts"])`, R would give you an error because you can't calculate the mean of a list!

10.5. Modifying Lists

Your data is rarely static. You can easily add, remove, or update elements in a list after you've created it.

10.5.1. Adding and Updating Elements

You can add a new element or change an existing one by using the `$` or `[...]` assignment syntax.

```
# Add the date of the experiment
experiment_data$date <- "2024-06-05"

# Add some notes using the [...] syntax
experiment_data[["notes"]] <- "Initial pilot experiment. High variance in read counts."

# Let's update the control status
experiment_data$is_control <- TRUE

# Let's look at the structure now
str(experiment_data)
```

```
List of 7
$ experiment_id: chr "EXP042"
$ gene_name    : chr "TP53"
$ read_counts  : num [1:4] 120 155 98 210
```

```
$ is_control      : logi TRUE
$ sample_matrix: int [1:2, 1:2] 1 2 3 4
..- attr(*, "dimnames")=List of 2
... $ : chr [1:2] "Treated" "Untreated"
... $ : chr [1:2] "Replicate1" "Replicate2"
$ date          : chr "2024-06-05"
$ notes         : chr "Initial pilot experiment. High variance in read counts."
```

10.5.2. Removing Elements

To remove an element from a list, you simply assign `NULL` to it. `NULL` is R's special object representing nothingness.

```
# We've decided the matrix isn't needed for this summary object.
experiment_data$sample_matrix <- NULL

# See the final structure of our list
str(experiment_data)
```

```
List of 6
$ experiment_id: chr "EXP042"
$ gene_name     : chr "TP53"
$ read_counts   : num [1:4] 120 155 98 210
$ is_control    : logi TRUE
$ date          : chr "2024-06-05"
$ notes         : chr "Initial pilot experiment. High variance in read counts."
```

10.6. A Biological Example: A Self-Contained Gene Record

Let's put this all together. Lists are perfect for creating self-contained records that you can easily pass to functions or combine into larger lists.

```
# --- Function Explainer: log2() ---
# The log2() function calculates the base-2 logarithm. It's very common in
# gene expression analysis to transform skewed count data to make it more
# symmetric and easier to model.

brca1_gene <- list(
```

10. Lists

```
gene_symbol = "BRCA1",
full_name = "BRCA1 DNA repair associated",
chromosome = "17",
expression_log2 = log2(c(45, 50, 30, 88, 120)),
related_diseases = c("Breast Cancer", "Ovarian Cancer")
)

# Now we can easily work with this structured information

# --- Function Explainer: cat() ---
# The cat() function concatenates and prints its arguments to the console.
# Unlike print(), it allows you to seamlessly join text and variables, and
# the "\n" character is used to add a newline (a line break).
cat("Analyzing gene:", brca1_gene$gene_symbol, "\n")
```

Analyzing gene: BRCA1

```
cat("Located on chromosome:", brca1_gene$chromosome, "\n")
```

Located on chromosome: 17

```
# Calculate the average log2 expression
# --- Function Explainer: mean() ---
# The mean() function calculates the arithmetic average of a numeric vector.
avg_expression <- mean(brca1_gene$expression_log2)
cat("Average log2 expression:", avg_expression, "\n")
```

Average log2 expression: 5.881784

This simple `brca1_gene` list is now a complete, portable record. You could imagine creating a list of these gene records, creating a powerful, hierarchical database for your entire project.

11. Data Frames

While R has many different data types, the one that is central to much of the power and popularity of R is the `data.frame`. A `data.frame` looks a bit like an R matrix in that it has two dimensions, rows and columns. However, `data.frames` are usually viewed as a set of columns representing variables and the rows representing the values of those variables. Importantly, a `data.frame` may contain *different* data types in each of its columns; matrices **must** contain only one data type. This distinction is important to remember, as there are *specific* approaches to working with R `data.frames` that may be different than those for working with matrices.

11.1. Learning goals

- Understand how `data.frames` are different from matrices.
- Know a few functions for examining the contents of a `data.frame`.
- List approaches for subsetting `data.frames`.
- Be able to load and save tabular data from and to disk.
- Show how to create `data.frames` from scratch.

11.2. Learning objectives

- Load the yeast growth dataset into R using `read.csv`.
- Examine the contents of the dataset.
- Use subsetting to find genes that may be involved with nutrient metabolism and transport.
- Summarize data measurements by categories.

11.3. Dataset

The data used here are borrowed directly from the [fantastic Bioconductor tutorials](#) and are a cleaned up version of the data from [Brauer et al. Coordination of Growth Rate, Cell](#)

11. Data Frames

Cycle, Stress Response, and Metabolic Activity in Yeast (2008) Mol Biol Cell 19:352-367.

These data are from a gene expression microarray, and in this paper the authors examine the relationship between growth rate and gene expression in yeast cultures limited by one of six different nutrients (glucose, leucine, ammonium, sulfate, phosphate, uracil). If you give yeast a rich media loaded with nutrients except restrict the supply of a single nutrient, you can control the growth rate to any rate you choose. By starving yeast of specific nutrients you can find genes that:

1. Raise or lower their expression in response to growth rate. Growth-rate dependent expression patterns can tell us a lot about cell cycle control, and how the cell responds to stress. The authors found that expression of >25% of all yeast genes is linearly correlated with growth rate, independent of the limiting nutrient. They also found that the subset of negatively growth-correlated genes is enriched for peroxisomal functions, and positively correlated genes mainly encode ribosomal functions.
2. Respond differently when different nutrients are being limited. If you see particular genes that respond very differently when a nutrient is sharply restricted, these genes might be involved in the transport or metabolism of that specific nutrient.

The dataset can be downloaded directly from:

- [brauer2007_tidy.csv](#)

We are going to read this dataset into R and then use it as a playground for learning about data.frames.

11.4. Reading in data

R has many capabilities for reading in data. Many of the functions have names that help us to understand what data format is to be expected. In this case, the filename that we want to read ends in `.csv`, meaning comma-separated-values. The `read.csv()` function reads in `.csv` files. As usual, it is worth reading `help('read.csv')` to get a better sense of the possible bells-and-whistles.

The `read.csv()` function can read directly from a URL, so we do not need to download the file directly. This dataset is relatively large (about 16MB), so this may take a bit depending on your network connection speed.

```
options(width=60)
```

11. Data Frames

```
url = paste0(  
  'https://raw.githubusercontent.com',  
  '/bioconnector/workshops/master/data/brauer2007_tidy.csv'  
)  
ydat <- read.csv(url)
```

Our variable, `ydat`, now “contains” the downloaded and read data. We can check to see what data type `read.csv` gave us:

```
class(ydat)
```

```
[1] "data.frame"
```

11.5. Inspecting `data.frames`

Our `ydat` variable is a `data.frame`. As I mentioned, the dataset is fairly large, so we will not be able to look at it all at once on the screen. However, R gives us many tools to inspect a `data.frame`.

- Overviews of content
 - `head()` to show first few rows
 - `tail()` to show last few rows
- Size
 - `dim()` for dimensions (rows, columns)
 - `nrow()`
 - `ncol()`
 - `object.size()` for power users interested in the memory used to store an object
- Data and attribute summaries
 - `colnames()` to get the names of the columns
 - `rownames()` to get the “names” of the rows—may not be present
 - `summary()` to get per-column summaries of the data in the `data.frame`.

```
head(ydat)
```

11. Data Frames

```

symbol systematic_name nutrient rate expression
1   SFB2          YNL049C  Glucose 0.05     -0.24
2   <NA>          YNL095C  Glucose 0.05      0.28
3   QRI7          YDL104C  Glucose 0.05     -0.02
4   CFT2          YLR115W  Glucose 0.05     -0.33
5   SS02          YMR183C  Glucose 0.05      0.05
6   PSP2          YML017W  Glucose 0.05     -0.69

                                bp
1       ER to Golgi transport
2   biological process unknown
3 proteolysis and peptidolysis
4   mRNA polyadenylation*
5           vesicle fusion*
6   biological process unknown

                                mf
1   molecular function unknown
2   molecular function unknown
3 metalloendopeptidase activity
4           RNA binding
5        t-SNARE activity
6   molecular function unknown

```

```
tail(ydat)
```

```

symbol systematic_name nutrient rate expression
198425  DOA1          YKL213C  Uracil  0.3    0.14
198426  KRE1          YNL322C  Uracil  0.3    0.28
198427  MTL1          YGR023W  Uracil  0.3    0.27
198428  KRE9          YJL174W  Uracil  0.3    0.43
198429  UTH1          YKR042W  Uracil  0.3    0.19
198430  <NA>          YOL111C  Uracil  0.3    0.04

                                bp
198425  ubiquitin-dependent protein catabolism*
198426  cell wall organization and biogenesis
198427  cell wall organization and biogenesis
198428  cell wall organization and biogenesis*
198429 mitochondrion organization and biogenesis*
198430        biological process unknown

                                mf
198425  molecular function unknown

```

11. Data Frames

```
198426 structural constituent of cell wall
198427      molecular function unknown
198428      molecular function unknown
198429      molecular function unknown
198430      molecular function unknown
```

```
dim(ydat)
```

```
[1] 198430      7
```

```
nrow(ydat)
```

```
[1] 198430
```

```
ncol(ydat)
```

```
[1] 7
```

```
colnames(ydat)
```

```
[1] "symbol"          "systematic_name" "nutrient"
[4] "rate"            "expression"       "bp"
[7] "mf"
```

```
summary(ydat)
```

```
symbol           systematic_name      nutrient
Length:198430    Length:198430      Length:198430
Class :character  Class :character  Class :character
Mode  :character  Mode  :character  Mode  :character
```

```
rate            expression        bp
Min.   :0.0500  Min.   :-6.500000  Length:198430
1st Qu.:0.1000  1st Qu.:-0.290000  Class :character
```

11. Data Frames

```
Median :0.2000    Median : 0.000000  Mode  :character
Mean   :0.1752    Mean   : 0.003367
3rd Qu.:0.2500    3rd Qu.: 0.290000
Max.   :0.3000    Max.   : 6.640000
               mf
Length:198430
Class :character
Mode  :character
```

In RStudio, there is an additional function, `View()` (note the capital “V”) that opens the first 1000 rows (default) in the RStudio window, akin to a spreadsheet view.

```
View(ydat)
```

11.6. Accessing variables (columns) and subsetting

In R, `data.frames` can be subset similarly to other two-dimensional data structures. The `[` in R is used to denote subsetting of any kind. When working with two-dimensional data, we need two values inside the `[]` to specify the details. The specification is `[rows, columns]`. For example, to get the first three rows of `ydat`, use:

```
ydat[1:3, ]
```

```
symbol systematic_name nutrient rate expression
1   SFB2          YNL049C  Glucose 0.05     -0.24
2   <NA>          YNL095C  Glucose 0.05      0.28
3   QRI7          YDL104C  Glucose 0.05     -0.02
                                bp
1       ER to Golgi transport
2   biological process unknown
3 proteolysis and peptidolysis
                                mf
1   molecular function unknown
2   molecular function unknown
3 metalloendopeptidase activity
```

11. Data Frames

Note how the second number, the columns, is blank. R takes that to mean “all the columns”. Similarly, we can combine rows and columns specification arbitrarily.

```
ydat[1:3, 1:3]
```

```
symbol systematic_name nutrient
1   SFB2          YNL049C  Glucose
2   <NA>          YNL095C  Glucose
3   QRI7          YDL104C  Glucose
```

Because selecting a single variable, or column, is such a common operation, there are two shortcuts for doing so *with data.frames*. The first, the \$ operator works like so:

```
# Look at the column names, just to refresh memory
colnames(ydat)
```

```
[1] "symbol"           "systematic_name" "nutrient"
[4] "rate"              "expression"       "bp"
[7] "mf"
```

```
# Note that I am using "head" here to limit the output
head(ydat$symbol)
```

```
[1] "SFB2" NA      "QRI7" "CFT2" "SS02" "PSP2"
```

```
# What is the actual length of "symbol"?
length(ydat$symbol)
```

```
[1] 198430
```

The second is related to the fact that, in R, data.frames are also lists. We subset a list by using `[[[]]]` notation. To get the second column of `ydat`, we can use:

```
head(ydat[[2]])
```

```
[1] "YNL049C" "YNL095C" "YDL104C" "YLR115W" "YMR183C"
[6] "YML017W"
```

11. Data Frames

Alternatively, we can use the column name:

```
head(ydat[["systematic_name"]])
```

```
[1] "YNL049C" "YNL095C" "YDL104C" "YLR115W" "YMR183C"  
[6] "YML017W"
```

11.6.1. Some data exploration

There are a couple of columns that include numeric values. Which columns are numeric?

```
class(ydat$symbol)
```

```
[1] "character"
```

```
class(ydat$rate)
```

```
[1] "numeric"
```

```
class(ydat$expression)
```

```
[1] "numeric"
```

Make histograms of: - the expression values - the rate values

What does the `table()` function do? Could you use that to look at the `rate` column given that that column appears to have repeated values?

What `rate` corresponds to the most nutrient-starved condition?

11.6.2. More advanced indexing and subsetting

We can use, for example, logical values (TRUE/FALSE) to subset data.frames.

```
head(ydat[ydat$symbol == 'LEU1', ])
```

	symbol	systematic_name	nutrient	rate	expression	bp
NA	<NA>	<NA>	<NA>	NA	NA	<NA>
NA.1	<NA>	<NA>	<NA>	NA	NA	<NA>
NA.2	<NA>	<NA>	<NA>	NA	NA	<NA>
NA.3	<NA>	<NA>	<NA>	NA	NA	<NA>
NA.4	<NA>	<NA>	<NA>	NA	NA	<NA>
NA.5	<NA>	<NA>	<NA>	NA	NA	<NA>
	mf					
NA	<NA>					
NA.1	<NA>					
NA.2	<NA>					
NA.3	<NA>					
NA.4	<NA>					
NA.5	<NA>					

```
tail(ydat[ydat$symbol == 'LEU1', ])
```

	symbol	systematic_name	nutrient	rate	expression
NA.47244	<NA>	<NA>	<NA>	NA	NA
NA.47245	<NA>	<NA>	<NA>	NA	NA
NA.47246	<NA>	<NA>	<NA>	NA	NA
NA.47247	<NA>	<NA>	<NA>	NA	NA
NA.47248	<NA>	<NA>	<NA>	NA	NA
NA.47249	<NA>	<NA>	<NA>	NA	NA
	bp	mf			
NA.47244	<NA>	<NA>			
NA.47245	<NA>	<NA>			
NA.47246	<NA>	<NA>			
NA.47247	<NA>	<NA>			
NA.47248	<NA>	<NA>			
NA.47249	<NA>	<NA>			

What is the problem with this approach? It appears that there are a bunch of NA values. Taking a quick look at the symbol column, we see what the problem.

11. Data Frames

```
summary(ydat$symbol)
```

Length	Class	Mode
198430	character	character

Using the `is.na()` function, we can make filter further to get down to values of interest.

```
head(ydat[ydat$symbol == 'LEU1' & !is.na(ydat$symbol), ])
```

	symbol	systematic_name	nutrient	rate	expression
1526	LEU1	YGL009C	Glucose	0.05	-1.12
7043	LEU1	YGL009C	Glucose	0.10	-0.77
12555	LEU1	YGL009C	Glucose	0.15	-0.67
18071	LEU1	YGL009C	Glucose	0.20	-0.59
23603	LEU1	YGL009C	Glucose	0.25	-0.20
29136	LEU1	YGL009C	Glucose	0.30	0.03
		bp			
1526	leucine biosynthesis				
7043	leucine biosynthesis				
12555	leucine biosynthesis				
18071	leucine biosynthesis				
23603	leucine biosynthesis				
29136	leucine biosynthesis				
		mf			
1526	3-isopropylmalate dehydratase activity				
7043	3-isopropylmalate dehydratase activity				
12555	3-isopropylmalate dehydratase activity				
18071	3-isopropylmalate dehydratase activity				
23603	3-isopropylmalate dehydratase activity				
29136	3-isopropylmalate dehydratase activity				

Sometimes, looking at the data themselves is not that important. Using `dim()` is one possibility to look at the number of rows and columns after subsetting.

```
dim(ydat[ydat$expression > 3, ])
```

```
[1] 714    7
```

11. Data Frames

Find the high expressed genes when leucine-starved. For this task we can also use `subset` which allows us to treat column names as R variables (no \$ needed).

```
subset(ydat, nutrient == 'Leucine' & rate == 0.05 & expression > 3)
```

	symbol	systematic_name	nutrient	rate	expression
133768	QDR2	YIL121W	Leucine	0.05	4.61
133772	LEU1	YGL009C	Leucine	0.05	3.84
133858	BAP3	YDR046C	Leucine	0.05	4.29
135186	<NA>	YPL033C	Leucine	0.05	3.43
135187	<NA>	YLR267W	Leucine	0.05	3.23
135288	HXT3	YDR345C	Leucine	0.05	5.16
135963	TP02	YGR138C	Leucine	0.05	3.75
135965	YR02	YBR054W	Leucine	0.05	4.40
136102	GPG1	YGL121C	Leucine	0.05	3.08
136109	HSP42	YDR171W	Leucine	0.05	3.07
136119	HXT5	YHR096C	Leucine	0.05	4.90
136151	<NA>	YJL144W	Leucine	0.05	3.06
136152	MOH1	YBL049W	Leucine	0.05	3.43
136153	<NA>	YBL048W	Leucine	0.05	3.95
136189	HSP26	YBR072W	Leucine	0.05	4.86
136231	NCA3	YJL116C	Leucine	0.05	4.03
136233	<NA>	YBR116C	Leucine	0.05	3.28
136486	<NA>	YGR043C	Leucine	0.05	3.07
137443	ADH2	YMR303C	Leucine	0.05	4.15
137448	ICL1	YER065C	Leucine	0.05	3.54
137451	SFC1	YJR095W	Leucine	0.05	3.72
137569	MLS1	YNL117W	Leucine	0.05	3.76
			bp		
133768			multidrug transport		
133772			leucine biosynthesis		
133858			amino acid transport		
135186			meiosis*		
135187			biological process unknown		
135288			hexose transport		
135963			Polyamine transport		
135965			biological process unknown		
136102			signal transduction		
136109			response to stress*		
136119			hexose transport		

11. Data Frames

136151	response to dessication
136152	biological process unknown
136153	<NA>
136189	response to stress*
136231	mitochondrion organization and biogenesis
136233	<NA>
136486	biological process unknown
137443	fermentation*
137448	glyoxylate cycle
137451	fumarate transport*
137569	glyoxylate cycle mf
133768	multidrug efflux pump activity
133772	3-isopropylmalate dehydratase activity
133858	amino acid transporter activity
135186	molecular function unknown
135187	molecular function unknown
135288	glucose transporter activity*
135963	spermine transporter activity
135965	molecular function unknown
136102	signal transducer activity
136109	unfolded protein binding
136119	glucose transporter activity*
136151	molecular function unknown
136152	molecular function unknown
136153	<NA>
136189	unfolded protein binding
136231	molecular function unknown
136233	<NA>
136486	transaldolase activity
137443	alcohol dehydrogenase activity
137448	isocitrate lyase activity
137451	succinate:fumarate antiporter activity
137569	malate synthase activity

11.7. Aggregating data

Aggregating data, or summarizing by category, is a common way to look for trends or differences in measurements between categories. Use `aggregate` to find the mean expression

11. Data Frames

by gene symbol.

```
head(aggregate(ydat$expression, by=list( ydat$symbol), mean))
```

```
Group.1           x
1    AAC1  0.52888889
2    AAC3 -0.21628571
3   AAD10  0.43833333
4   AAD14 -0.07166667
5   AAD16  0.24194444
6   AAD4 -0.79166667
```

```
# or
head(aggregate(expression ~ symbol, mean, data=ydat))
```

```
symbol  expression
1    AAC1  0.52888889
2    AAC3 -0.21628571
3   AAD10  0.43833333
4   AAD14 -0.07166667
5   AAD16  0.24194444
6   AAD4 -0.79166667
```

11.8. Creating a data.frame from scratch

Sometimes it is useful to combine related data into one object. For example, let's simulate some data.

```
smoker = factor(rep(c("smoker", "non-smoker"), each=50))
smoker_numeric = as.numeric(smoker)
x = rnorm(100)
risk = x + 2*smoker_numeric
```

We have two variables, `risk` and `smoker` that are related. We can make a data.frame out of them:


11. Data Frames

```
smoker_risk = data.frame(smoker = smoker, risk = risk)
head(smoker_risk)
```

```
smoker      risk
1 smoker 3.438347
2 smoker 3.570912
3 smoker 4.511678
4 smoker 4.131091
5 smoker 2.582227
6 smoker 4.046004
```

R also has plotting shortcuts that work with data.frames to simplify plotting

```
plot(risk ~ smoker, data=smoker_risk)
```

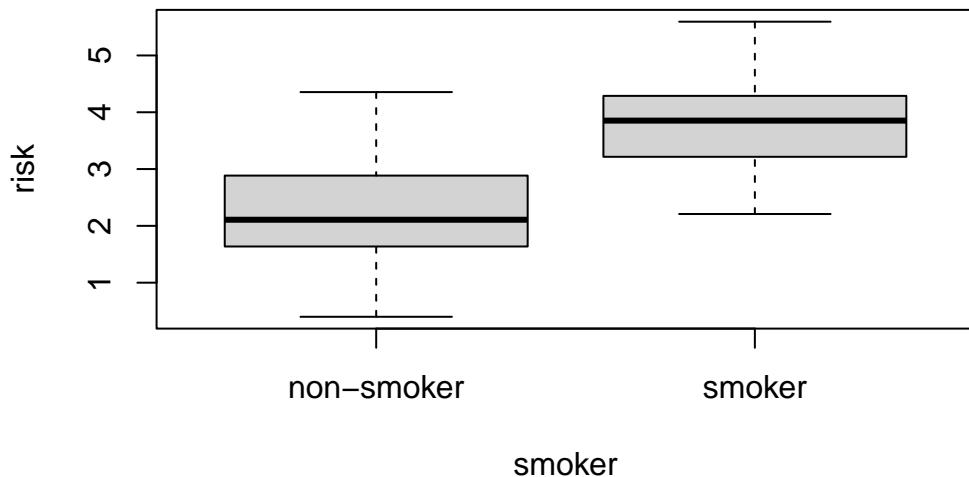

11.9. Saving a data.frame

Once we have a data.frame of interest, we may want to save it. The most portable way to save a data.frame is to use one of the `write` functions. In this case, let's save the data as a `.csv` file.

```
write.csv(smoker_risk, "smoker_risk.csv")
```

12. Factors

12.1. Factors

A factor is a special type of vector, normally used to hold a categorical variable—such as smoker/non-smoker, state of residency, zipcode—in many statistical functions. Such vectors have class “factor”. Factors are primarily used in Analysis of Variance (ANOVA) or other situations when “categories” are needed. When a factor is used as a predictor variable, the corresponding indicator variables are created (more later).

Note of caution that factors in R often *appear* to be character vectors when printed, but you will notice that they do not have double quotes around them. They are stored in R as numbers with a key name, so sometimes you will note that the factor *behaves* like a numeric vector.

```
# create the character vector
citizen<-c("uk","us","no","au","uk","us","us","no","au")

# convert to factor
citizenf<-factor(citizen)
citizen
```

```
[1] "uk" "us" "no" "au" "uk" "us" "us" "no" "au"
```

```
citizenf
```

```
[1] uk us no au uk us us no au
Levels: au no uk us
```

```
# convert factor back to character vector
as.character(citizenf)
```

```
[1] "uk" "us" "no" "au" "uk" "us" "us" "no" "au"
```

12. Factors

```
# convert to numeric vector  
as.numeric(citizenf)
```

```
[1] 3 4 2 1 3 4 4 2 1
```

R stores many data structures as vectors with “attributes” and “class” (just so you have seen this).

```
attributes(citizenf)
```

```
$levels  
[1] "au" "no" "uk" "us"
```

```
$class  
[1] "factor"
```

```
class(citizenf)
```

```
[1] "factor"
```

```
# note that after unclassing, we can see the  
# underlying numeric structure again  
unclass(citizenf)
```

```
[1] 3 4 2 1 3 4 4 2 1  
attr(,"levels")  
[1] "au" "no" "uk" "us"
```

Tabulating factors is a useful way to get a sense of the “sample” set available.

```
table(citizenf)
```

```
citizenf  
au no uk us  
2 2 2 3
```

Part III.

Exploratory data analysis

Imagine you're on an adventure, about to embark on a journey into the unknown. You've just been handed a treasure map, with the promise of valuable insights waiting to be discovered. This map is your data set, and the journey is exploratory data analysis (EDA).

As you begin your exploration, you start by getting a feel for the terrain. You take a broad, bird's-eye view of the data, examining its structure and dimensions. Are you dealing with a vast landscape or a small, confined area? Are there any missing pieces in the map that you'll need to account for? Understanding the overall context of your data set is crucial before venturing further.

With a sense of the landscape, you now zoom in to identify key landmarks in the data. You might look for unusual patterns, trends, or relationships between variables. As you spot these landmarks, you start asking questions: What's causing that spike in values? Are these two factors related, or is it just a coincidence? By asking these questions, you're actively engaging with the data and forming hypotheses that could guide future analysis or experiments.

As you continue your journey, you realize that the map alone isn't enough to fully understand the terrain. You need more tools to bring the data to life. You start visualizing the data using charts, plots, and graphs. These visualizations act as your binoculars, allowing you to see patterns and relationships more clearly. Through them, you can uncover the hidden treasures buried within the data.

EDA isn't a linear path from start to finish. As you explore, you'll find yourself circling back to previous points, refining your questions, and digging deeper. The process is iterative, with each new discovery informing the next. And as you go, you'll gain a deeper understanding of the data's underlying structure and potential.

Finally, after your thorough exploration, you'll have a solid foundation to build upon. You'll be better equipped to make informed decisions, test hypotheses, and draw meaningful conclusions. The insights you've gained through EDA will serve as a compass, guiding you towards the true value hidden within your data. And with that, you've successfully completed your journey through exploratory data analysis.

13. Introduction to `dplyr`: mammal sleep dataset

The dataset we will be using to introduce the `dplyr` package is an updated and expanded version of the mammals sleep dataset. Updated sleep times and weights were taken from V. M. Savage and G. B. West. A quantitative, theoretical framework for understanding mammalian sleep¹.

13.1. Learning goals

- Know that `dplyr` is just a different approach to manipulating data in `data.frames`.
- List the commonly used `dplyr` verbs and how they can be used to manipulate `data.frames`.
- Show how to aggregate and summarize data using `dplyr`
- Know what the piping operator, `|>`, is and how it can be used.

13.2. Learning objectives

- Select subsets of the mammal sleep dataset.
- Reorder the dataset.
- Add columns to the dataset based on existing columns.
- Summarize the amount of sleep by categorical variables using `group_by` and `summarize`.

¹A quantitative, theoretical framework for understanding mammalian sleep. Van M. Savage, Geoffrey B. West. Proceedings of the National Academy of Sciences Jan 2007, 104 (3) 1051-1056; DOI: [10.1073/pnas.0610080104](https://doi.org/10.1073/pnas.0610080104)

13. Introduction to dplyr: mammal sleep dataset

13.3. What is dplyr?

The *dplyr* package is a specialized package for working with `data.frames` (and the related `tibble`) to transform and summarize tabular data with rows and columns. For another explanation of *dplyr* see the *dplyr* package vignette: [Introduction to dplyr](#)

13.4. Why Is dplyr useful?

dplyr contains a set of functions—commonly called the *dplyr* “verbs”—that perform common data manipulations such as filtering for rows, selecting specific columns, re-ordering rows, adding new columns and summarizing data. In addition, *dplyr* contains a useful function to perform another common task which is the “split-apply-combine” concept.

Compared to base functions in R, the functions in *dplyr* are often easier to work with, are more consistent in the syntax and are targeted for data analysis around data frames, instead of just vectors.

13.5. Data: Mammals Sleep

The `msleep` (mammals sleep) data set contains the sleep times and weights for a set of mammals and is available in the `dagdata` repository on github. This data set contains 83 rows and 11 variables. The data happen to be available as a `dataset` in the `ggplot2` package. To get access to the `msleep` dataset, we need to first install the `ggplot2` package.

```
install.packages('ggplot2')
```

Then, we can load the library.

```
library(ggplot2)
data(msleep)
```

As with many datasets in R, “help” is available to describe the dataset itself.

```
?msleep
```

13. Introduction to dplyr: mammal sleep dataset

The columns are described in the help page, but are included here, also.

column name	Description
name	common name
genus	taxonomic rank
vore	carnivore, omnivore or herbivore?
order	taxonomic rank
conservation	the conservation status of the mammal
sleep_total	total amount of sleep, in hours
sleep_rem	rem sleep, in hours
sleep_cycle	length of sleep cycle, in hours
awake	amount of time spent awake, in hours
brainwt	brain weight in kilograms
bodywt	body weight in kilograms

13.6. dplyr verbs

The dplyr verbs are listed here. There are many other functions available in dplyr, but we will focus on just these.

dplyr verbs	Description
<code>select()</code>	select columns
<code>filter()</code>	filter rows
<code>arrange()</code>	re-order or arrange rows
<code>mutate()</code>	create new columns
<code>summarise()</code>	summarise values
<code>group_by()</code>	allows for group operations in the “split-apply-combine” concept

13.7. Using the dplyr verbs

The two most basic functions are `select()` and `filter()`, which selects columns and filters rows respectively. What are the equivalent ways to select columns without dplyr? And filtering to include only specific rows?

Before proceeding, we need to install the dplyr package:

13. Introduction to dplyr: mammal sleep dataset

```
install.packages('dplyr')
```

And then load the library:

```
library(dplyr)
```

```
Attaching package: 'dplyr'
```

```
The following objects are masked from 'package:stats':
```

```
filter, lag
```

```
The following objects are masked from 'package:base':
```

```
intersect, setdiff, setequal, union
```

13.7.1. Selecting columns: select()

Select a set of columns such as the `name` and the `sleep_total` columns.

```
sleepData <- select(msleep, name, sleep_total)
head(sleepData)
```

```
# A tibble: 6 x 2
  name                 sleep_total
  <chr>                <dbl>
1 Cheetah              12.1
2 Owl monkey            17
3 Mountain beaver      14.4
4 Greater short-tailed shrew 14.9
5 Cow                  4
6 Three-toed sloth     14.4
```

To select all the columns *except* a specific column, use the “-” (subtraction) operator (also known as negative indexing). For example, to select all columns except `name`:

13. Introduction to dplyr: mammal sleep dataset

```
head(select(msleep, -name))

# A tibble: 6 x 10
  genus     vore   order  conservation sleep_total sleep_rem sleep_cycle awake
  <chr>    <chr>  <chr>      <chr>        <dbl>      <dbl>      <dbl> <dbl>
1 Acinonyx  carni Carnivo~ lc           12.1       NA       NA     11.9
2 Aotus      omni  Primates <NA>        17         1.8      NA      7
3 Aplodontia herbi Rodentia nt          14.4       2.4      NA     9.6
4 Blarina    omni  Soricom~ lc           14.9       2.3     0.133    9.1
5 Bos        herbi Artioda~ domesticated 4          0.7     0.667    20
6 Bradypus   herbi Pilosa  <NA>        14.4       2.2     0.767    9.6
# i 2 more variables: brainwt <dbl>, bodywt <dbl>
```

To select a range of columns by name, use the “:” operator. Note that dplyr allows us to use the column names without quotes and as “indices” of the columns.

```
head(select(msleep, name:order))

# A tibble: 6 x 4
  name              genus     vore   order
  <chr>            <chr>    <chr>  <chr>
1 Cheetah          Acinonyx  carni Carnivora
2 Owl monkey       Aotus     omni  Primates
3 Mountain beaver Aplodontia herbi Rodentia
4 Greater short-tailed shrew Blarina  omni  Soricomorpha
5 Cow               Bos       herbi Artiodactyla
6 Three-toed sloth Bradypus  herbi Pilosa
```

To select all columns that start with the character string “sl”, use the function `starts_with()`.

```
head(select(msleep, starts_with("sl")))

# A tibble: 6 x 3
  sleep_total sleep_rem sleep_cycle
  <dbl>       <dbl>      <dbl>
1     12.1       NA       NA
2      17         1.8      NA
```

13. Introduction to dplyr: mammal sleep dataset

```
3      14.4      2.4      NA
4      14.9      2.3     0.133
5       4       0.7     0.667
6      14.4      2.2     0.767
```

Some additional options to select columns based on a specific criteria include:

1. `ends_with()` = Select columns that end with a character string
2. `contains()` = Select columns that contain a character string
3. `matches()` = Select columns that match a regular expression
4. `one_of()` = Select column names that are from a group of names

13.7.2. Selecting rows: `filter()`

The `filter()` function allows us to filter rows to include only those rows that *match* the filter. For example, we can filter the rows for mammals that sleep a total of more than 16 hours.

```
filter(msleep, sleep_total >= 16)
```

```
# A tibble: 8 x 11
  name   genus vore  order conservation sleep_total sleep_rem sleep_cycle awake
  <chr>  <chr> <chr> <chr> <chr>          <dbl>      <dbl>      <dbl> <dbl>
1 Owl    Aotus  omni  Prim~ <NA>           17        1.8      NA     7
2 Long-n~ Dasy~ carni Cing~ lc            17.4       3.1     0.383  6.6
3 North ~ Dide~ omni  Dide~ lc            18        4.9     0.333  6
4 Big    br~ Epte~ inse~ Chir~ lc           19.7       3.9     0.117  4.3
5 Thick~~ Lutr~ carni Dide~ lc           19.4       6.6      NA     4.6
6 Little~ Myot~ inse~ Chir~ <NA>          19.9       2       0.2    4.1
7 Giant ~ Prio~ inse~ Cing~ en           18.1       6.1      NA     5.9
8 Arctic~ Sper~ herbi Rode~ lc           16.6       NA      NA     7.4
# i 2 more variables: brainwt <dbl>, bodywt <dbl>
```

Filter the rows for mammals that sleep a total of more than 16 hours *and* have a body weight of greater than 1 kilogram.

```
filter(msleep, sleep_total >= 16, bodywt >= 1)
```

13. Introduction to dplyr: mammal sleep dataset

```
# A tibble: 3 x 11
  name   genus vore  order conservation sleep_total sleep_rem sleep_cycle awake
  <chr>  <chr> <chr> <chr> <chr>       <dbl>      <dbl>      <dbl> <dbl>
1 Long-n~ Dasy~ carni Cing~ lc        17.4       3.1      0.383    6.6
2 North ~ Dide~ omni  Dide~ lc        18         4.9      0.333     6
3 Giant ~ Prio~ inse~ Cing~ en       18.1       6.1       NA        5.9
# i 2 more variables: brainwt <dbl>, bodywt <dbl>
```

Filter the rows for mammals in the Perissodactyla and Primates taxonomic order. The `%in%` operator is a logical operator that returns TRUE for values of a vector that are present in a second vector.

```
filter(msleep, order %in% c("Perissodactyla", "Primates"))
```

```
# A tibble: 15 x 11
  name   genus vore  order conservation sleep_total sleep_rem sleep_cycle awake
  <chr>  <chr> <chr> <chr> <chr>       <dbl>      <dbl>      <dbl> <dbl>
1 Owl m~ Aotus omni  Prim~ <NA>       17         1.8      NA        7
2 Grivet Cerc~ omni  Prim~ lc        10         0.7      NA       14
3 Horse Equus herbi Peri~ domesticated 2.9        0.6       1      21.1
4 Donkey Equus herbi Peri~ domesticated 3.1        0.4      NA       20.9
5 Patas~ Eryt~ omni  Prim~ lc        10.9       1.1      NA      13.1
6 Galago Gala~ omni  Prim~ <NA>       9.8        1.1      0.55     14.2
7 Human Homo omni  Prim~ <NA>       8          1.9      1.5       16
8 Mongo~ Lemur herbi Prim~ vu        9.5        0.9      NA      14.5
9 Macaque Maca~ omni  Prim~ <NA>      10.1       1.2      0.75     13.9
10 Slow ~ Nyct~ carni Prim~ <NA>      11         NA      NA        13
11 Chimp~ Pan   omni  Prim~ <NA>      9.7        1.4      1.42     14.3
12 Baboon Papio omni  Prim~ <NA>      9.4        1       0.667    14.6
13 Potto Pero~ omni  Prim~ lc        11         NA      NA        13
14 Squir~ Saim~ omni  Prim~ <NA>      9.6        1.4      NA      14.4
15 Brazi~ Tapi~ herbi Peri~ vu        4.4        1       0.9      19.6
# i 2 more variables: brainwt <dbl>, bodywt <dbl>
```

You can use the boolean operators (e.g. `>`, `<`, `>=`, `<=`, `!=`, `%in%`) to create the logical tests.

13.8. “Piping” with |>

It is not unusual to want to perform a set of operations using dplyr. The pipe operator `|>` allows us to “pipe” the output from one function into the input of the next. While there is nothing special about how R treats operations that are written in a pipe, the idea of piping is to allow us to read multiple functions operating one after another from left-to-right. Without piping, one would either 1) save each step in set of functions as a temporary variable and then pass that variable along the chain or 2) have to “nest” functions, which can be hard to read.

Here’s an example we have already used:

```
head(select(msleep, name, sleep_total))
```

```
# A tibble: 6 x 2
  name           sleep_total
  <chr>          <dbl>
1 Cheetah        12.1
2 Owl monkey     17
3 Mountain beaver 14.4
4 Greater short-tailed shrew 14.9
5 Cow            4
6 Three-toed sloth 14.4
```

Now in this case, we will pipe the `msleep` data frame to the function that will select two columns (`name` and `sleep_total`) and then pipe the new data frame to the function `head()`, which will return the head of the new data frame.

```
msleep |>
  select(name, sleep_total) |>
  head()
```

```
# A tibble: 6 x 2
  name           sleep_total
  <chr>          <dbl>
1 Cheetah        12.1
2 Owl monkey     17
3 Mountain beaver 14.4
4 Greater short-tailed shrew 14.9
5 Cow            4
6 Three-toed sloth 14.4
```

13. Introduction to dplyr: mammal sleep dataset

You will soon see how useful the pipe operator is when we start to combine many functions.

Now that you know about the pipe operator (`|>`), we will use it throughout the rest of this tutorial.

13.8.1. Arrange Or Re-order Rows Using `arrange()`

To arrange (or re-order) rows by a particular column, such as the taxonomic order, list the name of the column you want to arrange the rows by:

```
msleep |> arrange(order) |> head()
```

```
# A tibble: 6 x 11
  name   genus vore  order conservation sleep_total sleep_rem sleep_cycle awake
  <chr>  <chr> <chr> <chr>        <dbl>      <dbl>      <dbl> <dbl>
1 Tenrec  Tenre~ omni  Afro~ <NA>       15.6       2.3     NA    8.4
2 Cow     Bos    herbi Arti~ domesticated  4          0.7     0.667  20
3 Roe de~ Capr~ herbi Arti~ lc         3          NA      NA    21
4 Goat    Capri  herbi Arti~ lc         5.3       0.6     NA    18.7
5 Giraffe Gira~ herbi Arti~ cd         1.9       0.4     NA    22.1
6 Sheep   Ovis   herbi Arti~ domesticated 3.8       0.6     NA    20.2
# i 2 more variables: brainwt <dbl>, bodywt <dbl>
```

Now we will select three columns from `msleep`, arrange the rows by the taxonomic order and then arrange the rows by `sleep_total`. Finally, show the head of the final data frame:

```
msleep |>
  select(name, order, sleep_total) |>
  arrange(order, sleep_total) |>
  head()
```

```
# A tibble: 6 x 3
  name   order      sleep_total
  <chr>  <chr>      <dbl>
1 Tenrec  Afrosoricida  15.6
2 Giraffe Artiodactyla  1.9
3 Roe deer Artiodactyla  3
4 Sheep   Artiodactyla  3.8
```

13. Introduction to dplyr: mammal sleep dataset

```
5 Cow      Artiodactyla      4
6 Goat     Artiodactyla    5.3
```

Same as above, except here we filter the rows for mammals that sleep for 16 or more hours, instead of showing the head of the final data frame:

```
msleep |>
  select(name, order, sleep_total) |>
  arrange(order, sleep_total) |>
  filter(sleep_total >= 16)
```

```
# A tibble: 8 x 3
  name          order      sleep_total
  <chr>        <chr>        <dbl>
1 Big brown bat Chiroptera   19.7
2 Little brown bat Chiroptera 19.9
3 Long-nosed armadillo Cingulata 17.4
4 Giant armadillo Cingulata  18.1
5 North American Opossum Didelphimorphia 18
6 Thick-tailed opossum Didelphimorphia 19.4
7 Owl monkey       Primates     17
8 Arctic ground squirrel Rodentia   16.6
```

For something slightly more complicated do the same as above, except arrange the rows in the sleep_total column in a descending order. For this, use the function `desc()`

```
msleep |>
  select(name, order, sleep_total) |>
  arrange(order, desc(sleep_total)) |>
  filter(sleep_total >= 16)
```

```
# A tibble: 8 x 3
  name          order      sleep_total
  <chr>        <chr>        <dbl>
1 Little brown bat Chiroptera 19.9
2 Big brown bat Chiroptera 19.7
3 Giant armadillo Cingulata 18.1
4 Long-nosed armadillo Cingulata 17.4
5 Thick-tailed opossum Didelphimorphia 19.4
```

13. Introduction to dplyr: mammal sleep dataset

6	North American Opossum	Didelphimorphia	18
7	Owl monkey	Primates	17
8	Arctic ground squirrel	Rodentia	16.6

13.9. Create New Columns Using `mutate()`

The `mutate()` function will add new columns to the data frame. Create a new column called `rem_proportion`, which is the ratio of rem sleep to total amount of sleep.

```
msleep |>
  mutate(rem_proportion = sleep_rem / sleep_total) |>
  head()
```

```
# A tibble: 6 x 12
  name    genus vore  order conservation sleep_total sleep_rem sleep_cycle awake
  <chr>   <chr> <chr> <chr>           <dbl>      <dbl>      <dbl> <dbl>
1 Cheetah Acin~ carni Carn~ lc            12.1       NA        NA     11.9
2 Owl mo~ Aotus omni Prim~ <NA>          17          1.8       NA      7
3 Mounta~ Aplo~ herbi Rode~ nt            14.4       2.4       NA     9.6
4 Greate~ Blar~ omni Sori~ lc            14.9       2.3      0.133    9.1
5 Cow      Bos    herbi Arti~ domesticated 4          0.7      0.667   20
6 Three~~ Brad~ herbi Pilo~ <NA>          14.4       2.2      0.767   9.6
# i 3 more variables: brainwt <dbl>, bodywt <dbl>, rem_proportion <dbl>
```

You can add many new columns using `mutate` (separated by commas). Here we add a second column called `bodywt_grams` which is the `bodywt` column in grams.

```
msleep |>
  mutate(rem_proportion = sleep_rem / sleep_total,
        bodywt_grams = bodywt * 1000) |>
  head()
```

```
# A tibble: 6 x 13
  name    genus vore  order conservation sleep_total sleep_rem sleep_cycle awake
  <chr>   <chr> <chr> <chr>           <dbl>      <dbl>      <dbl> <dbl>
1 Cheetah Acin~ carni Carn~ lc            12.1       NA        NA     11.9
2 Owl mo~ Aotus omni Prim~ <NA>          17          1.8       NA      7
3 Mounta~ Aplo~ herbi Rode~ nt            14.4       2.4       NA     9.6
```

13. Introduction to dplyr: mammal sleep dataset

```
4 Greate~ Blar~ omni  Sori~ lc          14.9      2.3      0.133    9.1
5 Cow       Bos     herbi Arti~ domesticated   4         0.7      0.667    20
6 Three~~ Brad~ herbi Pilo~ <NA>        14.4      2.2      0.767    9.6
# i 4 more variables: brainwt <dbl>, bodywt <dbl>, rem_proportion <dbl>,
#   bodywt_grams <dbl>
```

Is there a relationship between `rem_proportion` and `bodywt`? How about `sleep_total`?

13.9.1. Create summaries: `summarise()`

The `summarise()` function will create summary statistics for a given column in the data frame such as finding the mean. For example, to compute the average number of hours of sleep, apply the `mean()` function to the column `sleep_total` and call the summary value `avg_sleep`.

```
msleep |>
  summarise(avg_sleep = mean(sleep_total))
```

```
# A tibble: 1 x 1
  avg_sleep
  <dbl>
1     10.4
```

There are many other summary statistics you could consider such `sd()`, `min()`, `max()`, `median()`, `sum()`, `n()` (returns the length of vector), `first()` (returns first value in vector), `last()` (returns last value in vector) and `n_distinct()` (number of distinct values in vector).

```
msleep |>
  summarise(avg_sleep = mean(sleep_total),
            min_sleep = min(sleep_total),
            max_sleep = max(sleep_total),
            total = n())
```

```
# A tibble: 1 x 4
  avg_sleep min_sleep max_sleep total
  <dbl>      <dbl>      <dbl> <int>
1     10.4      1.9      19.9     83
```

13.10. Grouping data: group_by()

The `group_by()` verb is an important function in dplyr. The `group_by` allows us to use the concept of “split-apply-combine”. We literally want to split the data frame by some variable (e.g. taxonomic order), apply a function to the individual data frames and then combine the output. This approach is similar to the `aggregate` function from R, but `group_by` integrates with dplyr.

Let’s do that: split the `msleep` data frame by the taxonomic order, then ask for the same summary statistics as above. We expect a set of summary statistics for each taxonomic order.

```
msleep |>
  group_by(order) |>
  summarise(avg_sleep = mean(sleep_total),
            min_sleep = min(sleep_total),
            max_sleep = max(sleep_total),
            total = n())

# A tibble: 19 x 5
# ... with 5 variables:
#   order      avg_sleep  min_sleep  max_sleep total
#   <chr>        <dbl>       <dbl>       <dbl>    <int>
# 1 Afrosoricida     15.6       15.6       15.6     1
# 2 Artiodactyla      4.52       1.9        9.1      6
# 3 Carnivora        10.1       3.5        15.8     12
# 4 Cetacea           4.5        2.7        5.6      3
# 5 Chiroptera        19.8       19.7       19.9     2
# 6 Cingulata          17.8       17.4       18.1     2
# 7 Didelphimorphia    18.7       18         19.4     2
# 8 Diprotodontia      12.4       11.1       13.7     2
# 9 Erinaceomorpha     10.2       10.1       10.3     2
# 10 Hyracoidea        5.67       5.3        6.3      3
# 11 Lagomorpha         8.4        8.4        8.4      1
# 12 Monotremata       8.6        8.6        8.6      1
# 13 Perissodactyla     3.47       2.9        4.4      3
# 14 Pilosa             14.4       14.4       14.4     1
# 15 Primates           10.5       8          17       12
# 16 Proboscidea         3.6        3.3        3.9      2
# 17 Rodentia            12.5       7          16.6     22
# 18 Scandentia          8.9        8.9        8.9      1
# 19 Soricomorpha        11.1       8.4       14.9      5
```

14. Case Study: Behavioral Risk Factor Surveillance System

14.1. A Case Study on the Behavioral Risk Factor Surveillance System

The Behavioral Risk Factor Surveillance System (BRFSS) is a large-scale health survey conducted annually by the Centers for Disease Control and Prevention (CDC) in the United States. The BRFSS collects information on various health-related behaviors, chronic health conditions, and the use of preventive services among the adult population (18 years and older) through telephone interviews. The main goal of the BRFSS is to identify and monitor the prevalence of risk factors associated with chronic diseases, inform public health policies, and evaluate the effectiveness of health promotion and disease prevention programs. The data collected through BRFSS is crucial for understanding the health status and needs of the population, and it serves as a valuable resource for researchers, policy makers, and healthcare professionals in making informed decisions and designing targeted interventions.

In this chapter, we will walk through an exploratory data analysis (EDA) of the Behavioral Risk Factor Surveillance System dataset using R. EDA is an important step in the data analysis process, as it helps you to understand your data, identify trends, and detect any anomalies before performing more advanced analyses. We will use various R functions and packages to explore the dataset, with a focus on active learning and hands-on experience.

14.2. Loading the Dataset

First, let's load the dataset into R. We will use the `read.csv()` function from the base R package to read the data and store it in a data frame called `brfss`. Make sure the CSV file is in your working directory, or provide the full path to the file.

First, we need to get the data. Either download the data from [THIS LINK](#) or have R do it directly from the command-line (preferred):

14. Case Study: Behavioral Risk Factor Surveillance System

```
download.file('https://raw.githubusercontent.com/seandavi/ITR/master/BRFSS-subset.csv',  
             destfile = 'BRFSS-subset.csv')  
  
path <- file.choose()      # look for BRFSS-subset.csv  
  
stopifnot(file.exists(path))  
brfss <- read.csv(path)
```

14.3. Inspecting the Data

Once the data is loaded, let's take a look at the first few rows of the dataset using the `head()` function:

```
head(brfss)
```

	Age	Weight	Sex	Height	Year
1	31	48.98798	Female	157.48	1990
2	57	81.64663	Female	157.48	1990
3	43	80.28585	Male	177.80	1990
4	72	70.30682	Male	170.18	1990
5	31	49.89516	Female	154.94	1990
6	58	54.43108	Female	154.94	1990

This will display the first six rows of the dataset, allowing you to get a feel for the data structure and variable types.

Next, let's check the dimensions of the dataset using the `dim()` function:

```
dim(brfss)
```

```
[1] 20000      5
```

This will return the number of rows and columns in the dataset, which is important to know for subsequent analyses.

14.4. Summary Statistics

Now that we have a basic understanding of the data structure, let's calculate some summary statistics. The `summary()` function in R provides a quick overview of the main statistics for each variable in the dataset:

```
summary(brfss)
```

Age	Weight	Sex	Height
Min. :18.00	Min. : 34.93	Length:20000	Min. :105.0
1st Qu.:36.00	1st Qu.: 61.69	Class :character	1st Qu.:162.6
Median :51.00	Median : 72.57	Mode :character	Median :168.0
Mean :50.99	Mean : 75.42		Mean :169.2
3rd Qu.:65.00	3rd Qu.: 86.18		3rd Qu.:177.8
Max. :99.00	Max. :278.96		Max. :218.0
NA's :139	NA's :649		NA's :184
 Year			
Min. :1990			
1st Qu.:1990			
Median :2000			
Mean :2000			
3rd Qu.:2010			
Max. :2010			

This will display the minimum, first quartile, median, mean, third quartile, and maximum for each numeric variable, and the frequency counts for each factor level for categorical variables.


14.5. Data Visualization

Visualizing the data can help you identify patterns and trends in the dataset. Let's start by creating a histogram of the Age variable using the `hist()` function.

This will create a histogram showing the frequency distribution of ages in the dataset. You can customize the appearance of the histogram by adjusting the parameters within the `hist()` function.

14. Case Study: Behavioral Risk Factor Surveillance System

```
hist(brfss$Age, main = "Age Distribution",
      xlab = "Age", col = "lightblue")
```

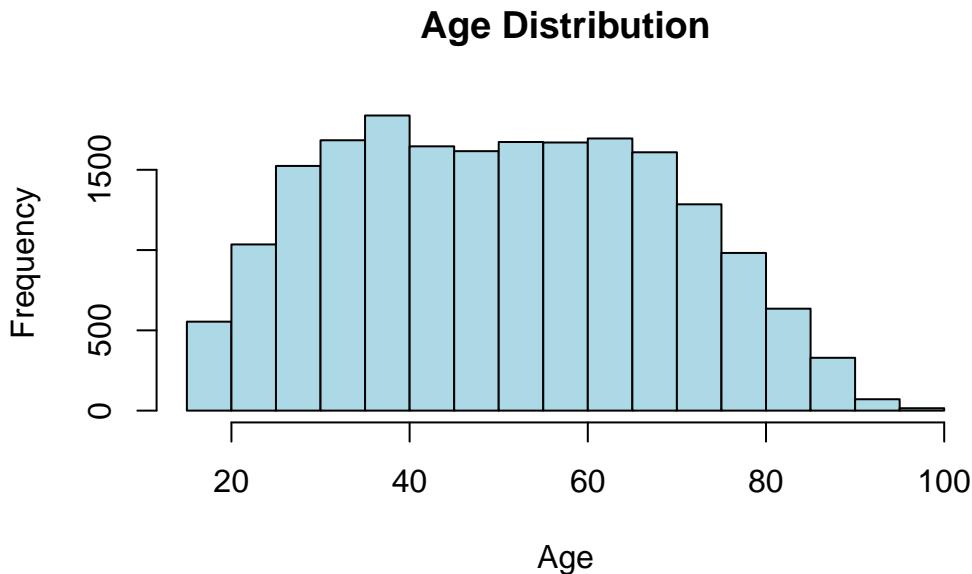

💡 What are the options for a histogram?


The `hist()` function has many options. For example, you can change the number of bins, the color of the bars, the title, and the x-axis label. You can also add a vertical line at the mean or median, or add a normal curve to the histogram. For more information, type `?hist` in the R console.

More generally, it is important to understand the options available for each function you use. You can do this by reading the documentation for the function, which can be accessed by typing `?function_name` or `help("function_name")` in the R console.

Next, let's create a boxplot to compare the distribution of Weight between males and females. We will use the `boxplot()` function for this. This will create a boxplot comparing the weight distribution between males and females. You can customize the appearance of the boxplot by adjusting the parameters within the `boxplot()` function.

```
boxplot(brfss$Weight ~ brfss$Sex, main = "Weight Distribution by Sex",
        xlab = "Sex", ylab = "Weight", col = c("pink", "lightblue"))
```

Weight Distribution by Sex

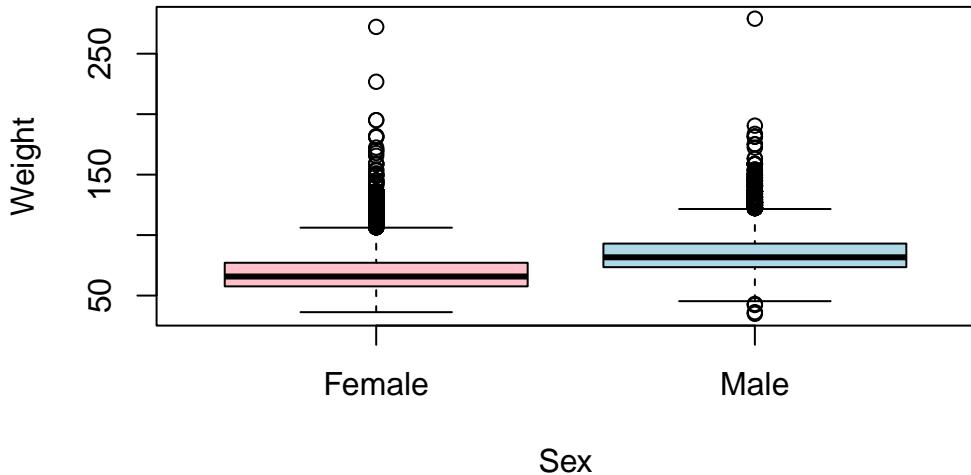


14.6. Analyzing Relationships Between Variables

To further explore the data, let's investigate the relationship between age and weight using a scatterplot. We will use the `plot()` function for this:

This will create a scatterplot of age and weight, allowing you to visually assess the relationship between these two variables.

```
plot(brfss$Age, brfss$Weight, main = "Scatterplot of Age and Weight",
     xlab = "Age", ylab = "Weight", col = "darkblue")
```

Scatterplot of Age and Weight

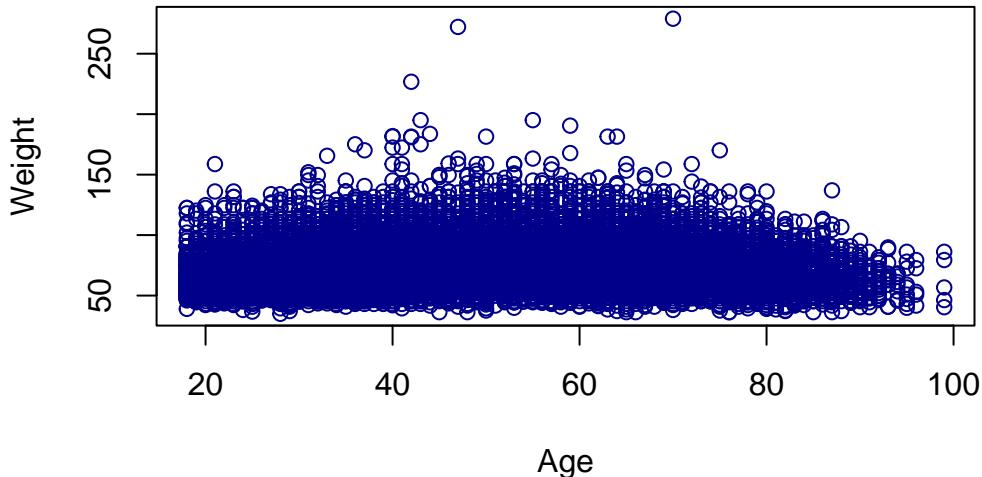

To quantify the strength of the relationship between age and weight, we can calculate the correlation coefficient using the `cor()` function:

This will return the correlation coefficient between age and weight, which can help you determine whether there is a linear relationship between these variables.

```
cor(brfss$Age, brfss$Weight)
```

```
[1] NA
```

Why does `cor()` give a value of NA? What can we do about it? A quick glance at `help("cor")` will give you the answer.

```
cor(brfss$Age, brfss$Weight, use = "complete.obs")
```

```
[1] 0.02699989
```

14.7. Exercises

1. What is the mean weight in this dataset? How about the median? What is the difference between the two? What does this tell you about the distribution of weights in the dataset?

14. Case Study: Behavioral Risk Factor Surveillance System

```
mean(brfss$Weight, na.rm = TRUE)  
[1] 75.42455  
  
median(brfss$Weight, na.rm = TRUE)  
[1] 72.57478  
  
mean(brfss$Weight, na.rm=TRUE) - median(brfss$Weight, na.rm = TRUE)  
[1] 2.849774
```

- Given the findings about the `mean` and `median` in the previous exercise, use the `hist()` function to create a histogram of the weight distribution in this dataset. How would you describe the shape of this distribution?


```
hist(brfss$Weight, xlab="Weight (kg)", breaks = 30)
```



- Use `plot()` to examine the relationship between height and weight in this dataset.

```
plot(brfss$Height, brfss$Weight)
```

14. Case Study: Behavioral Risk Factor Surveillance System

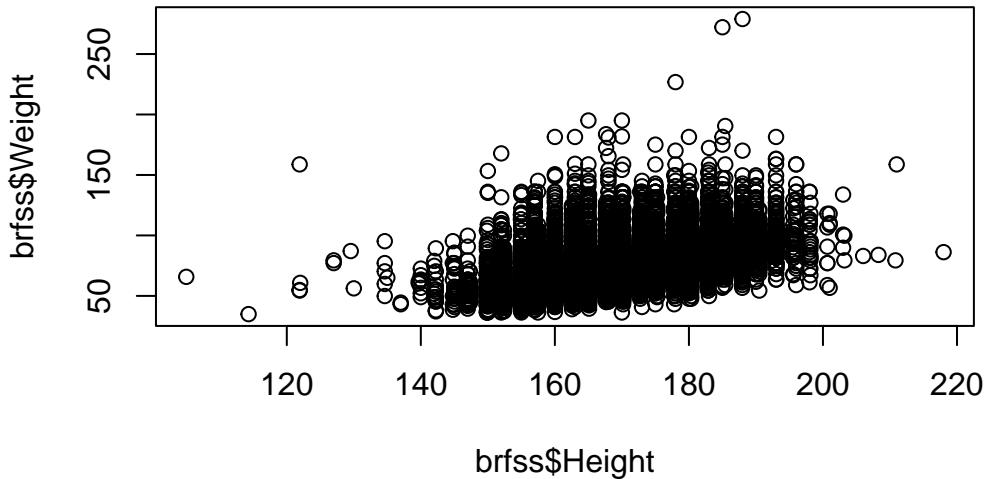

4. What is the correlation between height and weight? What does this tell you about the relationship between these two variables?


```
cor(brfss$Height, brfss$Weight, use = "complete.obs")
```

[1] 0.5140928

5. Create a histogram of the height distribution in this dataset. How would you describe the shape of this distribution?

```
hist(brfss$Height, xlab="Height (cm)", breaks = 30)
```

Histogram of brfss\$Height

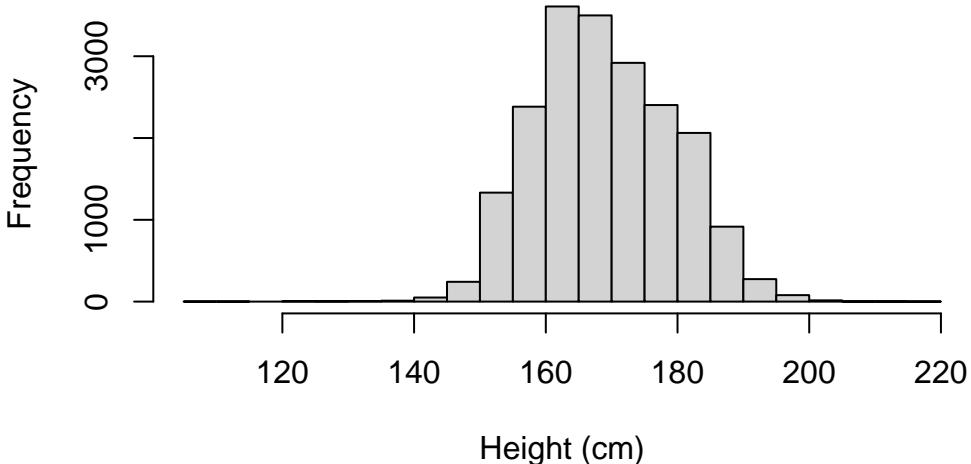

14.8. Conclusion

In this chapter, we have demonstrated how to perform an exploratory data analysis on the Behavioral Risk Factor Surveillance System dataset using R. We covered data loading, inspection, summary statistics, visualization, and the analysis of relationships between variables. By actively engaging with the R code and data, you have gained valuable experience in using R for EDA and are well-equipped to tackle more complex analyses in your future work.

Remember that EDA is just the beginning of the data analysis process, and further statistical modeling and hypothesis testing will likely be necessary to draw meaningful conclusions from your data. However, EDA is a crucial step in understanding your data and informing your subsequent analyses.

14.9. Learn about the data

Using the data exploration techniques you have seen to explore the brfss dataset.

- `summary()`
- `dim()`
- `colnames()`
- `head()`
- `tail()`
- `class()`
- `View()`

You may want to investigate individual columns visually using plotting like `hist()`. For categorical data, consider using something like `table()`.

14.10. Clean data

R read `Year` as an integer value, but it's really a `factor`

```
brfss$Year <- factor(brfss$Year)
```

14.11. Weight in 1990 vs. 2010 Females


- Create a subset of the data

```
brfssFemale <- brfss[brfss$Sex == "Female",]
summary(brfssFemale)
```

	Age	Weight	Sex	Height
Min.	18.00	36.29	Length:12039	Min. :105.0
1st Qu.	37.00	57.61	Class :character	1st Qu.:157.5
Median	52.00	65.77	Mode :character	Median :163.0
Mean	51.92	69.05		Mean :163.3
3rd Qu.	67.00	77.11		3rd Qu.:168.0
Max.	99.00	272.16		Max. :200.7
NA's	103	NA's :560		NA's :140
	Year			
	1990:5718			
	2010:6321			

- Visualize

```
plot(Weight ~ Year, brfssFemale)
```

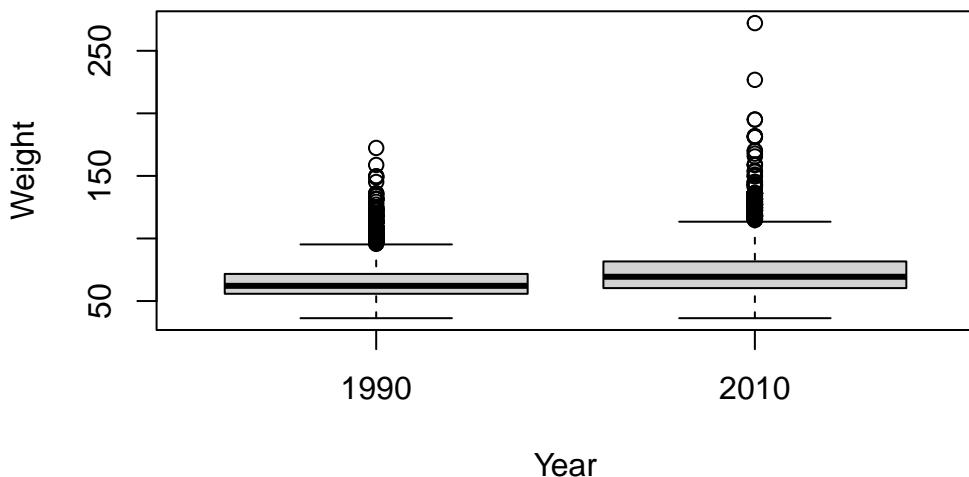

14. Case Study: Behavioral Risk Factor Surveillance System

- Statistical test

```
t.test(Weight ~ Year, brfssFemale)
```

Welch Two Sample t-test

```
data: Weight by Year
t = -27.133, df = 11079, p-value < 2.2e-16
alternative hypothesis: true difference in means between group 1990 and group 2010 is not equal to 0
95 percent confidence interval:
-8.723607 -7.548102
sample estimates:
mean in group 1990 mean in group 2010
64.81838          72.95424
```

14.12. Weight and height in 2010 Males

- Create a subset of the data

```
brfss2010Male <- subset(brfss, Year == 2010 & Sex == "Male")
summary(brfss2010Male)
```


Age	Weight	Sex	Height	Year
Min. :18.00	Min. : 36.29	Length:3679	Min. :135	1990: 0
1st Qu.:45.00	1st Qu.: 77.11	Class :character	1st Qu.:173	2010:3679
Median :57.00	Median : 86.18	Mode :character	Median :178	
Mean :56.25	Mean : 88.85		Mean :178	
3rd Qu.:68.00	3rd Qu.: 99.79		3rd Qu.:183	
Max. :99.00	Max. :278.96		Max. :218	
NA's :30	NA's :49		NA's :31	

- Visualize the relationship

```
hist(brfss2010Male$Weight)
```


14. Case Study: Behavioral Risk Factor Surveillance System

Histogram of brfss2010Male\$Weight

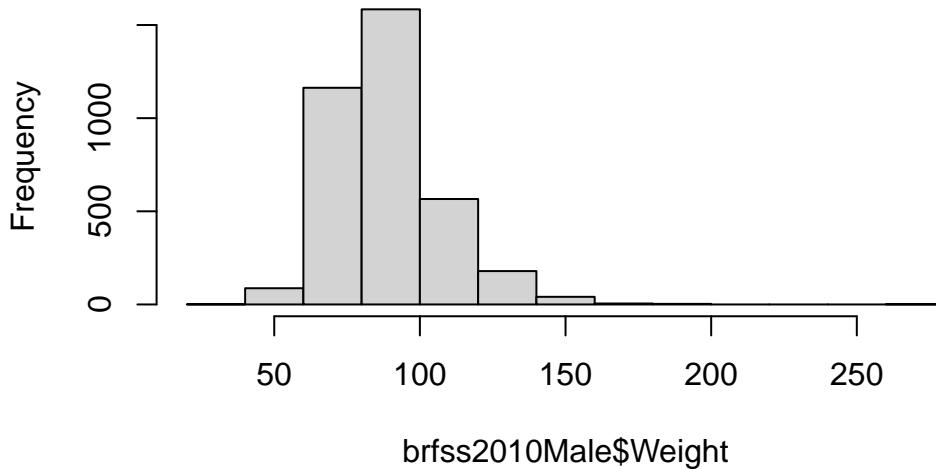


```
hist(brfss2010Male$Height)
```

Histogram of brfss2010Male\$Height

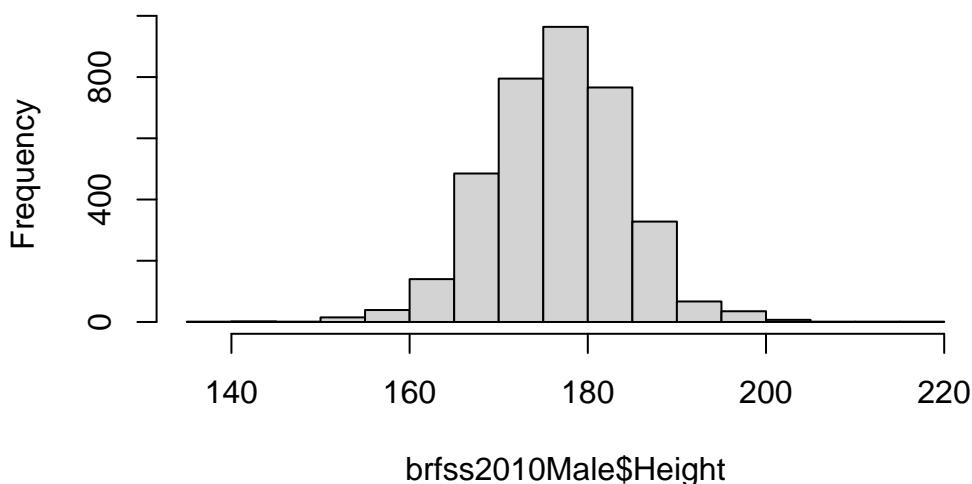

```
plot(Weight ~ Height, brfss2010Male)
```

14. Case Study: Behavioral Risk Factor Surveillance System

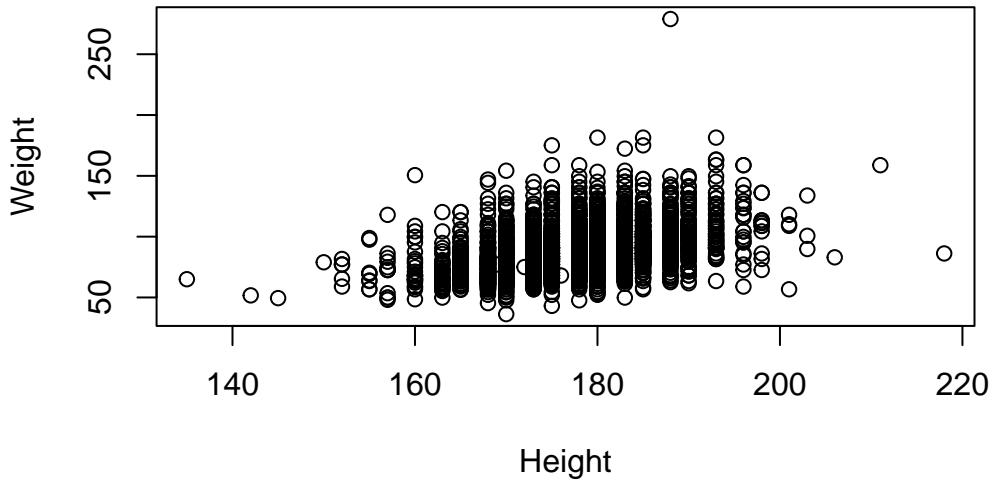

- Fit a linear model (regression)

```
fit <- lm(Weight ~ Height, brfss2010Male)
fit
```

```
Call:
lm(formula = Weight ~ Height, data = brfss2010Male)
```

```
Coefficients:
```

(Intercept)	Height
-86.8747	0.9873

Summarize as ANOVA table

```
anova(fit)
```

Analysis of Variance Table

Response: Weight


	Df	Sum Sq	Mean Sq	F value	Pr(>F)
Height	1	197664	197664	693.8	< 2.2e-16 ***
Residuals	3617	1030484	285		

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

14. Case Study: Behavioral Risk Factor Surveillance System

- Plot points, superpose fitted regression line; where am I?

```
plot(Weight ~ Height, brfss2010Male)
abline(fit, col="blue", lwd=2)
# Substitute your own weight and height...
points(73 * 2.54, 178 / 2.2, col="red", cex=4, pch=20)
```

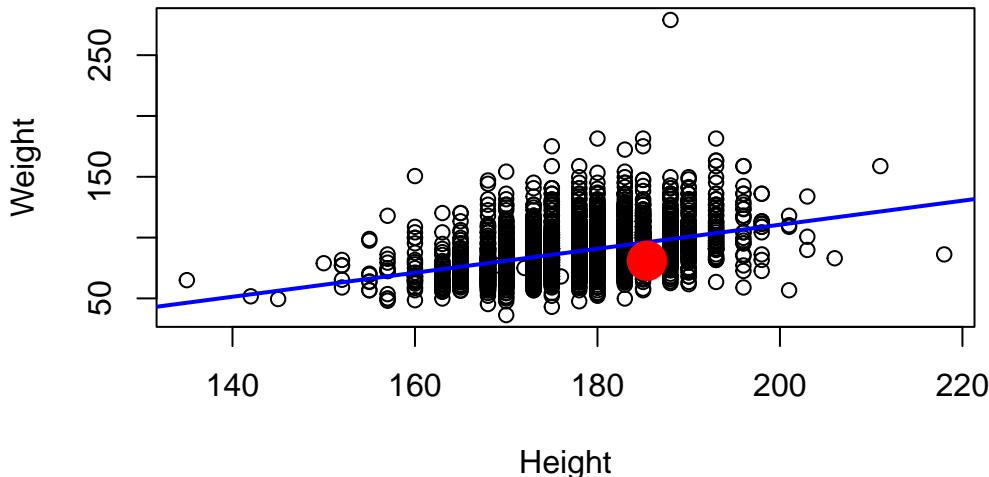

- Class and available ‘methods’

```
class(fit)          # 'noun'
methods(class=class(fit)) # 'verb'
```

- Diagnostics

```
plot(fit)
# Note that the "plot" above does not have a ".lm"
# However, R will use "plot.lm". Why?
?plot.lm
```

Part IV.

statistics

15. Working with distribution functions

Which values do pnorm, dnorm, qnorm, and rnorm return? How do I remember the difference between these?

I find it helpful to have visual representations of distributions as pictures. It is difficult for me to think of distributions, or differences between probability, density, and quantiles without visualizing the shape of the distribution. So I figured it would be helpful to have a visual guide to pnorm, dnorm, qnorm, and rnorm.

Table 15.1.: Table 1.1: Functions for the normal distribution

Function	Input	Output
pnorm	x	$P(X < x)$
dnorm	x	$f(x)$, or the height of the density curve at x
qnorm	q, a quantile from 0 to 1	x such that $P(X < x) = q$
rnorm	n	n random samples from the distribution

15.1. pnorm

This function gives the probability function for a normal distribution. If you do not specify the mean and standard deviation, R defaults to standard normal. Figure 15.1

```
pnorm(q, mean = 0, sd = 1, lower.tail = TRUE, log.p = FALSE)
```

The R help file for pnorm provides the template above. The value you input for q is a value on the x-axis, and the returned value is the area under the distribution curve to the left of that point.

```
Warning: Using `size` aesthetic for lines was deprecated in ggplot2 3.4.0.  
i Please use `linewidth` instead.
```

15. Working with distribution functions

This function gives the probability function for a normal distribution. If you do not specify the mean and standard deviation, R defaults to standard normal.

`pnorm(q, mean = 0, sd = 1, lower.tail = TRUE, log.p = FALSE)` The R help file for `pnorm` provides the template above. The value you input for `q` is a value on the x-axis, and the returned value is the area under the distribution curve to the left of that point.

The option `lower.tail = TRUE` tells R to use the area to the left of the given point. This is the default, so will remain true even without entering it. In order to compute the area to the right of the given point, you can either switch to `lower.tail = FALSE`, or simply calculate `1-pnorm()` instead. This is demonstrated below.

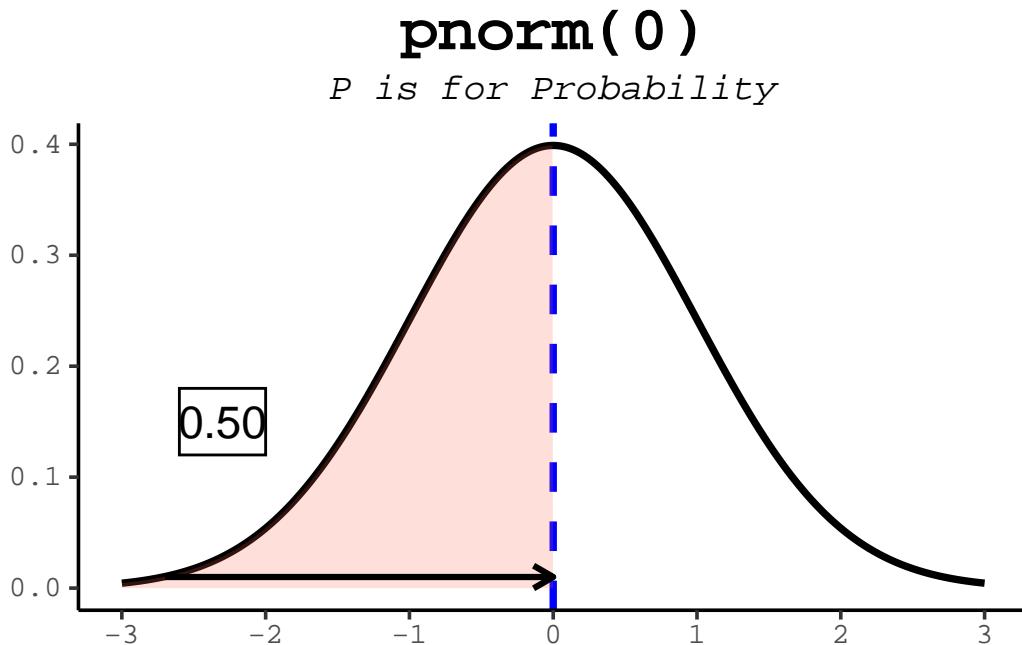


Figure 15.1.: The `pnorm` function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.

The option `lower.tail = TRUE` tells R to use the area to the left of the given point. This is the default, so will remain true even without entering it. In order to compute the area to the right of the given point, you can either switch to `lower.tail = FALSE`, or simply calculate `1-pnorm()` instead.

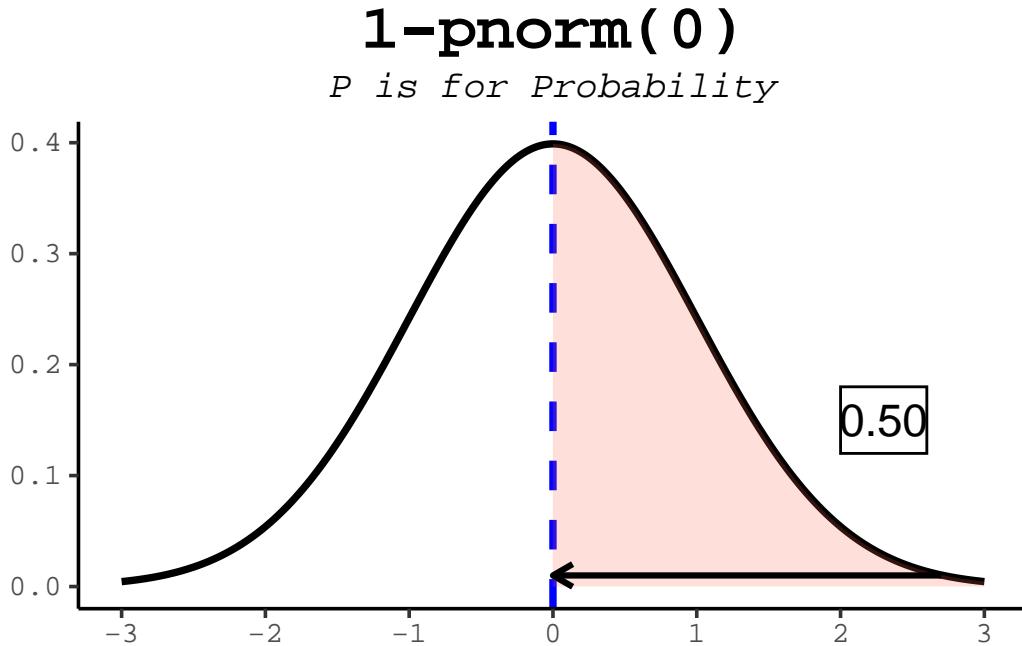


Figure 15.2.: The `pnorm` function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.

15.2. `dnorm`

This function calculates the probability density function (PDF) for the normal distribution. It gives the probability density (height of the curve) at a specified value (x).

15.3. `qnorm`

This function calculates the quantiles of the normal distribution. It returns the value (x) corresponding to a specified probability (p). It is the inverse of the `pnorm` function.

15.4. `rnorm`

```
print(r1)
```

15. Working with distribution functions

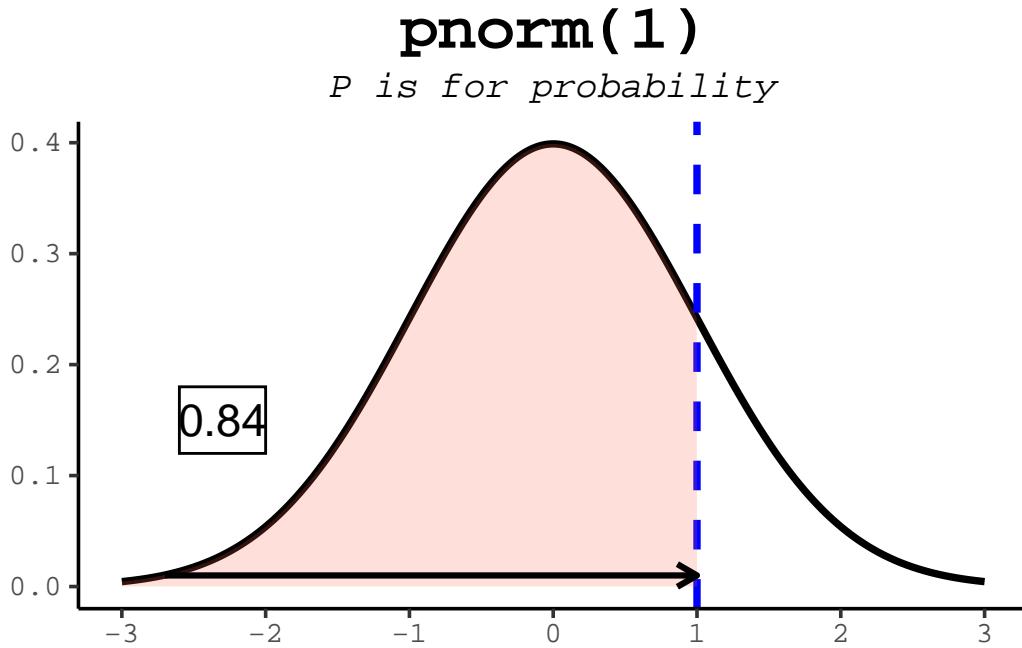


Figure 15.3.: The pnorm function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.

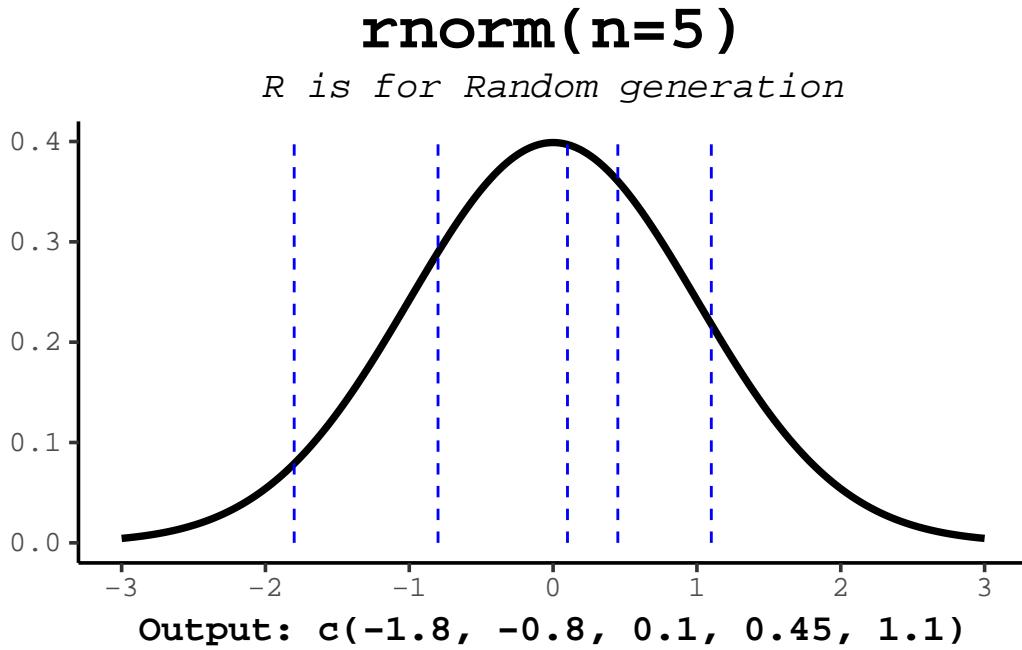


Figure 15.13.: The rnorm function takes a number of samples and returns a vector of random numbers from the normal distribution (with mean=0, sd=1 as defaults)

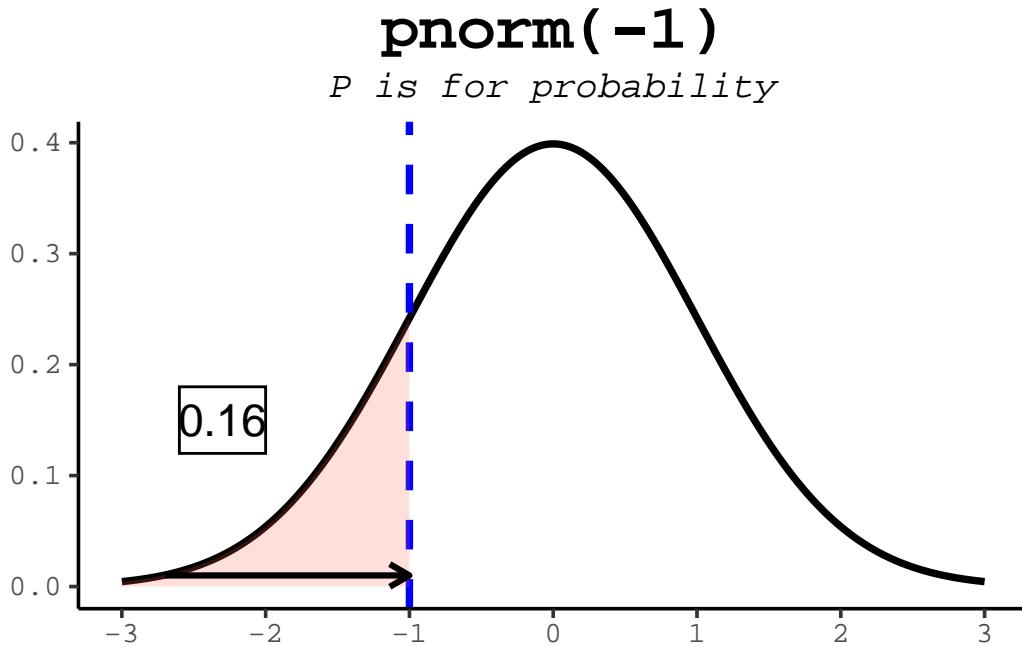


Figure 15.4.: The `pnorm` function takes a quantile (value on the x-axis) and returns the area under the curve to the left of that value.

15.5. IQ scores

Normal Distribution and its Application with IQ

The normal distribution, also known as the Gaussian distribution, is a continuous probability distribution characterized by its bell-shaped curve. It is defined by two parameters: the mean (μ) and the standard deviation (σ). The mean represents the central tendency of the distribution, while the standard deviation represents the dispersion or spread of the data.

The IQ scores are an excellent example of the normal distribution, as they are designed to follow this distribution pattern. The mean IQ score is set at 100, and the standard deviation is set at 15. This means that the majority of the population (about 68%) have an IQ score between 85 and 115, while 95% of the population have an IQ score between 70 and 130.

- What is the probability of having an IQ score between 85 and 115?

```
pnorm(115, mean = 100, sd = 15) - pnorm(85, mean = 100, sd = 15)
```

- What is the 90th percentile of the IQ scores?

15. Working with distribution functions

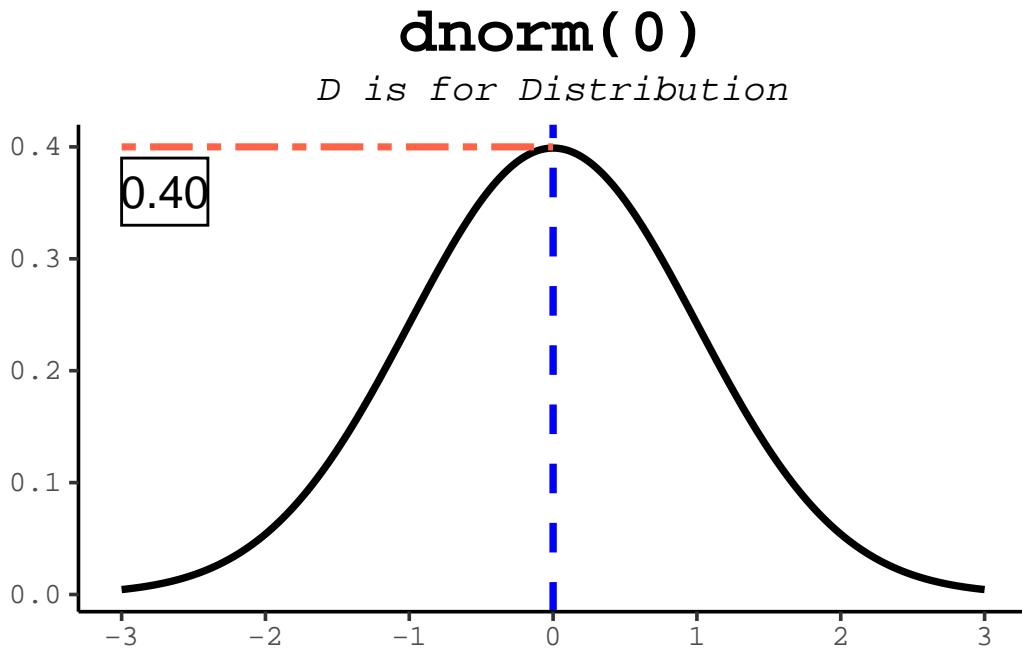


Figure 15.5.: The `dnorm` function returns the height of the normal distribution at a given point.

```
qnorm(0.9, mean = 100, sd = 15)
```

- What is the probability of having an IQ score above 130?

```
1 - pnorm(130, mean = 100, sd = 15)
```

- What is the probability of having an IQ score below 70?

```
pnorm(70, mean = 100, sd = 15)
```

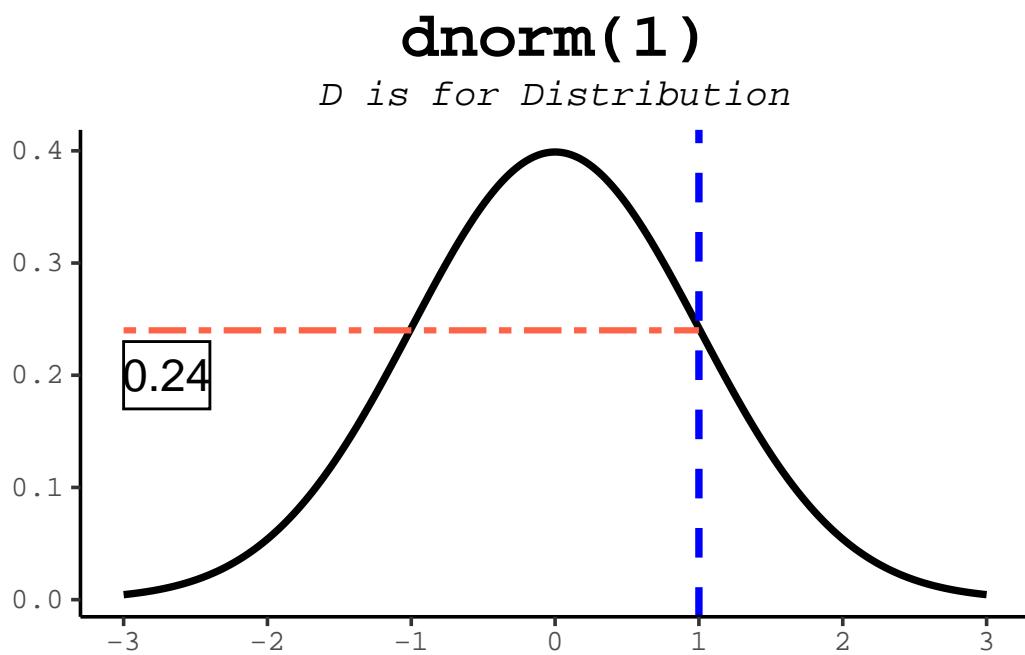


Figure 15.6.: The `dnorm` function returns the height of the normal distribution at a given point.

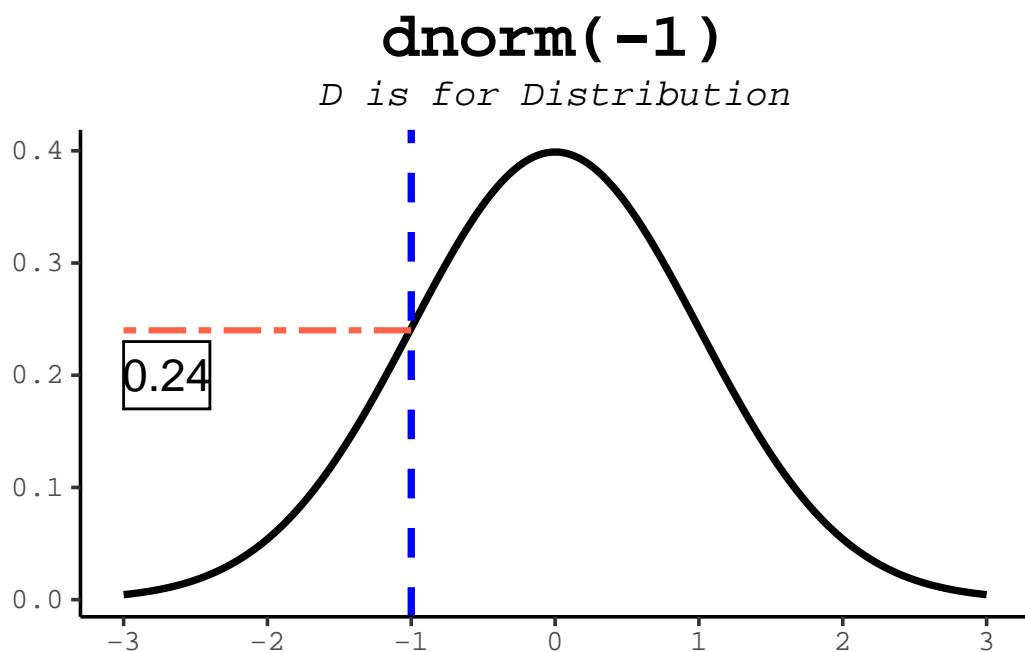


Figure 15.7.: The `dnorm` function returns the height of the normal distribution at a given point.

15. Working with distribution functions

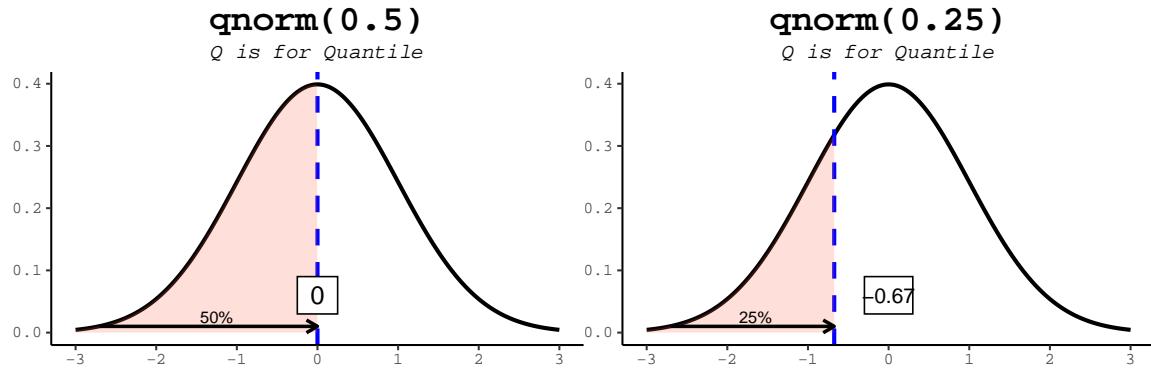


Figure 15.8.: The `qnorm` function is the inverse of the `pnorm` function in that it takes a probability and gives the quantile.

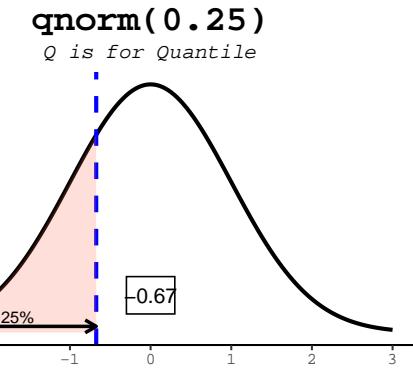


Figure 15.9.: The `qnorm` function is the inverse of the `pnorm` function in that it takes a probability and gives the quantile.

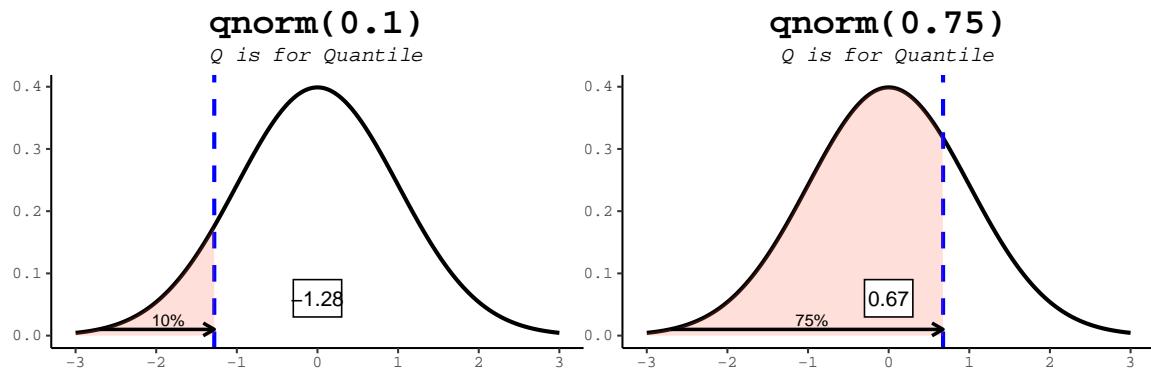


Figure 15.10.: The `qnorm` function is the inverse of the `pnorm` function in that it takes a probability and gives the quantile.

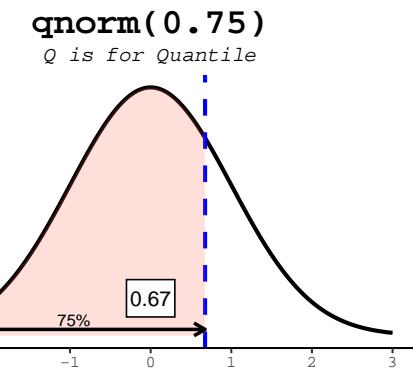


Figure 15.11.: The `qnorm` function is the inverse of the `pnorm` function in that it takes a probability and gives the quantile.

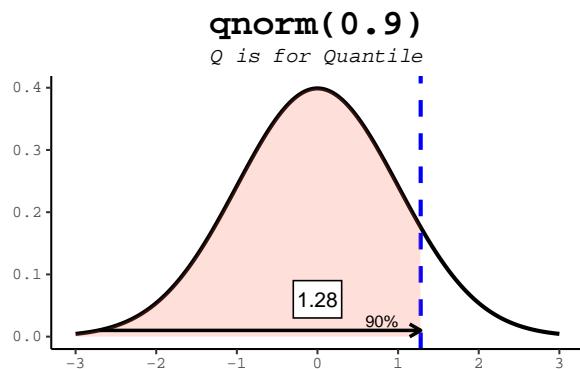


Figure 15.12.: The `qnorm` function is the inverse of the `pnorm` function in that it takes a probability and gives the quantile.

16. The t-statistic and t-distribution

16.1. Background

The t-test is a [statistical hypothesis test](#) that is commonly used when the data are normally distributed (follow a normal distribution) if the value of the population standard deviation were known. When the population standard deviation is not known and is replaced by an estimate based on the data, the test statistic follows a Student's t distribution.

T-tests are handy hypothesis tests in statistics when you want to compare means. You can compare a sample mean to a hypothesized or target value using a one-sample t-test. You can compare the means of two groups with a two-sample t-test. If you have two groups with paired observations (e.g., before and after measurements), use the paired t-test.

A t-test looks at the t-statistic, the t-distribution values, and the degrees of freedom to determine the statistical significance. To conduct a test with three or more means, we would use an analysis of variance.

The distribution that the t-statistic follows was described in a famous paper (Student 1908) by “Student”, a pseudonym for [William Sealy Gosset](#).

16.2. The Z-score and probability

Before talking about the t-distribution and t-scores, let's review the Z-score, its relation to the normal distribution, and probability.

The Z-score is defined as:

$$Z = \frac{x - \mu}{\sigma} \quad (16.1)$$

where μ is the population mean from which x is drawn and σ is the population standard deviation (taken as known, not estimated from the data).

The probability of observing a Z score of z or greater can be calculated by $pnorm(z, \mu, \sigma)$.

16. The *t*-statistic and *t*-distribution

For example, let's assume that our "population" is known and it truly has a mean 0 and standard deviation 1. If we have observations drawn from that population, we can assign a probability of seeing that observation by random chance *under the assumption that the null hypothesis is TRUE*.

```
zscore = seq(-5, 5, 1)
```

For each value of zscore, let's calculate the p-value and put the results in a `data.frame`.

```
df = data.frame(  
  zscore = zscore,  
  pval   = pnorm(zscore, 0, 1)  
)  
df
```


	zscore	pval
1	-5	2.866516e-07
2	-4	3.167124e-05
3	-3	1.349898e-03
4	-2	2.275013e-02
5	-1	1.586553e-01
6	0	5.000000e-01
7	1	8.413447e-01
8	2	9.772499e-01
9	3	9.986501e-01
10	4	9.999683e-01
11	5	9.999997e-01

Why is the p-value of something 5 population standard deviations away from the mean (`zscore=5`) nearly 1 in this calculation? What is the default for `pnorm` with respect to being one-sided or two-sided?

Let's plot the values of probability vs z-score:

```
plot(df$zscore, df$pval, type='b')
```

16. The *t*-statistic and *t*-distribution

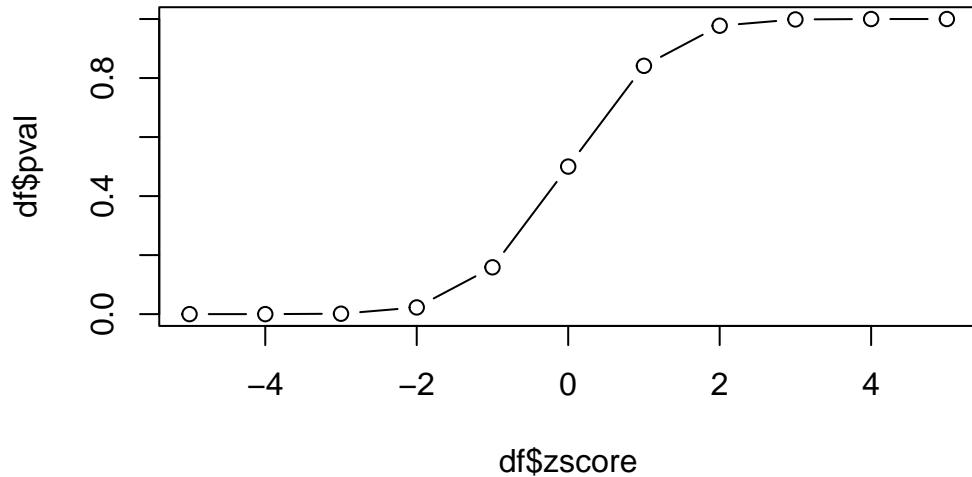

This plot is the *empirical* cumulative density function (cdf) for our data. How can we use it? If we know the z-score, we can look up the probability of observing that value. Since we have constructed our experiment to follow the standard normal distribution, this cdf also represents the cdf of the standard normal distribution.

16.2.1. Small diversion: two-sided `pnorm` function

The `pnorm` function returns the “one-sided” probability of having a value at least as extreme as the observed x and uses the “lower” tail by default. Let’s create a function that computes two-sided p-values.

1. Take the absolute value of x
2. Compute `pnorm` with `lower.tail=FALSE` so we get lower p-values with larger values of x .
3. Since we want to include both tails, we need to multiply the area (probability) returned by `pnorm` by 2.

```
twosidedpnorm = function(x, mu=0, sd=1) {  
  2*pnorm(abs(x), mu, sd, lower.tail=FALSE)  
}
```

And we can test this to see how likely it is to be 2 or 3 standard deviations from the mean:

```
twosidedpnorm(2)
```

16. The t-statistic and t-distribution

```
[1] 0.04550026
```

```
twosidedpnorm(3)
```

```
[1] 0.002699796
```

16.3. The t-distribution

We spent time above working with z-scores and probability. An important aspect of working with the normal distribution is that we MUST assume that we know the standard deviation. Remember that the Z-score is defined as:

$$Z = \frac{x - \mu}{\sigma}$$

The formula for the *population* standard deviation is:

$$\sigma = \sqrt{\frac{1}{N} \sum_{i=1}^N (xi - \mu)^2} \quad (16.2)$$

In general, the population standard deviation is taken as “known” as we did above.

If we do not but only have a *sample* from the population, instead of using the Z-score, we use the t-score defined as:

$$t = \frac{x - \bar{x}}{s} \quad (16.3)$$

This looks quite similar to the formula for Z-score, but here we have to *estimate* the standard deviation, s from the data. The formula for s is:

$$s = \sqrt{\frac{1}{N-1} \sum_{i=1}^N (x_i - \bar{x})^2} \quad (16.4)$$

Since we are estimating the standard deviation from the data, this leads to extra variability that shows up as “fatter tails” for smaller sample sizes than for larger sample sizes. We can see this by comparing the *t-distribution* for various numbers of degrees of freedom (sample sizes).

16. The t-statistic and t-distribution

We can look at the effect of sample size on the distributions graphically by looking at the densities for 3, 5, 10, 20 degrees of freedom and the normal distribution:

```
library(dplyr)
library(ggplot2)
t_values = seq(-6,6,0.01)
df = data.frame(
  value = t_values,
  t_3   = dt(t_values,3),
  t_6   = dt(t_values,6),
  t_10  = dt(t_values,10),
  t_20  = dt(t_values,20),
  Normal= dnorm(t_values)
) |>
  tidyr::gather("Distribution", "density", -value)
ggplot(df, aes(x=value, y=density, color=Distribution)) +
  geom_line()
```


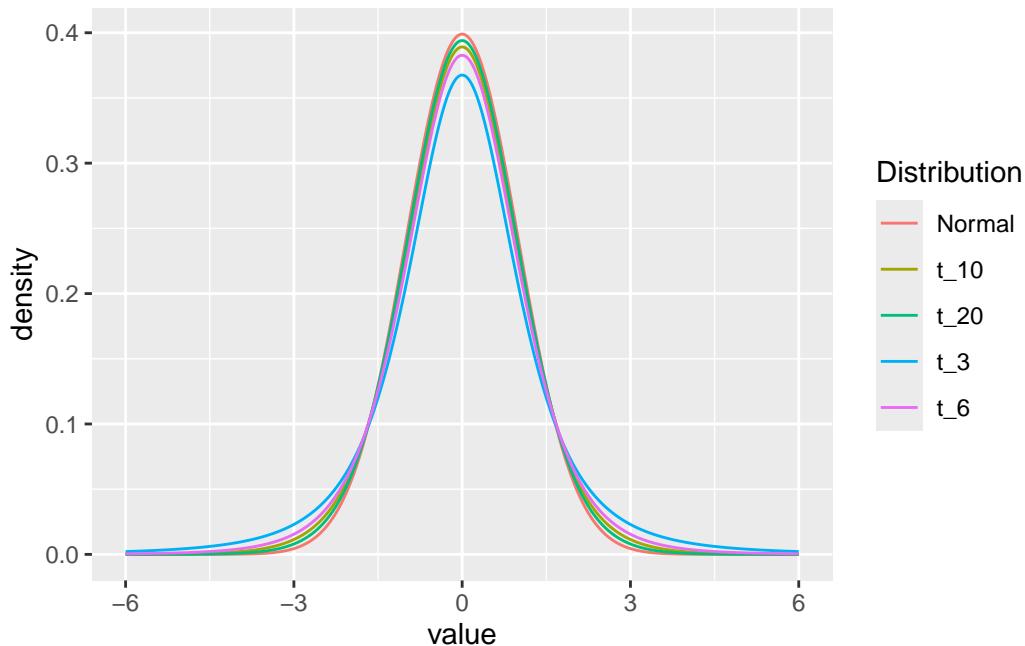


Figure 16.1.: t-distributions for various degrees of freedom. Note that the tails are fatter for smaller degrees of freedom, which is a result of estimating the standard deviation from the data.

16. The t-statistic and t-distribution

The `dt` and `dnorm` functions give the density of the distributions for each point.

```
df2 = df |>
  group_by(Distribution) |>
  arrange(value) |>
  mutate(cdf=cumsum(density))
ggplot(df2, aes(x=value, y=cdf, color=Distribution)) +
  geom_line()
```

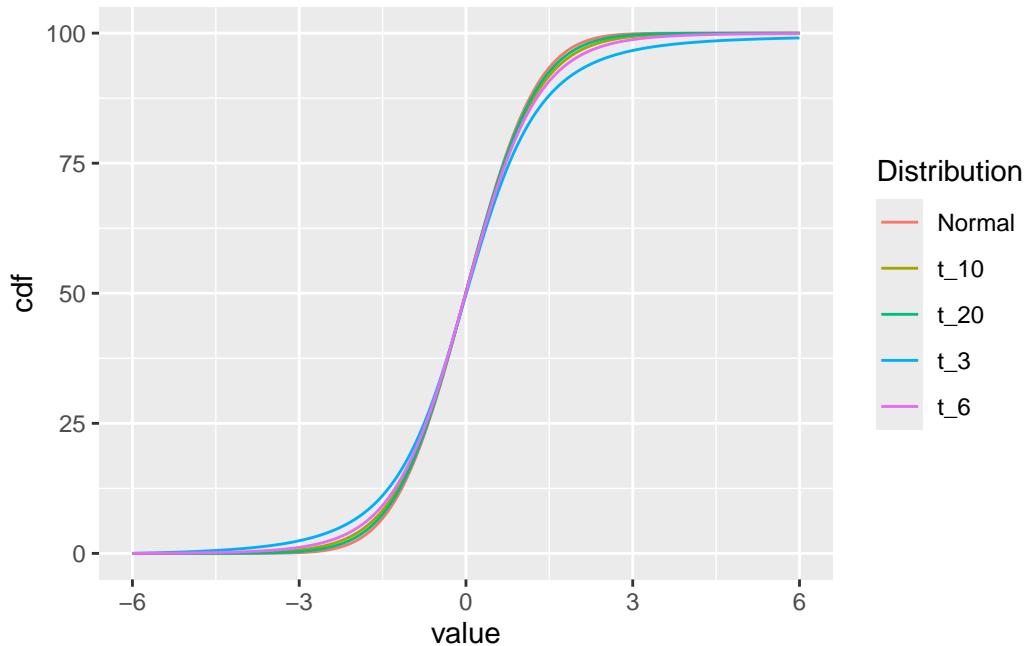

16.3.1. p-values based on Z vs t

When we have a “sample” of data and want to compute the statistical significance of the difference of the mean from the population mean, we calculate the standard deviation of the sample means (standard error).

$$z = \frac{x - \mu}{\sigma / \sqrt{n}}$$

Let’s look at the relationship between the p-values of Z (from the normal distribution) vs t for a **sample** of data.

16. The t-statistic and t-distribution

```
set.seed(5432)
samp = rnorm(5,mean = 0.5)
z = sqrt(length(samp)) * mean(samp) #simplifying assumption (sigma=1, mu=0)
```

And the p-value if we assume we know the standard deviation:

```
pnorm(z, lower.tail = FALSE)
```

```
[1] 0.02428316
```

In reality, we don't know the standard deviation, so we have to estimate it from the data. We can do this by calculating the sample standard deviation:

```
ts = sqrt(length(samp)) * mean(samp) / sd(samp)
pnorm(ts, lower.tail = FALSE)
```

```
[1] 0.0167297
```

```
pt(ts,df = length(samp)-1, lower.tail = FALSE)
```

```
[1] 0.0503001
```

16.3.2. Experiment

When sampling from a normal distribution, we often calculate p-values to test hypotheses or determine the statistical significance of our results. The p-value represents the probability of obtaining a test statistic as extreme or more extreme than the one observed, under the null hypothesis.

In a typical scenario, we assume that the population mean and standard deviation are known. However, in many real-life situations, we don't know the true population standard deviation, and we have to estimate it using the sample standard deviation (Equation 16.4). This estimation introduces some uncertainty into our calculations, which affects the p-values. When we include an estimate of the standard deviation, we switch from using the standard normal (z) distribution to the t-distribution for calculating p-values.

What would happen if we used the normal distribution to calculate p-values when we use the sample standard deviation? Let's find out!

16. The t-statistic and t-distribution

1. Simulate a bunch of samples of size n from the standard normal distribution
2. Calculate the p-value distribution for those samples based on the normal.
3. Calculate the p-value distribution for those samples based on the normal, but with the *estimated* standard deviation.
4. Calculate the p-value distribution for those samples based on the t-distribution.

Create a function that draws a sample of size n from the standard normal distribution.

```
zf = function(n) {  
  samp = rnorm(n)  
  z = sqrt(length(samp)) * mean(samp) / 1 #simplifying assumption (sigma=1, mu=0)  
  z  
}
```

And give it a try:

```
zf(5)
```


```
[1] 0.7406094
```

Perform 10000 replicates of our sampling and z-scoring. We are using the assumption that we know the population standard deviation; in this case, we do know since we are sampling from the standard normal distribution.

```
z10k = replicate(10000,zf(5))  
hist(pnorm(z10k))
```

16. The t -statistic and t -distribution

Histogram of $\text{pnorm}(\text{z10k})$

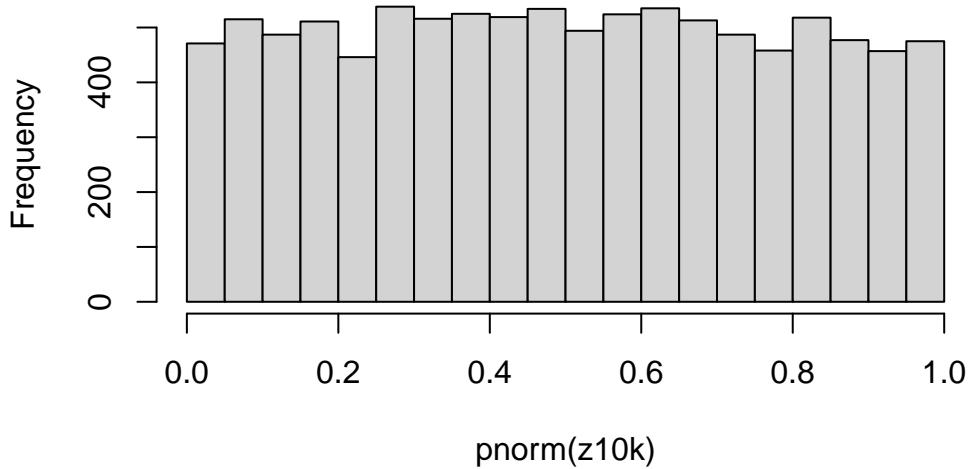

And do the same, but now creating a t -score function. We are using the assumption that we *don't* know the population standard deviation; in this case, we must estimate it from the data. Note the difference in the calculation of the t -score (ts) as compared to the z -score (z).


```
tf = function(n) {
  samp = rnorm(n)
  # now, using the sample standard deviation since we
  # "don't know" the population standard deviation
  ts = sqrt(length(samp)) * mean(samp) / sd(samp)
  ts
}
```

If we use those t -scores and calculate the p -values based on the normal distribution, the histogram of those p -values looks like:

```
t10k = replicate(10000, tf(5))
hist(pnorm(t10k))
```

16. The t -statistic and t -distribution

Histogram of $\text{pnorm}(\text{t10k})$

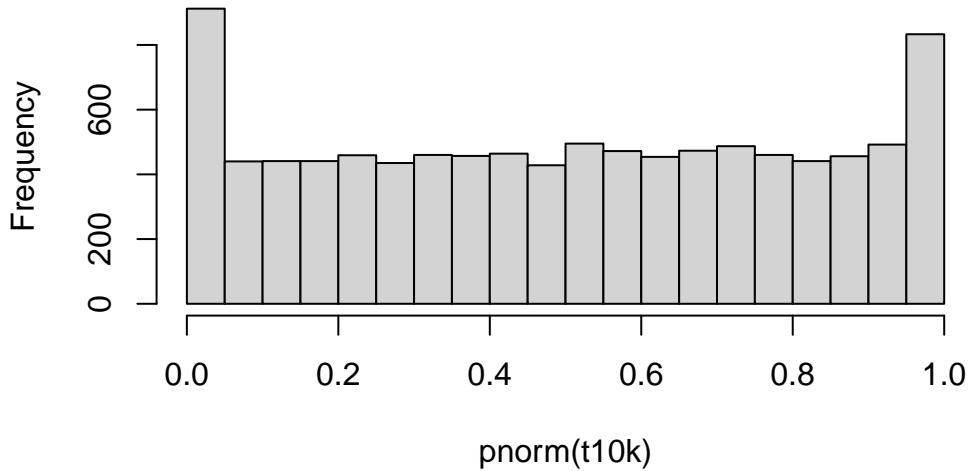


Since we are using the normal distribution to calculate the p-values, we are, in effect, assuming that we know the population standard deviation. This assumption is incorrect, and we can see that the p-values are not uniformly distributed between 0 and 1.

If we use those t-scores and calculate the p-values based on the t -distribution, the histogram of those p-values looks like:

```
hist(pt(t10k, 5))
```

Histogram of $\text{pt}(\text{t10k}, 5)$

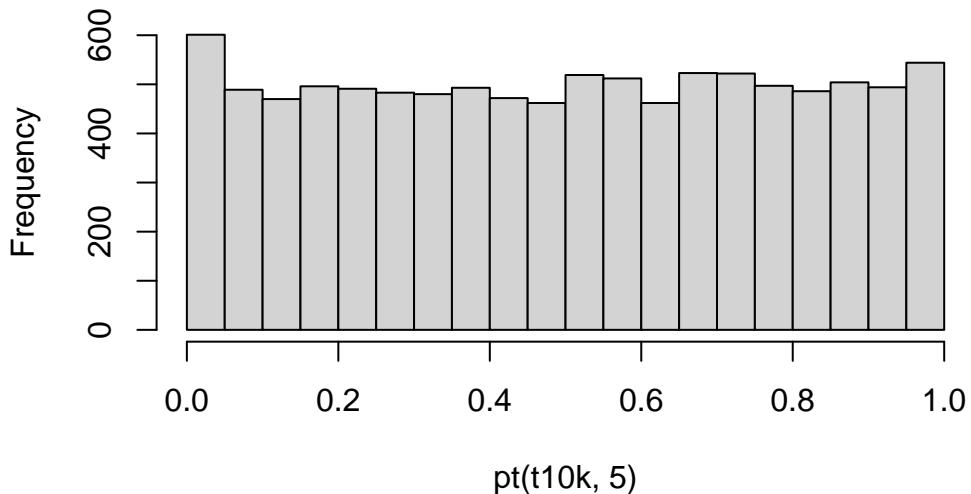


16. The t-statistic and t-distribution

Now, the p-values are uniformly distributed between 0 and 1, as expected.

What is a qqplot and how do we use it? A qqplot is a plot of the quantiles of two distributions against each other. If the two distributions are identical, the points will fall on a straight line. If the two distributions are different, the points will deviate from the straight line. We can use a qqplot to compare the t-distribution to the normal distribution. If the t-distribution is identical to the normal distribution, the points will fall on a straight line. If the t-distribution is different from the normal distribution, the points will deviate from the straight line. In this case, we can see that the t-distribution is different from the normal distribution, as the points deviate from the straight line. What would happen if we increased the sample size? The t-distribution would approach the normal distribution, and the points would fall closer and closer to the straight line.

```
qqplot(z10k,t10k)
abline(0,1)
```

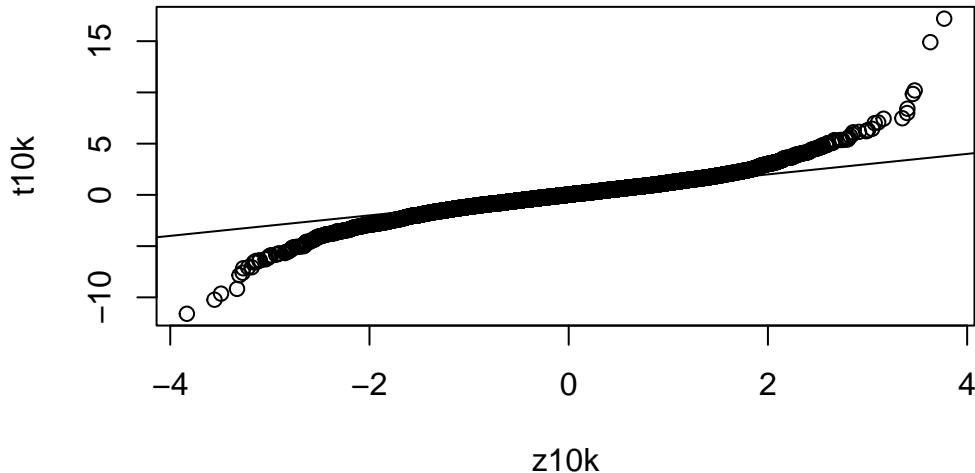

16.4. Summary of t-distribution vs normal distribution

The t-distribution is a family of probability distributions that depends on a parameter called degrees of freedom, which is related to the sample size. The t-distribution approaches the standard normal distribution as the sample size increases but has heavier tails for smaller sample sizes. This means that the t-distribution is more conservative in calculating p-values for small samples, making it harder to reject the null hypothesis. Including an estimate of the standard deviation changes the way we calculate p-values by switching from the standard normal distribution to the t-distribution, which accounts for

16. The *t*-statistic and *t*-distribution

the uncertainty introduced by estimating the population standard deviation from the sample. This adjustment is particularly important for small sample sizes, as it provides a more accurate assessment of the statistical significance of our results.

16.5. `t.test`

16.5.1. One-sample

We are going to use the `t.test` function to perform a one-sample t-test. The `t.test` function takes a vector of values as input that represents the sample values. In this case, we'll simulate our sample using the `rnorm` function and presume that our “effect-size” is 1.

```
x = rnorm(20,1)
# small sample
# Just use the first 5 values of the sample
t.test(x[1:5])
```

One Sample t-test

```
data: x[1:5]
t = 0.97599, df = 4, p-value = 0.3843
alternative hypothesis: true mean is not equal to 0
95 percent confidence interval:
-1.029600 2.145843
sample estimates:
mean of x
0.5581214
```

In this case, we set up the experiment so that the null hypothesis is true (the true mean is not zero, but actually 1). However, we only have a small sample size that leads to a modest p-value.

Increasing the sample size allows us to see the effect more clearly.

```
t.test(x[1:20])
```

16. The t-statistic and t-distribution

One Sample t-test

```
data: x[1:20]
t = 3.8245, df = 19, p-value = 0.001144
alternative hypothesis: true mean is not equal to 0
95 percent confidence interval:
0.3541055 1.2101894
sample estimates:
mean of x
0.7821474
```

16.5.2. two-sample

```
x = rnorm(10,0.5)
y = rnorm(10,-0.5)
t.test(x,y)
```

Welch Two Sample t-test

```
data: x and y
t = 3.4296, df = 17.926, p-value = 0.003003
alternative hypothesis: true difference in means is not equal to 0
95 percent confidence interval:
0.5811367 2.4204048
sample estimates:
mean of x mean of y
0.7039205 -0.7968502
```

16.5.3. from a data.frame

In some situations, you may have data and groups as columns in a data.frame. See the following data.frame, for example

```
df = data.frame(value=c(x,y),group=as.factor(rep(c('g1','g2'),each=10)))
df
```

16. The t-statistic and t-distribution

	value	group
1	1.12896674	g1
2	-1.26838101	g1
3	1.04577597	g1
4	1.69075585	g1
5	0.18672204	g1
6	1.99715092	g1
7	1.15424947	g1
8	0.37671442	g1
9	-0.09565723	g1
10	0.82290783	g1
11	-1.48530261	g2
12	-1.29200440	g2
13	-0.18778362	g2
14	0.59205742	g2
15	-2.10065248	g2
16	-0.29961560	g2
17	-0.38985115	g2
18	-2.47126235	g2
19	-0.63654380	g2
20	0.30245611	g2

R allows us to perform a t-test using the `formula` notation.

```
t.test(value ~ group, data=df)
```

```
Welch Two Sample t-test

data: value by group
t = 3.4296, df = 17.926, p-value = 0.003003
alternative hypothesis: true difference in means between group g1 and group g2 is not equal
95 percent confidence interval:
 0.5811367 2.4204048
sample estimates:
mean in group g1 mean in group g2
 0.7039205      -0.7968502
```

You read that as **value is a function of group**. In practice, this will do a t-test between the **values** in g1 vs g2.

16.5.4. Equivalence to linear model

```
t.test(value ~ group, data=df, var.equal=TRUE)
```

Two Sample t-test

```
data: value by group
t = 3.4296, df = 18, p-value = 0.002989
alternative hypothesis: true difference in means between group g1 and group g2 is not equal
95 percent confidence interval:
0.5814078 2.4201337
sample estimates:
mean in group g1 mean in group g2
0.7039205      -0.7968502
```

This is *equivalent* to:

```
res = lm(value ~ group, data=df)
summary(res)
```

```
Call:
lm(formula = value ~ group, data = df)

Residuals:
    Min      1Q  Median      3Q     Max 
-1.9723 -0.5600  0.2511  0.5252  1.3889 

Coefficients:
            Estimate Std. Error t value Pr(>|t|)    
(Intercept)  0.7039     0.3094   2.275  0.03538 *  
groupg2     -1.5008     0.4376  -3.430  0.00299 ** 
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Residual standard error: 0.9785 on 18 degrees of freedom
Multiple R-squared:  0.3952,    Adjusted R-squared:  0.3616 
F-statistic: 11.76 on 1 and 18 DF,  p-value: 0.002989
```

16.6. Power calculations

The power of a statistical test is the probability that the test will reject the null hypothesis when the alternative hypothesis is true. In other words, the power of a statistical test is the probability of not making a Type II error. The power of a statistical test depends on the significance level (alpha), the sample size, and the effect size.

The `power.t.test` function can be used to calculate the power of a one-sample t-test.

Looking at `help("power.t.test")`, we see that the function takes the following arguments:

- `n` - sample size
- `delta` - effect size
- `sd` - standard deviation of the sample
- `sig.level` - significance level
- `power` - power

We need to supply four of these arguments to calculate the fifth. For example, if we want to calculate the power of a one-sample t-test with a sample size of 5, a standard deviation of 1, and an effect size of 1, we can use the following command:

```
power.t.test(n = 5, delta = 1, sd = 1, sig.level = 0.05)
```

```
Two-sample t test power calculation
```

```

n = 5
delta = 1
sd = 1
sig.level = 0.05
power = 0.2859276
alternative = two.sided
```

NOTE: n is number in *each* group

This gives a nice summary of the power calculation. We can also extract the power value from the result:

16. The *t*-statistic and *t*-distribution

```
power.t.test(n = 5, delta = 1, sd = 1,  
             sig.level = 0.05, type='one.sample')$power
```

```
[1] 0.4013203
```

Tip

When getting results from a function that don't look "computable" such as those from `power.t.test`, you can use the `$` operator to extract the value you want. In this case, we want the `power` value from the result of `power.t.test`.

How would you know what to extract? You can use the `names` function or the `str` function to see the structure of the result. For example:

```
names(power.t.test(n = 5, delta = 1, sd = 1,  
                   sig.level = 0.05, type='one.sample'))  
  
[1] "n"           "delta"        "sd"          "sig.level"    "power"  
[6] "alternative" "note"         "method"
```

```
# or  
str(power.t.test(n = 5, delta = 1, sd = 1,  
                  sig.level = 0.05, type='one.sample'))
```

```
List of 8  
 $ n           : num 5  
 $ delta       : num 1  
 $ sd          : num 1  
 $ sig.level   : num 0.05  
 $ power       : num 0.401  
 $ alternative: chr "two.sided"  
 $ note        : NULL  
 $ method      : chr "One-sample t test power calculation"  
 - attr(*, "class")= chr "power.htest"
```

Alternatively, we may know a lot about our experimental system and want to calculate the sample size needed to achieve a certain power. For example, if we want to achieve a power of 0.8 with a standard deviation of 1 and an effect size of 1, we can use the following command:

16. The t-statistic and t-distribution

```
power.t.test(delta = 1, sd = 1, sig.level = 0.05, power = 0.8, type = "one.sample")
```

```
One-sample t test power calculation

n = 9.937864
delta = 1
sd = 1
sig.level = 0.05
power = 0.8
alternative = two.sided
```

The `power.t.test` function is convenient and quite fast. As we've seen before, though, sometimes the distribution of the test statistics is now easily calculated. In those cases, we can use simulation to calculate the power of a statistical test. For example, if we want to calculate the power of a one-sample t-test with a sample size of 5, a standard deviation of 1, and an effect size of 1, we can use the following command:

```
sim_t_test_pval <- function(n = 5, delta = 1, sd = 1, sig.level = 0.05) {
  x = rnorm(n, delta, sd)
  t.test(x)$p.value <= sig.level
}
pow = mean(replicate(1000, sim_t_test_pval()))
pow
```

```
[1] 0.405
```

Let's break this down. First, we define a function called `sim_t_test_pval` that takes the same arguments as the `power.t.test` function. Inside the function, we simulate a sample of size `n` from a normal distribution with mean `delta` and standard deviation `sd`. Then, we perform a one-sample t-test on the sample and return a logical value indicating whether the p-value is less than the significance level. Next, we use the `replicate` function to repeat the simulation 1000 times. Finally, we calculate the proportion of simulations in which the p-value was less than the significance level. This proportion is an estimate of the power of the one-sample t-test.

Let's compare the results of the `power.t.test` function and our simulation-based approach:

16. The t-statistic and t-distribution

```
power.t.test(n = 5, delta = 1, sd = 1, sig.level = 0.05, type='one.sample')$power  
  
[1] 0.4013203  
  
mean(replicate(1000, sim_t_test_pval(n = 5, delta = 1, sd = 1, sig.level = 0.05)))  
  
[1] 0.414
```

16.7. Resources

See the [pwr package](#) for more information on power calculations.

17. K-means clustering

17.1. History of the k-means algorithm

The k-means clustering algorithm was first proposed by Stuart Lloyd in 1957 as a technique for pulse-code modulation. However, it was not published until 1982. In 1965, Edward W. Forgy published an essentially identical method, which became widely known as the k-means algorithm. Since then, k-means clustering has become one of the most popular unsupervised learning techniques in data analysis and machine learning.

K-means clustering is a method for finding patterns or groups in a dataset. It is an unsupervised learning technique, meaning that it doesn't rely on previously labeled data for training. Instead, it identifies structures or patterns directly from the data based on the similarity between data points (see Figure 17.1).

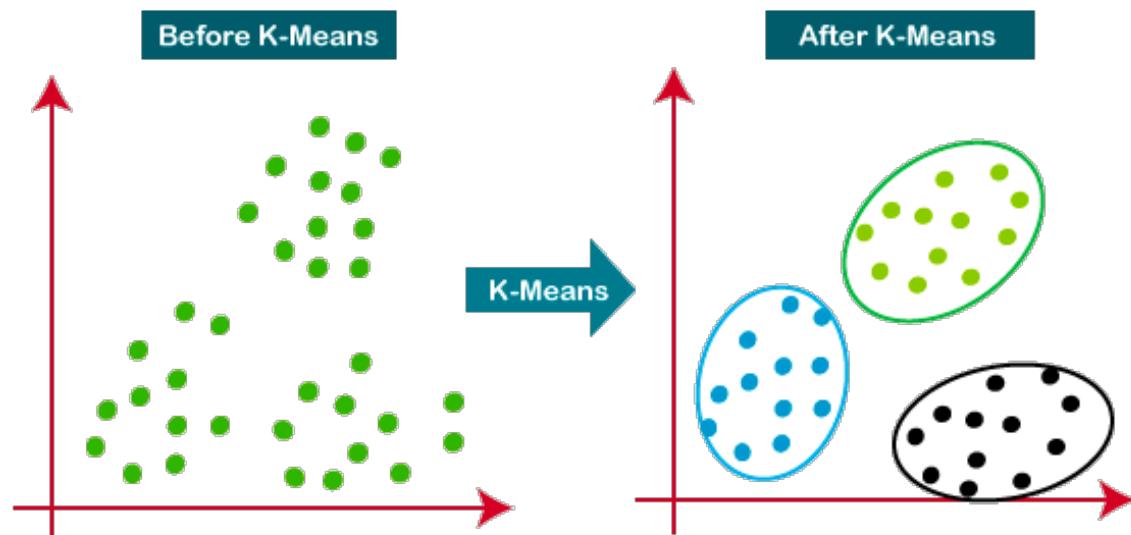


Figure 17.1.: K-means clustering takes a dataset and divides it into k clusters.

In simple terms, k-means clustering aims to divide a dataset into k distinct groups or clusters, where each data point belongs to the cluster with the nearest mean (average).

17. K-means clustering

The goal is to minimize the variability within each cluster while maximizing the differences between clusters. This helps to reveal hidden patterns or relationships in the data that might not be apparent otherwise.

17.2. The k-means algorithm

The k-means algorithm follows these general steps:

1. Choose the number of clusters k .
2. Initialize the cluster centroids randomly by selecting k data points from the dataset.
3. Assign each data point to the nearest centroid.
4. Update the centroids by computing the mean of all the data points assigned to each centroid.
5. Repeat steps 3 and 4 until the centroids no longer change or a certain stopping criterion is met (e.g., a maximum number of iterations).

The algorithm converges when the centroids stabilize or no longer change significantly. The final clusters represent the underlying patterns or structures in the data. Advantages and disadvantages of k-means clustering

17.3. Pros and cons of k-means clustering

Compared to other clustering algorithms, k-means has several advantages:

- **Simplicity and ease of implementation** The k-means algorithm is relatively straightforward and can be easily implemented, even for large datasets.
- **Scalability** The algorithm can be adapted for large datasets using various optimization techniques or parallel processing.
- **Speed** K-means is generally faster than other clustering algorithms, especially when the number of clusters k is small.
- **Interpretability** The results of k-means clustering are easy to understand, as the algorithm assigns each data point to a specific cluster based on its similarity to the cluster's centroid.

However, k-means clustering has several disadvantages as well:

17. K-means clustering

- **Choice of k** Selecting the appropriate number of clusters can be challenging and often requires domain knowledge or experimentation. A poor choice of k may yield poor results.
- **Sensitivity to initial conditions** The algorithm's results can vary depending on the initial placement of centroids. To overcome this issue, the algorithm can be run multiple times with different initializations and the best solution can be chosen based on a criterion (e.g., minimizing within-cluster variation).
- **Assumes spherical clusters** K-means assumes that clusters are spherical and evenly sized, which may not always be the case in real-world datasets. This can lead to poor performance if the underlying clusters have different shapes or densities.
- **Sensitivity to outliers** The algorithm is sensitive to outliers, which can heavily influence the position of centroids and the final clustering result. Preprocessing the data to remove or mitigate the impact of outliers can help improve the performance of k-means clustering.

Despite limitations, k-means clustering remains a popular and widely used method for exploring and analyzing data, particularly in biological data analysis, where identifying patterns and relationships can provide valuable insights into complex systems and processes.

17.4. An example of k-means clustering

17.4.1. The data and experimental background

The data we are going to use are from DeRisi, Iyer, and Brown (1997). From their abstract:

DNA microarrays containing virtually every gene of *Saccharomyces cerevisiae* were used to carry out a comprehensive investigation of the temporal program of gene expression accompanying the metabolic shift from fermentation to respiration. The expression profiles observed for genes with known metabolic functions pointed to features of the metabolic reprogramming that occur during the diauxic shift, and the expression patterns of many previously uncharacterized genes provided clues to their possible functions.

These data are available from NCBI GEO as [GSE28](#).

In the case of the baker's or brewer's yeast *Saccharomyces cerevisiae* growing on glucose with plenty of aeration, the diauxic growth pattern is commonly observed in batch culture.

17. K-means clustering

During the first growth phase, when there is plenty of glucose and oxygen available, the yeast cells prefer glucose fermentation to aerobic respiration even though aerobic respiration is the more efficient pathway to grow on glucose. This experiment profiles gene expression for 6400 genes over a time course during which the cells are undergoing a [diauxic shift](#).

The data in deRisi et al. have no replicates and are time course data. Sometimes, seeing how groups of genes behave can give biological insight into the experimental system or the function of individual genes. We can use clustering to group genes that have a similar expression pattern over time and then potentially look at the genes that do so.

Our goal, then, is to use `kmeans` clustering to divide highly variable (informative) genes into groups and then to visualize those groups.

17.5. Getting data

These data were deposited at NCBI GEO back in 2002. GEOquery can pull them out easily.

```
library(GEOquery)
gse = getGEO("GSE28")[[1]]
class(gse)
```

```
[1] "ExpressionSet"
attr(,"package")
[1] "Biobase"
```

GEOquery is a little dated and was written before the `SummarizedExperiment` existed. However, Bioconductor makes a conversion from the old `ExpressionSet` that `GEOquery` uses to the `SummarizedExperiment` that we see so commonly used now.

```
library(SummarizedExperiment)
gse = as(gse, "SummarizedExperiment")
gse
```

```
class: SummarizedExperiment
dim: 6400 7
metadata(3): experimentData annotation protocolData
assays(1): exprs
rownames(6400): 1 2 ... 6399 6400
```

17. K-means clustering

```
rowData names(20): ID ORF ... FAILED IS_CONTAMINATED
colnames(7): GSM887 GSM888 ... GSM892 GSM893
colData names(33): title geo_accession ... supplementary_file
  data_row_count
```

Taking a quick look at the `colData()`, it might be that we want to reorder the columns a bit.

```
colData(gse)$title
```

```
[1] "diauxic shift timecourse: 15.5 hr" "diauxic shift timecourse: 0 hr"
[3] "diauxic shift timecourse: 18.5 hr" "diauxic shift timecourse: 9.5 hr"
[5] "diauxic shift timecourse: 11.5 hr" "diauxic shift timecourse: 13.5 hr"
[7] "diauxic shift timecourse: 20.5 hr"
```

So, we can reorder by hand to get the time course correct:

```
gse = gse[, c(2,4,5,6,1,3,7)]
```

17.6. Preprocessing

In gene expression data analysis, the primary objective is often to identify genes that exhibit significant differences in expression levels across various conditions, such as diseased vs. healthy samples or different time points in a time-course experiment. However, gene expression datasets are typically large, noisy, and contain numerous genes that do not exhibit substantial changes in expression levels. Analyzing all genes in the dataset can be computationally intensive and may introduce noise or false positives in the results.

One common approach to reduce the complexity of the dataset and focus on the most informative genes is to subset the genes based on their standard deviation in expression levels across the samples. The standard deviation is a measure of dispersion or variability in the data, and genes with high standard deviations have more variation in their expression levels across the samples.

By selecting genes with high standard deviations, we focus on genes that show relatively large changes in expression levels across different conditions. These genes are more likely to be biologically relevant and involved in the underlying processes or pathways of interest. In contrast, genes with low standard deviations exhibit little or no change in expression levels and are less likely to be informative for the analysis. It turns out that applying

17. K-means clustering

filtering based on criteria such as standard deviation can also increase power and reduce false positives in the analysis (Bourgon, Gentleman, and Huber 2010).

To subset the genes for analysis based on their standard deviation, the following steps can be followed: Calculate the standard deviation of each gene's expression levels across all samples. Set a threshold for the standard deviation, which can be determined based on domain knowledge, data distribution, or a specific percentile of the standard deviation values (e.g., selecting the top 10% or 25% of genes with the highest standard deviations). Retain only the genes with a standard deviation above the chosen threshold for further analysis.

By subsetting the genes based on their standard deviation, we can reduce the complexity of the dataset, speed up the subsequent analysis, and increase the likelihood of detecting biologically meaningful patterns and relationships in the gene expression data. The threshold for the standard deviation cutoff is rather arbitrary, so it may be beneficial to try a few to check for sensitivity of findings.

```
sds = apply(assays(gse)[[1]], 1, sd)
hist(sds)
```

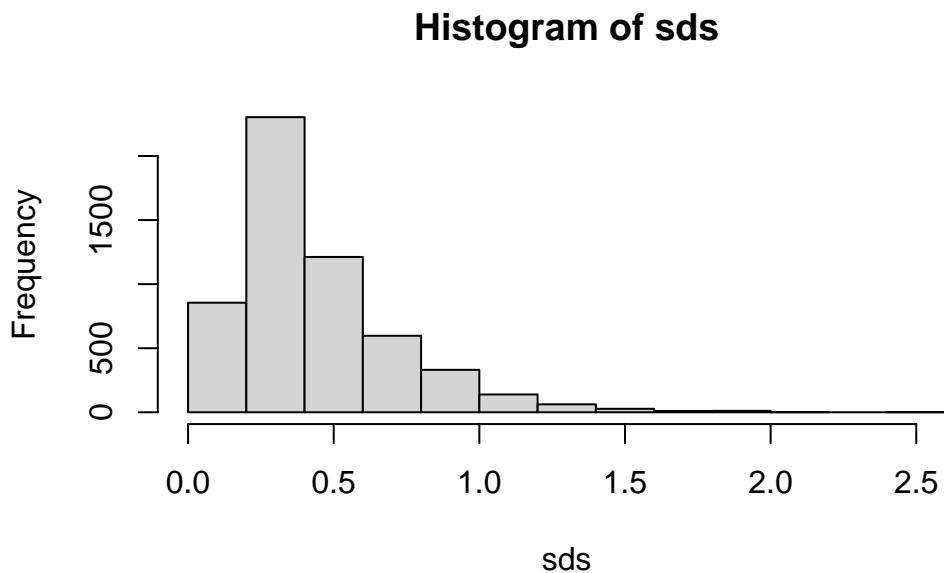


Figure 17.2.: Histogram of standard deviations for all genes in the deRisi dataset.

Examining the plot, we can see that the most highly variable genes have an $sd > 0.8$ or so (arbitrary). We can, for convenience, create a new `SummarizedExperiment` that contains only our most highly variable genes.

```
idx = sds>0.8 & !is.na(sds)
gse_sub = gse[idx,]
```

17.7. Clustering

Now, `gse_sub` contains a subset of our data.

The `kmeans` function takes a matrix and the number of clusters as arguments.

```
k = 4
km = kmeans(assays(gse_sub)[[1]], 4)
```

The `km` `kmeans` result contains a vector, `km$cluster`, which gives the cluster associated with each gene. We can plot the genes for each cluster to see how these different genes behave.

```
expression_values = assays(gse_sub)[[1]]
par(mfrow=c(2,2), mar=c(3,4,1,2)) # this allows multiple plots per page
for(i in 1:k) {
  matplot(t(expression_values[km$cluster==i, ]), type='l', ylim=c(-3,3),
          ylab = paste("cluster", i))
}
```

17. K-means clustering

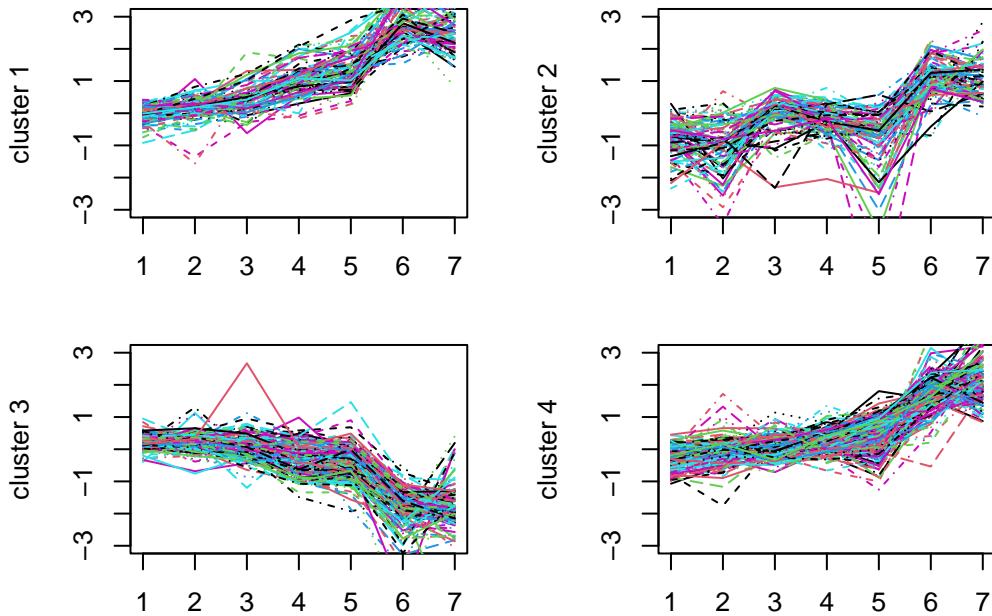


Figure 17.3.: Gene expression profiles for the four clusters identified by k-means clustering.
Each line represents a gene in the cluster, and each column represents a time point in the experiment. Each cluster shows a distinct trend where the genes in the cluster are potentially co-regulated.

Try this with different size k . Perhaps go back to choose more genes (using a smaller cutoff for sd).

17.8. Summary

In this lesson, we have learned how to use k-means clustering to identify groups of genes that behave similarly over time. We have also learned how to subset our data to focus on the most informative genes.

18. Machine Learning

18.1. What is Machine Learning?

Machine learning is a subfield of artificial intelligence that focuses on the development of algorithms and models that enable computers to learn and make decisions or predictions without explicit programming. It has emerged as a powerful tool for solving complex problems across various industries, including healthcare, finance, marketing, and natural language processing. This chapter provides an overview of machine learning, its types, key concepts, applications, and challenges.

Machine learning in biology is a really broad topic. Greener et al. (2022) present a nice overview of the different types of machine learning methods that are used in biology. Libbrecht and Noble (2015) also present an early review of machine learning in genetics and genomics.

18.2. Classes of Machine Learning

18.2.1. Supervised learning

Supervised learning is a type of machine learning where the model learns from labeled data, i.e., input-output pairs, to make predictions. It includes tasks like regression (predicting continuous values) and classification (predicting discrete classes or categories).

18.2.2. Unsupervised learning

Unsupervised learning involves learning from unlabeled data, where the model discovers patterns or structures within the data. Common unsupervised learning tasks include clustering (grouping similar data points), dimensionality reduction (reducing the number of features or variables), and anomaly detection (identifying unusual data points).

i Terminology and Concepts

- **Data** Data is the foundation of machine learning and can be structured (tabular) or unstructured (text, images, audio). It is usually divided into training, validation, and testing sets for model development and evaluation.
- **Features** Features are the variables or attributes used to describe the data points. Feature engineering and selection are crucial steps in machine learning to improve model performance and interpretability.
- **Models and Algorithms** Models are mathematical representations of the relationship between features and the target variable(s). Algorithms are the methods used to train models, such as linear regression, decision trees, and neural networks.
- **Hyperparameters and Tuning** Hyperparameters are adjustable parameters that control the learning process of an algorithm. Tuning involves finding the optimal set of hyperparameters to improve model performance.
- **Evaluation Metrics** Evaluation metrics quantify the performance of a model, such as accuracy, precision, recall, F1-score (for classification), and mean squared error, R-squared (for regression).

```
set.seed(123)
sinsim <- function(n,sd=0.1) {
  x <- seq(0,1,length.out=n)
  y <- sin(2*pi*x) + rnorm(n,0,sd)
  return(data.frame(x=x,y=y))
}
dat <- sinsim(100,0.25)
library(ggplot2)
library(patchwork)
p_base <- ggplot(dat,aes(x=x,y=y)) +
  geom_point(alpha=0.7) +
  theme_bw()
p_lm <- p_base +
  geom_smooth(method="lm", se=FALSE, alpha=0.6, formula = y ~ x)
p_lmsin <- p_base +
  geom_smooth(method="lm",formula=y~sin(2*pi*x), se=FALSE, alpha=0.6)
p_loess_wide <- p_base +
  geom_smooth(method="loess",span=0.5, se=FALSE, alpha=0.6, formula = y ~ x)
```

```
p_loess_narrow <- p_base +
  geom_smooth(method="loess",span=0.1, se=FALSE, alpha=0.6, formula = y ~ x)
p_lm + p_lmsin + p_loess_wide + p_loess_narrow + plot_layout(ncol=2) +
  plot_annotation(tag_levels = 'A') &
  theme(plot.tag = element_text(size = 8))
```

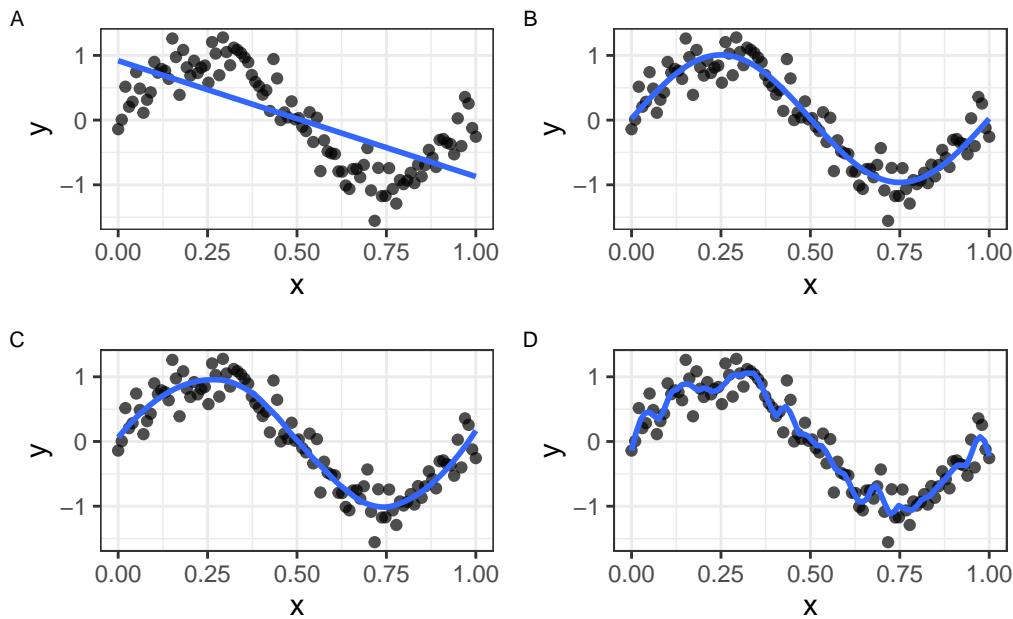


Figure 18.1.: Data simulated according to the function $f(x) = \sin(2\pi x) + N(0, 0.25)$ fitted with four different models. A) A simple linear model demonstrates *underfitting*. B) A linear model with a sin function ($y = \sin(2\pi x)$) and C) a loess model with a wide span (0.5) demonstrate *good fits*. D) A loess model with a narrow span (0.1) is a good example of *overfitting*.

In Figure 18.1, we simulate data according to the function $f(x) = \sin(2\pi x) + N(0, 0.25)$ and fit four different models. Choosing a model that is too simple (A) will result in *underfitting* the data, while choosing a model that is too complex (D) will result in *overfitting* the data.

When thinking about machine learning, it can help to have a simple framework in mind. In Figure 18.2, we present a simple view of machine learning according to the [scikit-learn](#) package.

We're going to focus on supervised learning here. Here is a rough schematic (see Figure 18.3) of the supervised learning process from the [mlr3](#) book.

18. Machine Learning

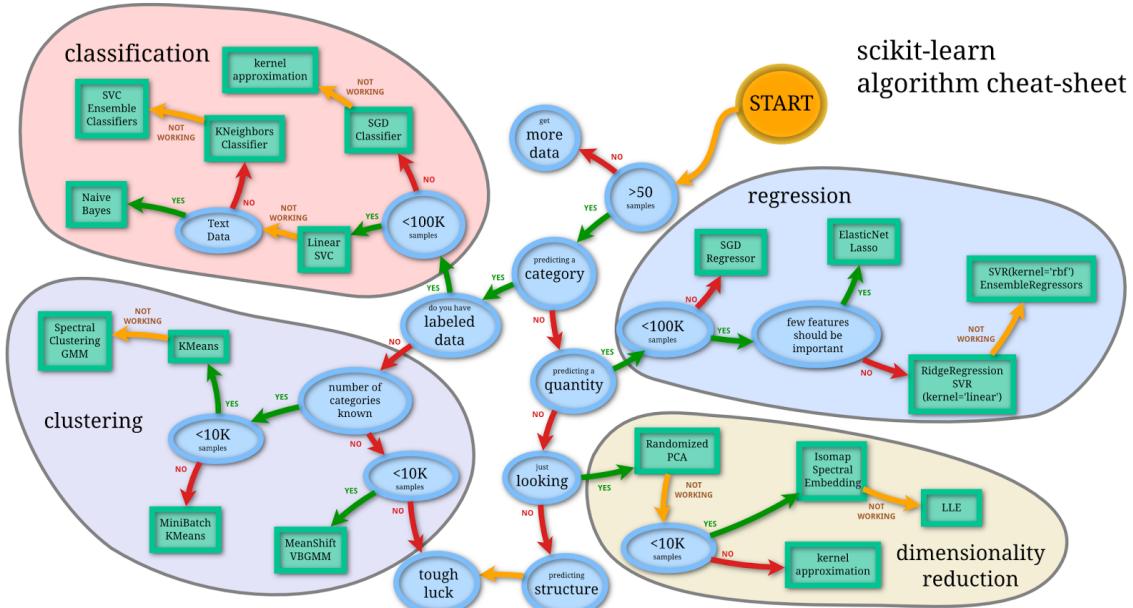


Figure 18.2.: A simple view of machine learning according the sklearn.

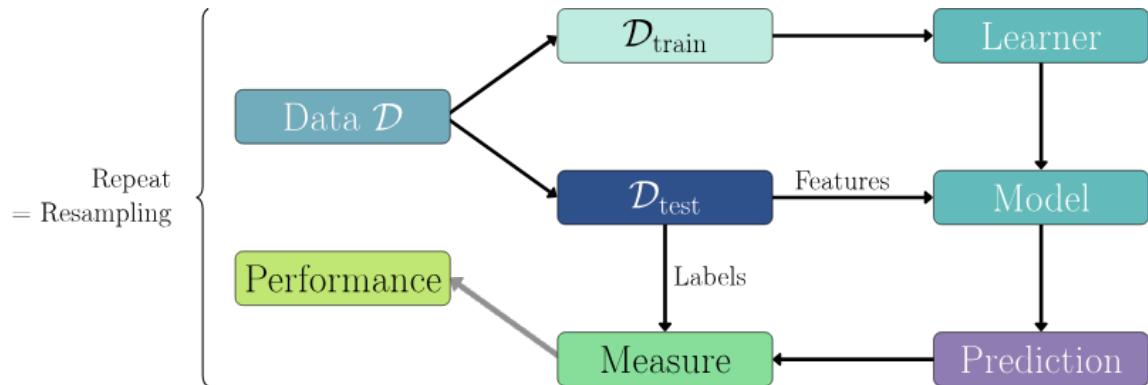


Figure 18.3.: A schematic of the supervised learning process.

18. Machine Learning

In nearly all cases, we will have a training set and a test set. The training set is used to train the model, and the test set is used to evaluate the model (see Figure 18.4). Even when we don't have a separate test set, we will usually create one by splitting the data.

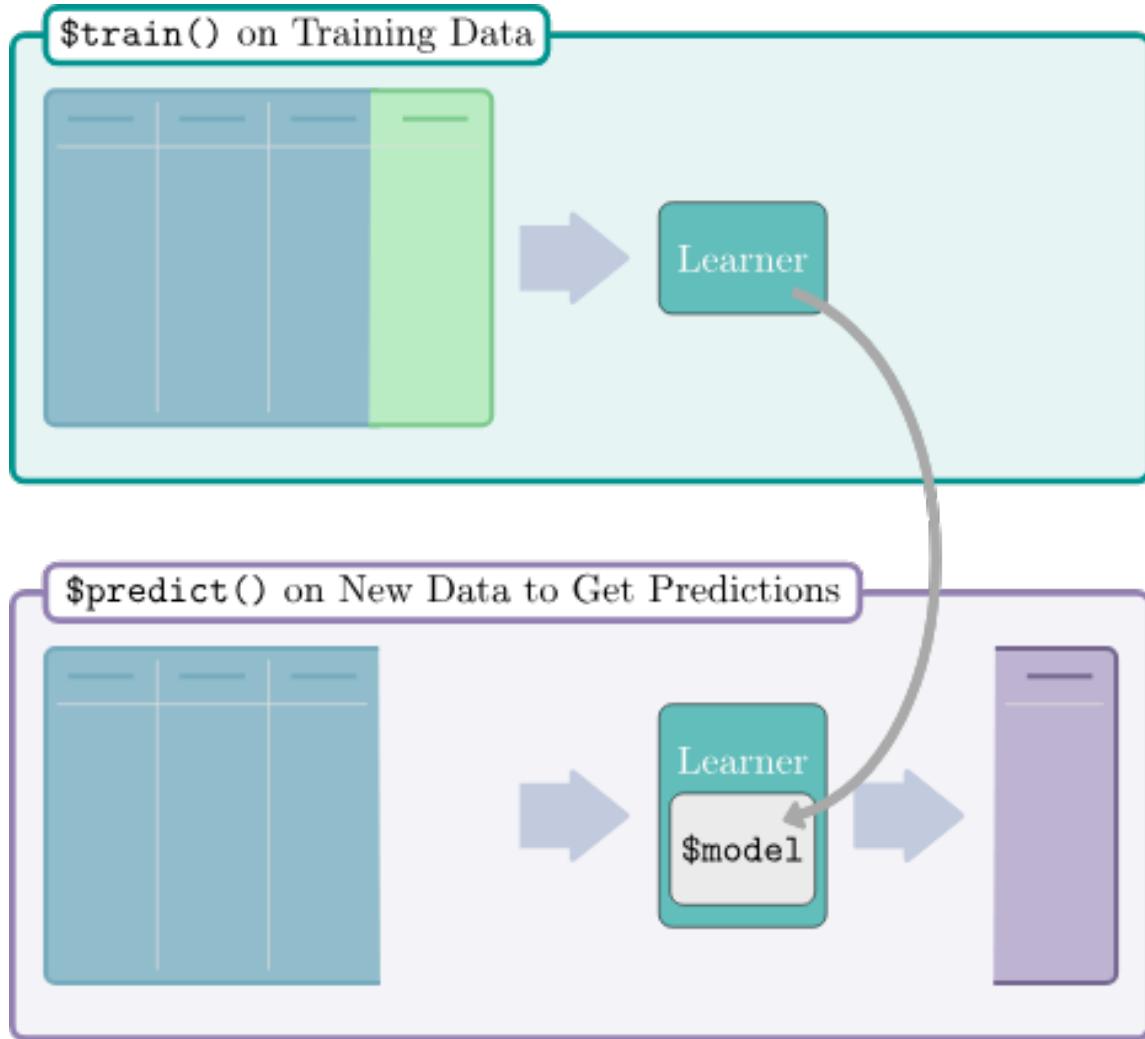


Figure 18.4.: Training and testing sets.

18.3. Supervised Learning

18.3.1. Linear regression

In [statistics](#), [linear regression](#) is a [linear](#) approach for modelling the relationship between a [scalar](#) response and one or more explanatory variables (also known as [dependent](#) and [independent variables](#)). The case of one explanatory variable is called [*simple linear regression*](#); for more than one, the process is called [**multiple linear regression**](#). This term is distinct from [multivariate linear regression](#), where multiple [correlated](#) dependent variables are predicted, rather than a single scalar variable.

In linear regression, the relationships are modeled using [linear predictor functions](#) whose unknown model [parameters](#) are [estimated](#) from the [data](#). Such models are called [linear models](#). Most commonly, the [conditional mean](#) of the response given the values of the explanatory variables (or predictors) is assumed to be an [affine function](#) of those values; less commonly, the conditional [median](#) or some other [quantile](#) is used. Like all forms of [regression analysis](#), linear regression focuses on the [conditional probability distribution](#) of the response given the values of the predictors, rather than on the [joint probability distribution](#) of all of these variables, which is the domain of [multivariate analysis](#).

Linear regression was the first type of regression analysis to be studied rigorously, and to be used extensively in practical applications. This is because models which depend linearly on their unknown parameters are easier to fit than models which are non-linearly related to their parameters and because the statistical properties of the resulting estimators are easier to determine.

18.3.2. K-nearest Neighbor

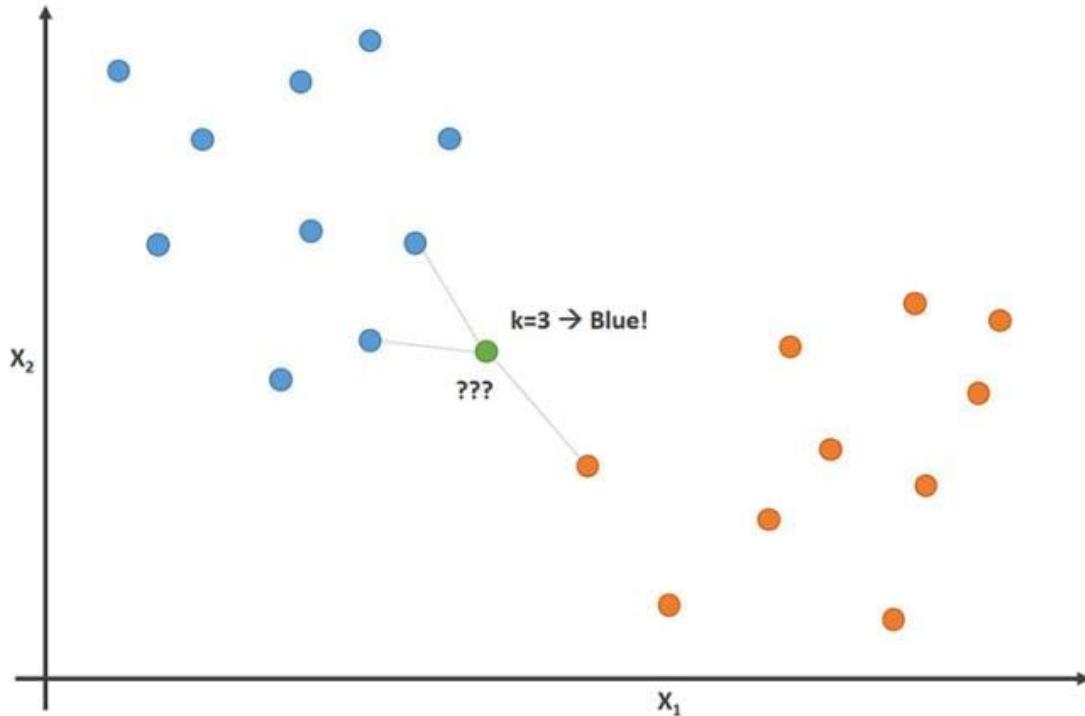


Figure 18.5.: **Figure.** The k-nearest neighbor algorithm can be used for regression or classification.

The **k-nearest neighbors algorithm** (**k**-NN) is a [non-parametric supervised learning](#) method first developed by [Evelyn Fix](#) and [Joseph Hodges](#) in 1951, and later expanded by [Thomas Cover](#). It is used for [classification](#) and [regression](#). In both cases, the input consists of the k closest training examples in a [data set](#).

The k-nearest neighbor (k-NN) algorithm is a simple, yet powerful, supervised machine learning method used for classification and regression tasks. It is an instance-based, non-parametric learning method that stores the entire training dataset and makes predictions based on the similarity between data points. The underlying principle of the k-NN algorithm is that similar data points (those that are close to each other in multidimensional space) are likely to have similar outcomes or belong to the same class.

Here's a description of how the k-NN algorithm works:

18. Machine Learning

1. Determine the value of k: The first step is to choose the number of nearest neighbors (k) to consider when making predictions. The value of k is a user-defined hyperparameter and can significantly impact the algorithm's performance. A small value of k can lead to overfitting, while a large value may result in underfitting.
2. Compute distance: Calculate the distance between the new data point (query point) and each data point in the training dataset. The most common distance metrics used are Euclidean, Manhattan, and Minkowski distance. The choice of distance metric depends on the problem and the nature of the data.
3. Find k -nearest neighbors: Identify the k data points in the training dataset that are closest to the query point, based on the chosen distance metric.
4. Make predictions: Once the k -nearest neighbors are identified, the final step is to make predictions. The prediction for the query point can be made in two ways:
 - a. For classification, determine the class labels of the k -nearest neighbors and assign the class label with the highest frequency (majority vote) to the query point. In case of a tie, one can choose the class with the smallest average distance to the query point or randomly select one among the tied classes.
 - b. For regression tasks, the k -NN algorithm follows a similar process, but instead of majority voting, it calculates the mean (or median) of the target values of the k -nearest neighbors and assigns it as the prediction for the query point.

The k -NN algorithm is known for its simplicity, ease of implementation, and ability to handle multi-class problems. However, it has some drawbacks, such as high computational cost (especially for large datasets), sensitivity to the choice of k and distance metric, and poor performance with high-dimensional or noisy data. Scaling and preprocessing the data, as well as using dimensionality reduction techniques, can help mitigate some of these issues.

- In *k -NN classification*, the output is a class membership. An object is classified by a plurality vote of its neighbors, with the object being assigned to the class most common among its k nearest neighbors (k is a positive [integer](#), typically small). If $k = 1$, then the object is simply assigned to the class of that single nearest neighbor.
- In *k -NN regression*, the output is the property value for the object. This value is the average of the values of k nearest neighbors.

k -NN is a type of [classification](#) where the function is only approximated locally and all computation is deferred until function evaluation. Since this algorithm relies on distance for classification, if the features represent different physical units or come in vastly different scales then [normalizing](#) the training data can improve its accuracy dramatically.

Both for classification and regression, a useful technique can be to assign weights to the contributions of the neighbors, so that the nearer neighbors contribute more to the average

than the more distant ones. For example, a common weighting scheme consists in giving each neighbor a weight of $1/d$, where d is the distance to the neighbor.

The neighbors are taken from a set of objects for which the class (for k -NN classification) or the object property value (for k -NN regression) is known. This can be thought of as the training set for the algorithm, though no explicit training step is required.

18.4. Penalized regression

Adapted from <http://www.sthda.com/english/articles/37-model-selection-essentials-in-r/153-penalized-regression-essentials-ridge-lasso-elastic-net/>.

Penalized regression is a type of regression analysis that introduces a penalty term to the loss function in order to prevent overfitting and improve the model's ability to generalize. Remember that in regression, the *loss* function is the sum of squares Equation 18.1.

$$L = \sum_{i=0}^n (\hat{y}_i - y_i)^2 \quad (18.1)$$

In Equation 18.1, \hat{y}_i is the predicted output, y_i is the actual output, and n is the number of observations. The goal of regression is to minimize the loss function by finding the optimal values of the model parameters or coefficients. The model parameters are estimated using the training data. The model is then evaluated using the test data. If the model performs well on the training data but poorly on the test data, it is said to be overfit. Overfitting occurs when the model learns the training data too well, including the noise, and is not able to generalize well to new data. This is a common problem in machine learning, particularly when there are a large number of predictors compared to the number of observations, and can be addressed by penalized regression.

The two most common types of penalized regression are Ridge Regression (L2 penalty) and LASSO Regression (L1 penalty). Both Ridge and LASSO help to reduce model complexity and prevent over-fitting which may result from simple linear regression. However, the choice between Ridge and LASSO depends on the situation and the dataset at hand. If feature selection is important for the interpretation of the model, LASSO might be preferred. If the goal is prediction accuracy and the model needs to retain all features, Ridge might be the better choice.

18.4.1. Ridge regression

Ridge regression shrinks the regression coefficients, so that variables, with minor contribution to the outcome, have their coefficients close to zero. The shrinkage of the coefficients is achieved by penalizing the regression model with a penalty term called L2-norm, which is the sum of the squared coefficients. The amount of the penalty can be fine-tuned using a constant called lambda (λ). Selecting a good value for λ is critical. When $\lambda=0$, the penalty term has no effect, and ridge regression will produce the classical least square coefficients. However, as λ increases to infinite, the impact of the shrinkage penalty grows, and the ridge regression coefficients will get close zero. The loss function for Ridge Regression is:

$$L = \sum_{i=0}^n (\hat{y}_i - y_i)^2 + \lambda \sum_{j=0}^k \beta_j^2 \quad (18.2)$$

Here, \hat{y}_i is the predicted output, y_i is the actual output, β_j represents the model parameters or coefficients, and λ is the regularization parameter. The second term, $\sum_j \beta_j^2$, is the penalty term where all parameters are squared and summed. Ridge regression tends to shrink the coefficients but doesn't necessarily zero them.

Note that, in contrast to the ordinary least square regression, ridge regression is highly affected by the scale of the predictors. Therefore, it is better to standardize (i.e., scale) the predictors before applying the ridge regression (James et al. 2014), so that all the predictors are on the same scale. The standardization of a predictor x , can be achieved using the formula $x' = \frac{x}{sd(x)}$, where $sd(x)$ is the standard deviation of x . The consequence of this is that, all standardized predictors will have a standard deviation of one allowing the final fit to not depend on the scale on which the predictors are measured.

One important advantage of the ridge regression, is that it still performs well, compared to the ordinary least square method (see Equation 18.1), in a situation where you have a large multivariate data with the number of predictors (p) larger than the number of observations (n). One disadvantage of the ridge regression is that, it will include all the predictors in the final model, unlike the stepwise regression methods, which will generally select models that involve a reduced set of variables. Ridge regression shrinks the coefficients towards zero, but it will not set any of them exactly to zero. The LASSO regression is an alternative that overcomes this drawback.

18.4.2. LASSO regression

LASSO stands for *Least Absolute Shrinkage and Selection Operator*. It shrinks the regression coefficients toward zero by penalizing the regression model with a penalty term called

18. Machine Learning

L1-norm, which is the sum of the absolute coefficients. In the case of LASSO regression, the penalty has the effect of forcing some of the coefficient estimates, with a minor contribution to the model, to be exactly equal to zero. This means that, LASSO can be also seen as an alternative to the subset selection methods for performing variable selection in order to reduce the complexity of the model. As in ridge regression, selecting a good value of λ for the LASSO is critical. The loss function for LASSO Regression is:

$$L = \sum_{i=0}^n (\hat{y}_i - y_i)^2 + \lambda \sum_{j=0}^k |\beta_j| \quad (18.3)$$

Similar to Ridge, \hat{y}_i is the predicted output, y_i is the actual output, j represents the model parameters or coefficients, and λ is the regularization parameter. The second term, $|\beta_j|$, is the penalty term where the absolute values of all parameters are summed. LASSO regression tends to shrink the coefficients and can zero out some of them, effectively performing variable selection.

One obvious advantage of LASSO regression over ridge regression, is that it produces simpler and more interpretable models that incorporate only a reduced set of the predictors. However, neither ridge regression nor the LASSO will universally dominate the other. Generally, LASSO might perform better in a situation where some of the predictors have large coefficients, and the remaining predictors have very small coefficients. Ridge regression will perform better when the outcome is a function of many predictors, all with coefficients of roughly equal size (James et al. 2014).

Cross-validation methods can be used for identifying which of these two techniques is better on a particular data set.

18.4.3. Elastic Net

Elastic Net produces a regression model that is penalized with both the L1-norm and L2-norm. The consequence of this is to effectively shrink coefficients (like in ridge regression) and to set some coefficients to zero (as in LASSO).

18.4.4. Classification and Regression Trees (CART)

[Decision Tree Learning](#) is supervised learning approach used in statistics, data mining and machine learning. In this formalism, a classification or regression decision tree is used as a predictive model to draw conclusions about a set of observations. Decision trees are a popular machine learning method used for both classification and regression tasks. They are hierarchical, tree-like structures that model the relationship between features and the

18. Machine Learning

target variable by recursively splitting the data into subsets based on the feature values. Each internal node in the tree represents a decision or test on a feature, and each branch represents the outcome of that test. The leaf nodes contain the final prediction, which is the majority class for classification tasks or the mean/median of the target values for regression tasks.

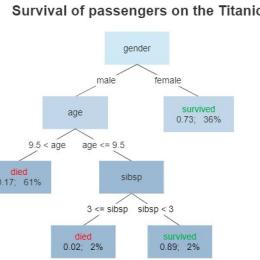


Figure 18.6.: An example of a decision tree that performs classification, also sometimes called a classification tree.

Here's an overview of the decision tree learning process:

- Select the best feature and split value: Start at the root node and choose the feature and split value that results in the maximum reduction of impurity (or increase in information gain) in the child nodes. For classification tasks, impurity measures like Gini index or entropy are commonly used, while for regression tasks, mean squared error (MSE) or mean absolute error (MAE) can be used.
- Split the data: Partition the dataset into subsets based on the chosen feature and split value.
- Recursion: Repeat steps 1 and 2 for each subset until a stopping criterion is met. Stopping criteria can include reaching a maximum tree depth, a minimum number of samples per leaf, or no further improvement in impurity.
- Prune the tree (optional): To reduce overfitting, decision trees can be pruned by removing branches that do not significantly improve the model's performance on the validation dataset. This can be done using techniques like reduced error pruning or cost-complexity pruning.

Decision trees have several advantages, such as:

- **Interpretability** They are easy to understand, visualize, and explain, even for non-experts.
- **Minimal data preprocessing** Decision trees can handle both numerical and categorical data, and they are robust to outliers and missing values.

18. Machine Learning

- **Non-linear relationships** They can capture complex non-linear relationships between features and the target variable.

However, decision trees also have some drawbacks:

- **Overfitting** They are prone to overfitting, especially when the tree is deep or has few samples per leaf. Pruning and setting stopping criteria can help mitigate this issue.
- **Instability** Small changes in the data can lead to different tree structures. This can be addressed by using ensemble methods like random forests or gradient boosting machines (GBMs).
- **Greedy learning** Decision tree algorithms use a greedy approach, meaning they make locally optimal choices at each node. This may not always result in a globally optimal tree.

Despite these limitations, decision trees are widely used in various applications due to their simplicity, interpretability, and ability to handle diverse data types.

18.4.5. RandomForest

Random forests or **random decision forests** is an [ensemble learning](#) method for [classification](#), [regression](#) and other tasks that operates by constructing a multitude of [decision trees](#) at training time. For classification tasks, the output of the random forest is the class selected by most trees. For regression tasks, the mean or average prediction of the individual trees is returned. Random decision forests correct for decision trees' habit of [overfitting](#) to their [training set](#). Random forests generally outperform [decision trees](#), but their accuracy is lower than gradient boosted trees [[citation needed](#)]. However, data characteristics can affect their performance.

The first algorithm for random decision forests was created in 1995 by [Tin Kam Ho](#) using the [random subspace method](#), which, in Ho's formulation, is a way to implement the "stochastic discrimination" approach to classification proposed by Eugene Kleinberg.

An extension of the algorithm was developed by [Leo Breiman](#) and [Adele Cutler](#), who registered "Random Forests" as a [trademark](#) in 2006 (as of 2019[[update](#)], owned by [Minitab, Inc.](#)). The extension combines Breiman's "bagging" idea and random selection of features, introduced first by Ho and later independently by Amit and [Geman](#) in order to construct a collection of decision trees with controlled variance.

Random forests are frequently used as "blackbox" models in businesses, as they generate reasonable predictions across a wide range of data while requiring little configuration.

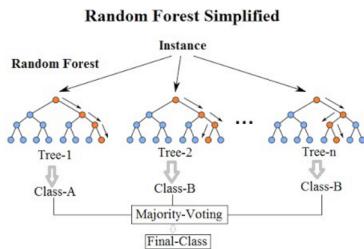


Figure 18.7.: Random forests or random decision forests is an ensemble learning method for classification, regression and other tasks that operates by constructing a multitude of decision trees at training time.

19. Machine Learning 2

19.1. Overview

In this chapter, we focus on practical aspects of machine learning. The goal is to provide a hands-on introduction to the application of machine learning techniques to real-world data. While the theoretical foundations of machine learning are important, the ability to apply these techniques to solve practical problems is equally crucial. In this chapter, we will use the `mlr3` package in R to build and evaluate machine learning models for classification and regression tasks.

We will use three examples to illustrate the machine learning workflow:

1. **Cancer types classification:** We will classify different types of cancer based on gene expression data.
2. **Age prediction from DNA methylation:** We will predict the chronological age of individuals based on DNA methylation patterns.
3. **Gene expression prediction:** We will predict gene expression levels based on histone modification data.

We'll be applying knn, decision trees, and random forests, linear regression, and penalized regression models to these datasets.

The `mlr3` R package is a modern, object-oriented machine learning framework in R that builds on the success of its predecessor, the `mlr` package. It provides a flexible and extensible platform for handling common machine learning tasks such as data preprocessing, model training, hyperparameter tuning, and model evaluation Figure 19.1. The package is designed to guide and standardize the process of using complex machine learning pipelines.

19.1.1. Key features of `mlr3`

- **Task abstraction** `mlr3` encapsulates different types of learning problems like classification, regression, and survival analysis into “Task” objects, making it easier to

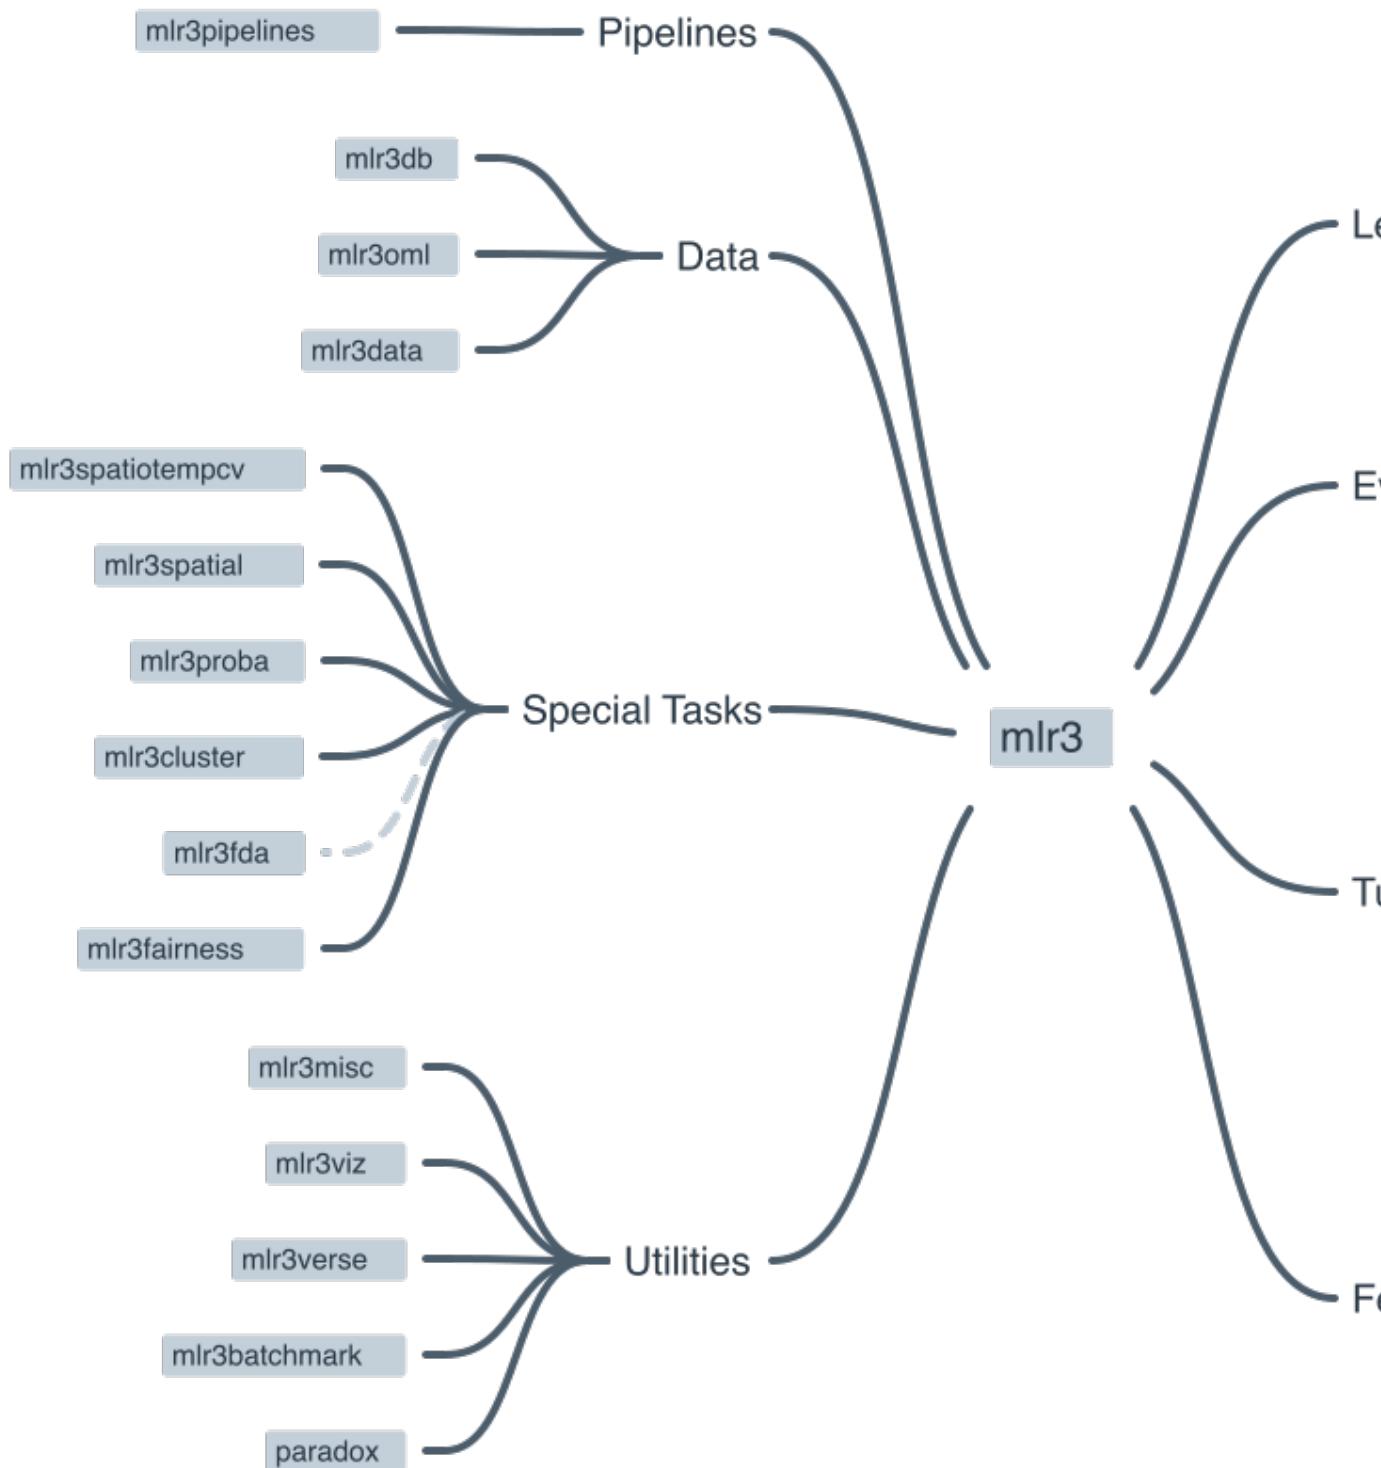


Figure 19.1.: The `mlr3` ecosystem.

19. Machine Learning 2

handle various learning scenarios. Examples of tasks include classification tasks, regression tasks, and survival tasks.

- **Modular design** The package follows a modular design, allowing users to quickly swap out different components such as learners (algorithms), measures (performance metrics), and resampling strategies. Examples of learners include linear regression, logistic regression, and random forests. Examples of measures include accuracy, precision, recall, and F1 score. Examples of resampling strategies include cross-validation, bootstrapping, and holdout validation.
- **Extensibility** Users can extend the functionality of mlr3 by adding custom components like learners, measures, and preprocessing steps via the R6 object-oriented system.
- **Preprocessing** mlr3 provides a flexible way to preprocess data using “PipeOps” (pipeline operations), allowing users to create reusable preprocessing pipelines.
- **Tuning and model selection** mlr3 supports hyperparameter tuning and model selection using various search strategies like grid search, random search, and Bayesian optimization.
- **Parallelization** The package allows for parallelization of model training and evaluation, making it suitable for large-scale machine learning tasks.
- **Benchmarking** mlr3 facilitates benchmarking of multiple algorithms on multiple tasks, simplifying the process of comparing and selecting the best models.

You can find more information, including tutorials and examples, on the official mlr3 GitHub repository¹ and the mlr3 book².

19.2. The mlr3 workflow

The mlr3 package is designed to simplify the process of creating and deploying complex machine learning pipelines. The package follows a modular design, which means that users can quickly swap out different components such as learners (algorithms), measures (performance metrics), and resampling strategies. The package also supports parallelization of model training and evaluation, making it suitable for large-scale machine learning tasks.

The following sections describe each of these steps in detail.

¹<https://github.com/mlr-org/mlr3>

²<https://mlr3book.mlro.org/>

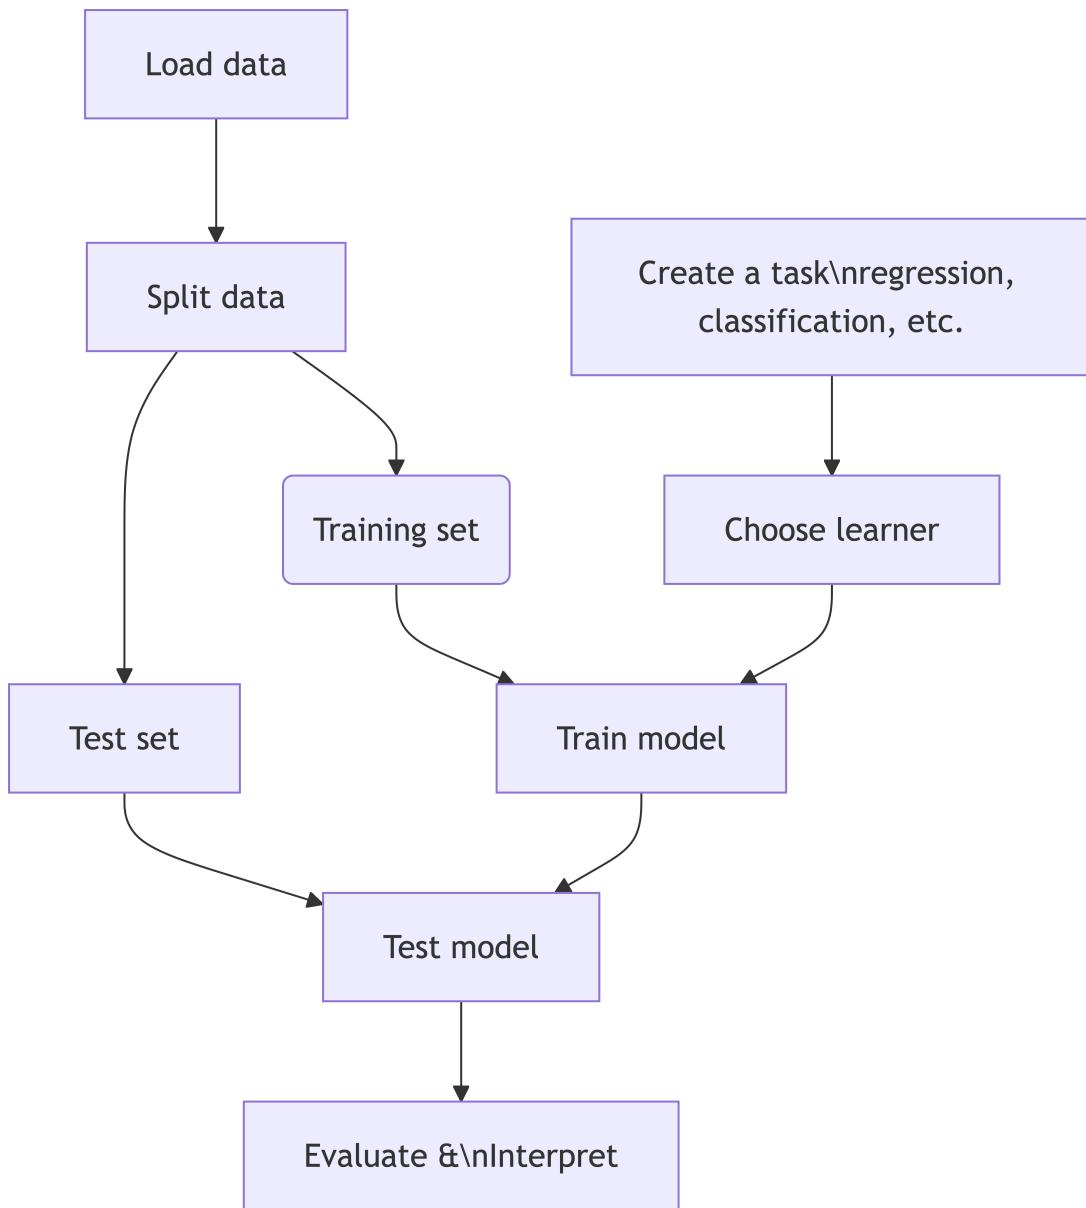


Figure 19.2.: The simplified workflow of a machine learning pipeline using mlr3.

19.2.1. The machine learning Task

Imagine you want to teach a computer how to make predictions or decisions, similar to how you might teach a student. To do this, you need to clearly define what you want the computer to learn and work on. This is called defining a “task.” Let’s break down what this involves and why it’s important.

19.2.1.1. Step 1: Understand the Problem

First, think about what problem you want to solve or what question you want the computer to answer. For example: - Do you want to predict the weather for tomorrow? - Are you trying to figure out if an email is spam or not? - Do you want to know how much a house might sell for?

These questions define your **task type**. In machine learning, there are several common task types:

- **Classification:** Deciding which category something belongs to (e.g., spam or not spam).
- **Regression:** Predicting a number (e.g., the price of a house).
- **Clustering:** Grouping similar items together (e.g., customer segmentation).

19.2.1.2. Step 2: Choose Your Data

Next, you need data that is related to your problem. Think of data as the information or examples you’ll use to teach the computer. For instance, if your task is to predict house prices, your data might include:

- The size of the house
- The number of bedrooms
- The location of the house
- The age of the house

These pieces of information are called **features**. Features are the input that the computer uses to make predictions.

19.2.1.3. Step 3: Define the Target

Along with features, you need to define the **target**. The target is what you want to predict or decide. In the house price example, the target would be the actual price of the house.

19.2.1.4. Step 4: Create the Task

Now that you have your problem, data, and target, you can create the task. In mlr3, a task brings together the type of problem (task type), the features (input data), and the target (what you want to predict).

Here's a simple summary:

1. **Task Type:** What kind of problem are you solving? (e.g., classification, regression)
2. **Features:** What information do you have to make the prediction? (e.g., size, location)
3. **Target:** What are you trying to predict? (e.g., house price)

By clearly defining these elements, you set a solid foundation for the machine learning process. This helps ensure that the computer can learn effectively and make accurate predictions.

19.2.1.5. mlr3 and Tasks

The mlr3 package uses the concept of “Tasks” to encapsulate different types of learning problems like classification, regression, and survival analysis. A Task contains the data (features and target variable) and additional metadata to define the machine learning problem. For example, in a classification task, the target variable is a label (stored as a character or factor), while in a regression task, the target variable is a numeric quantity (stored as an integer or numeric).

There are a number of [Task Types](#) that are supported by mlr3. To create a task from a `data.frame()`, `data.table()` or `Matrix()`, you first need to select the right task type:

- **Classification Task:** The target is a label (stored as `character` or `factor`) with only relatively few distinct values → [TaskClassif](#).
- **Regression Task:** The target is a numeric quantity (stored as `integer` or `numeric`) → [TaskRegr](#).
- **Survival Task:** The target is the (right-censored) time to an event. More censoring types are currently in development → [mlr3proba::TaskSurv](#) in add-on package `mlr3proba`.
- **Density Task:** An unsupervised task to estimate the density → [mlr3proba::TaskDens](#) in add-on package `mlr3proba`.

19. Machine Learning 2

- **Cluster Task:** An unsupervised task type; there is no target and the aim is to identify similar groups within the feature space → `mlr3cluster::TaskClust` in add-on package `mlr3cluster`.
- **Spatial Task:** Observations in the task have spatio-temporal information (e.g. coordinates) → `mlr3spatiotempcv::TaskRegrST` or `mlr3spatiotempcv::TaskClassifST` in add-on package `mlr3spatiotempcv`.
- **Ordinal Regression Task:** The target is ordinal → `TaskOrdinal` in add-on package `mlr3ordinal` (still in development).

19.2.2. The “Learner” in Machine Learning

After you’ve defined your task, the next step in teaching a computer to make predictions or decisions is to choose a “learner.” Let’s explore what a learner is and how it fits into the `mlr3` package.

19.2.2.1. What is a “Learner”?

Think of a learner as the method or tool that the computer uses to learn from the data. Another common name for a “learner” is a “model.” It’s similar to choosing a tutor or a teacher for a student. Different learners have different ways of understanding and processing information. For example:

- Some learners might be great at recognizing patterns in data, like a tutor who is excellent at spotting trends.
- Others might be good at making decisions based on rules, like a tutor who uses step-by-step logic.

In machine learning, there are many types of learners, each with its own strengths and weaknesses. Here are a few examples:

- **Decision Trees:** These learners make decisions by asking a series of questions, like “Is the house larger than 1000 square feet?” and “Does it have more than 3 bedrooms?”
- **k-Nearest Neighbors:** These learners make predictions based on the similarity of new data points to existing data points.
- **Linear Regression:** This learner tries to fit a straight line through the data points to make predictions about numbers.
- **Random Forests:** These are like a group of decision trees working together to make more accurate predictions.

19. Machine Learning 2

- **Support Vector Machines:** These learners find the best boundary that separates different categories in the data.

19.2.2.2. Choosing the Right Learner

Selecting the right learner is crucial because different learners work better for different types of tasks and data. For example:

- If your task is to classify emails as spam or not spam, a decision tree or a support vector machine might work well.
- If you're predicting house prices, linear regression or random forests could be good choices.

The goal is to find a learner that can understand the patterns in your data and make accurate predictions. This is where the `mlr3` package comes in handy. It provides a wide range of learners that you can choose from, making it easier to experiment and find the best learner for your task.

19.2.2.3. Learners in `mlr3`

In the `mlr3` package, learners are pre-built tools that you can easily use for your tasks. Here's how it works:

1. **Select a Learner:** `mlr3` provides a variety of learners to choose from, like decision trees, linear regression, and more.
2. **Train the Learner:** Once you've selected a learner, you provide it with your task (the problem, data, and target). The learner uses this information to learn and make predictions.
3. **Evaluate and Improve:** After training, you can test how well the learner performs and make adjustments if needed, such as trying a different learner or fine-tuning the current one.

19.2.2.4. `mlr3` and Learners

Objects of class `Learner` provide a unified interface to many popular machine learning algorithms in R. They consist of methods to train and predict a model for a `Task` and provide meta-information about the learners, such as the hyperparameters (which control the behavior of the learner) you can set.

19. Machine Learning 2

The base class of each learner is `Learner`, specialized for regression as `LearnerRegr` and for classification as `LearnerClassif`. Other types of learners, provided by extension packages, also inherit from the `Learner` base class, e.g. `mlr3proba::LearnerSurv` or `mlr3cluster::LearnerClust`.

All Learners work in a two-stage procedure:

- **Training stage:** The training data (features and target) is passed to the Learner’s `$train()` function which trains and stores a model, i.e. the relationship of the target and features.
- **Predict stage:** The new data, usually a different slice of the original data than used for training, is passed to the `$predict()` method of the Learner. The model trained in the first step is used to predict the missing target, e.g. labels for classification problems or the numerical value for regression problems.

There are a number of [predefined learners](#). The `mlr3` package ships with the following set of classification and regression learners. We deliberately keep this small to avoid unnecessary dependencies:

- `classif.featureless`: Simple baseline classification learner. The default is to always predict the label that is most frequent in the training set. While this is not very useful by itself, it can be used as a “[fallback learner](#)” to make predictions in case another, more sophisticated, learner failed for some reason.
- `regr.featureless`: Simple baseline regression learner. The default is to always predict the mean of the target in training set. Similar to `mlr_learners_classif.featureless`, it makes for a good “[fallback learner](#)”
- `classif.rpart`: Single classification tree from package `rpart`.
- `regr.rpart`: Single regression tree from package `rpart`.

This set of baseline learners is usually insufficient for a real data analysis. Thus, we have cherry-picked implementations of the most popular machine learning method and collected them in the `mlr3learners` package:

- Linear (`regr.lm`) and logistic (`classif.log_reg`) regression
- Penalized Generalized Linear Models (`regr.glmnet`, `classif.glmnet`), possibly with built-in optimization of the penalization parameter (`regr.cv_glmnet`, `classif.cv_glmnet`)
- (Kernelized) k-Nearest Neighbors regression (`regr.kknn`) and classification (`classif.kknn`).
- Kriging / Gaussian Process Regression (`regr.km`)
- Linear (`classif.lda`) and Quadratic (`classif.qda`) Discriminant Analysis
- Naive Bayes Classification (`classif.naive_bayes`)
- Support-Vector machines (`regr.svm`, `classif.svm`)
- Gradient Boosting (`regr.xgboost`, `classif.xgboost`)

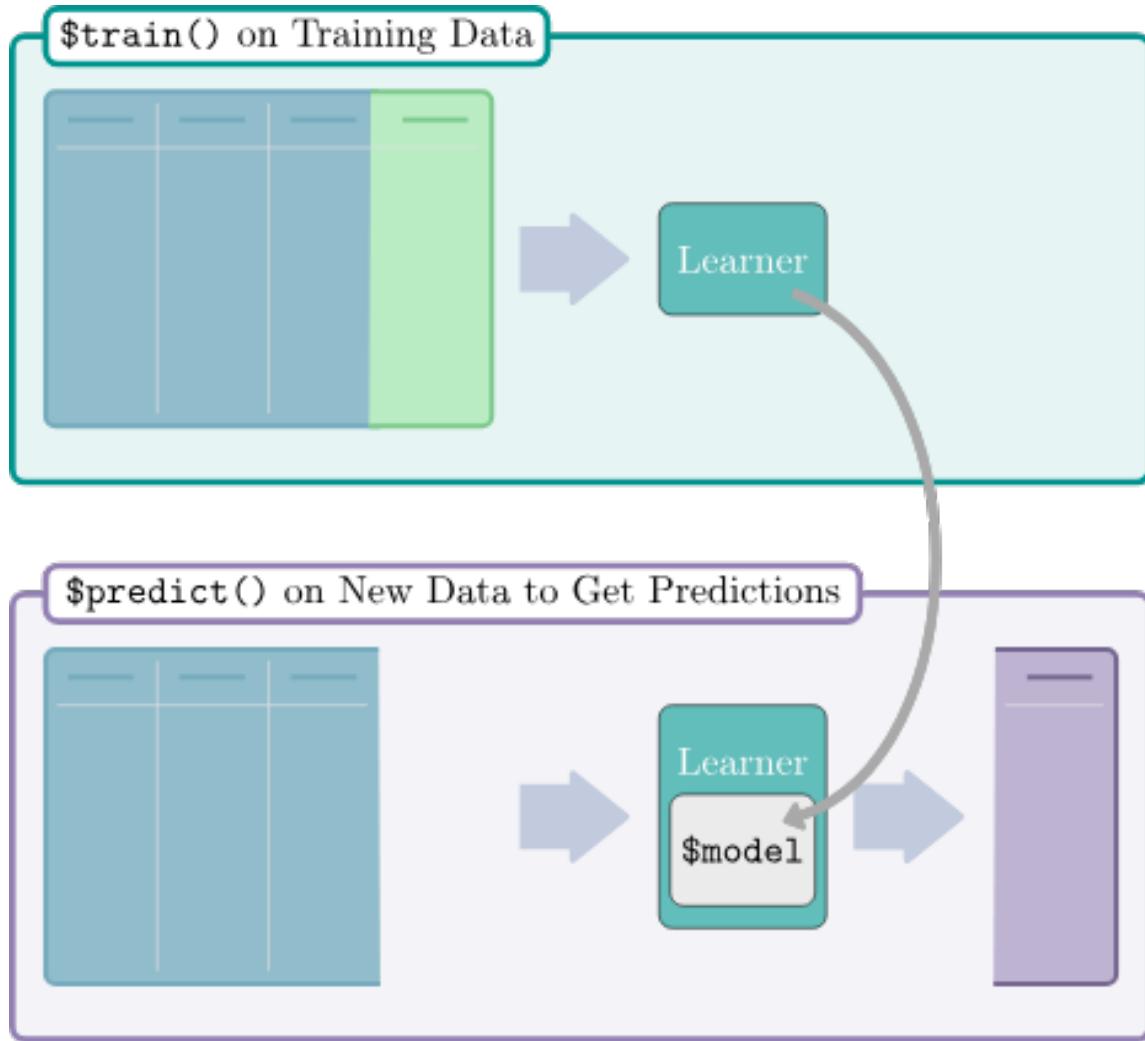


Figure 19.3.: Two stages of a learner. Top: data (features and a target) are passed to an (untrained) learner. Bottom: new data are passed to the trained model which makes predictions for the ‘missing’ target column.

- Random Forests for regression and classification (`regr.ranger`, `classif.ranger`)

More machine learning methods and alternative implementations are collected in the [mlr3extralearners repository](#).

19.3. Setup

```
library(mlr3verse)
library(GEOquery)
library(mlr3learners) # for knn
library(ranger) # for randomforest
set.seed(789)
```

19.4. Example: Cancer types

In this exercise, we will be classifying cancer types based on gene expression data. The data we are going to access are from Brouwer-Visser et al. (2018).

The data are from the Gene Expression Omnibus (GEO) database, a public repository of functional genomics data. The data are from a study that aimed to identify gene expression signatures that can distinguish between different types of cancer. The data include gene expression profiles from patients with different types of cancer. The goal is to build a machine learning model that can predict the cancer type based on the gene expression data.

19.4.1. Understanding the Problem

Before we start building a machine learning model, it's important to understand the problem we are trying to solve. Here are some key questions to consider:

- What are the features?
- What is the target variable?
- What type of machine learning task is this (classification, regression, clustering)?
- What is the goal of the analysis?

19.4.2. Data Preparation

Use the [GEOquery](#) package to fetch data about [GSE103512](#).

```
library(GEOquery)
gse = getGEO("GSE103512")[[1]]
```

The first step, a detail, is to convert from the older Bioconductor data structure (GEOquery was written in 2007), the `ExpressionSet`, to the newer `SummarizedExperiment`.

```
library(SummarizedExperiment)
se = as(gse, "SummarizedExperiment")
```

Examine two variables of interest, cancer type and tumor/normal status.

```
with(colData(se), table(`cancer.type.ch1`, `normal.ch1`))
```

cancer.type.ch1	normal.ch1
no	yes
BC	65 10
CRC	57 12
NSCLC	60 9
PCA	60 7

Before embarking on a machine learning analysis, we need to make sure that we understand the data. Things like missing values, outliers, and other problems can cause problems for machine learning algorithms.

In R, plotting, summaries, and other exploratory data analysis tools are available. PCA analysis, clustering, and other methods can also be used to understand the data. It is worth spending time on this step, as it can save time later.

19.4.3. Feature selection and data cleaning

While we could use all genes in the analysis, we will select the most informative genes using the variance of gene expression across samples. Other methods for feature selection are available, including those based on correlation with the outcome variable.

! Feature selection

Feature selection should be done on the training data only, not the test data to avoid overfitting. The test data should be used only for evaluation. In other words, the test data should be “unseen” by the model until the final evaluation.

Remember that the `apply` function applies a function to each row or column of a matrix. Here, we apply the `sd` function to each row of the expression matrix to get a vector of stan

```
sds = apply(assay(se, 'exprs'), 1, sd)
## filter out normal tissues
se_small = se[order(sds, decreasing = TRUE)[1:200],
              colData(se)$characteristics_ch1.1=='normal: no']
# remove genes with no gene symbol
se_small = se_small[rowData(se_small)$Gene.Symbol!='', ]
```

To make the data easier to work with, we will use the opportunity to use one of the `rowData` columns as the rownames of the data frame. The `make.names` function is used to make sure that the rownames are valid R variable names and unique.

```
## convert to matrix for later use
dat = assay(se_small, 'exprs')
rownames(dat) = make.names(rowData(se_small)$Gene.Symbol)
```

We also need to transpose the data so that the rows are the samples and the columns are the features in order to use the data with `mlr3`.

```
feat_dat = t(dat)
tumor = data.frame(tumor_type = colData(se_small)$cancer.type.ch1, feat_dat)
```

This is another good time to check the data. Make sure that the data is in the format that you expect. Check the dimensions, the column names, and the data types.

19.4.4. Creating the “task”

The first step in using `mlr3` is to create a `task`. A task is a data set with a target variable. In this case, the target variable is the cancer type. The `mlr3` package provides a function

to convert a data frame into a task. These tasks can be used with any machine learning algorithm in mlr3.

This is a classification task, so we will use the `as_task_classif` function to create the task. The classification task requires a target variable that is categorical.

```
library(mlr3)
tumor$tumor_type = as.factor(tumor$tumor_type)
task = as_task_classif(tumor, target='tumor_type')
```

19.4.5. Splitting the data

Here, we randomly divide the data into 2/3 training data and 1/3 test data. This is a common split, but other splits can be used. The training data is used to train the model, and the test data is used to evaluate the trained model.

```
set.seed(7)
train_set = sample(task$row_ids, 0.67 * task$nrow)
test_set = setdiff(task$row_ids, train_set)
```

! Important

Training and testing on the same data is a common mistake. We want to test the model on data that it has not seen before. This is the only way to know if the model is overfitting and to get an accurate estimate of the model's performance.

In the next sections, we will train and evaluate three different models on the data: k-nearest-neighbor, classification tree, and random forest. Remember that the goal is to predict the cancer type based on the gene expression data. The mlr3 package uses the concept of “learners” to encapsulate different machine learning algorithms.

19.4.6. Example learners

19.4.6.1. K-nearest-neighbor

The first model we will use is the k-nearest-neighbor model. This model is based on the idea that similar samples have similar outcomes. The number of neighbors to use is a parameter that can be tuned. We'll use the default value of 7, but you can try other values to see how they affect the results. In fact, mlr3 provides the ability to tune parameters automatically, but we won't cover that here.

19.4.6.1.1. Create the learner

In mlr3, the machine learning algorithms are called learners. To create a learner, we use the `lrn` function. The `lrn` function takes the name of the learner as an argument. The `lrn` function also takes other arguments that are specific to the learner. In this case, we will use the default values for the arguments.

```
library(mlr3learners)
learner = lrn("classif.kknn")
```

You can get a list of all the learners available in mlr3 by using the `lrn()` function without any arguments.

```
lrn()
```

```
<DictionaryLearner> with 51 stored values
Keys: classif.cv_glmnet, classif.debug, classif.featureless,
       classif.glmnet, classif.kknn, classif.lda, classif.log_reg,
       classif.multinom, classif.naive_bayes, classif.nnet, classif.qda,
       classif.ranger, classif.rpart, classif.svm, classif.xgboost,
       clust.agnes, clust.ap, clust.bico, clust.birch, clust.cmeans,
       clust.cobweb, clust.dbscan, clust.dbscan_fpc, clust.diana, clust.em,
       clust.fanny, clust.featureless, clust.ff, clust.hclust,
       clust.hdbscan, clust.kkmeans, clust.kmeans, clust.MBatchKMeans,
       clust.mclust, clust.meanshift, clust.optics, clust.pam,
       clust.SimpleKMeans, clust.xmeans, regr.cv_glmnet, regr.debug,
       regr.featureless, regr.glmnet, regr.kknn, regr.km, regr.lm,
       regr.nnet, regr.ranger, regr.rpart, regr.svm, regr.xgboost
```

19.4.6.1.2. Train

To train the model, we use the `train` function. The `train` function takes the task and the row ids of the training data as arguments.

```
learner$train(task, row_ids = train_set)
```

Here, we can look at the trained model:

19. Machine Learning 2

```
# output is large, so do this on your own  
learner$model
```

19.4.6.1.3. Predict

Lets use our trained model works to predict the classes of the **training** data. Of course, we already know the classes of the training data, but this is a good way to check that the model is working as expected. It also gives us a measure of performance on the training data that we can compare to the test data to look for overfitting.

```
pred_train = learner$predict(task, row_ids=train_set)
```

And check on the test data:

```
pred_test = learner$predict(task, row_ids=test_set)
```

19.4.6.1.4. Assess

In this section, we can look at the accuracy and performance of our model on the training data and the test data. We can also look at the confusion matrix to see which classes are being confused with each other.

```
pred_train$confusion
```

truth	BC	CRC	NSCLC	PCA
response	BC	42	0	0
	CRC	0	40	0
	NSCLC	1	0	44
	PCA	0	0	35

This is a multi-class confusion matrix. The rows are the true classes and the columns are the predicted classes. The diagonal shows the number of samples that were correctly classified. The off-diagonal elements show the number of samples that were misclassified.

We can also look at the accuracy of the model on the training data and the test data. The accuracy is the number of correctly classified samples divided by the total number of samples.

```
measures = msrs(c('classif.acc'))
pred_train$score(measures)
```

```
classif.acc
0.9938272
```

```
pred_test$confusion
```

	truth			
response	BC	CRC	NSCLC	PCA
BC	22	0	0	0
CRC	0	17	1	0
NSCLC	0	0	15	0
PCA	0	0	0	25

```
pred_test$score(measures)
```

```
classif.acc
0.9875
```

Compare the accuracy on the training data to the accuracy on the test data. Do you see any evidence of overfitting?

19.4.6.2. Classification tree

We are going to use a classification tree to classify the data. A classification tree is a series of yes/no questions that are used to classify the data. The questions are based on the features in the data. The classification tree is built by finding the feature that best separates the data into the different classes. Then, the data is split based on the value of that feature. The process is repeated until the data is completely separated into the different classes.

19.4.6.2.1. Train

```
# in this case, we want to keep the model
# so we can look at it later
learner = lrn("classif.rpart", keep_model = TRUE)

learner$train(task, row_ids = train_set)
```

We can take a look at the model.

```
learner$model

n= 162

node), split, n, loss, yval, (yprob)
 * denotes terminal node

1) root 162 118 NSCLC (0.26543210 0.24691358 0.27160494 0.21604938)
  2) CDHR5>=5.101625 40    0 CRC (0.00000000 1.00000000 0.00000000 0.00000000) *
  3) CDHR5< 5.101625 122   78 NSCLC (0.35245902 0.00000000 0.36065574 0.28688525)
     6) ACPP< 6.088431 87   43 NSCLC (0.49425287 0.00000000 0.50574713 0.00000000)
        12) GATA3>=4.697803 41    1 BC (0.97560976 0.00000000 0.02439024 0.00000000) *
        13) GATA3< 4.697803 46    3 NSCLC (0.06521739 0.00000000 0.93478261 0.00000000) *
    7) ACPP>=6.088431 35    0 PCA (0.00000000 0.00000000 0.00000000 1.00000000) *
```

Decision trees are easy to visualize if they are small. Here, we can see that the tree is very simple, with only two splits.

```
library(mlr3viz)
library(ggparty)
```

Loading required package: ggplot2

Loading required package: partykit

Loading required package: grid

Loading required package: libcoin

19. Machine Learning 2

```
Loading required package: mvtnorm
```

```
Attaching package: 'partykit'
```

```
The following object is masked from 'package:SummarizedExperiment':
```

```
width
```

```
The following object is masked from 'package:GenomicRanges':
```

```
width
```

```
The following object is masked from 'package:IRanges':
```

```
width
```


```
The following object is masked from 'package:S4Vectors':
```

```
width
```

```
The following object is masked from 'package:BiocGenerics':
```

```
width
```

```
autoplot(learner, type='ggparty')
```

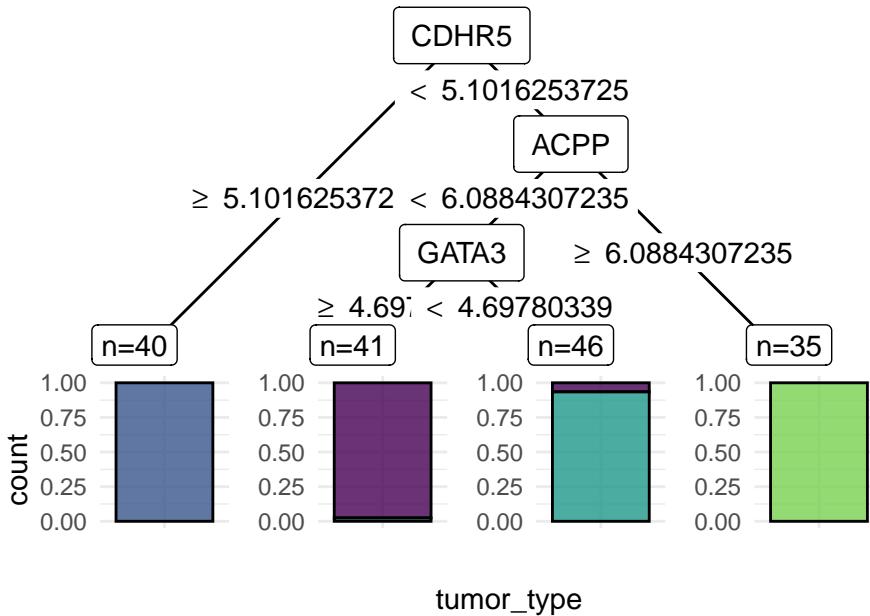

19.4.6.2.2. Predict

Now that we have trained the model on the *training* data, we can use it to predict the classes of the training data and the test data. The `$predict` method takes a `task` and produces a prediction based on the *trained* model, in this case, called `learner`.

```
pred_train = learner$predict(task, row_ids=train_set)
```

Remember that we split the data into training and test sets. We can use the trained model to predict the classes of the test data. Since the *test* data was not used to train the model, it is not “cheating” like what we just did where we did the prediction on the *training* data.

```
pred_test = learner$predict(task, row_ids=test_set)
```

19.4.6.2.3. Assess

For classification tasks, we often look at a confusion matrix of the *truth* vs the *predicted* classes for the samples.

! Important

Assessing the performance of a model should **always** be **reported** from assessment on an independent test set.

```
pred_train$confusion
```

		truth			
response	BC	CRC	NSCLC	PCA	
BC	40	0	1	0	
CRC	0	40	0	0	
NSCLC	3	0	43	0	
PCA	0	0	0	35	

- What does this confusion matrix tell you?

We can also ask for several “measures” of the performance of the model. Here, we ask for the accuracy of the model. To get a complete list of measures, use `msr()`.

```
measures = msrs(c('classif.acc'))
pred_train$score(measures)
```

```
classif.acc
0.9753086
```

- How does the accuracy compare to the confusion matrix?
- How does this accuracy compare to the accuracy of the k-nearest-neighbor model?
- How about the decision tree model?

```
pred_test$confusion
```

		truth			
response	BC	CRC	NSCLC	PCA	
BC	20	0	1	0	
CRC	0	17	3	0	
NSCLC	2	0	12	0	
PCA	0	0	0	25	

```
pred_test$score(measures)
```

```
classif.acc  
0.925
```

- What does the confusion matrix in the *test* set tell you?
- How do the assessments of the *test* and *training* sets differ?

💡 Overfitting

When the assessment of the test set is worse than the evaluation of the training set, the model may be *overfit*. How to address overfitting varies by model type, but it is a sign that you should pay attention to model selection and parameters.

19.4.6.3. RandomForest

```
learner = lrn("classif.ranger", importance = "impurity")
```

19.4.6.3.1. Train

```
learner$train(task, row_ids = train_set)
```

Again, you can look at the model that was trained.

```
learner$model
```

Ranger result

Call:

```
ranger::ranger(dependent.variable.name = task$target_names, data = task$data(), proba
```

Type:	Classification
Number of trees:	500
Sample size:	162
Number of independent variables:	192
Mtry:	13

19. Machine Learning 2

```
Target node size:           1
Variable importance mode:  impurity
Splitrule:                 gini
OOB prediction error:     0.62 %
```

For more details, the mlr3 random forest approach is based on the ranger package. You can look at the ranger documentation.

- What is the OOB error in the output?

Random forests are a collection of decision trees. Since predictors enter the trees in a random order, the trees are different from each other. The random forest procedure gives us a measure of the “importance” of each variable.

```
head(learner$importance(), 15)
```

```
CDHR5  TRPS1.1    FABP1    EPS8L3    KRT20    EFHD1    LGALS4    TRPS1
4.791870 3.918063 3.692649 3.651422 3.340382 3.314491 2.952969 2.926175
SFTPB  SFTPB.1    GATA3    GATA3.1   TMPRSS2   MUC12    POF1B
2.805811 2.681004 2.344603 2.271845 2.248734 2.207347 1.806906
```

More “important” variables are those that are more often used in the trees. Are the most important variables the same as the ones that were important in the decision tree?

If you are interested, look up a few of the important variables in the model to see if they make biological sense.

19.4.6.3.2. Predict

Again, we can use the trained model to predict the classes of the training data and the test data.

```
pred_train = learner$predict(task, row_ids=train_set)
```

```
pred_test = learner$predict(task, row_ids=test_set)
```

19.4.6.3.3. Assess

```
pred_train$confusion
```

		truth			
response		BC	CRC	NSCLC	PCA
BC		43	0	0	0
CRC		0	40	0	0
NSCLC		0	0	44	0
PCA		0	0	0	35

```
measures = msrs(c('classif.acc'))
pred_train$score(measures)
```

```
classif.acc
1
```

```
pred_test$confusion
```

		truth			
response		BC	CRC	NSCLC	PCA
BC		22	0	0	0
CRC		0	17	0	0
NSCLC		0	0	16	0
PCA		0	0	0	25

```
pred_test$score(measures)
```

```
classif.acc
1
```

19.5. Example Predicting age from DNA methylation

We will be building a regression model for chronological age prediction, based on DNA methylation. This is based on the work of [Jana Naue et al. 2017](#), in which biomarkers are examined to predict the chronological age of humans by analyzing the DNA methylation patterns. Different machine learning algorithms are used in this study to make an age prediction.

19. Machine Learning 2

It has been recognized that within each individual, the level of **DNA methylation** changes with age. This knowledge is used to select useful biomarkers from DNA methylation datasets. The **CpG sites** with the highest correlation to age are selected as the biomarkers (and therefore features for building a regression model). In this tutorial, specific biomarkers are analyzed by machine learning algorithms to create an age prediction model.

The data are taken from [this tutorial](#).

```
library(data.table)
meth_age = rbind(
  fread('https://zenodo.org/record/2545213/files/test_rows_labels.csv'),
  fread('https://zenodo.org/record/2545213/files/train_rows.csv')
)
```

Let's take a quick look at the data.

```
head(meth_age)
```

```
RPA2_3 ZYG11A_4 F5_2 HOXC4_1 NKIRAS2_2 MEIS1_1 SAMD10_2 GRM2_9 TRIM59_5
<num> <num> <num> <num> <num> <num> <num> <num> <num>
1: 65.96 18.08 41.57 55.46 30.69 63.42 40.86 68.88 44.32
2: 66.83 20.27 40.55 49.67 29.53 30.47 37.73 53.30 50.09
3: 50.30 11.74 40.17 33.85 23.39 58.83 38.84 35.08 35.90
4: 65.54 15.56 33.56 36.79 20.23 56.39 41.75 50.37 41.46
5: 59.01 14.38 41.95 30.30 24.99 54.40 37.38 30.35 31.28
6: 81.30 14.68 35.91 50.20 26.57 32.37 32.30 55.19 42.21
LDB2_3 ELOVL2_6 DDO_1 KLF14_2 Age
<num> <num> <num> <num> <int>
1: 56.17 62.29 40.99 2.30 40
2: 58.40 61.10 49.73 1.07 44
3: 58.81 50.38 63.03 0.95 28
4: 58.05 50.58 62.13 1.99 37
5: 65.80 48.74 41.88 0.90 24
6: 70.15 61.36 33.62 1.87 43
```

As before, we create the `task` object, but this time we use `as_task_regr()` to create a regression task.

- Why is this a regression task?

```
task = as_task_regr(meth_age,target = 'Age')

set.seed(7)
train_set = sample(task$row_ids, 0.67 * task$nrow)
test_set = setdiff(task$row_ids, train_set)
```

19.5.1. Example learners

19.5.1.1. Linear regression

We will start with a simple linear regression model.

```
learner = lrn("regr.lm")
```

19.5.1.1.1. Train

```
learner$train(task, row_ids = train_set)
```

When you train a linear regression model, we can evaluate some of the diagnostic plots to see if the model is appropriate (Figure 19.4).

```
par(mfrow=c(2,2))
plot(learner$model)
```

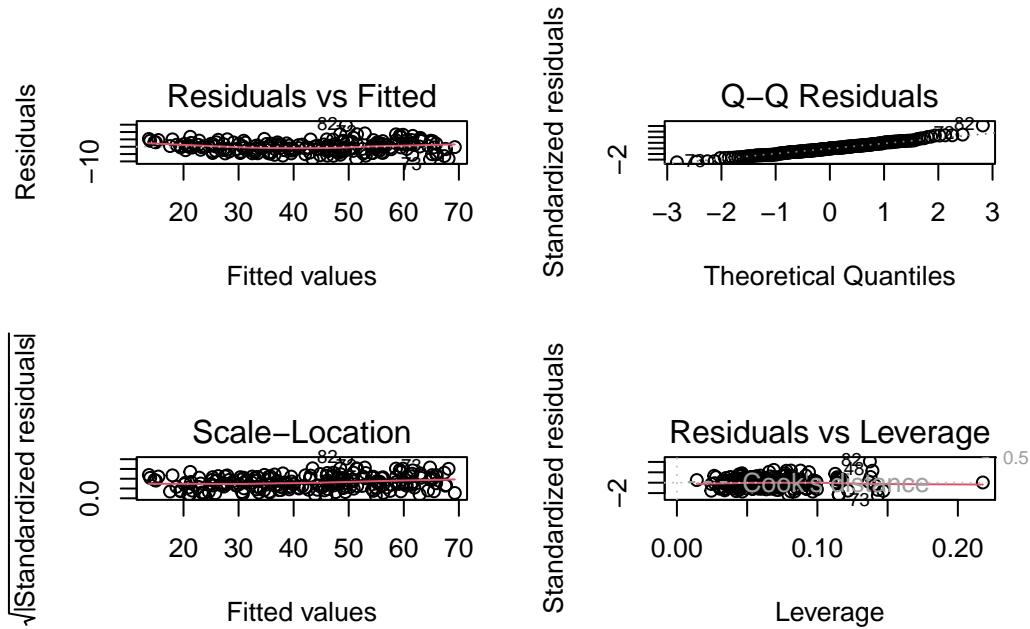


Figure 19.4.: Regression diagnostic plots. The top left plot shows the residuals vs. fitted values. The top right plot shows the normal Q-Q plot. The bottom left plot shows the scale-location plot. The bottom right plot shows the residuals vs. leverage.

19.5.1.1.2. Predict

```
pred_train = learner$predict(task, row_ids=train_set)
```

```
pred_test = learner$predict(task, row_ids=test_set)
```

19.5.1.1.3. Assess

```
pred_train
```


```
<PredictionRegr> for 209 observations:
  row_ids  truth  response
    298     29  31.40565
    103     58  56.26019
    194     53  48.96480
```

19. Machine Learning 2

```
---  
312    48 52.61195  
246    66 67.66312  
238    38 39.38414
```

We can plot the relationship between the `truth` and `response`, or predicted value to see visually how our model performs.

```
library(ggplot2)  
ggplot(pred_train,aes(x=truth, y=response)) +  
  geom_point() +  
  geom_smooth(method='lm')  
  
'geom_smooth()' using formula = 'y ~ x'
```

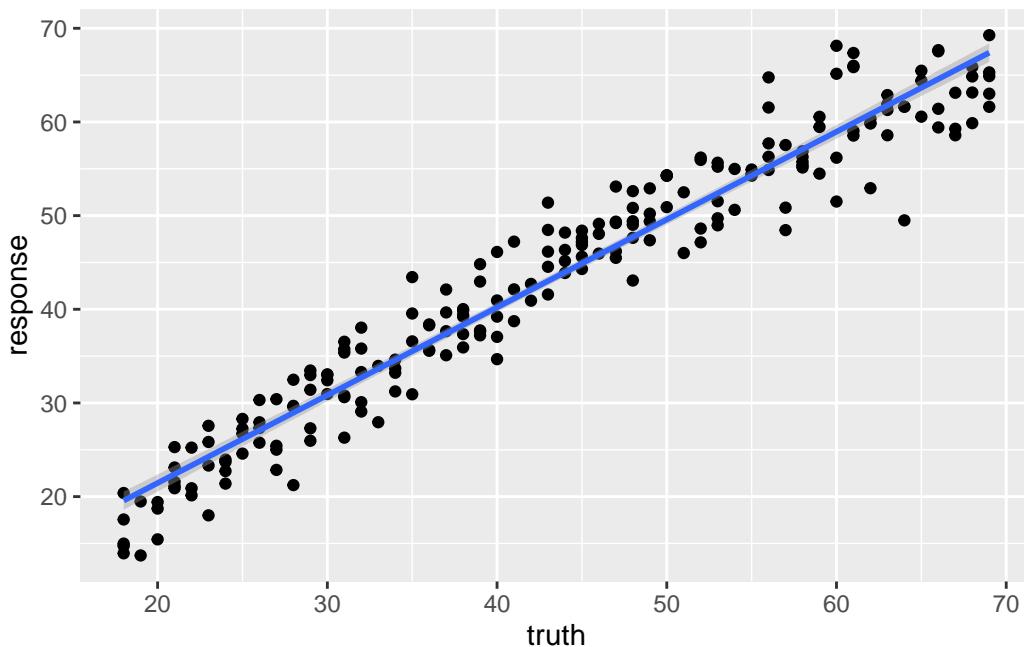

We can use the r-squared of the fit to roughly compare two models.

```
measures = msrs(c('regr.rsq'))  
pred_train$score(measures)
```

19. Machine Learning 2

```
rsq  
0.9376672
```

```
pred_test
```

```
<PredictionRegr> for 103 observations:  
  row_ids truth response  
    4      37 37.64301  
    5      24 28.34777  
    7      34 33.22419  
    ---  ---  ---  
   306     42 41.65864  
   307     63 58.68486  
   309     68 70.41987
```

```
pred_test$score(measures)
```

```
rsq  
0.9363526
```

19.5.1.2. Regression tree

```
learner = lrn("regr.rpart", keep_model = TRUE)
```

19.5.1.2.1. Train

```
learner$train(task, row_ids = train_set)
```

```
learner$model
```

```
n= 209
```

```
node), split, n, deviance, yval  
  * denotes terminal node
```

```
1) root 209 45441.4500 43.27273
```

19. Machine Learning 2

```
2) ELOVL2_6< 56.675 98 5512.1220 30.24490
   4) ELOVL2_6< 47.24 47 866.4255 24.23404
      8) GRM2_9< 31.3 34 289.0588 22.29412 *
      9) GRM2_9>=31.3 13 114.7692 29.30769 *
   5) ELOVL2_6>=47.24 51 1382.6270 35.78431
   10) F5_2>=39.295 35 473.1429 33.28571 *
   11) F5_2< 39.295 16 213.0000 41.25000 *
3) ELOVL2_6>=56.675 111 8611.3690 54.77477
   6) ELOVL2_6< 65.365 63 3101.2700 49.41270
      12) KLF14_2< 3.415 37 1059.0270 46.16216 *
      13) KLF14_2>=3.415 26 1094.9620 54.03846 *
   7) ELOVL2_6>=65.365 48 1321.3120 61.81250 *
```

What is odd about using a regression tree here is that we end up with only a few discrete estimates of age. Each “leaf” has a value.

19.5.1.2.2. Predict

```
pred_train = learner$predict(task, row_ids=train_set)
```

```
pred_test = learner$predict(task, row_ids=test_set)
```

19.5.1.2.3. Assess

```
pred_train
```


```
<PredictionRegr> for 209 observations:
  row_ids  truth  response
    298     29 33.28571
    103     58 61.81250
    194     53 46.16216
    ---     ---     ---
    312     48 54.03846
    246     66 61.81250
    238     38 41.25000
```

We can see the effect of the discrete values much more clearly here.

19. Machine Learning 2

```
library(ggplot2)
ggplot(pred_train,aes(x=truth, y=response)) +
  geom_point() +
  geom_smooth(method='lm')

`geom_smooth()` using formula = 'y ~ x'
```

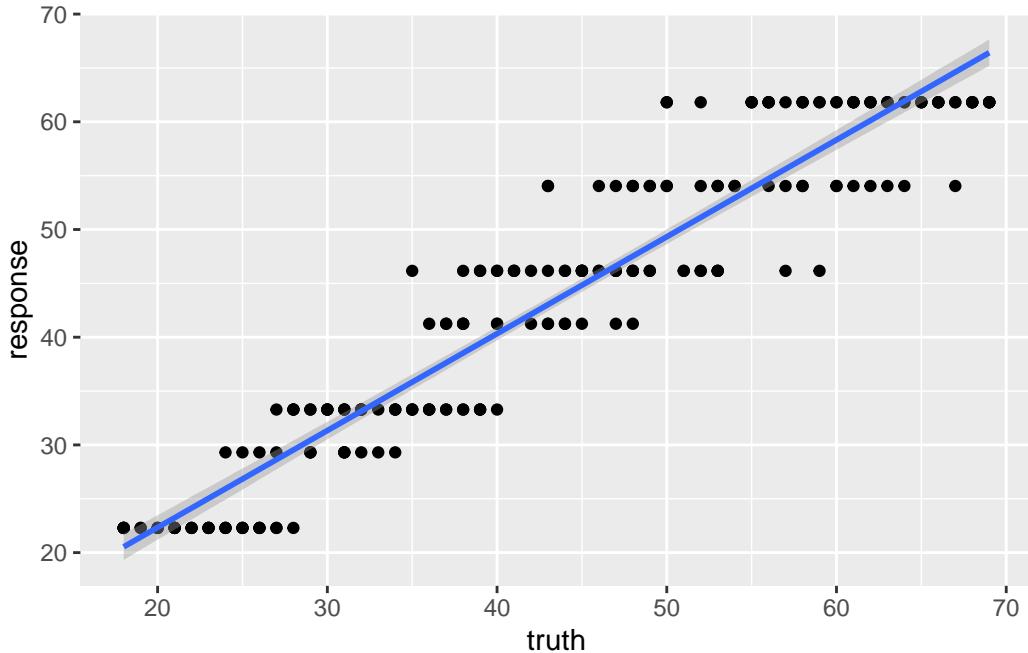

And the r-squared values for this model prediction shows quite a bit of difference from the linear regression above.

```
measures = msrs(c('regr.rsq'))
pred_train$score(measures)
```

```
rsq
0.8995351
```

```
pred_test
```

19. Machine Learning 2

```
<PredictionRegr> for 103 observations:  
  row_ids truth response  
    4      37 41.25000  
    5      24 33.28571  
    7      34 33.28571  
    ---  ----  ---  
   306     42 46.16216  
   307     63 61.81250  
   309     68 61.81250
```

```
pred_test$score(measures)
```

```
rsq  
0.8545402
```

19.5.1.3. RandomForest

Randomforest is also tree-based, but unlike the single regression tree above, randomforest is a “forest” of trees which will eliminate the discrete nature of a single tree.

```
learner = lrn("regr.ranger", mtry=2, min.node.size=20)
```

19.5.1.3.1. Train

```
learner$train(task, row_ids = train_set)
```

```
learner$model
```

Ranger result

Call:

```
ranger::ranger(dependent.variable.name = task$target_names, data = task$data(), min.n
```

```
Type:                      Regression  
Number of trees:           500  
Sample size:                209  
Number of independent variables: 13
```

19. Machine Learning 2

```
Mtry:                      2
Target node size:          20
Variable importance mode: none
Splitrule:                 variance
OOB prediction error (MSE): 18.85364
R squared (OOB):           0.9137009
```

19.5.1.3.2. Predict

```
pred_train = learner$predict(task, row_ids=train_set)

pred_test = learner$predict(task, row_ids=test_set)
```

19.5.1.3.3. Assess


```
pred_train

<PredictionRegr> for 209 observations:
  row_ids truth response
    298     29 30.62154
    103     58 58.05445
    194     53 48.25661
    ---     ---    ---
    312     48 51.49846
    246     66 64.39315
    238     38 38.18038

ggplot(pred_train,aes(x=truth, y=response)) +
  geom_point() +
  geom_smooth(method='lm')

`geom_smooth()` using formula = 'y ~ x'
```

19. Machine Learning 2

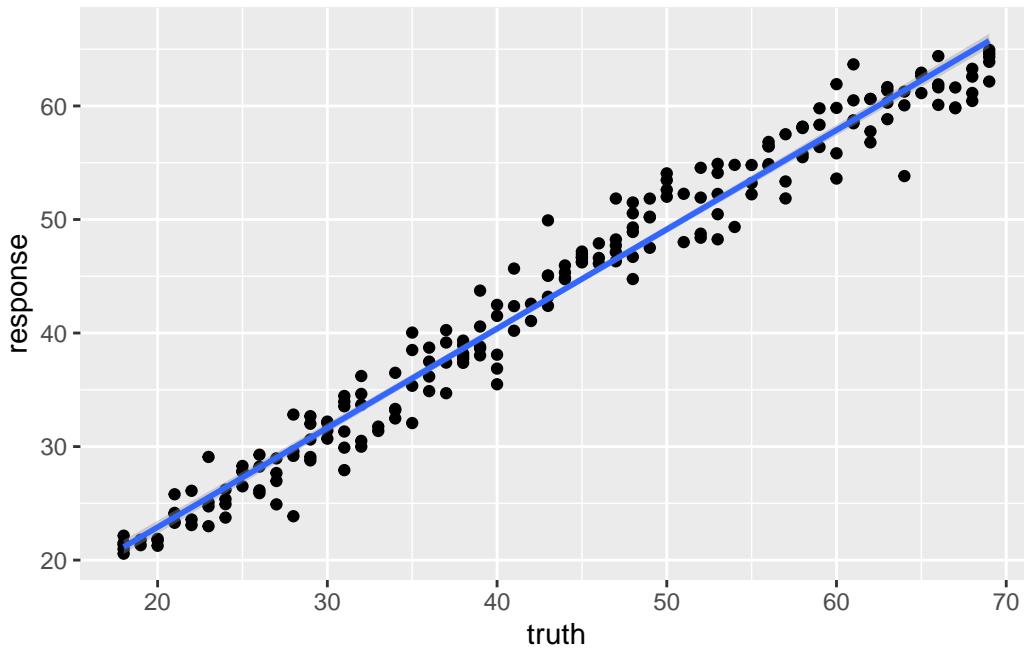

```
measures = msrs(c('regr.rsq'))
pred_train$score(measures)
```

```
rsq
0.960961
```

```
pred_test
```

```
<PredictionRegr> for 103 observations:
  row_ids  truth  response
        4     37 37.79631
        5     24 29.18371
        7     34 33.26780
    ---
  306     42 40.29101
  307     63 58.26534
  309     68 63.15481
```

```
pred_test$score(measures)
```

```
rsq
0.9208394
```

19.6. Example: Expression prediction from histone modification data

In this little set of exercises, you will be using histone marks near a gene to predict its expression (Figure 19.5).

$$y \sim h1 + h2 + h3 + \dots \quad (19.1)$$

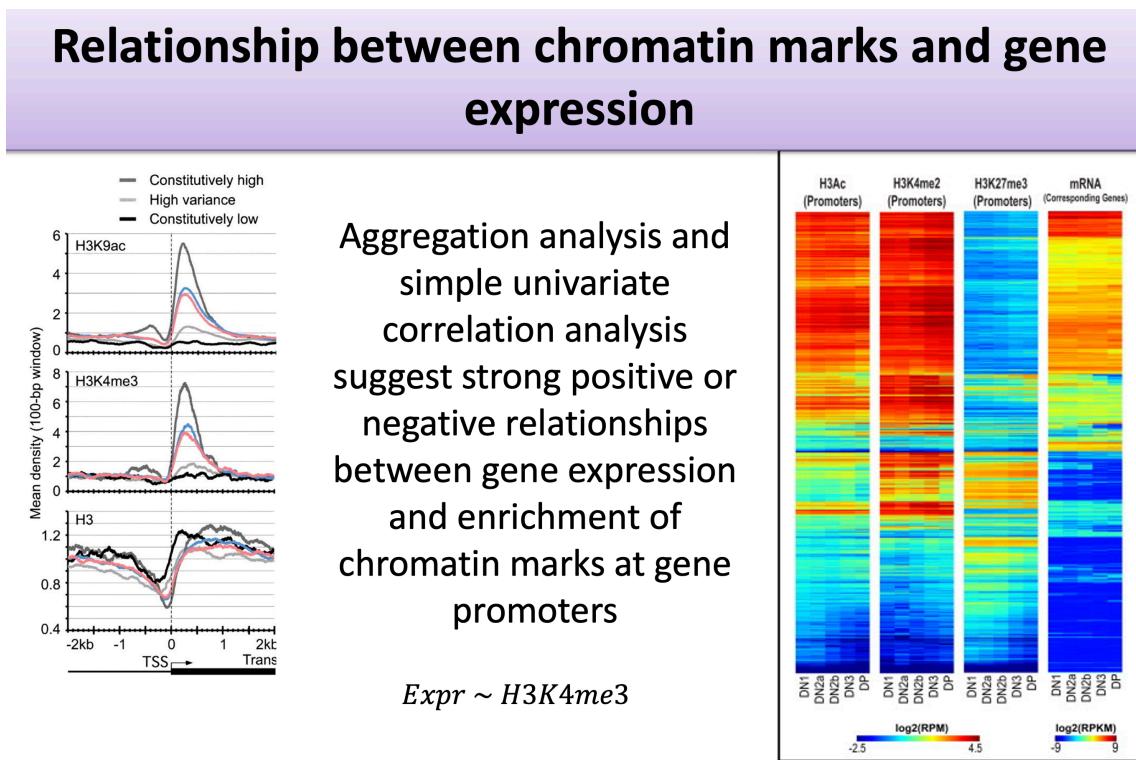


Figure 19.5.: What is the combined effect of histone marks on gene expression?

The data are from a study that aimed to predict gene expression from histone modification data. The data include gene expression levels and histone modification data for a set of genes. The goal is to build a machine learning model that can predict gene expression levels based on the histone modification data. The histone modification data are simply summaries of the histone marks within the promoter, defined as the region 2kb upstream of the transcription start site for this exercise.

We will try a couple of different approaches:

1. Penalized regression
2. RandomForest

19.6.1. The Data

The data in this exercise were developed by Anshul Kundaje. We are not going to focus on the details of the data collection, etc. Instead, this is

```
fullFeatureSet <- read.table("http://seandavi.github.io/ITR/expression-prediction/features.
```

What are the column names of the predictor variables?

```
colnames(fullFeatureSet)
```

```
[1] "Control"    "Dnase"      "H2az"       "H3k27ac"    "H3k27me3"   "H3k36me3"
[7] "H3k4me1"    "H3k4me2"    "H3k4me3"    "H3k79me2"   "H3k9ac"     "H3k9me1"
[13] "H3k9me3"   "H4k20me1"
```

These are going to be predictors combined into a model. Some of our learners will rely on predictors being on a similar scale. Are our data already there?

To perform centering and scaling by column, we can convert to a matrix and then use `scale`.

```
par(mfrow=c(1,2))
scaled_features <- scale(as.matrix(fullFeatureSet))
boxplot(fullFeatureSet, title='Original data')
boxplot(scaled_features, title='Centered and scaled data')
```

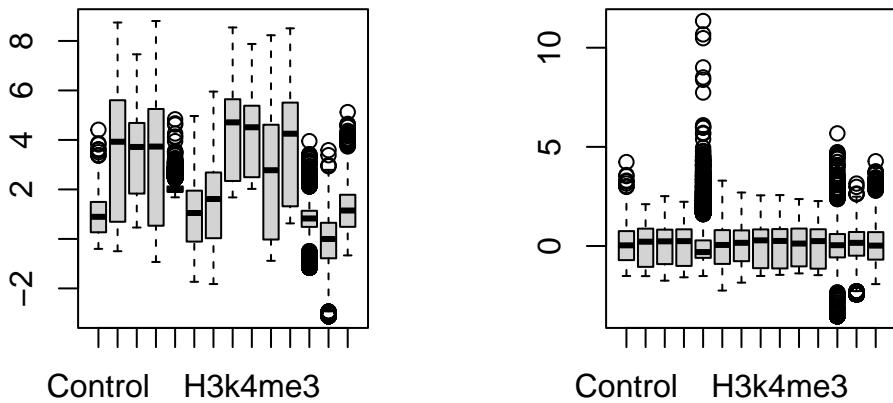


Figure 19.6.: Boxplots of original and scaled data.

There is a row for each gene and a column for each histone mark and we can see that the data are centered and scaled by column. We can also see some patterns in the data (see Figure 19.7).

```
sampled_features <- fullFeatureSet[sample(nrow(scaled_features), 500),]
library(ComplexHeatmap)
```

```
=====
ComplexHeatmap version 2.22.0
Bioconductor page: http://bioconductor.org/packages/ComplexHeatmap/
Github page: https://github.com/jokergoo/ComplexHeatmap
Documentation: http://jokergoo.github.io/ComplexHeatmap-reference

If you use it in published research, please cite either one:
- Gu, Z. Complex Heatmap Visualization. iMeta 2022.
- Gu, Z. Complex heatmaps reveal patterns and correlations in multidimensional genomic data. Bioinformatics 2016.
```

The new `InteractiveComplexHeatmap` package can directly export static complex heatmaps into an interactive Shiny app with zero effort. Have a try!

This message can be suppressed by:
`suppressPackageStartupMessages(library(ComplexHeatmap))`

19. Machine Learning 2

```
Heatmap(sampled_features, name='histone marks', show_row_names=FALSE)
```

Warning: The input is a data frame-like object, convert it to a matrix.

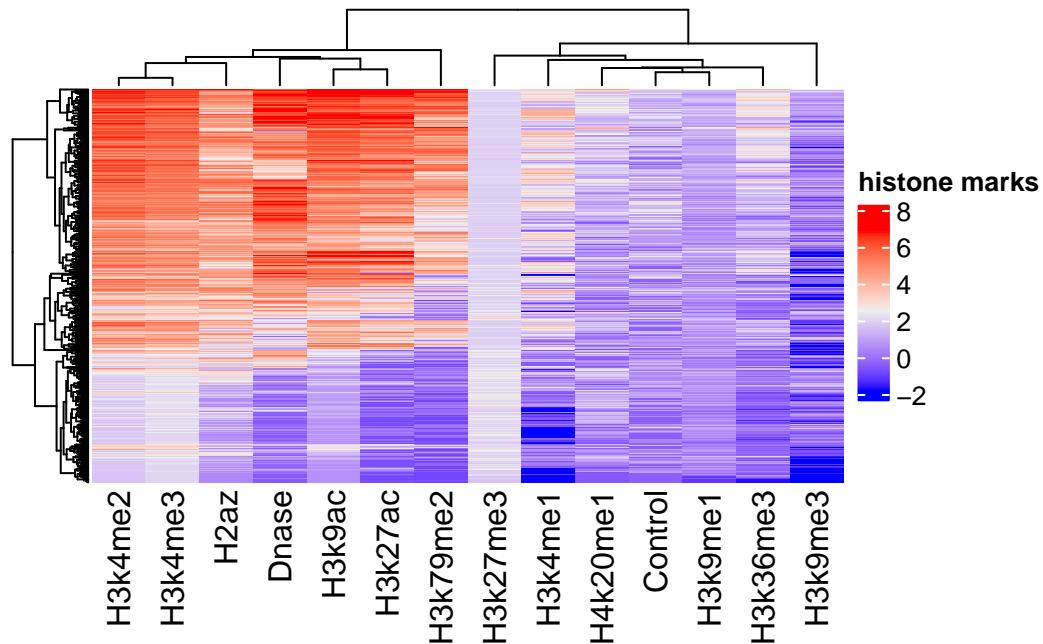


Figure 19.7.: Heatmap of 500 randomly sampled rows of the data. Columns are histone marks and there is a row for each gene.

Now, we can read in the associated gene expression measures that will become our “target” for prediction.

```
target <- scan(url("http://seandavi.github.io/ITR/expression-prediction/target.txt"), skip=1)
# make into a data frame
exp_pred_data <- data.frame(gene_expression=target, scaled_features)
```

And the first few rows of the target data frame using:

```
head(exp_pred_data, 3)
```

19. Machine Learning 2

```
          gene_expression      Control      Dnase      H2az
ENSG00000000419.7.49575069      6.082343  0.7452926  0.7575546  1.0728432
ENSG00000000457.8.169863093    2.989145  1.9509786  1.0216546  0.3702787
ENSG00000000938.7.27961645    -5.058894 -0.3505542 -1.4482958 -1.0390775
                                H3k27ac   H3k27me3   H3k36me3   H3k4me1
ENSG00000000419.7.49575069    1.0950440 -0.5125312  1.1334793  0.4127984
ENSG00000000457.8.169863093    0.7142157 -0.4079244  0.8739005  1.1649282
ENSG00000000938.7.27961645    -1.0173283  1.4117293 -0.5157582 -0.5017450
                                H3k4me2   H3k4me3   H3k79me2   H3k9ac
ENSG00000000419.7.49575069    1.2136176  1.1202901  1.5155803  1.2468256
ENSG00000000457.8.169863093    0.6456572  0.6508561  0.7976487  0.5792891
ENSG00000000938.7.27961645    -0.1878255 -0.6560973 -1.3803974 -1.0067972
                                H3k9me1   H3k9me3   H4k20me1
ENSG00000000419.7.49575069    0.1426980  1.185622   1.9599992
ENSG00000000457.8.169863093    0.3630902  1.014923   -0.2695111
ENSG00000000938.7.27961645    0.6564520 -1.370871  -1.8773178
```

19.6.2. Create task

```
exp_pred_task = as_task_regr(exp_pred_data, target='gene_expression')
```

Partition the data into test and training sets. We will use $\frac{1}{3}$ and $\frac{2}{3}$ of the data for testing.

```
split = partition(exp_pred_task)
```

19.6.3. Example learners

19.6.3.1. Linear regression

```
learner = lrn("regr.lm")
```

19.6.3.1.1. Train

```
learner$train(exp_pred_task, split$train)
```

19.6.3.1.2. Predict


```
pred_train = learner$predict(exp_pred_task, split$train)
pred_test = learner$predict(exp_pred_task, split$test)
```

19.6.3.1.3. Assess

```
pred_train
```

```
<PredictionRegr> for 5789 observations:
  row_ids      truth   response
    1  6.082343  5.182373
    2  2.989145  2.970278
    3 -5.058894 -5.283509
    ...
  8637 -5.058894 -3.955237
  8638  6.089159  4.809801
  8640 -3.114148 -4.723061
```

```
plot(pred_train)
```

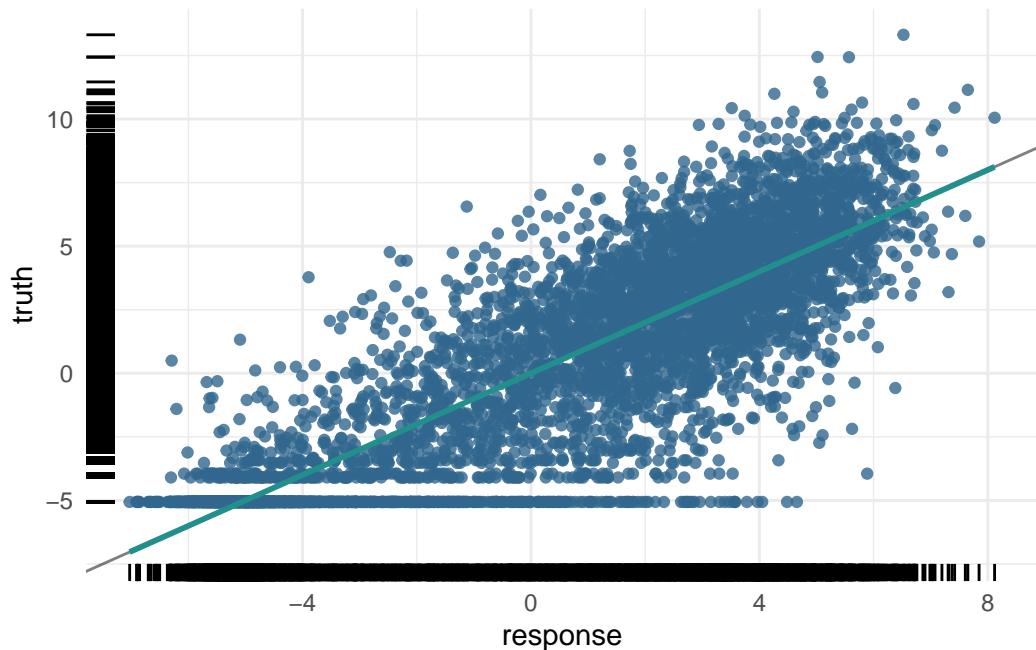

19. Machine Learning 2

For the training data:

```
measures = msrs(c('regr.rsq'))
pred_train$score(measures)
```

```
rsq
0.7505366
```


And the test data:

```
pred_test$score(measures)
```

```
rsq
0.7510334
```

And the plot of the test data predictions:

```
plot(pred_test)
```

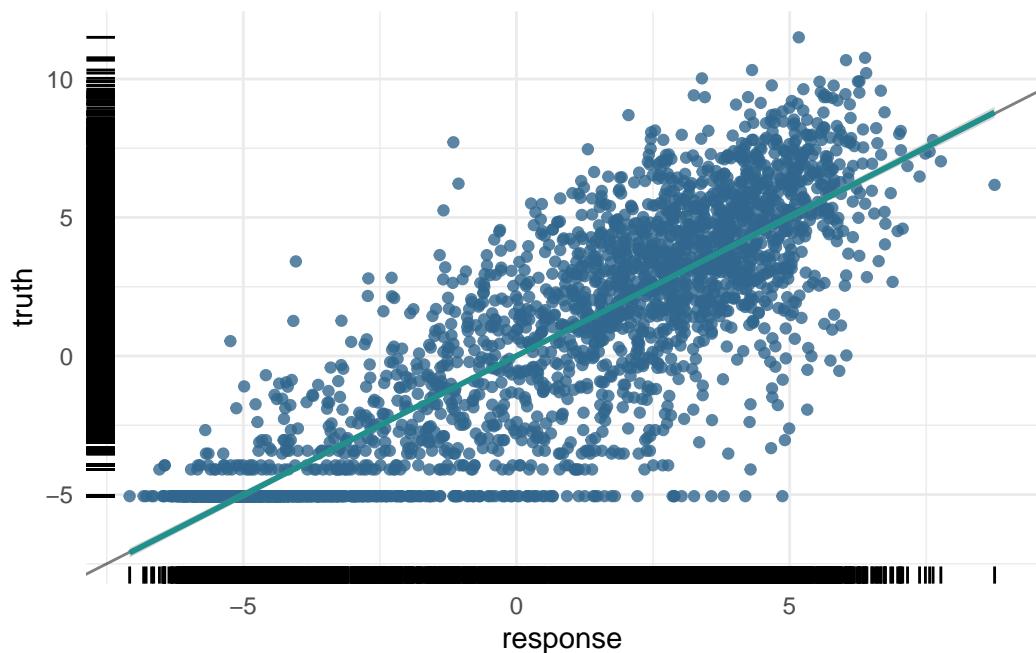

19.6.3.2. Penalized regression

Imagine you want to teach a computer to predict house prices based on various features like size, number of bedrooms, and location. You decide to use **regression**, which finds a relationship between these features and the house prices. But what if your model becomes too complicated? This is where **penalized regression** comes in.

19.6.3.2.1. The Problem with Overfitting

Sometimes, the model tries too hard to fit every single data point perfectly. This can make the model very complex, like trying to draw a perfect line through a very bumpy path. This problem is called **overfitting**. An overfitted model works well on the data it has seen (training data) but performs poorly on new, unseen data (testing data).

19.6.3.2.2. Introducing Penalized Regression

Penalized regression helps prevent overfitting by adding a “penalty” to the model for being too complex. Think of it as a way to encourage the model to be simpler and more general. There are three common types of penalized regression:

1. Ridge Regression (L2 Penalty):

- Adds a penalty based on the size of the coefficients. It tries to keep all coefficients small.
- If the model’s equation looks too complicated, Ridge Regression will push it towards a simpler form by shrinking the coefficients.
- Imagine you have a rubber band that pulls the coefficients towards zero, making the model less likely to overfit.

2. Lasso Regression (L1 Penalty):

- Adds a penalty that can shrink some coefficients all the way to zero.
- This means Lasso Regression can completely remove some features from the model, making it simpler.
- Imagine you have a pair of scissors that can cut off the least important features, leaving only the most important ones.

3. Elastic Net:

- Combines both Ridge and Lasso penalties. It adds penalties for both the size and the number of coefficients.
- This method balances between shrinking coefficients and eliminating some altogether, offering the benefits of both Ridge and Lasso.

19. Machine Learning 2

- Think of Elastic Net as using both the rubber band (Ridge) and scissors (Lasso) to simplify the model.

With our data, the number of predictors is not huge, but we might be interested in 1) reducing overfitting, 2) improving interpretability, or 3) both by minimizing the number of predictors in our model without drastically affecting our prediction accuracy. Without penalized regression, the model might come up with a very complex equation. With Ridge, Lasso, or Elastic Net, the model simplifies this equation by either shrinking the coefficients (Ridge), removing some of them (Lasso), or balancing both (Elastic Net).

Here's a simple summary:

- **Ridge Regression:** Reduces the impact of less important features by shrinking their coefficients.
- **Lasso Regression:** Can eliminate some features entirely by setting their coefficients to zero.
- **Elastic Net:** Combines the effects of Ridge and Lasso, shrinking some coefficients and eliminating others.

Using penalized regression in machine learning ensures that your model:

1. **Performs Better on New Data:** By avoiding overfitting, the model can make more accurate predictions on new, unseen data.
2. **Is Easier to Interpret:** A simpler model with fewer features is easier to understand and explain.

19.6.3.3. Penalized Regression with mlr3

In the `mlr3` package, you can easily apply penalized regression methods to your tasks. Here's how:

1. **Select Penalized Regression Learners:** `mlr3` provides learners for Ridge, Lasso, and Elastic Net Regression.
2. **Train the Learner:** Use your data to train the chosen penalized regression model.
3. **Evaluate and Adjust:** Check how well the model performs and make adjustments if needed.

This description explains penalized regression, including Ridge, Lasso, and Elastic Net, in an intuitive way, highlighting their benefits and how they work, while relating them to familiar concepts and the `mlr3` package.

19. Machine Learning 2

Recall that we can use penalized regression to select the most important predictors from a large set of predictors. In this case, we will use the `glmnet` package to perform penalized regression, but we will use the `m1r` interface to `glmnet` to make it easier to use.

The `nfolds` parameter is the number of folds to use in the cross-validation procedure.

What is Cross-Validation? Cross-validation is a technique used to assess how well a model will perform on unseen data. It involves splitting the data into multiple parts, training the model on some of these parts, and validating it on the remaining parts. This process is repeated several times to ensure the model's performance is consistent.

Why Use Cross-Validation? Cross-validation helps to:

- Avoid Overfitting: By testing the model on different subsets of the data, cross-validation helps ensure that the model does not memorize the training data but learns to generalize from it.
- Select the Best Model Parameters: Penalized regression models, such as those trained with `glmnet`, have parameters that control the strength of the penalty (e.g., `lambda`). Cross-validation helps find the best values for these parameters.

When using the `glmnet` package, cross-validation can be performed using the `cv.glmnet` function. Here's how the process works:

1. Split the Data: The data is divided into k folds (common choices are 5 or 10 folds). Each fold is a subset of the data.
2. Train and Validate: The model is trained k times. In each iteration, $k - 1$ folds are used for training, and the remaining fold is used for validation. This process is repeated until each fold has been used as the validation set exactly once.
3. Calculate Performance: The performance of the model (e.g., mean squared error for regression) is calculated for each fold. The average performance across all folds is computed to get an overall measure of how well the model is expected to perform on unseen data.
4. Select the Best Parameters: The `cv.glmnet` function evaluates different values of the penalty parameter (`lambda`). It selects the `lambda` value that results in the best average performance across the folds.

In this case, we will use the `cv_glmnet` learner, which will automatically select the best value of the penalization parameters. When the `alpha` parameter is set to 0, the model is a Ridge regression model. When the `alpha` parameter is set to 1, the model is a Lasso regression model.

```
learner = lrn("regr.cv_glmnet", nfolds=10, alpha=0)
```

19.6.3.3.1. Train

```
learner$train(exp_pred_task)

measures = msrs(c('regr.rsq', 'regr.mse', 'regr.rmse'))
pred_train$score(measures)

rsq  regr.mse regr.rmse
0.7505366 4.8335493 2.1985334
```

In the case of the penalized regression, we can also look at the coefficients of the model.

```
coef(learner$model)

15 x 1 sparse Matrix of class "dgCMatrix"
  s0
(Intercept) 0.10173828
Control      -0.07049573
Dnase        0.87495827
H2az         0.33778155
H3k27ac     0.19454755
H3k27me3    -0.26196627
H3k36me3    0.70067015
H3k4me1     -0.06753216
H3k4me2     0.15796965
H3k4me3     0.38806405
H3k79me2    0.94399114
H3k9ac       0.50694074
H3k9me1     -0.07422291
H3k9me3     -0.17013775
H4k20me1    0.11617186
```

Note that the coefficients are all zero for the histone marks that were not selected by the model. In this case, we can use the model not to predict new data, but to help us understand the data.


```
pred_train = learner$predict(exp_pred_task, split$train)
pred_test = learner$predict(exp_pred_task, split$test)
```

19.6.3.3.2. Assess

```
pred_train
```

```
<PredictionRegr> for 5789 observations:
  row_ids      truth   response
    1  6.082343  4.892642
    2  2.989145  2.932909
    3 -5.058894 -4.518292
    ...
  8637 -5.058894 -4.341742
  8638  6.089159  4.696146
  8640 -3.114148 -4.153795
```

```
plot(pred_train)
```

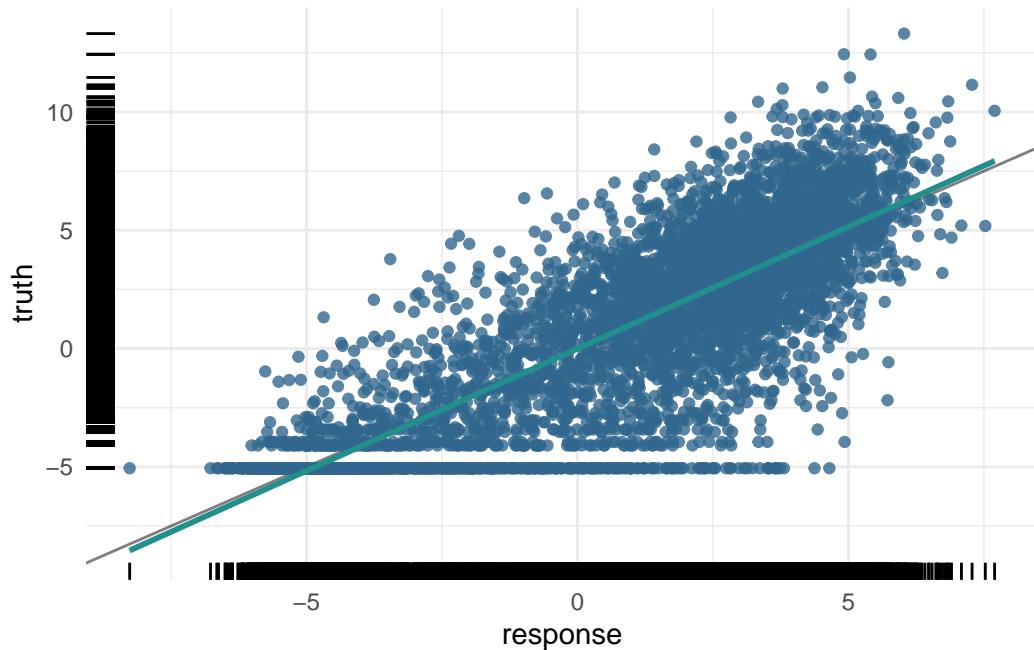

For the training data:

19. Machine Learning 2

```
measures = msrs(c('regr.rsq'))
pred_train$score(measures)
```

```
rsq
0.742853
```


And the test data:

```
pred_test$score(measures)
```

```
rsq
0.7428019
```

And the plot of the test data predictions:

```
plot(pred_test)
```

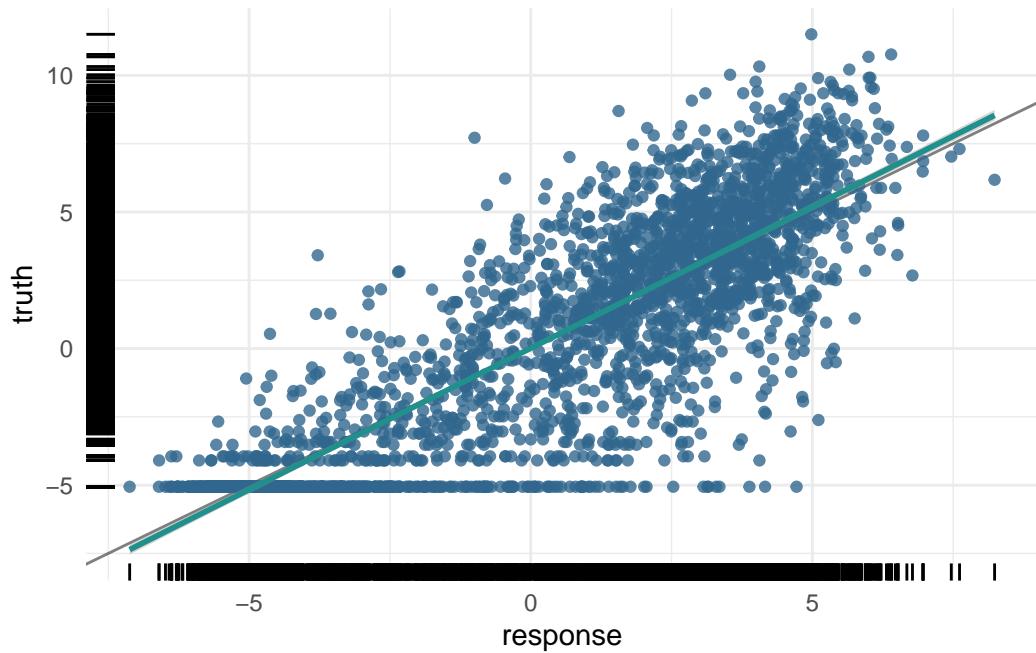

19. Machine Learning 2

```
# Calculate the R-squared value
truth <- pred_test$truth
predicted <- pred_test$response
rss <- sum((truth - predicted)^2) # Residual sum of squares
tss <- sum((truth - mean(truth))^2) # Total sum of squares
r_squared <- 1 - (rss / tss)
```

Part V.

Bioconductor

20. Accessing and working with public omics data

20.1. Background

The data we are going to access are from [this paper](#).

Background: The tumor microenvironment is an important factor in cancer immunotherapy response. To further understand how a tumor affects the local immune system, we analyzed immune gene expression differences between matching normal and tumor tissue. Methods: We analyzed public and new gene expression data from solid cancers and isolated immune cell populations. We also determined the correlation between CD8, FoxP3 IHC, and our gene signatures. Results: We observed that regulatory T cells (Tregs) were one of the main drivers of immune gene expression differences between normal and tumor tissue. A tumor-specific CD8 signature was slightly lower in tumor tissue compared with normal of most (12 of 16) cancers, whereas a Treg signature was higher in tumor tissue of all cancers except liver. Clustering by Treg signature found two groups in colorectal cancer datasets. The high Treg cluster had more samples that were consensus molecular subtype 1/4, right-sided, and microsatellite-instable, compared with the low Treg cluster. Finally, we found that the correlation between signature and IHC was low in our small dataset, but samples in the high Treg cluster had significantly more CD8+ and FoxP3+ cells compared with the low Treg cluster. Conclusions: Treg gene expression is highly indicative of the overall tumor immune environment. Impact: In comparison with the consensus molecular subtype and microsatellite status, the Treg signature identifies more colorectal tumors with high immune activation that may benefit from cancer immunotherapy.

In this little exercise, we will:

1. Access public omics data using the GEOquery package
2. Get an opportunity to work with another SummarizedExperiment object.
3. Perform a simple unsupervised analysis to visualize these public data.

20.2. GEOquery to PCA

The first step is to install the R package [GEOquery](#). This package allows us to access data from the Gene Expression Omnibus (GEO) database. GEO is a public repository of omics data.

```
BiocManager::install("GEOquery")
```

GEOquery has only one commonly used function, `getGEO()` which takes a GEO accession number as an argument. The GEO accession number is a unique identifier for a dataset.

Use the [GEOquery](#) package to fetch data about [GSE103512](#).

```
library(GEOquery)
gse = getGEO("GSE103512")[[1]]
```

You might ask why we are using `[[1]]` at the end of the `getGEO()` function. The reason is that `getGEO()` returns a list of GSE objects. We are only interested in the first one (and in this case, the only one). We return a list of GSE objects because in the early days, it was not unusual to have a single GEO accession number represent multiple datasets. While uncommon now, we've kept the convention since lots of "older" data is still quite useful.

Again, a historically-derived detail, is to convert from the older Bioconductor data structure (GEOquery was written in 2007), the `ExpressionSet`, to the newer `SummarizedExperiment`.

```
library(SummarizedExperiment)
se = as(gse, "SummarizedExperiment")
```

Use some code to determine the answers to the following:

- What is the class of `se`?
- What are the dimensions of `se`?
- What are the dimensions of the `assay` slot of `se`?
- What are the dimensions of the `colData` slot of `se`?
- What variables are in the `colData` slot of `se`?

Examine two variables of interest, cancer type and tumor/normal status. The `with` function is a convenience to allow us to access variables in a data frame by name (rather than having to do `dataframe$variable_name`). Recalling that the `table` function is a convenient way to summarize the counts of unique values in a vector, we can use `with` to access the variables of interest and `table` to summarize the counts of unique values.

20. Accessing and working with public omics data

```
with(colData(se),table(`cancer.type.ch1`,`normal.ch1`))
```

```
normal.ch1
cancer.type.ch1 no yes
    BC     65 10
    CRC    57 12
    NSCLC 60  9
    PCA    60  7
```

- How many samples are there of each cancer type?
- How many samples are there of each tumor/normal status?

When performing unsupervised analysis, it is common to filter genes by variance to find the most informative genes. It is common practice to filter genes by standard deviation or some other measure of variability and keep the top X percent of them when performing dimensionality reduction. There is not a single right answer to what percentage to use, so try a few to see what happens. In the example code, I chose to use the top 500 genes by standard deviation, but you can play with the threshold to see what happens.

Recall that the `assay` function is used to access the data matrix of the `SummarizedExperiment` object.

Think through the code below and then run it.

```
sds = apply(assay(se, 'exprs'), 1, sd)
dat = assay(se, 'exprs')[order(sds, decreasing = TRUE)[1:500],]
```

If you don't recognize the function `apply`, it is a function that applies a function to each row or column of a matrix. In this case, we are applying the `sd` function to each row of the data matrix. The `order` function is used to sort the standard deviations in decreasing order (when `decreasing=TRUE`). And the `[1:500]` is used to subset the data matrix to the top 500 genes by standard deviation.


Perform PCA and prepare for plotting. We will be using `ggplot2`, so we need to make a `data.frame` before plotting.

```
pca_results <- prcomp(t(dat))
pca_df = as.data.frame(pca_results$x)
pca_df$Type=factor(colData(se)[,'cancer.type.ch1'])
pca_df$Normal = factor(colData(se)[,'normal.ch1'])
```

20. Accessing and working with public omics data

Now, we are going to plot the results of the PCA, coloring the points by cancer type and using different shapes for normal and tumor samples.

```
library(ggplot2)
ggplot(pca_df, aes(x=PC1,y=PC2,shape=Normal,color=Type)) +
  geom_point( alpha=0.6) + theme(text=element_text(size = 18))
```

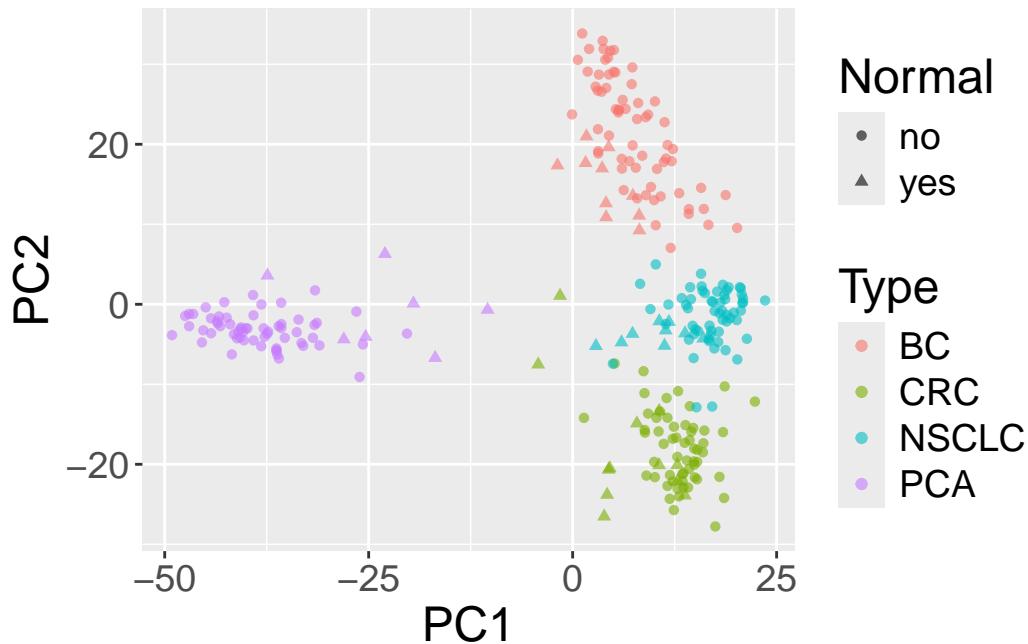

In this case, the x-axis is the first principal component and the y-axis is the second principal component.

- What do you see?
- What about additional principal components?
- Bonus: Try using the `GGally` package to plot principal components (using the `ggpairs` function).
- Bonus: Calculate the variance explained by each principal component and plot the results.

21. Introduction to `SummarizedExperiment`

The `SummarizedExperiment` class is used to store rectangular matrices of experimental results, which are commonly produced by sequencing and microarray experiments. Each object stores observations of one or more samples, along with additional meta-data describing both the observations (features) and samples (phenotypes).

A key aspect of the `SummarizedExperiment` class is the coordination of the meta-data and assays when subsetting. For example, if you want to exclude a given sample you can do for both the meta-data and assay in one operation, which ensures the meta-data and observed data will remain in sync. Improperly accounting for meta and observational data has resulted in a number of incorrect results and retractions so this is a very desirable property.

`SummarizedExperiment` is in many ways similar to the historical `ExpressionSet`, the main distinction being that `SummarizedExperiment` is more flexible in its row information, allowing both `GRanges` based as well as those described by arbitrary `DataFrames`. This makes it ideally suited to a variety of experiments, particularly sequencing based experiments such as RNA-Seq and ChIP-Seq.

```
BiocManager::install('airway')
BiocManager::install('SummarizedExperiment')
```

21.1. Anatomy of a `SummarizedExperiment`

The *SummarizedExperiment* package contains two classes: `SummarizedExperiment` and `RangedSummarizedExperiment`.

`SummarizedExperiment` is a matrix-like container where rows represent features of interest (e.g. genes, transcripts, exons, etc.) and columns represent samples. The objects contain one or more assays, each represented by a matrix-like object of numeric or other mode. The rows of a `SummarizedExperiment` object represent features of interest. Information about these features is stored in a `DataFrame` object, accessible using the function `rowData()`. Each row of the `DataFrame` provides information on the feature in the corresponding row

21. Introduction to `SummarizedExperiment`

of the `SummarizedExperiment` object. Columns of the `DataFrame` represent different attributes of the features of interest, e.g., gene or transcript IDs, etc.

`RangedSummarizedExperiment` is the “child” of the `SummarizedExperiment` class which means that all the methods on `SummarizedExperiment` also work on a `RangedSummarizedExperiment`.

The fundamental difference between the two classes is that the rows of a `RangedSummarizedExperiment` object represent genomic ranges of interest instead of a `DataFrame` of features. The `RangedSummarizedExperiment` ranges are described by a `GRanges` or a `GRangesList` object, accessible using the `rowRanges()` function.

Figure 21.1 displays the class geometry and highlights the vertical (column) and horizontal (row) relationships.

21.1.1. Assays

The `airway` package contains an example dataset from an RNA-Seq experiment of read counts per gene for airway smooth muscles. These data are stored in a `RangedSummarizedExperiment` object which contains 8 different experimental and assays 64,102 gene transcripts.

```
Loading required package: airway
```

```
library(SummarizedExperiment)
data(airway, package="airway")
se <- airway
se
```



```
class: RangedSummarizedExperiment
dim: 63677 8
metadata(1): ''
assays(1): counts
rownames(63677): ENSG000000000003 ENSG000000000005 ... ENSG00000273492
ENSG00000273493
rowData names(10): gene_id gene_name ... seq_coord_system symbol
colnames(8): SRR1039508 SRR1039509 ... SRR1039520 SRR1039521
colData names(9): SampleName cell ... Sample BioSample
```

To retrieve the experiment data from a `SummarizedExperiment` object one can use the `assays()` accessor. An object can have multiple assay datasets each of which can be accessed using the `$` operator. The `airway` dataset contains only one assay (`counts`). Here each row represents a gene transcript and each column one of the samples.

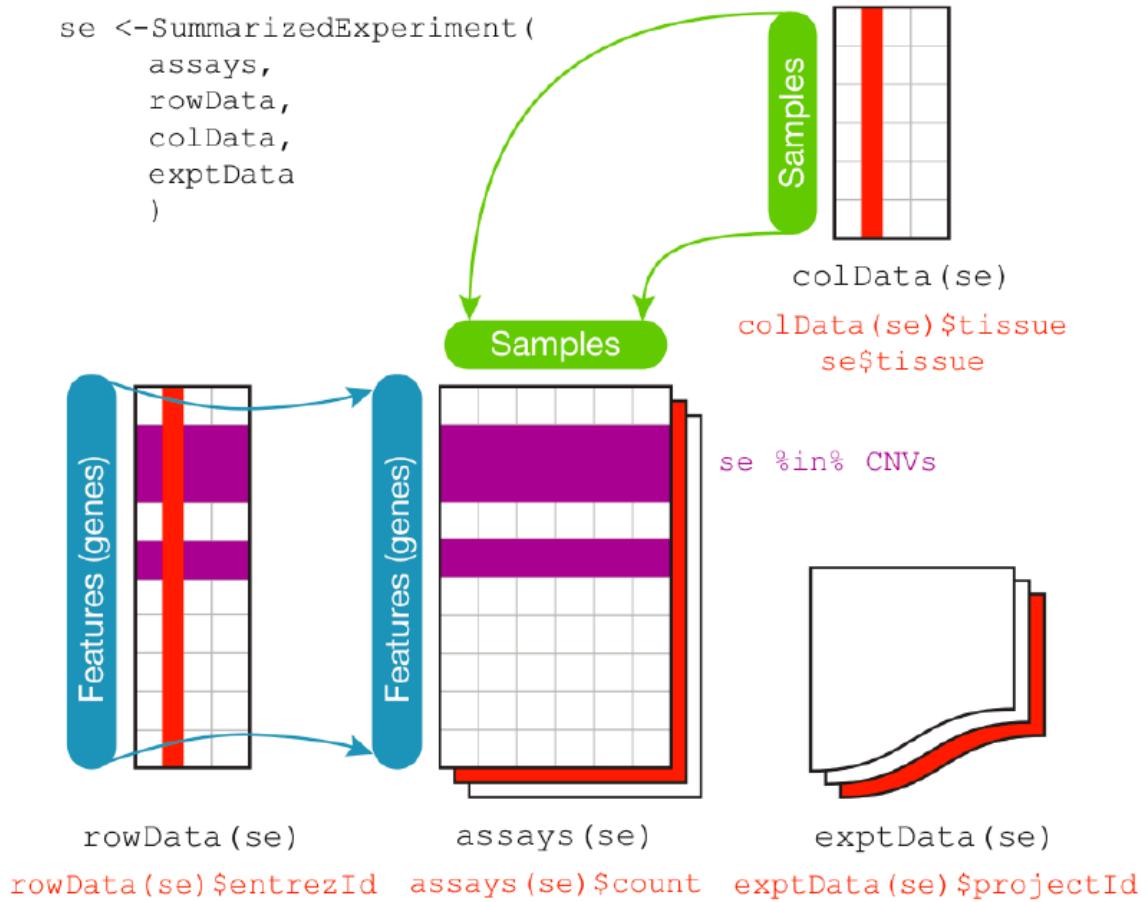


Figure 21.1.: Summarized Experiment. There are three main components, the `colData()`, the `rowData()` and the `assays()`. The accessors for the various parts of a complete `SummarizedExperiment` object match the names.

21. Introduction to *SummarizedExperiment*

assays(se)\$counts

	SRR103955	SRR103956	SRR103957	SRR103958	SRR103959	SRR1039510	SRR1039511	SRR1039512
ENSG00000000000679	448	873	408	1138	1047	770	572	
ENSG0000000000050	0	0	0	0	0	0	0	
ENSG00000000041667	515	621	365	587	799	417	508	
ENSG00000000042660	211	263	164	245	331	233	229	
ENSG00000000046660	55	40	35	78	63	76	60	
ENSG0000000009380	0	2	0	1	0	0	0	
ENSG00000000092551	3679	6177	4252	6721	11027	5176	7995	
ENSG0000000103633	1062	1733	881	1424	1439	1359	1109	
ENSG0000000108419	380	595	493	820	714	696	704	
ENSG0000000116794	236	464	175	658	584	360	269	

21.1.2. ‘Row’ (regions-of-interest) data

The `rowRanges()` accessor is used to view the range information for a `RangedSummarizedExperiment`. (Note if this were the parent `SummarizedExperiment` class we'd use `rowData()`). The data are stored in a `GRangesList` object, where each list element corresponds to one gene transcript and the ranges in each `GRanges` correspond to the exons in the transcript.

`rowRanges(se)`

GRangesList object of length 63677:

\$ENSG0000000003

GRanges object with 17 ranges and 2 metadata columns:

	seqnames	ranges	strand		exon_id	exon_name
	<Rle>	<IRanges>	<Rle>		<integer>	<character>
[1]	X	99883667-99884983	-		667145	ENSE00001459322
[2]	X	99885756-99885863	-		667146	ENSE00000868868
[3]	X	99887482-99887565	-		667147	ENSE00000401072
[4]	X	99887538-99887565	-		667148	ENSE00001849132
[5]	X	99888402-99888536	-		667149	ENSE00003554016
...
[13]	X	99890555-99890743	-		667156	ENSE00003512331
[14]	X	99891188-99891686	-		667158	ENSE00001886883
[15]	X	99891605-99891803	-		667159	ENSE00001855382

21. Introduction to SummarizedExperiment

```
[16]      X 99891790-99892101      - | 667160 ENSE00001863395
[17]      X 99894942-99894988      - | 667161 ENSE00001828996
-----
seqinfo: 722 sequences (1 circular) from an unspecified genome

...
<63676 more elements>
```

21.1.3. ‘Column’ (sample) data

Sample meta-data describing the samples can be accessed using `colData()`, and is a `DataFrame` that can store any number of descriptive columns for each sample row.

```
colData(se)
```

```
DataFrame with 8 rows and 9 columns
  SampleName    cell     dex   albut      Run avgLength
  <factor> <factor> <factor> <factor> <factor> <integer>
SRR1039508 GSM1275862 N61311 untrt  untrt SRR1039508      126
SRR1039509 GSM1275863 N61311 trt    untrt  SRR1039509      126
SRR1039512 GSM1275866 N052611 untrt  untrt  SRR1039512      126
SRR1039513 GSM1275867 N052611 trt    untrt  SRR1039513      87
SRR1039516 GSM1275870 N080611 untrt  untrt  SRR1039516      120
SRR1039517 GSM1275871 N080611 trt    untrt  SRR1039517      126
SRR1039520 GSM1275874 N061011 untrt  untrt  SRR1039520      101
SRR1039521 GSM1275875 N061011 trt    untrt  SRR1039521      98
  Experiment    Sample    BioSample
  <factor> <factor> <factor>
SRR1039508 SRX384345 SRS508568 SAMN02422669
SRR1039509 SRX384346 SRS508567 SAMN02422675
SRR1039512 SRX384349 SRS508571 SAMN02422678
SRR1039513 SRX384350 SRS508572 SAMN02422670
SRR1039516 SRX384353 SRS508575 SAMN02422682
SRR1039517 SRX384354 SRS508576 SAMN02422673
SRR1039520 SRX384357 SRS508579 SAMN02422683
SRR1039521 SRX384358 SRS508580 SAMN02422677
```

This sample metadata can be accessed using the `$` accessor which makes it easy to subset the entire object by a given phenotype.

21. Introduction to *SummarizedExperiment*

```
# subset for only those samples treated with dexamethasone
se[, se$dex == "trt"]

class: RangedSummarizedExperiment
dim: 63677 4
metadata(1): ''
assays(1): counts
rownames(63677): ENSG000000000003 ENSG000000000005 ... ENSG00000273492
  ENSG00000273493
rowData names(10): gene_id gene_name ... seq_coord_system symbol
colnames(4): SRR1039509 SRR1039513 SRR1039517 SRR1039521
colData names(9): SampleName cell ... Sample BioSample
```

21.1.4. Experiment-wide metadata

Meta-data describing the experimental methods and publication references can be accessed using `metadata()`.

```
metadata(se)
```

```
[[1]]
Experiment data
  Experimenter name: Himes BE
  Laboratory: NA
  Contact information:
  Title: RNA-Seq transcriptome profiling identifies CRISPLD2 as a glucocorticoid responsive
  URL: http://www.ncbi.nlm.nih.gov/pubmed/24926665
  PMIDs: 24926665

  Abstract: A 226 word abstract is available. Use 'abstract' method.
```

Note that `metadata()` is just a simple list, so it is appropriate for *any* experiment wide metadata the user wishes to save, such as storing model formulas.

```
metadata(se)$formula <- counts ~ dex + albut

metadata(se)
```

```
[[1]]
Experiment data
  Experimenter name: Himes BE
  Laboratory: NA
  Contact information:
    Title: RNA-Seq transcriptome profiling identifies CRISPLD2 as a glucocorticoid responsive
    URL: http://www.ncbi.nlm.nih.gov/pubmed/24926665
    PMIDs: 24926665

  Abstract: A 226 word abstract is available. Use 'abstract' method.
```

```
$formula
counts ~ dex + albut
```

21.2. Common operations on *SummarizedExperiment*

21.2.1. Subsetting

- [Performs two dimensional subsetting, just like subsetting a matrix or data frame.

```
# subset the first five transcripts and first three samples
se[1:5, 1:3]
```

```
class: RangedSummarizedExperiment
dim: 5 3
metadata(2): '' formula
assays(1): counts
rownames(5): ENSG00000000003 ENSG00000000005 ENSG00000000419
             ENSG00000000457 ENSG00000000460
rowData names(10): gene_id gene_name ... seq_coord_system symbol
colnames(3): SRR1039508 SRR1039509 SRR1039512
colData names(9): SampleName cell ... Sample BioSample
```

- \$ operates on `colData()` columns, for easy sample extraction.

```
se[, se$cell == "N61311"]
```

```

class: RangedSummarizedExperiment
dim: 63677 2
metadata(2): '' formula
assays(1): counts
rownames(63677): ENSG000000000003 ENSG000000000005 ... ENSG00000273492
ENSG00000273493
rowData names(10): gene_id gene_name ... seq_coord_system symbol
colnames(2): SRR1039508 SRR1039509
colData names(9): SampleName cell ... Sample BioSample

```

21.2.2. Getters and setters

- `rowRanges()` / (`rowData()`, `colData()`, `metadata()`)

```

counts <- matrix(1:15, 5, 3, dimnames=list(LETTERS[1:5], LETTERS[1:3]))

dates <- SummarizedExperiment(assays=list(counts=counts),
                             rowData=DataFrame(month=month.name[1:5], day=1:5))

# Subset all January assays
dates[rowData(dates)$month == "January", ]

```

```

class: SummarizedExperiment
dim: 1 3
metadata(0):
assays(1): counts
rownames(1): A
rowData names(2): month day
colnames(3): A B C
colData names(0):

```

- `assay()` versus `assays()` There are two accessor functions for extracting the assay data from a `SummarizedExperiment` object. `assays()` operates on the entire list of assay data as a whole, while `assay()` operates on only one assay at a time. `assay(x, i)` is simply a convenience function which is equivalent to `assays(x)[[i]]`.

```
assays(se)
```

```

List of length 1
names(1): counts

```

21. Introduction to *SummarizedExperiment*

```
assays(se) [[1]] [1:5, 1:5]
```

	SRR1039508	SRR1039509	SRR1039512	SRR1039513	SRR1039516
ENSG000000000003	679	448	873	408	1138
ENSG000000000005	0	0	0	0	0
ENSG000000000419	467	515	621	365	587
ENSG000000000457	260	211	263	164	245
ENSG000000000460	60	55	40	35	78

```
# assay defaults to the first assay if no i is given  
assay(se) [1:5, 1:5]
```

	SRR1039508	SRR1039509	SRR1039512	SRR1039513	SRR1039516
ENSG000000000003	679	448	873	408	1138
ENSG000000000005	0	0	0	0	0
ENSG000000000419	467	515	621	365	587
ENSG000000000457	260	211	263	164	245
ENSG000000000460	60	55	40	35	78

```
assay(se, 1) [1:5, 1:5]
```

	SRR1039508	SRR1039509	SRR1039512	SRR1039513	SRR1039516
ENSG000000000003	679	448	873	408	1138
ENSG000000000005	0	0	0	0	0
ENSG000000000419	467	515	621	365	587
ENSG000000000457	260	211	263	164	245
ENSG000000000460	60	55	40	35	78

21.2.3. Range-based operations

- `subsetByOverlaps()` *SummarizedExperiment* objects support all of the `findOverlaps()` methods and associated functions. This includes `subsetByOverlaps()`, which makes it easy to subset a *SummarizedExperiment* object by an interval.

In the next code block, we define a region of interest (or many regions of interest) and then subset our *SummarizedExperiment* by overlaps with this region.

21. Introduction to `SummarizedExperiment`

```
# Subset for only rows which are in the interval 100,000 to 110,000 of
# chromosome 1
roi <- GRanges(seqnames="1", ranges=100000:1100000)
sub_se = subsetByOverlaps(se, roi)
sub_se
```



```
class: RangedSummarizedExperiment
dim: 74 8
metadata(2): '' formula
assays(1): counts
rownames(74): ENSG00000131591 ENSG00000177757 ... ENSG00000272512
               ENSG00000273443
rowData names(10): gene_id gene_name ... seq_coord_system symbol
colnames(8): SRR1039508 SRR1039509 ... SRR1039520 SRR1039521
colData names(9): SampleName cell ... Sample BioSample
```



```
dim(sub_se)
```



```
[1] 74 8
```

21.3. Constructing a `SummarizedExperiment`

Often, `SummarizedExperiment` or `RangedSummarizedExperiment` objects are returned by functions written by other packages. However it is possible to create them by hand with a call to the `SummarizedExperiment()` constructor. The code below is simply to illustrate the mechanics of creating an object from scratch. In practice, you will probably have the pieces of the object from other sources such as Excel files or csv files.

Constructing a `RangedSummarizedExperiment` with a `GRanges` as the `rowRanges` argument:

```
nrows <- 200
ncols <- 6
counts <- matrix(runif(nrows * ncols, 1, 1e4), nrows)
rowRanges <- GRanges(rep(c("chr1", "chr2"), c(50, 150)),
                      IRanges(floor(runif(200, 1e5, 1e6)), width=100),
                      strand=sample(c("+", "-"), 200, TRUE),
                      feature_id=sprintf("ID%03d", 1:200))
```

21. Introduction to SummarizedExperiment

```
colData <- DataFrame(Treatment=rep(c("ChIP", "Input"), 3),  
                      row.names=LETTERS[1:6])  
  
SummarizedExperiment(assays=list(counts=counts),  
                      rowRanges=rowRanges, colData=colData)
```

```
class: RangedSummarizedExperiment  
dim: 200 6  
metadata(0):  
assays(1): counts  
rownames: NULL  
rowData names(1): feature_id  
colnames(6): A B ... E F  
colData names(1): Treatment
```

A `SummarizedExperiment` can be constructed with or without supplying a `DataFrame` for the `rowData` argument:

```
SummarizedExperiment(assays=list(counts=counts), colData=colData)
```

```
class: SummarizedExperiment  
dim: 200 6  
metadata(0):  
assays(1): counts  
rownames: NULL  
rowData names(0):  
colnames(6): A B ... E F  
colData names(1): Treatment
```

22. Ranges Exercises

In the following exercises, we will use the `GenomicRanges` package to explore range operations. We will use the `AnnotationHub` package to load DNase hypersensitivity data from the ENCODE project. In practice, the ENCODE project published datasets like these as bed files. `AnnotationHub` has packaged these into `GRanges` objects that we can load and use directly. However, if you have a bed file of your own (peak calls, enhancer regions, etc.), you can load them into `GRanges` objects using `rtracklayer::import`.

22.1. Exercise 1

In this exercise, we will use DNase hypersensitivity data to practice working with a `GRanges` object.

- Use the `AnnotationHub` package to find the `goldenpath/hg19/encodeDCC/wgEncodeUwDnase/wgEncodeUwDnaseK562PkRep1.narrowPeak.g` `GRanges` object. Load that into R as the variable `dnase`.

```
library(AnnotationHub)
ah = AnnotationHub()
query(ah, "goldenpath/hg19/encodeDCC/wgEncodeUwDnase/wgEncodeUwDnaseK562PkRep1.narrowPeak.g"
# the thing above should have only one record, so we can
# just grab it
dnase = query(ah, "goldenpath/hg19/encodeDCC/wgEncodeUwDnase/wgEncodeUwDnaseK562PkRep1.narr
```

- What type of object is `dnase`?

```
dnase
class(dnase)
```

- What metadata is stored in `dnase`?

```
mcols(dnase)
• How many peaks are on each chromosome?
```

22. Ranges Exercises

```
library(GenomicFeatures)
table(seqnames(dnase))
```

- What are the mean, min, max, and median widths of the peaks?

```
summary(width(dnase))
```

- What are the sequences that were used in the analysis? Do the names have “chr” or not? Experiment with changing the `seqlevelsStyle` to adjust the sequence names.

```
seqlevels(dnase)
seqlevelsStyle(dnase)
seqlevelsStyle(dnase) = 'ensembl'
seqlevelsStyle(dnase)
seqlevels(dnase)
```

- What is the total amount of “landscape” covered by the peaks? Assume that the peaks do not overlap. What portion of the genome does this represent?

```
sum(width(dnase))
sum(seqlengths(dnase))
sum(width(dnase))/sum(seqlengths(dnase))
```

22.2. Exercise 2

In this exercise, we are going to load the second DNase hypersensitivity replicate to investigate overlaps with the first replicate.

- Use the AnnotationHub to find the second replicate, `goldenpath/hg19/encodeDCC/wgEncodeUwDnase/wgEncodeUwDnaseK562PkRep2.narrowPeak.gz`. Load that as `dnase2`.

```
query(ah, "goldenpath/hg19/encodeDCC/wgEncodeUwDnase/wgEncodeUwDnaseK562PkRep2.narrowPeak.gz")
# the thing above should have only one record, so we can
# just grab it
dnase2 = query(ah, "goldenpath/hg19/encodeDCC/wgEncodeUwDnase/wgEncodeUwDnaseK562PkRep2.narrowPeak.gz")
```

- How many peaks are there in `dnase` and `dnase2`? Are there are similar number?

22. Ranges Exercises

```
length(dnase)
length(dnase2)
```

- What are the peak sizes for `dnase2`?

```
summary(width(dnase2))
```

- What proportion of the genome does `dnase2` cover?

```
sum(width(dnase))/sum(seqLengths(dnase))
```

- Count the number of peaks from `dnase` that overlap with `dnase2`.

```
sum(dnase %over% dnase2)
```

- Assume that your peak-caller was “too specific” and that you want to expand your peaks by 50 bp on each end (so make them 100 bp larger). Use a combination of `resize` (and pay attention to the `fix` argument) and `width` to do this expansion to `dnase` and call the new `GRanges` object “`dnase_wide`”.

```
w = width(dnase)
dnase_wide = resize(dnase, width=w+100, fix='center') #make a copy
width(dnase_wide)
```

22.3. Exercise 3

In this exercise, we are going to look at the overlap of DNAse sites relative to genes. To get started, install and load the `TxDb.Hsapiens.UCSC.hg19.knownGene` txdb object.

```
BiocManager::install("TxDb.Hsapiens.UCSC.hg19.knownGene")
library("TxDb.Hsapiens.UCSC.hg19.knownGene")
kg = TxDb.Hsapiens.UCSC.hg19.knownGene
```

- Load the transcripts from the `knownGene` txdb into a variable. What is the class of this object?

22. Ranges Exercises

```
library("TxDb.Hsapiens.UCSC.hg19.knownGene")
kg = TxDb.Hsapiens.UCSC.hg19.knownGene
gx = genes(kg)
class(gx)
length(gx)
```

- Read about the `flank` method for GRanges objects. How could you use that to get the “promoter” regions of the transcripts? Let’s assume that the promoter region is 2kb upstream of the gene.

```
flank(gx, 2000)
```

- Instead of using `flank`, could you do the same thing with the `TxDb` object? (See `?promoters`).

```
proms = promoters(kg)
```

- Do any of the regions in the promoters overlap with each other?

```
summary(countOverlaps(proms))
```

- To find overlap of our DNase sites with promoters, let’s collapse overlapping “promoters” to just keep the contiguous regions by using `reduce`.

```
# reduce takes all overlapping regions and collapses them
# into a single region that spans all of the overlapping regions
prom_regions = reduce(proms)

# now we can check for overlaps
summary(countOverlaps(prom_regions))
```

- Count the number of DNase sites that overlap with our promoter regions.

```
sum(dnase %over% prom_regions)
# if you notice no overlap, check the seqlevels
# and seqlevelsStyle
seqlevelsStyle(dnase) = "UCSC"
sum(dnase %over% prom_regions)
sum(dnase2 %over% prom_regions)
```

22. Ranges Exercises

- Is this surprising? If we were to assume that the promoter and dnase regions are “independent” of each other, what number of overlaps would we expect?

```
prop_proms = sum(width(prom_regions))/sum(seqlengths(prom_regions))
prop_dnase = sum(width(dnase))/sum(seqlengths(prom_regions))
# Iff the dnase and promoter regions are
# not related, then we would expect this number
# of DNase overlaps with promoters.
prop_proms * prop_dnase * length(dnase)
```

22.4. Exercise 4

We'll be using data from histone modification ChIP-seq experiments in human cells to illustrate the concepts of genomic ranges and features. The data consists of genomic intervals representing regions of the genome where specific histone modifications are enriched. These intervals are typically identified using ChIP-seq, a technique that maps protein-DNA interactions across the genome.

The ChIP-seq data is stored in a BED file format, which is a tab-delimited text file format commonly used to represent genomic intervals. Each line in the BED file corresponds to a genomic interval and contains information about the chromosome, start and end positions, and strand orientation of the interval. Additional columns may include metadata such as the signal strength or significance of the interval.

The AnnotationHub package in Bioconductor provides access to a wide range of genomic datasets, including ChIP-seq data. We can use this package to retrieve the ChIP-seq data for histone modifications in human cells and convert it into a GenomicRanges object for further analysis.

<https://www.encodeproject.org/chip-seq/histone/>

Let's start by loading the AnnotationHub package and retrieving the ChIP-seq data for histone modifications in human cells. You can read more about the AnnotationHub package and how to use it in the Bioconductor documentation.

```
library(AnnotationHub)
ah <- AnnotationHub()
```

There are multiple ways to search the AnnotationHub database. We've done that for you and here are the GRanges objects for each of four histone marks, and one histone mark replicate.

22. Ranges Exercises

```
h3k4me1 <- ah[['AH25832']]
h3k4me3 <- ah[['AH25833']]
h3k9ac <- ah[['AH25834']]
h3k27me3 <- ah[['AH25835']]
h3k4me3_2 <- ah[['AH27284']]
```

Each of these variables now represents the peak calls after a chip-seq experiment pulling down the histone mark of interest. In the encode project these records were `bed` files. The `bed` files have been converted to `GRanges` objects to allow computation within R.

```
# Grab cpg islands as well
cpg = query(ah, c('cpg', 'UCSC', 'hg19'))[[1]]
```

Let's say that we don't know the behavior of the histone methylation marks with respect to CpG islands. We could ask the question, "What is the overlap of the histone peaks with CpG islands?"

```
sum(h3k4me1 %over% cpg)
```

We might want to actually count the number of bases of overlap between the methyl mark and CpG islands.

```
# The intersection of two peak sets results in the
# overlapping regions as a new set of regions
# The width of each peak is the number of overlapping bases
# And the sum of the widths is the total bases overlapping
sum(width(intersect(h3k4me1, cpg)))
```

But some methyl marks are known to have very broad signals, meaning that there is a higher chance of overlapping CpG islands just because there are more methylated bases. We can adjust for this by "normalizing" for all possible bases covered by either set of peaks, using `union`. We might think of this as a sort of "enrichment score" of one set in another set.

```
sum(width(union(h3k4me1, cpg)))
# and now "normalize"
sum(width(intersect(h3k4me1, cpg)))/sum(width(union(h3k4me1, cpg)))
```

Let's write a small function to calculate our little enrichment score.

22. Ranges Exercises

```
range_enrichment_score <- function(r1, r2) {  
  i = sum(width(intersect(r1, r2)))  
  u = sum(width(union(r1,r2)))  
  return(i/u)  
}
```

And give it a try:

```
range_enrichment_score(h3k4me1, cpg)
```

23. ATAC-Seq with Bioconductor

Overview

Pre-requisites

This workshop assumes:

- A working and up-to-date version of R
- Basic knowledge of R syntax
- Familiarity with the *GenomicRanges* package and range manipulations
- Familiarity with BAM files and their contents

Participation

After a very brief review of ATAC-Seq and chromatin accessibility, students will work independently to follow this workflow. Additional materials are provided as links at the end of the workshop for those wanting deeper exposure. Additional materials include alignment from FASTQ files and peak calling.

R / Bioconductor packages used

- *Rsamtools*
- *GenomicRanges*
- *GenomicFeatures*
- *GenomicAlignments*
- *rtracklayer*
- *heatmaps*

Time outline

Time outline

An example for a 45-minute workshop:

Activity	Time
Introduction	15m
Independent work	2-3hr
Additional exercises (optional, external)	up to 12 hours

Learning goals

- Describe how to import sequence alignments in BAM format into R
- Relate fragment size to genomic characteristics such as nucleosome occupancy and open chromatin.
- Perform basic alignment manipulations in R to enrich ATAC-seq data for chromatin characteristics.
- Gain familiarity with the IGV genome browser and examining data in genomic context.
- Visualize summaries of genomic signal using profile plots and heatmaps.

Learning objectives

- Load and save genomic data in BAM and BigWig formats [GenomicAlignments and rtracklayer].
- Perform basic QC plots from ATAC-Seq data.
- Isolate nucleosome-free and mononucleosome regions from ATAC-seq data.
- Install and use IGV to visualize data in genomic context.
- Create profile plots using the heatmaps package.

24. Background

Chromatin accessibility assays measure the extent to which DNA is open and accessible. Such assays now use high throughput sequencing as a quantitative readout. DNase assays, first using microarrays(Crawford, Davis, et al. 2006) and then DNase-Seq (Crawford, Holt, et al. 2006), requires a larger amount of DNA and is labor-indensive and has been largely supplanted by ATAC-Seq (Buenrostro et al. 2013).

The Assay for Transposase Accessible Chromatin with high-throughput sequencing (ATAC-seq) method maps chromatin accessibility genome-wide. This method quantifies DNA accessibility with a hyperactive Tn5 transposase that cuts and inserts sequencing adapters into regions of chromatin that are accessible. High throughput sequencing of fragments produced by the process map to regions of increased accessibility, transcription factor binding sites, and nucleosome positioning. The method is both fast and sensitive and can be used as a replacement for DNase *and* MNase.

An early review of chromatin accessibility assays (Tsompana and Buck 2014) compares the use cases, pros and cons, and expected signals from each of the most common approaches (Figure @ref(fig:chromatinAssays)).

24. Background

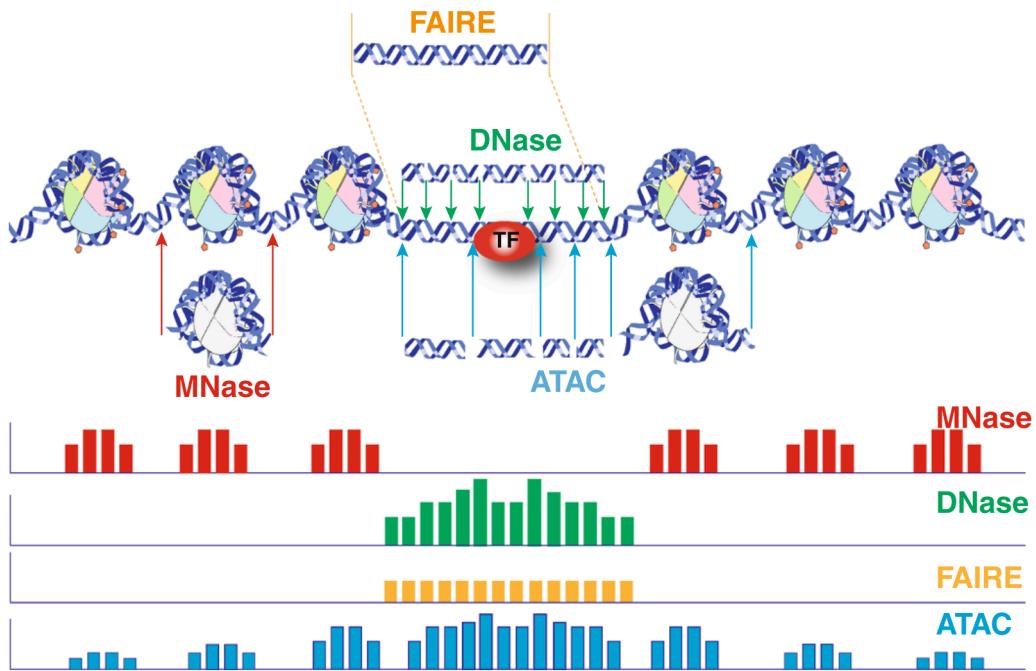


Figure 24.1.: Chromatin accessibility methods, compared. Representative DNA fragments generated by each assay are shown, with end locations within chromatin defined by colored arrows. Bar diagrams represent data signal obtained from each assay across the entire region. The footprint created by a transcription factor (TF) is shown for ATAC-seq and DNase-seq experiments.

The first manuscript describing ATAC-Seq protocol and findings outlined how ATAC-Seq data “line up” with other datatypes such as ChIP-seq and DNase-seq (Figure @ref(fig:greenleaf)). They also highlight how fragment length correlates with specific genomic regions and characteristics (Buenrostro et al. 2013, fig. 3).

24. Background

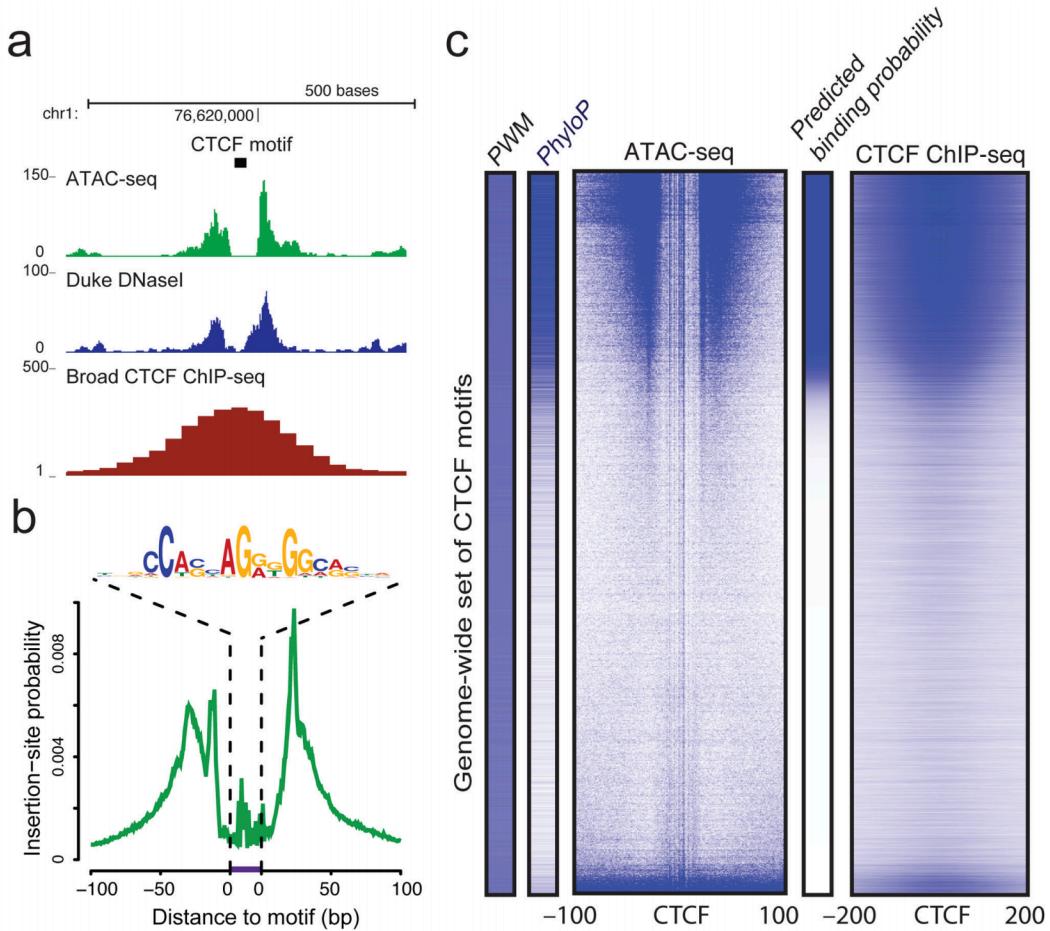


Figure 24.2.: Multimodal chromatin comparisons. From (Buenrostro et al. 2013), Figure 4.
 (a) CTCF footprints observed in ATAC-seq and DNase-seq data, at a specific locus on chr1. (b) Aggregate ATAC-seq footprint for CTCF (motif shown) generated over binding sites within the genome (c) CTCF predicted binding probability inferred from ATAC-seq data, position weight matrix (PWM) scores for the CTCF motif, and evolutionary conservation (PhyloP). Right-most column is the CTCF ChIP-seq data (ENCODE) for this GM12878 cell line, demonstrating high concordance with predicted binding probability.

Buenrostro et al. provide a detailed protocol for performing ATAC-Seq and quality control of results (Buenrostro et al. 2015). Updated and modified protocols that improve on signal-to-noise and reduce input DNA requirements have been described.

24.1. Informatics overview

ATAC-Seq protocols typically utilize paired-end sequencing protocols. The reads are aligned to the respective *genome* using `bowtie2`, BWA, or other short-read aligner. The result, after appropriate manipulation, often using `samtools`, results in a BAM file. Among other details, the BAM format includes columns for:

```
knitr::include_graphics('imgs/bam_shot.png')
```

Figure 24.3.: A BAM file in text form. The output of `samtools view` is the text format of the BAM file (called SAM format). Bioconductor and many other tools use BAM files for input. Note that BAM files also often include an index `.bai` file that enables random access into the file; one can read just a genomic region without having to read the entire file.

- sequence name (`chr1`)
 - start position (integer)
 - a *CIGAR* string that describes the alignment in a compact form
 - the sequence to which the pair aligns
 - the position to which the pair aligns
 - a bit flag field that describes multiple characteristics of the alignment
 - the sequence and quality string of the read
 - additional tags that tend to be aligner-specific

24. Background

Duplicate fragments (those with the *same* start and end position of other reads) are marked and likely discarded. Reads that fail to align “properly” are also often excluded from analysis. It is worth noting that most software packages allow simple “marking” of such reads and that there is usually no need to create a special BAM file before proceeding with downstream work.

After alignment and BAM processing, the workflow can switch to *Bioconductor*.

24.2. Working with sequencing data in Bioconductor

The *Bioconductor* project includes several infrastructure packages for dealing with ranges (sequence name, start, end, +/- strand) on sequences (Lawrence et al. 2013) as well as capabilities with working with Fastq files directly (Morgan et al. 2016).

Table 24.1.: Commonly used Bioconductor and their high-level use cases.

Package	Use cases
<i>Rsamtools</i>	low level access to FASTQ, VCF, SAM, BAM, BCF formats
<i>GenomicRanges</i>	Container and methods for handling genomic regions
<i>GenomicFeatures</i>	Work with transcript databases, gff, gtf and BED formats
<i>GenomicAlignments</i>	Reader for BAM format
<i>rtracklayer</i>	import and export multiple UCSC file formats including BigWig and Bed

As noted in the previous section, the output of an ATAC-Seq experiment is a BAM file. As paired-end sequencing is a commonly-applied approach for ATAC-Seq, the `readGAlignmentPairs` function is the appropriate method to use.

25. Data import and quality control

```
library(GenomicAlignments)
```

Reading a paired-end BAM file looks a bit complicated, but the following code will:

1. Read the included BAM file.
2. Include read pairs only (`isPaired = TRUE`)
3. Include properly paired reads (`isProperPair = TRUE`)
4. Include reads with mapping quality ≥ 1
5. Add a couple of additional fields, `mapq` (mapping quality) and `isize` (insert size) to the default fields.

```
greenleaf <- readGAlignmentPairs(  
  "https://github.com/seandavi/RBiocBook/raw/main/atac-seq/extdata/Sorted_ATAC_21_22.bam"  
  param = ScanBamParam(  
    mapqFilter = 1,  
    flag = scanBamFlag(  
      isPaired = TRUE,  
      isProperPair = TRUE  
    ),  
    what = c("mapq", " isize")  
  )  
)
```

Exercise: What is the class of `greenleaf`? *Exercise:* Use the `GenomicAlignments::first()` accessor to get the first read of the pair as a `GAlignments` object. Save the result as a variable called `gl_first_read`. Use the `mcols` accessor to find the “metadata columns” of `gl_first_read`. *Exercise:* How many read pairs map to each chromosome?

We can make plot of the number of reads mapping to each chromosome.

25. Data import and quality control

```
library(ggplot2)
library(dplyr)
chromCounts <- table(seqnames(greenleaf)) %>%
  data.frame() %>%
  dplyr::rename(chromosome = Var1, count = Freq)
```

To keep things small, the example BAM file includes only chromosomes 21 and 22.

```
ggplot(chromCounts, aes(x = chromosome, y = count)) +
  geom_bar(stat = "identity") +
  theme(axis.text.x = element_text(angle = 45, hjust = 1))
```

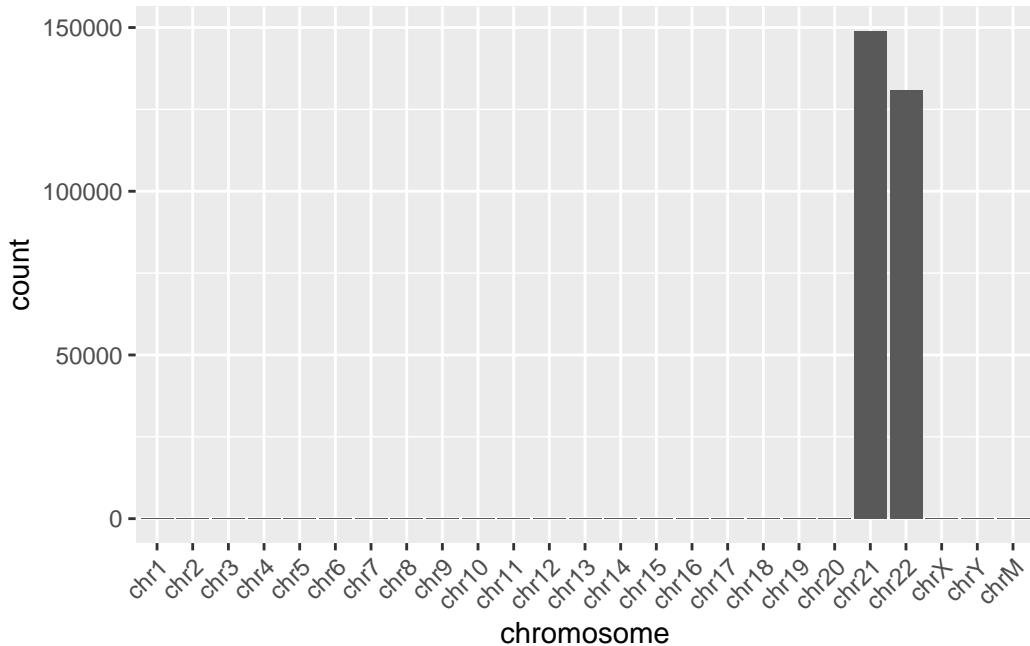


Figure 25.1.: Reads per chromosome. In our example data, we are using only chromosomes 21 and 22.

Normalizing by the chromosome length can yield the reads per megabase which should crudely be similar across all chromosomes.

```
chromCounts <- chromCounts %>%
  dplyr::mutate(readsPerMb = (count / (seqlengths(greenleaf) / 1e6)))
```

25. Data import and quality control

And show a plot. For two chromosomes, this is a little underwhelming.

```
ggplot(chromCounts, aes(x = chromosome, y = readsPerMb)) +  
  geom_bar(stat = "identity") +  
  theme(axis.text.x = element_text(angle = 45, hjust = 1)) +  
  theme_bw()
```

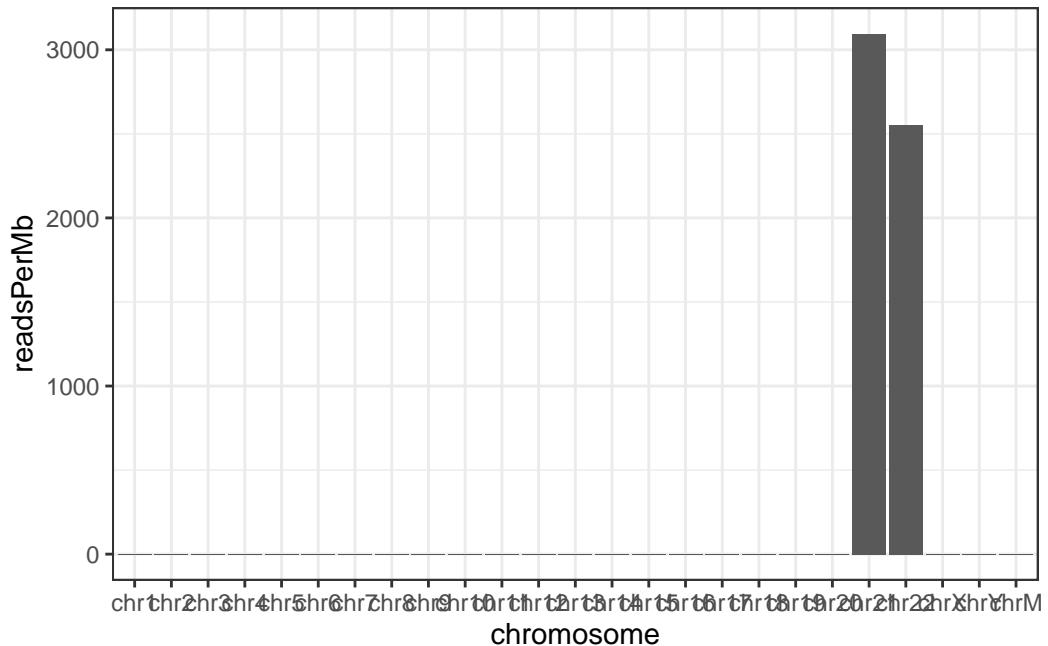


Figure 25.2.: Read counts normalized by chromosome length. This is not a particularly important plot, but it can be useful to see the relative contribution of each chromosome given its length.

25.1. Coverage

The `coverage` method for genomic ranges calculates, for each base, the number of overlapping features. In the case of a BAM file from ATAC-Seq converted to a GAlignmentPairs object, the coverage gives us an idea of the extent to which reads pile up to form peaks.

```
cvg <- coverage(greenleaf)  
class(cvg)
```

25. Data import and quality control

```
[1] "SimpleRleList"
attr(,"package")
[1] "IRanges"
```

The coverage is returned as a `SimpleRleList` object. Using `names` can get us the names of the elements of the list.

```
names(cvg)
```

```
[1] "chr1"  "chr2"  "chr3"  "chr4"  "chr5"  "chr6"  "chr7"  "chr8"  "chr9"
[10] "chr10" "chr11" "chr12" "chr13" "chr14" "chr15" "chr16" "chr17" "chr18"
[19] "chr19" "chr20" "chr21" "chr22" "chrX"  "chrY"  "chrM"
```

There is a name for each chromosome. Looking at the `chr21` entry:

```
cvg$chr21
```

```
integer-Rle of length 48129895 with 397462 runs
Lengths: 9411376      50       11      50 ...
Values :      0        2        0        2 ...      1        2        1        0
```


we see that each chromosome is represented as an `Rle`, short for run-length-encoding. Simply put, since along the chromosome there are many repeated values, we can recode the long vector as a set of (length: value) pairs. For example, if the first 9,410,000 base pairs have 0 coverage, we encode that as (9,410,000: 0). Doing that across the chromosome can very significantly reduce the memory use for genomic coverage.


The following little function, `plotCvgHistByChrom` can plot a histogram of the coverage for a chromosome.

```
plotCvgHistByChrom <- function(cvg, chromosome) {
  library(ggplot2)
  cvgcounts <- as.data.frame(table(cvg[[chromosome]]))
  cvgcounts[, 1] <- as.numeric(as.character(cvgcounts[, 1]))
  colnames(cvgcounts) <- c("Coverage", "Count")
  ggplot(cvgcounts, aes(x = Coverage, y = Count)) +
    ggttitle(paste("Chromosome", chromosome)) +
    geom_point(alpha = 0.5) +
    geom_smooth(span = 0.2) +
```

25. Data import and quality control

```
    scale_y_log10() +  
    theme_bw()  
}  
for (i in c("chr21", "chr22")) {  
  print(plotCvgHistByChrom(cvg, i))  
}
```

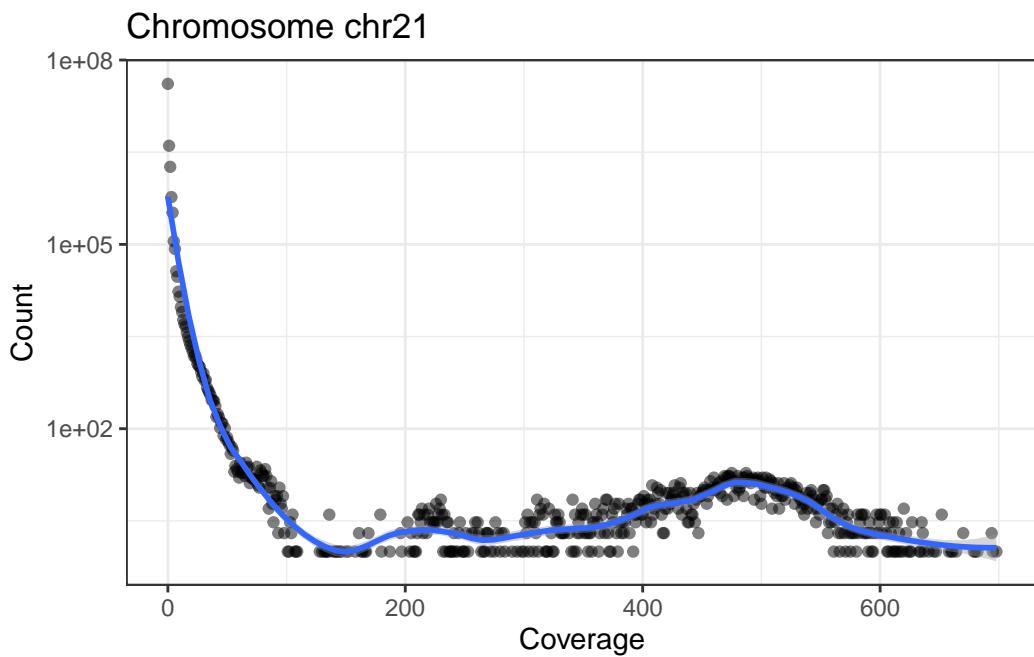

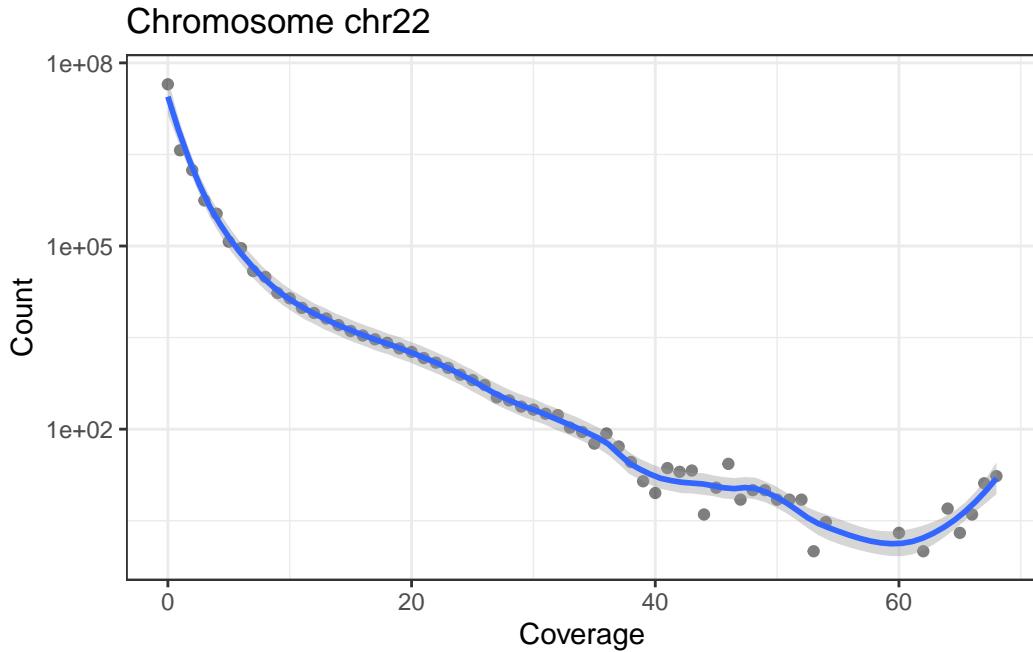

25.2. Fragment Lengths

The first ATAC-Seq manuscript (Buenrostro et al. 2013) highlighted the relationship between fragment length and nucleosomes (see Figure @ref{fig:flgreenleaf}).

```
knitr::include_graphics("https://cdn.ncbi.nlm.nih.gov/pmc/blobs/0ad9/3959825/fde39a9fb288/n
```

25. Data import and quality control

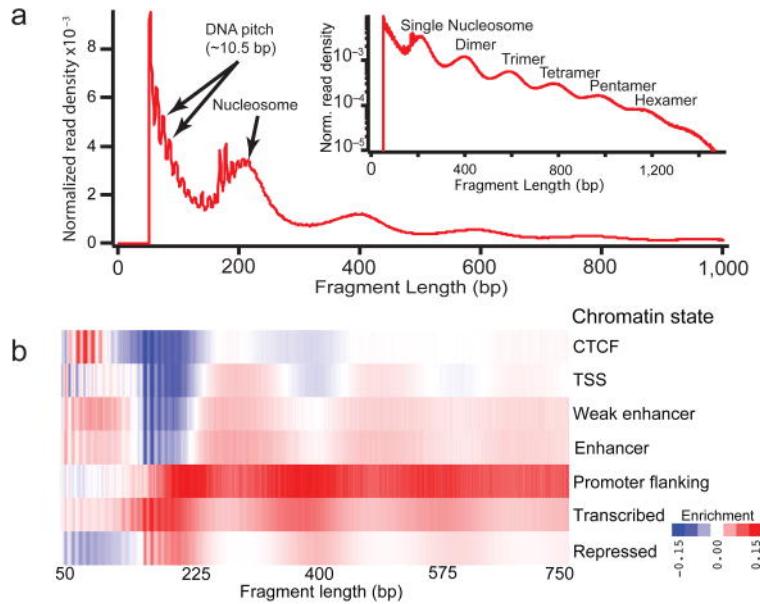


Figure 25.3.: Relationship between fragment length and nucleosome number.

Remember that we loaded the example BAM file with insert sizes (`isize`). We can use that “column” to examine the fragment lengths (another name for insert size). Also, note that the insert size for the `first` read and the `second` are the same (absolute value). Here, we will use `first`.


```
GenomicAlignments::first(greenleaf)
mcols(GenomicAlignments::first(greenleaf))
class(mcols(GenomicAlignments::first(greenleaf)))
head(mcols(GenomicAlignments::first(greenleaf))$isize)
fraglengths <- abs(mcols(GenomicAlignments::first(greenleaf))$isize)
```

We can plot the fragment length density (histogram) using the `density` function.

```
plot(density(fraglengths, bw = 0.05), xlim = c(0, 1000))
```

25. Data import and quality control

density(x = fraglengths, bw = 0.05)

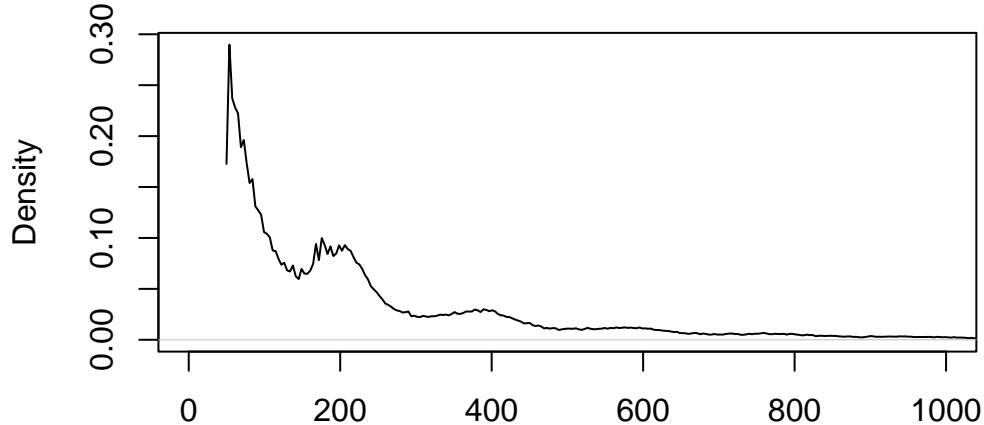

N = 279884 Bandwidth = 0.05


Figure 25.4.: Fragment length histogram.

Exercise: Adjust the `xlim`, `bw`, and try `log="y"` in the plot to highlight features present in figure ??.

And for fun, the ggplot2 version:

```
library(dplyr)
library(ggplot2)
fragLenPlot <- table(fraglengths) %>%
  data.frame() %>%
  rename(
    InsertSize = fraglengths,
    Count = Freq
  ) %>%
  mutate(
    InsertSize = as.numeric(as.vector(InsertSize)),
    Count = as.numeric(as.vector(Count))
  ) %>%
  ggplot(aes(x = InsertSize, y = Count)) +
  geom_line()
print(fragLenPlot + theme_bw() + lims(x = c(-1, 250)))
```

25. Data import and quality control

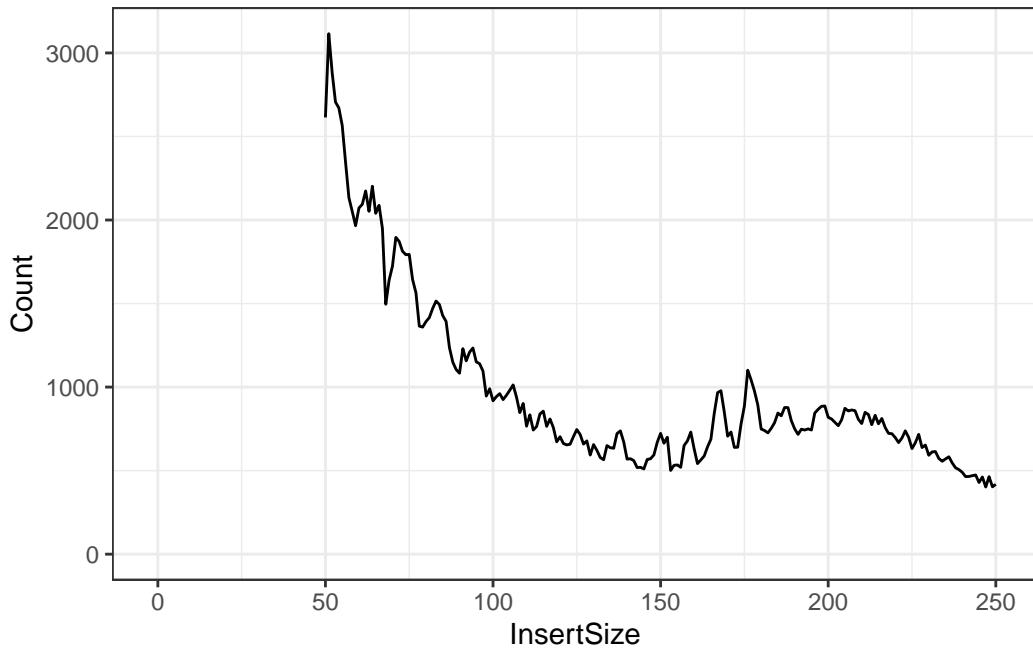

Knowing that the nucleosome-free regions will have insert sizes shorter than one nucleosome, we can isolate the read pairs that have that characteristic.

```
gl_nf <- greenleaf[mcols(GenomicAlignments::first(greenleaf))$isize < 100]
```

And the mononucleosome reads will be between 187 and 250 base pairs for insert size/fragment length.

```
gl_mn <- greenleaf[mcols(GenomicAlignments::first(greenleaf))$isize > 187 &
  mcols(GenomicAlignments::first(greenleaf))$isize < 250]
```

Finally, we expect nucleosome-free reads to be enriched near the TSS while mononucleosome reads should not be. We will use the [heatmaps](#) package to take a look at these two sets of reads with respect to the tss of the human genome.

```
library(TxDb.Hsapiens.UCSC.hg19.knownGene)
proms <- promoters(TxDb.Hsapiens.UCSC.hg19.knownGene, 250, 250)
seqs <- c("chr21", "chr22")
seqlevels(proms, pruning.mode = "coarse") <- seqs # only chromosome 21 and 22
```

Take a look at the [heatmaps](#) package vignette to learn more about the heatmaps package capabilities.

25. Data import and quality control

```
library(heatmaps)
gl_nf_hm <- CoverageHeatmap(proms, coverage(gl_nf), coords = c(-250, 250))
label(gl_nf_hm) <- "NucFree"
scale(gl_nf_hm) <- c(0, 10)
plotHeatmapMeta(gl_nf_hm)
```

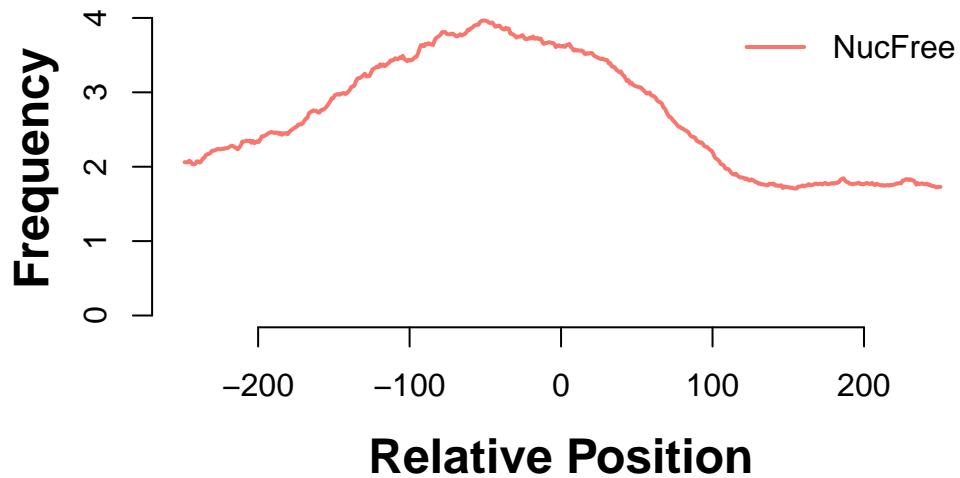


Figure 25.5.: Enrichment of nucleosome free reads just upstream of the TSS.

```
gl_mn_hm <- CoverageHeatmap(proms, coverage(gl_mn), coords = c(-250, 250))
label(gl_mn_hm) <- "MonoNuc"
scale(gl_mn_hm) <- c(0, 10)
plotHeatmapMeta(gl_mn_hm)
```

25. Data import and quality control

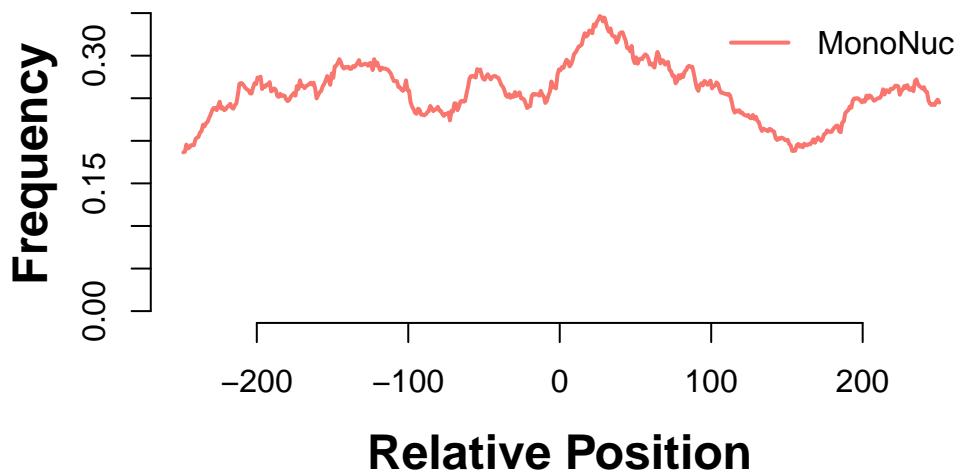


Figure 25.6.: Depletion of nucleosome free reads just upstream of the TSS.

```
plotHeatmapList(list(gl_mn_hm, gl_nf_hm))
```

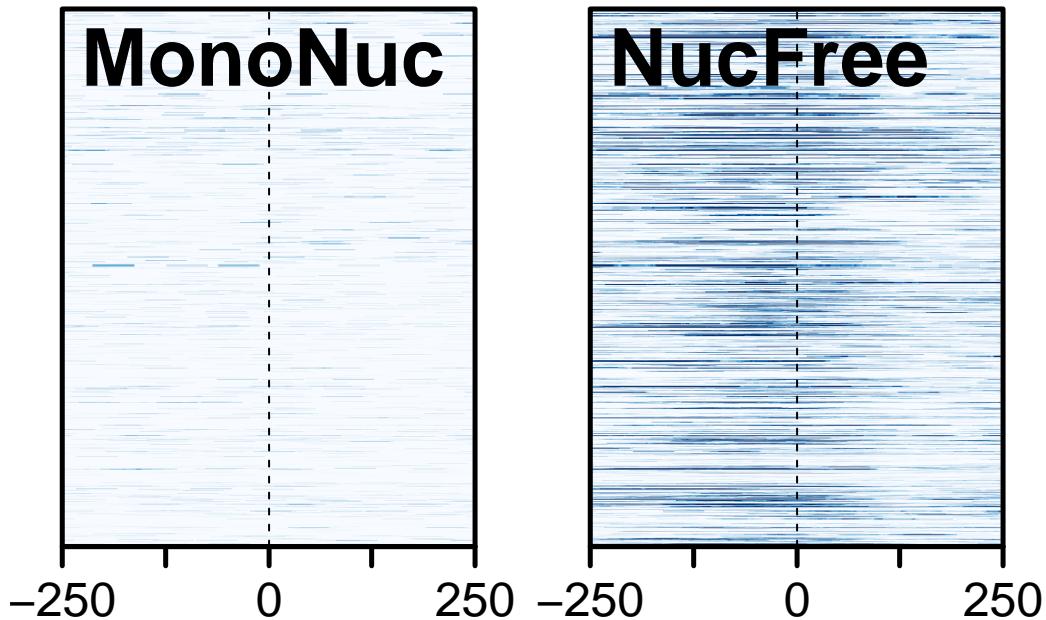


Figure 25.7.: Comparison of signals at TSS. Mononucleosome data on the left, nucleosome-free on the right.

26. Viewing data in IGV

Install IGV from [here](#).

We export the greenleaf data as a BigWig file.

```
library(rtracklayer)
export.bw(coverage(greenleaf), "greenleaf.bw")
```

Exercise: In IGV, choose hg19. Then, load the `greenleaf.bw` file and explore chromosomes 21 and 22. *Exercise:* Export the nucleosome-free portion of the data as a BigWig file and examine that in IGV. Where do you expect to see the strongest signals?

27. Additional work

For those working extensively on ATAC-Seq, there is a great workflow/tutorial available from Thomas Carroll:

https://rockefelleruniversity.github.io/RU_ATAC_Workshop.html

Feel free to work through it. In addition to the work above, there is also the *ATACseqQC* package vignette that offers more than just QC. At least a couple more packages are available in *Bioconductor*.

Appendix

Session info

```
R version 4.4.3 (2025-02-28)
Platform: aarch64-apple-darwin20
Running under: macOS Sequoia 15.3.1

Matrix products: default
BLAS:    /Library/Frameworks/R.framework/Versions/4.4-arm64/Resources/lib/libRblas.0.dylib
LAPACK:  /Library/Frameworks/R.framework/Versions/4.4-arm64/Resources/lib/libRlapack.dylib;

locale:
[1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8

time zone: America/New_York
tzcode source: internal

attached base packages:
[1] stats4      stats       graphics   grDevices  utils       datasets   methods
[8] base

other attached packages:
[1] rtracklayer_1.66.0
[2] heatmaps_1.30.0
[3] TxDb.Hsapiens.UCSC.hg19.knownGene_3.2.2
[4] GenomicFeatures_1.58.0
[5] AnnotationDbi_1.68.0
[6] dplyr_1.1.4
[7] ggplot2_3.5.2
[8] GenomicAlignments_1.42.0
[9] Rsamtools_2.22.0
[10] Biostrings_2.74.1
[11] XVector_0.46.0
```

Session info

```
[12] SummarizedExperiment_1.36.0  
[13] Biobase_2.66.0  
[14] MatrixGenerics_1.18.1  
[15] matrixStats_1.5.0  
[16] GenomicRanges_1.58.0  
[17] GenomeInfoDb_1.42.3  
[18] IRanges_2.40.1  
[19] S4Vectors_0.44.0  
[20] BiocGenerics_0.52.0  
[21] BiocStyle_2.34.0  
[22] knitr_1.50
```

loaded via a namespace (and not attached):

[1] tidyselect_1.2.1	EBImage_4.48.0	farver_2.1.2
[4] blob_1.2.4	bitops_1.0-9	fastmap_1.2.0
[7] RCurl_1.98-1.17	XML_3.99-0.18	digest_0.6.37
[10] lifecycle_1.0.4	KEGGREST_1.46.0	RSQLite_2.4.0
[13] magrittr_2.0.3	compiler_4.4.3	rlang_1.1.6
[16] tools_4.4.3	plotrix_3.8-4	yaml_2.3.10
[19] htmlwidgets_1.6.4	S4Arrays_1.6.0	labeling_0.4.3
[22] bit_4.6.0	curl_6.2.3	DelayedArray_0.32.0
[25] RColorBrewer_1.1-3	KernSmooth_2.23-26	abind_1.4-8
[28] BiocParallel_1.40.2	withr_3.0.2	grid_4.4.3
[31] scales_1.4.0	tinytex_0.57	cli_3.6.5
[34] rmarkdown_2.29	crayon_1.5.3	generics_0.1.4
[37] httr_1.4.7	rjson_0.2.23	DBI_1.2.3
[40] cachem_1.1.0	zlibbioc_1.52.0	splines_4.4.3
[43] parallel_4.4.3	tiff_0.1-12	BiocManager_1.30.25
[46] restfulr_0.0.15	vctrs_0.6.5	Matrix_1.7-3
[49] jsonlite_2.0.0	fftwwtools_0.9-11	bit64_4.6.0-1
[52] jpeg_0.1-11	locfit_1.5-9.12	glue_1.8.0
[55] codetools_0.2-20	gttable_0.3.6	BiocIO_1.16.0
[58] UCSC.utils_1.2.0	tibble_3.2.1	pillar_1.10.2
[61] htmltools_0.5.8.1	GenomeInfoDbData_1.2.13	R6_2.6.1
[64] evaluate_1.0.3	lattice_0.22-7	png_0.1-8
[67] memoise_2.0.1	SparseArray_1.6.2	nlme_3.1-168
[70] mgcv_1.9-3	xfun_0.52	pkgconfig_2.0.3

MACS2

The MACS2 package is a commonly-used package for calling peaks. Installation and other details are available¹.

```
pip install macs2
```

¹<https://github.com/taoliu/MACS>

28. References

References

- Bourgon, Richard, Robert Gentleman, and Wolfgang Huber. 2010. “Independent Filtering Increases Detection Power for High-Throughput Experiments.” *Proceedings of the National Academy of Sciences* 107 (21): 9546–51. <https://doi.org/10.1073/pnas.0914005107>.
- Brouwer-Visser, Jurriaan, Wei-Yi Cheng, Anna Bauer-Mehren, Daniela Maisel, Katharina Lechner, Emilia Andersson, Joel T. Dudley, and Francesca Milletti. 2018. “Regulatory T-Cell Genes Drive Altered Immune Microenvironment in Adult Solid Cancers and Allow for Immune Contextual Patient Subtyping.” *Cancer Epidemiology, Biomarkers & Prevention* 27 (1): 103–12. <https://doi.org/10.1158/1055-9965.EPI-17-0461>.
- Buenrostro, Jason D, Paul G Giresi, Lisa C Zaba, Howard Y Chang, and William J Greenleaf. 2013. “Transposition of Native Chromatin for Fast and Sensitive Epigenomic Profiling of Open Chromatin, DNA-binding Proteins and Nucleosome Position.” *Nature Methods* 10 (12): 1213–18. <https://doi.org/10.1038/nmeth.2688>.
- Buenrostro, Jason D, Beijing Wu, Howard Y Chang, and William J Greenleaf. 2015. “ATAC-seq: A Method for Assaying Chromatin Accessibility Genome-Wide.” *Current Protocols in Molecular Biology / Edited by Frederick M. Ausubel ... [Et Al.]* 109 (January): 21.29.1–9. <https://doi.org/10.1002/0471142727.mb2129s109>.
- Center, Pew Research. 2016. “Lifelong Learning and Technology.” *Pew Research Center: Internet, Science & Tech*. <https://www.pewresearch.org/internet/2016/03/22/lifelong-learning-and-technology/>.
- Crawford, Gregory E, Sean Davis, Peter C Scacheri, Gabriel Renaud, Mohamad J Hallawi, Michael R Erdos, Roland Green, Paul S Meltzer, Tyra G Wolfsberg, and Francis S Collins. 2006. “DNase-chip: A High-Resolution Method to Identify DNase I Hypersensitive Sites Using Tiled Microarrays.” *Nature Methods* 3 (7): 503–9. <http://www.ncbi.nlm.nih.gov/pubmed/16791207?dopt=AbstractPlus>.
- Crawford, Gregory E, Ingeborg E Holt, James Whittle, Bryn D Webb, Denise Tai, Sean Davis, Elliott H Margulies, et al. 2006. “Genome-Wide Mapping of DNase Hypersensitive Sites Using Massively Parallel Signature Sequencing (MPSS).” *Genome Research* 16 (1): 123–31. <http://www.ncbi.nlm.nih.gov/pubmed/16344561?dopt=AbstractPlus>.
- DeRisi, J. L., V. R. Iyer, and P. O. Brown. 1997. “Exploring the Metabolic and Genetic Control of Gene Expression on a Genomic Scale.” *Science (New York, N.Y.)* 278 (5338): 680–86. <https://doi.org/10.1126/science.278.5338.680>.

References

- Greener, Joe G., Shaun M. Kandathil, Lewis Moffat, and David T. Jones. 2022. “A Guide to Machine Learning for Biologists.” *Nature Reviews Molecular Cell Biology* 23 (1): 40–55. <https://doi.org/10.1038/s41580-021-00407-0>.
- Knowles, Malcolm S., Elwood F. Holton, and Richard A. Swanson. 2005. *The Adult Learner: The Definitive Classic in Adult Education and Human Resource Development*. 6th ed. Amsterdam ; Boston: Elsevier.
- Lawrence, Michael, Wolfgang Huber, Hervé Pagès, Patrick Aboyou, Marc Carlson, Robert Gentleman, Martin T Morgan, and Vincent J Carey. 2013. “Software for Computing and Annotating Genomic Ranges.” *PLoS Computational Biology* 9 (8): e1003118. <https://doi.org/10.1371/journal.pcbi.1003118>.
- Libbrecht, Maxwell W., and William Stafford Noble. 2015. “Machine Learning Applications in Genetics and Genomics.” *Nature Reviews Genetics* 16 (6): 321–32. <https://doi.org/10.1038/nrg3920>.
- Morgan, Martin, Herve Pages, V Obenchain, and N Hayden. 2016. “Rsamtools: Binary Alignment (BAM), FASTA, Variant Call (BCF), and Tabix File Import.” *R Package Version 1* (0): 677–89.
- Student. 1908. “The Probable Error of a Mean.” *Biometrika* 6 (1): 1–25. <https://doi.org/10.2307/2331554>.
- Tsompana, Maria, and Michael J Buck. 2014. “Chromatin Accessibility: A Window into the Genome.” *Epigenetics & Chromatin* 7 (1): 33. <https://doi.org/10.1186/1756-8935-7-33>.

A. Appendix

A.1. Data Sets

- [BRFSS subset](#)
- [ALL clinical data](#)
- [ALL expression data](#)

A.2. Swirl

The following is from the [swirl website](#).

The swirl R package makes it fun and easy to learn R programming and data science. If you are new to R, have no fear.

To get started, we need to install a new package into R.

```
install.packages('swirl')
```

Once installed, we want to load it into the R workspace so we can use it.

```
library('swirl')
```

Finally, to get going, start swirl and follow the instructions.

```
swirl()
```

B. Additional resources

- Base R Cheat Sheet
- Modern Data Visualization with R

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

The rise of sophisticated Artificial Intelligence (AI) tools, particularly Large Language Models (LLMs), has drastically altered day-to-day tasks for many. This chapter aims to guide you, as biologists venturing into these computational fields, on how to effectively and responsibly harness these AI tools. The focus will be on using them as powerful assistants to deepen your understanding of statistical concepts, enhance your ability to explore complex biological data with R, and ultimately boost your overall productivity and learning experience. Think of these tools not as a shortcut around learning, but as a versatile companion on your journey.

C.1. Introduction: AI as Your Bioinformatics Learning Companion

You've likely heard of tools like ChatGPT, Gemini, Claude, or GitHub Copilot. These are examples of LLMs and other AI-driven assistants that can process and generate human-like text, code, and even help with complex reasoning tasks. Their capabilities are particularly relevant when grappling with new programming languages like R, intricate statistical methods, or the challenge of deriving meaning from large biological datasets.

Table C.1.: Table AI Tools for Bioinformatics Learning

AI Tool	Description
ChatGPT	A conversational AI that can answer questions, explain concepts, and generate code snippets.
Gemini	Google's AI that can assist with coding, data analysis, and more.
Claude	An AI assistant that can help with writing, coding, and problem-solving.

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

AI Tool	Description
GitHub Copilot	An AI-powered code completion tool that suggests code as you type, based on the context of your project.
Perplexity	An AI that can answer questions and provide explanations across various domains, including programming and data science.

Why should you consider integrating these AI tools into your learning workflow? The benefits are manifold. They can help demystify complex topics by offering alternative explanations, assist in drafting R code for specific analyses, aid in the often-frustrating process of debugging, summarize lengthy documents, and even help you brainstorm approaches for data exploration.

 A Supplement, Not a Replacement

It's crucial to remember that AI is here to *supplement* your learning and critical thinking, not replace it. Your growing expertise in biology, combined with a solid understanding of statistical principles, remains paramount. AI can help you get there faster and overcome hurdles, but the destination is your own deep understanding.

However, it's also important to approach these tools with realistic expectations. LLMs can sometimes provide inaccurate information—a phenomenon often called “hallucination”—or exhibit biases present in their training data.¹ Therefore, your domain knowledge and developing statistical intuition are your best guides in sifting the digital wheat from the chaff.

C.2. AI for Understanding Statistical Concepts and R Functions

One of the most immediate benefits of LLMs is their ability to act as a patient, tireless tutor for statistical concepts. If you find a particular statistical idea challenging, you can ask an LLM to explain it in various ways. For instance, you might prompt: “Explain the concept of a p-value as if you were talking to a biologist who is new to statistics,” or “Describe the key differences between Principal Component Analysis (PCA) and t-Distributed Stochastic Neighbor Embedding (t-SNE) when analyzing gene expression data.” The ability to request analogies or examples directly relevant to biological datasets can be incredibly helpful.

¹Always be prepared to critically evaluate and verify information from AI tools against trusted sources.

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

Similarly, when you’re wrestling with the R language, AI tools can be invaluable. Perhaps you’re unsure about the syntax for a `dplyr` verb or the arguments for a `ggplot2` function. You could ask, “How do I use the `dplyr::filter()` function in R to select rows from my dataframe where the ‘gene_expression’ column is greater than 100 and the ‘treatment_group’ column is ‘Condition_A’?” or “Can you explain the main arguments of the `stats::t.test()` function in R and what its output signifies?” These tools can also help you discover R packages specifically designed for statistical tasks you have in mind.

When it comes to applying these concepts, AI can generate example R code. For common statistical tests like t-tests, ANOVAs, or chi-squared tests, you can request simple, reproducible examples, perhaps even with dummy data that you can then adapt.

Understand Before You Use

A word of caution is essential here: while AI can generate code, *you* are the scientist. Always strive to understand the code provided. Ensure it aligns with your research question, your data structure, and the assumptions of the statistical test you’re performing. Blindly copying and pasting code without comprehension can lead to erroneous conclusions.

C.3. AI for Data Exploration and Visualization Strategies

Exploring a new biological dataset can sometimes feel like navigating uncharted territory. AI can act as a brainstorming partner in this process. You could describe your dataset—its variables, the type of data (e.g., RNA-seq counts, proteomics measurements, microbial abundances), and the underlying biological context—and then ask for suggestions on initial exploratory analyses. For example: “I have a dataset with normalized protein abundance levels for samples from cancerous and healthy tissues, along with patient metadata like age and disease stage. What are some initial plots I could make in R with `ggplot2` to explore potential patterns or differences?”

Speaking of `ggplot2` and other R visualization libraries, LLMs can be particularly adept at helping you craft the precise code for the plots you envision. You can request code for specific plot types, ask for help customizing aesthetics like colors, labels, and themes, or even troubleshoot why your plot isn’t rendering as expected. “How can I add a title to my `ggplot`, change the x-axis label to ‘Gene Length (bp)’, and use a different color palette for my groups?” is a typical query an LLM can handle.

AI can also offer tentative interpretations of statistical outputs or visual patterns. However, this is where your scientific judgment is most critical.

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

🔥 AI Suggestions are Starting Points

While an LLM might suggest that a particular cluster in your PCA plot *could* represent a distinct biological condition, this is merely a hypothesis generated by the model. It is your responsibility to correlate this with your biological knowledge, experimental design, and further statistical validation. AI interpretations are starting points for your own deeper investigation, not final conclusions.

C.4. AI for Boosting Productivity and Troubleshooting

Beyond conceptual understanding and data exploration, AI tools can significantly enhance your day-to-day productivity. For instance, code generation and autocompletion features, whether in standalone LLMs or integrated into development environments (like GitHub Copilot, if available to you), can speed up the writing of boilerplate R code or complete lines of code you've started. This is especially useful for repetitive tasks, freeing you up to focus on the more analytical aspects of your work. Remember, the goal is to accelerate your coding, not to have entire complex analyses generated without your deep involvement and understanding.

One of the most common frustrations in programming is debugging. AI can be a powerful ally here. You can paste R error messages directly into an LLM and ask for explanations and potential fixes. If your code isn't behaving as expected, describe its intended function and the problematic output, and the AI may be able to pinpoint the issue.²

Other productivity boosts include asking AI to summarize lengthy R package documentation or even sections of research articles (always being mindful of access permissions and copyright). Furthermore, if you have a piece of R code that works but feels clunky or inefficient, you can ask an AI for suggestions on how to refactor it to make it more readable, efficient, or aligned with common R programming idioms.

C.5. Best Practices for Prompt Engineering

The quality of the output you receive from an LLM is heavily dependent on the quality of your input—your “prompt.” Effective prompt engineering is a skill that improves with practice.

²Providing a minimal reproducible example (a small piece of code with sample data that replicates the error) greatly improves the chances of getting useful debugging help from an AI.

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

The cornerstone of a good prompt is **specificity and context**. The more information you provide about your goal, your data, the biological question at hand, the specific R package you’re using, or the exact error message you’re encountering, the more tailored and useful the AI’s response will be. Consider the difference:

Vague Prompt	Specific & Contextualized Prompt
“How to plot data in R?”	“How can I create a scatter plot in R using <code>ggplot2</code> to show the relationship between ‘gene_expression_log2fc’ and ‘mirna_expression_log2fc’ from my <code>results_df</code> dataframe, with points colored by ‘cancer_subtype’?”
“My R code isn’t working.”	“I’m getting the error ‘Error: object ‘x’ not found’ in R when I run this code: <code>plot(x, y)</code> . I defined <code>x</code> in a previous chunk. Why might this be happening and how can I fix it?”

Don’t expect the perfect answer on your first attempt. **Iterate and refine your prompts.** If the initial response isn’t quite what you need, try rephrasing your question, adding more details, or breaking down a complex request into smaller parts. You can also **specify the desired output format**, such as “Provide the R code for this,” “Explain this concept in three simple bullet points,” or “List three potential statistical approaches for this problem.” Sometimes, asking for multiple perspectives or alternative solutions can also be enlightening. Finally, don’t hesitate to experiment with different LLMs if you have access to more than one, as their strengths can vary.

C.6. Ethical Considerations and Limitations

While AI tools offer tremendous potential, it’s imperative to use them responsibly and be acutely aware of their limitations.

Accuracy and “Hallucinations”: This is perhaps the most critical point. LLMs are designed to generate plausible text, but this text is not always factually correct or logically sound. They can “hallucinate” answers, code, or citations that seem convincing but are entirely fabricated.

You **must** critically evaluate all information and code generated by AI. Cross-reference with trusted sources like official R documentation, textbooks, peer-reviewed literature, and your own developing expertise. Never blindly trust AI-generated content, especially for scientific analysis.

Bias in AI Models: AI models learn from the vast corpus of text and code they are trained on. This training data can contain societal biases, which may then be reflected in the AI’s

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

responses. Be mindful of how this could subtly influence suggestions, interpretations, or even the tone of explanations.

Data Privacy and Confidentiality: This is a paramount concern in research.

Protect Your Sensitive Data

Under no circumstances should you input sensitive, unpublished, or personally identifiable data into public LLM interfaces. Always assume that any data you input could be stored or used by the AI provider. Familiarize yourself with the data usage policies of any AI tool you employ. For your coursework and research, focus on using AI for conceptual understanding, code related to non-sensitive example datasets, or publicly available data.

Over-Reliance and Skill Atrophy: The convenience of AI can be seductive. However, relying on it too heavily can hinder the development of your own foundational R programming and statistical reasoning skills. Use AI as a tool to *aid* and *accelerate* your learning, not to *replace* the hard work of understanding. The ultimate goal is for *you* to become proficient, not for the AI to perform tasks for you.

Reproducibility: If you incorporate AI-generated code or insights into your analyses, ensure you thoroughly understand them, can justify their use, and document them meticulously for reproducibility. It can be good practice to note the prompts you used if the interaction significantly shaped your approach, treating it almost like a consultation.

The table below summarizes some key limitations and suggested mitigations:

Limitation	Description	Mitigation Strategies
Accuracy Issues (Hallucinations)	Generates plausible but incorrect/fabricated information or code.	Verify with trusted sources; test code thoroughly; use critical thinking.
Bias	Reflects biases present in training data.	Be aware of potential biases; seek diverse perspectives; critically evaluate fairness of suggestions.
Data Privacy	Risk of exposing sensitive data if input into public tools.	Avoid inputting sensitive/unpublished data; use institutional/private instances if available and vetted; understand terms of service.

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

Limitation	Description	Mitigation Strategies
Lack of True Understanding	Manipulates patterns in data, doesn't "understand" concepts like humans do.	Don't attribute human-like reasoning; use it for specific tasks, not overarching scientific judgment.
Over-Reliance	Can hinder development of personal skills if used as a crutch.	Focus on learning principles; use AI to assist, not replace, your own effort; regularly practice without AI.
Reproducibility Challenges	Responses can vary; difficult to document exact "reasoning" of the AI.	Document prompts used for significant code/ideas; thoroughly understand and vet any AI-generated code you use.

C.7. The Future: AI in Bioinformatics and Data Science

The field of AI is evolving at a breathtaking pace, and its integration into bioinformatics and data science is only set to deepen. We may see more sophisticated AI-powered tools for hypothesis generation, experimental design, drug discovery, and personalized medicine. As future biologists and data scientists, cultivating an adaptable mindset and committing to continuous learning will be key to navigating and leveraging these advancements effectively. Staying curious about new tools, while maintaining a strong foundation in scientific principles and ethics, will serve you well.

C.8. Practical Exercises and Activities

To help you get comfortable and skilled in using AI tools, we encourage you to try the following:

- 1. Conceptual Clarification:** Choose a statistical concept from this course that you find somewhat challenging (e.g., "false discovery rate," "cross-validation," or "the assumptions of linear regression"). Use an LLM to ask for an explanation tailored to a biologist. Note down your prompt and the AI's response. Then, try to re-explain the concept in your own words to a classmate, drawing from (but not merely repeating) the AI's explanation.
- 2. R Code Generation & Adaptation:** Imagine you have a data frame in R named `rna_seq_data` with columns `gene_id`, `sample_name`, `normalized_count`, and `treatment_group` (with levels "control" and "treated"). Ask an LLM to generate R code using `dplyr` and `tidyverse` to calculate the average `normalized_count` for each `gene_id` within

C. AI Tools for Enhanced Learning and Productivity in Bioinformatics

each `treatment_group`, and then spread the data so that ‘control’ and ‘treated’ averages are in separate columns for each gene. Once you have the code, test it with some sample data (you can ask the AI to generate that too!) and ensure you understand each step.

3. **Debugging Practice:** Take a piece of R code. First, try to understand and debug it yourself. Then, paste the code and the error message into an LLM and ask for help. Compare the AI’s suggestions to your own troubleshooting. Did it help you find the solution faster? Did it explain the error well?
4. **Visualization Brainstorming:** Provide a clear description of a biological dataset, ideally one of your own (e.g., “A dataset containing measurements of 5 different cytokine levels in blood samples taken from patients at 3 time points post-vaccination, with patients also categorized by age group (young, middle, old).”). Use an LLM to brainstorm 3-4 different types of visualizations you could create using `ggplot2` to explore this data. For each visualization, describe what insights it might provide.

As you work through these exercises, make it a habit to document the prompts you use and critically assess the AI’s responses. Reflect on when the AI was most helpful, when its advice was off-base, and how you can refine your prompting strategy for better results in the future. This reflective practice is key to becoming a discerning and effective user of AI in your scientific endeavors.

Index

RStudio, [7](#)