



Code:

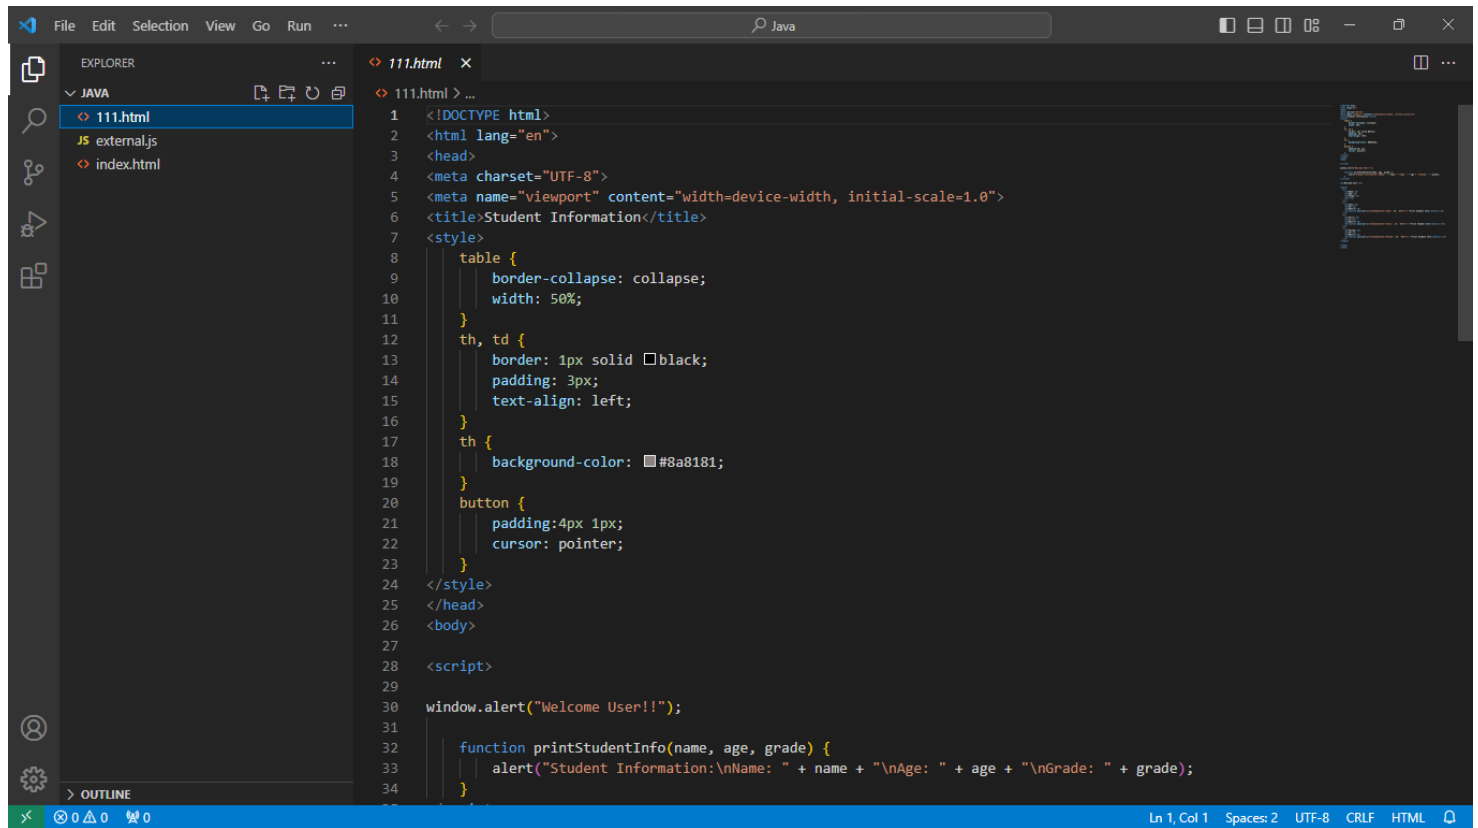

This screenshot shows the first part of the 111.html file in VS Code. The Explorer sidebar on the left shows the file structure with 111.html selected. The main editor area displays the following code:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 <title>Student Information</title>
7 <style>
8     table {
9         border-collapse: collapse;
10        width: 50%;
11    }
12    th, td {
13        border: 1px solid black;
14        padding: 3px;
15        text-align: left;
16    }
17    th {
18        background-color: #8a8181;
19    }
20    button {
21        padding: 4px 1px;
22        cursor: pointer;
23    }
24 </style>
25 </head>
26 <body>
27
28 <script>
29
30 window.alert("Welcome User!!");
31
32 function printStudentInfo(name, age, grade) {
33     alert("Student Information:\nName: " + name + "\nAge: " + age + "\nGrade: " + grade);
34 }
```

The status bar at the bottom indicates the cursor is at line 1, column 1, with 2 spaces, in UTF-8 encoding, CRLF line endings, and HTML mode.

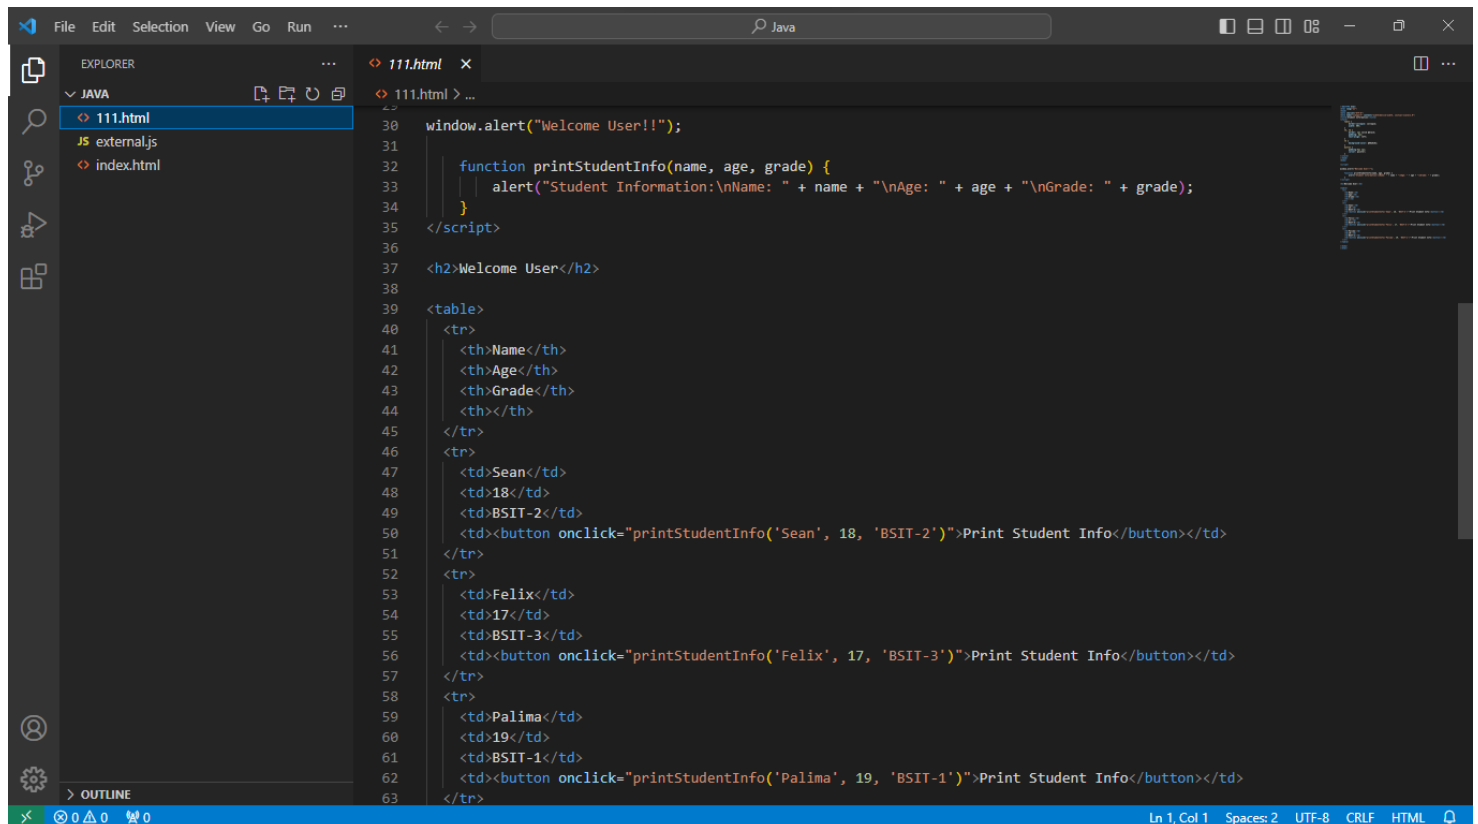


This screenshot shows the second part of the 111.html file in VS Code. The Explorer sidebar on the left shows the file structure with 111.html selected. The main editor area displays the following code:

```
30 window.alert("Welcome User!!");
31
32 function printStudentInfo(name, age, grade) {
33     alert("Student Information:\nName: " + name + "\nAge: " + age + "\nGrade: " + grade);
34 }
35 </script>
36
37 <h2>Welcome User</h2>
38
39 <table>
40 <tr>
41     <th>Name</th>
42     <th>Age</th>
43     <th>Grade</th>
44 </tr>
45 <tr>
46     <td>Sean</td>
47     <td>18</td>
48     <td>BSIT-2</td>
49     <td><button onclick="printStudentInfo('Sean', 18, 'BSIT-2')">Print Student Info</button></td>
50 </tr>
51 <tr>
52     <td>Felix</td>
53     <td>17</td>
54     <td>BSIT-3</td>
55     <td><button onclick="printStudentInfo('Felix', 17, 'BSIT-3')">Print Student Info</button></td>
56 </tr>
57 <tr>
58     <td>Palima</td>
59     <td>19</td>
60     <td>BSIT-1</td>
61     <td><button onclick="printStudentInfo('Palima', 19, 'BSIT-1')">Print Student Info</button></td>
62 </tr>
63 </table>
```

The status bar at the bottom indicates the cursor is at line 1, column 1, with 2 spaces, in UTF-8 encoding, CRLF line endings, and HTML mode.

Output:

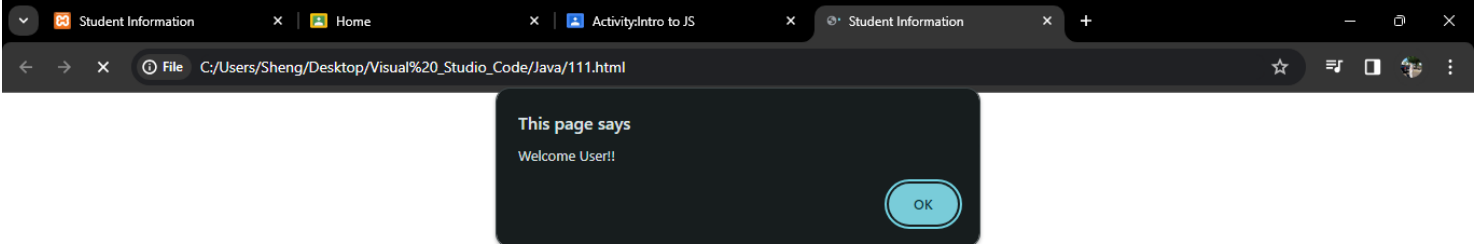

Welcome User

Name	Age	Grade	
Sean	18	BSIT-2	<div>Print Student Info</div>
Felix	17	BSIT-3	<div>Print Student Info</div>
Palima	19	BSIT-1	<div>Print Student Info</div>

When you click the “print” button this is the output.

Student Information

Home

Activity: Intro to JS

Student Information

+

File

C:/Users/Sheng/Desktop/Visual%20Studio_Code/Java/111.html

☆

Welcome User

Name	Age	Grade	
Sean	18	BSIT-2	<div>Print Student Info</div>
Felix	17	BSIT-3	<div>Print Student Info</div>
Palima	19	BSIT-1	<div>Print Student Info</div>

This page says

Student Information:
Name: Sean
Age: 18
Grade: BSIT-2

OK

Student Information

Home

ActivityIntro to JS

Student Information

FileC:/Users/Sheng/Desktop/Visual%20Studio_Code/Java/111.html

Welcome User

Name	Age	Grade	
Sean	18	BSIT-2	Print Student
Felix	17	BSIT-3	Print Student
Palima	19	BSIT-1	Print Student

This page says

Student Information:
Name: Felix
Age: 17
Grade: BSIT-3

OK

Student Information

Home

ActivityIntro to JS

Student Information

FileC:/Users/Sheng/Desktop/Visual%20Studio_Code/Java/111.html

Welcome User

Name	Age	Grade	
Sean	18	BSIT-2	Print Student
Felix	17	BSIT-3	Print Student
Palima	19	BSIT-1	Print Student

This page says

Student Information:
Name: Palima
Age: 19
Grade: BSIT-1

OK