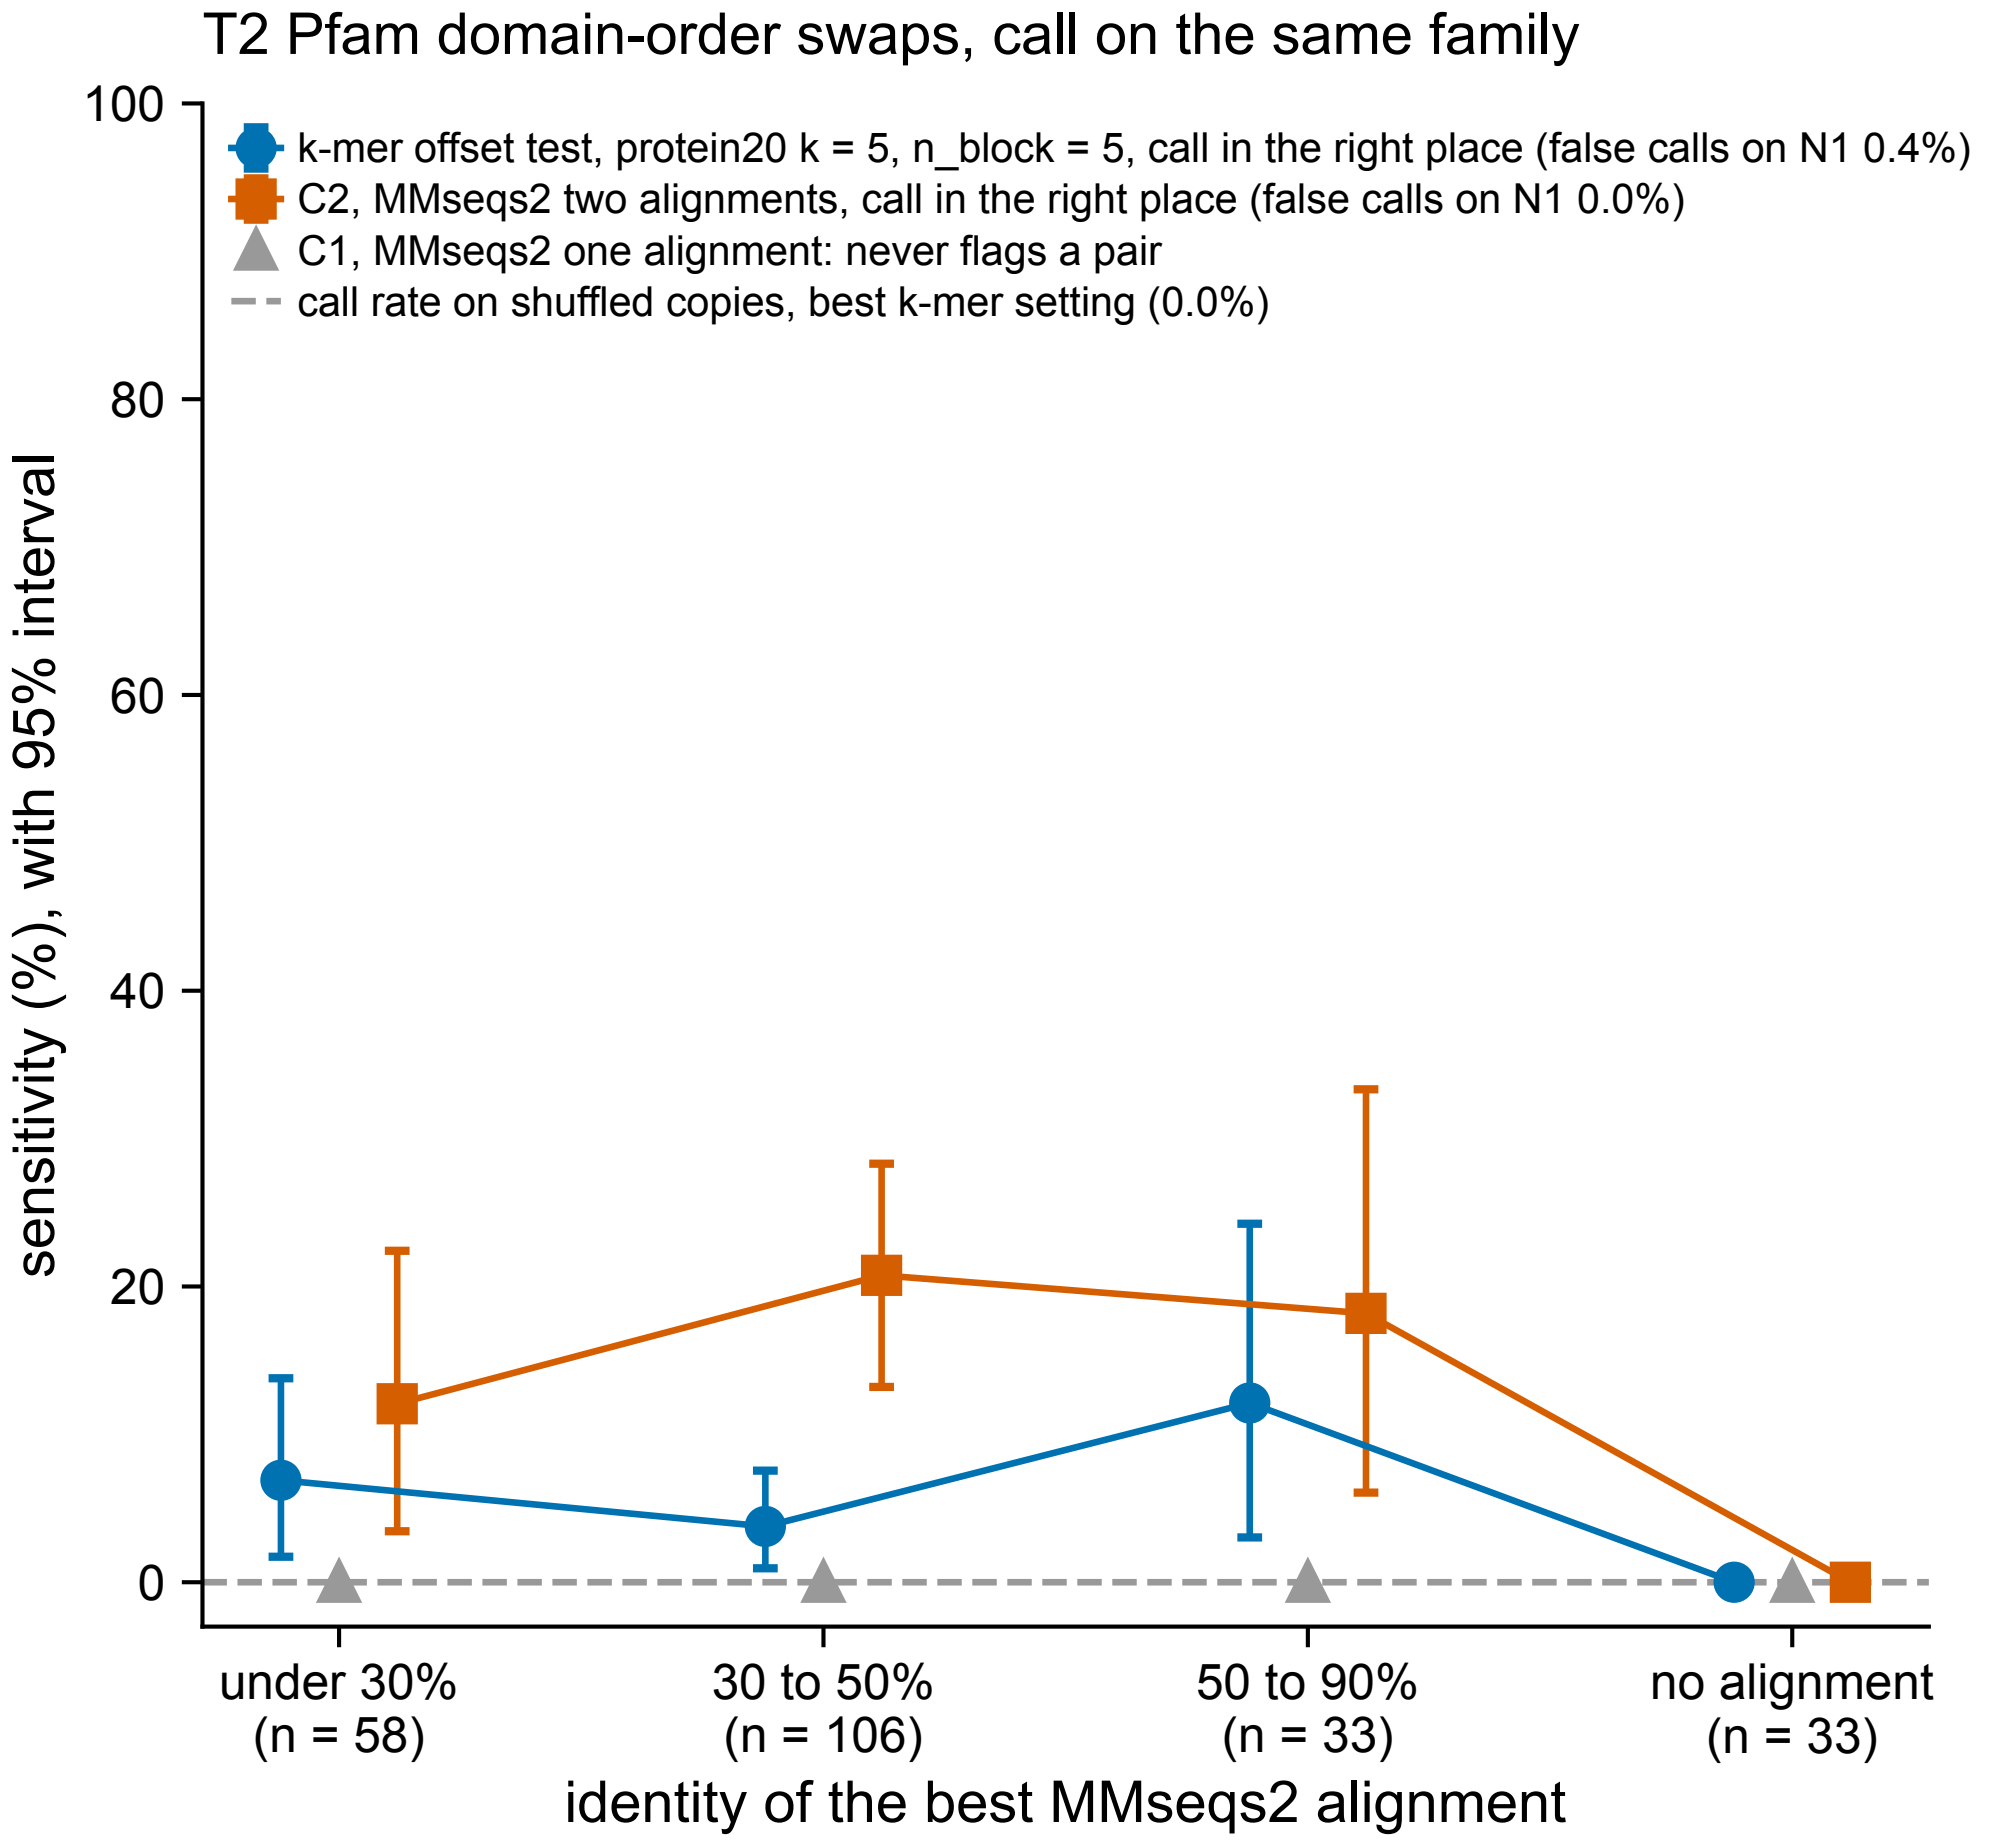
T2 Pfam domain-order swaps, call on the same family
k-mer offset test, protein20 k = 5, n_block = 5, call in the right place (false calls on N1 0.4%)
C2, MMseqs2 two alignments, call in the right place (false calls on N1 0.0%)
C1, MMseqs2 one alignment: never flags a pair
call rate on shuffled copies, best k-mer setting (0.0%)
sensitivity (%), with 95% interval
100
80
60
40
20
0
under 30%
(n = 58)
30 to 50%
(n = 106)
50 to 90%
(n = 33)
no alignment
(n = 33)
identity of the best MMseqs2 alignment